Analyzing Political Bias in LLMs via Target-Oriented Sentiment Classification

Akram Elbouanani¹, Evan Dufraisse¹, Adrian Popescu¹,

¹Université Paris-Saclay, CEA, List, F-91120, Palaiseau, France

Abstract

Political biases encoded by LLMs might have detrimental effects on downstream applications. Existing bias analysis methods rely on smallsize intermediate tasks (questionnaire answering or political content generation) and rely on the LLMs themselves for analysis, thus propagating bias. We propose a new approach leveraging the observation that LLM sentiment predictions vary with the target entity in the same sentence. We define an entropy-based inconsistency metric to encode this prediction variability. We insert 1319 demographically and politically diverse politician names in 450 political sentences and predict target-oriented sentiment using seven models in six widely spoken languages. We observe inconsistencies in all tested combinations and aggregate them in a statistically robust analysis at different granularity levels. We observe positive and negative bias toward left and far-right politicians and positive correlations between politicians with similar alignment. Bias intensity is higher for Western languages than for others. Larger models exhibit stronger and more consistent biases and reduce discrepancies between similar languages. We partially mitigate LLM unreliability in target-oriented sentiment classification (TSC) by replacing politician names with fictional but plausible counterparts.

1 Introduction

Large Language Models (LLMs) have reshaped the AI landscape due to their versatility and ease of use. Beyond their generation capabilities, they greatly simplified NLP tasks that previously required strong expertise and specific development (Kojima et al., 2022; Qin et al., 2024). However, multiple biases, including demographic (Salinas et al., 2023) and political ones (Motoki et al., 2024), question their use in socially important real-life applications, including the moderation of political discussions on social media platforms (Kolla et al., 2024) or

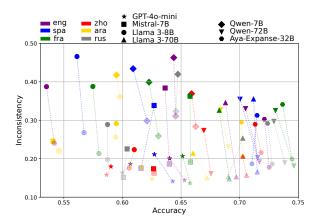


Figure 1: Sentiment-prediction based analysis of LLM model—language combinations when varying names in political sentences before and after politician name replacement with fictional but plausible names (no vs. 0.7 transparency). The desired behavior combines high accuracy, reflecting a correct understanding of the sentiment associated with names, and low inconsistency (Eq. 2), reflecting a lack of bias toward the analyzed entities. The comparison highlights the entity-related bias encoded in LLMs and the effectiveness of the name replacement mitigation approach.

the automatic analysis of media coverage of political events or discourse (Hsu et al., 2024). Addressing these tasks requires components such as hate speech detection, stance detection, or target-oriented sentiment analysis. These components entail subjectiveness and are bias-prone, making the understanding and mitigation of this phenomenon crucial for ensuring accuracy, fairness, and reliability.

Existing LLM political bias studies fall into two main categories. Questionnaire-based works (Hartmann et al., 2023; Motoki et al., 2024) repurpose methodologies, such as the Political Compass (Eysenck, 2018), to infer LLM political leanings based on answers to predefined questions. Generation-based methods (Bang et al., 2024; Buyl et al., 2024; Huang et al., 2020) prompt LLMs to

generate political content and deploy sentiment or stance detection to infer ideological alignments. While interesting, these approaches have significant limitations. First, the number of interactions with LLMs is usually reduced, leading to limited statistical power. Second, they depend on the prompt wording, with high result variability occurring even after minimal changes. Third, they provide limited actionable insights about LLM use in downstream applications.

Informed by these limitations, we propose a new political bias analysis framework leveraging LLM prediction inconsistency in target-oriented sentiment classification. Assume we apply TSC to: " \mathcal{X} has limited means but contributed to solving this conflict." A reliable classifier should consistently predict the same sentiment for any name replacing \mathcal{X} . We define an entropy-based inconsistency metric to quantify this undesired prediction variability. To verify this hypothesis, we use 450 political sentences from MAD-TSC (Dufraisse et al., 2023), an existing dataset, and 1319 politicians representing diversified demographics and eight political alignments. We vary the names in the sentences, vary the models, and use sentence translations in six languages to obtain nearly 25 million data points and robustly analyze LLMs' political bias.

Figure 1 analyzes political bias in LLMs using TSC accuracy and inconsistency metrics for 42 model-language combinations. Without mitigation, name-related inconsistency is significant for all models due to prediction variability when changing the politician names. Confirming previous results (Zhang et al., 2024), TSC accuracy is better for larger models. Section 4 provides detailed results for political alignments, languages, models, and politicians. We notably: (1) confirm positive and negative biases toward the left and the right political alignments, (2) find a positive correlation for politicians with a similar alignment, (3) show that bias intensity varies with the language, and (4) examine the effect of model size on biases. Replacing politicians with fictional but plausible names reduces inconsistency and slightly improves accuracy in most cases. This replacement provides a simple yet effective way to reduce TSC biases. However, a degree of inconsistency subsists, questioning the reliability of LLM usage for NLP tasks involving subjectivity.

2 Related Work

Sentiment analysis is a prominent NLP application (Ouyang et al., 2023) used for analyzing media biases (Falck et al., 2020; Dufraisse et al., 2024), predicting stock market (Lopez-Lira and Tang, 2023; Wu et al., 2023), and detecting hate speech (Chiu et al., 2022).

Importantly, LLMs exhibit societal, cultural, and political biases, which manifest in generated text (Sheng et al., 2021, 2019; Naous et al., 2024; An et al., 2025). These biases complicate sentiment analysis, particularly in politically sensitive contexts, as they can skew model predictions and reinforce preexisting biases (Ungless et al., 2023). We use these observations to highlight the predictions' unreliability and use them for political bias analysis.

Studies investigating biases in LLMs use two main approaches. The first, questionnaires and controlled tasks, employs structured prompts or multiple-choice questions to measure biases. For instance, (AlKhamissi et al., 2024) use simulated sociological surveys to quantify cultural alignment, while (Santurkar et al., 2023) leverage public opinion polls to evaluate alignment with demographic groups. (Hartmann et al., 2023) and (Motoki et al., 2024) utilize political compass tests and voting advice applications to assess political leanings. These methods provide easily quantifiable and reproducible results. A key advantage of questionnairebased approaches is their ability to systematically evaluate biases across diverse contexts, particularly when varying prompting strategies (Jiang et al., 2022; Abdulhai et al., 2024). However, they have significant limitations: constrained designs may not generalize to real-world applications (Lyu et al., 2024), and reliance on forced multiple-choice formats can misrepresent model behavior as well as not reflect real-world use cases (Wang et al., 2024b; Röttger et al., 2024). Importantly, the questionnaire sizes are usually reduced (Rozado, 2024), making a robust statistical analysis of results difficult.

The second approach, **open-ended generation tasks**, involves prompting LLMs to generate essays, poems, or lengthy texts, for a less constrained analysis of biases. For example, (Gover, 2023) apply sentiment analysis to political essays generated by GPT-3, revealing a moderate left-leaning bias. Similarly, (McGee, 2023) examine limericks generated by ChatGPT, uncovering patterns of bias favoring liberal politicians. These methods provide insights

into how biases manifest in free-form text, but they face significant challenges. Open-ended generation offers a valuable complement to questionnaire-based approaches, particularly for capturing biases in context-rich scenarios (Buyl et al., 2024). However, quantifying biases in open-ended outputs is inherently difficult. These studies often rely on word distribution analysis, sentiment or stance detection, or evaluation by LLMs as judges (Huang et al., 2020; Bang et al., 2024), which are biasprone themselves (Ungless et al., 2023). Moreover, the lack of control over output formats complicates bias assessment, as traditional algorithmic fairness metrics (e.g., equalized odds, demographic parity) are not directly applicable (Scherrer et al., 2024).

Sentiment analysis offers a complementary practical middle ground between structured questionnaires and open-ended text generation. Unlike rigid multiple-choice formats, it aligns with real-world language use while providing measurable bias assessments. The work closest to ours is (Buyl et al., 2024). The authors analyze LLM-generated descriptions of public figures, using LLMs as evaluators, a strategy that may compound biases. We take the opposite approach and leverage the LLM-based sentiment classification biases to elicit biases. The focus on fine-grained entities and the large number of data points available enable a flexible, nuanced, and comprehensive bias analysis.

LLMs are multilingual, and understanding linguistic and cultural variability is important for their deployment (Xu et al., 2024). Existing studies reveal that LLMs often exhibit misaligned cultural and moral biases (Hämmerl et al., 2023; Agarwal et al., 2024), with inconsistent performance and exposure biases across languages (Wang et al., 2024a). We contribute to this multilingual analysis by comparing LLMs prompted in six languages.

3 Methodology

We systematically analyze LLMs' political bias via a task-specific evaluation framework based on target-oriented sentiment classification. We define an inconsistency metric to quantify the TSC prediction variability. Our approach involves constructing a dataset of political entities and sentences, translating them into six languages, and evaluating multiple LLMs. We diversify personal and political attributes to control confounders such as demographics and popularity. We also introduce a control group of synthetic entities to isolate the

effects of entity-oriented biases encoded in LLMs. Our methodology is designed to provide statistically robust insights while remaining scalable and applicable to real-world scenarios.

3.1 Inconsistency Metric

We observe that LLMs inconsistently predict sentiment when changing politician names in a given sentence and leverage this variability to study biases. Let $\mathcal{E} = \{e_1, e_2, ..., e_n\}$ be the set of n political entities, and $\mathcal{S} = \{s_1, s_2, ..., s_m\}$ the set of m sentences used in experiments. Given a sentence s_i , we define a sentiment prediction set:

$$Y_i = \{ p(e_j, s_i) | e_j \in \mathcal{E} \} \tag{1}$$

with: $p(e_j, s_i)$ - the predicted sentiment when replacing a placeholder in s_i with entity e_j .

With these notations, we define the inconsistency metric (IC) for an LLM model–language pair as:

$$IC = \frac{1}{m} \sum_{i=1}^{m} H(Y_i)$$
 (2)

with: $H(Y_i)$ - the entropy of the sentiment label distribution in Y_i .

An unbiased LLM, a desirable behavior, would provide the same answer for a given sentence, regardless of the target entity. The entropy value would be zero, leading to IC=0. Figure 1 empirically confirms that inconsistencies appear for all tested model-language pairs, and Equation 2 is usable to study bias.

3.2 Model and Language Selection

Model Selection. We analyze political bias with multiple LLMs whose origin, size, and openness degree vary, including Mistral-7B, Qwen-7B, Qwen-72B, Llama 3-8B, Llama 3-70B, Aya-Expanse-32B, and GPT-4o-mini. The diversified geopolitical origin allows us to examine differences in training data composition and modeling choices. Varying the size of models from the same family enables the analysis of scale effects. Model specifications are provided in Table 5 in the Appendix.

Language Selection. We evaluate *English* (*eng*), *French* (*fra*), *Spanish* (*spa*), *Russian* (*rus*), *Arabic* (*ara*), *and Chinese* (*zho*) models to ensure linguistic, geopolitical, and script typology diversity. This selection spans Indo-European, Semitic, and Sino-Tibetan language families. All selected languages rank among the ten most spoken worldwide. Along

with model diversity, the language selection ensures the representativity of the proposed political bias analysis.

3.3 Data Collection

Entity Selection and Characterization. We combine structured data from Wikidata (Pellissier Tanon et al., 2016) and ParlGov (Döring and Manow, 2012) to select politicians and obtain their political alignments. We initially retain all Wikidata entries listing "politician" among their occupations and select their political party, birth year, gender, and country-related information. Since political parties are sometimes associated with multiple alignments, we resort to alignment averaging to group parties into eight classical categories (Heywood, 2021) (see definition in section D of the Appendix): Far Left (FL), Left (LL), Center Left (CL), Center (CC), Center Right (CR), Right (RR), Far Right (FR), and Big Tent (BT). Additionally, we use ParlGov political mappings (conservative vs. progressive and authoritarian vs. libertarian dimensions) to build a political compass. We perform entity recognition using FLAIR (Akbik et al., 2019) and entity-linking using mGENRE (De Cao et al., 2022) over CC-News (Mackenzie et al., 2020) to count politician mentions in the news and retain the most frequently mentioned politicians. We then employ a hierarchical sampling algorithm to obtain a list of 1319 politicians diversified across countries and political alignments. We detail the politician selection steps in section B of the Appendix. Finally, a control counterpart is generated per entity by synthesizing a fake name using GPT-4, conditioned on non-political attributes (gender, birth year, and country of origin).

Sentence Selection and Processing. We sample diversified sentences from MAD-TSC (Dufraisse et al., 2023), a TSC dataset sourced from numerous European news outlets. These journalistic sentences often convey sentiment in a complex manner, making TSC non-trivial. Sentences include a target entity and associated ground truth sentiment label (neutral, positive, or negative). Since we perform entity replacement, we design a decision diagram (see section E of the Appendix) to select only sentences for which entity replacement does not produce any counterfactual or grammatically incorrect constructions. For instance, substituting "Donald Trump" with another politician in a sentence containing "US President Donald Trump" could yield

misleading implications. We manually create two versions of each sentence—one using a male form and one using a female form (e.g., "...in her speech" and "...in his speech") to handle gender variation. This process results in a set of 450 sentences comprising 150 neutral, positive, and negative examples, each available in male and female variants. We enable multilingual analysis using professional sentence translations from MAD-TSC in French and Spanish. We combine automatic DeepL translations with manual Russian, Chinese, and Arabic verification. Native speakers with advanced English skills check that the original meaning is preserved and no translation or gender-related errors occur.

3.4 Experimental Setup and Analysis.

Prompt Design. We evaluate several prompting strategies to classify sentiment toward politicians using the sentences sampled from MAD-TSC. In an initial experiment, we test both zero-shot and fewshot prompting methods and compare constrained versus unconstrained response formats. We set the temperature at zero in all cases to obtain the most probable response. These experiments are conducted in multiple languages to ensure crosslinguistic validity and isolate political bias from artifacts introduced by prompt design. We summarize the obtained results in Table 2 and select the prompt that achieves the highest overall performance across languages and minimizes the incidence of invalid responses. Prompt formulations and examples are detailed in Appendix G.

Experimental Setup. We construct our dataset by pairing the 450 preprocessed sentences with the 1,319 entities, resulting in 593,550 prompts per language-model combination. With nearly 25 million data points, this setup ensures strong statistical support for the observed patterns and captures a wide range of interactions between linguistic constructs and political attributes, thereby providing a comprehensive foundation for subsequent analysis. The TSC-based framework enables a flexible aggregation of fine-grained individual data points highlighting various bias aspects. We present results for (1) sentiment distribution for political alignments on the left-to-right spectrum, (2) politician-level similarities, (3) 2-dimensional political compass analysis, (4) cross-language sentiment patterns, and (5) the effect of model size on bias intensity.

4 Results

Sentiment analysis across models and languages reveals systematic biases based on political alignment. Figure 2 shows that models consistently favor left, center-left, and centrist politicians while assigning more negative sentiment to right and farright politicians. These results are aligned with previous findings (Gover, 2023). Interestingly, while biases occur in all languages, they are more pronounced in English, Spanish, and French than in Russian, Arabic, and Chinese. A statistical test confirms the statistical significance in all languages (see section J of the Appendix). The consistency of these trends across models suggests that they are not random but may be caused by LLM training data biases. In the following paragraphs, we delve deeper into the influence of individual languages and models.

Larger models exhibit stronger biases that are more consistent across languages. Figure 2 shows larger language models display more pronounced biases than their smaller counterparts. Owen-72B and Llama 3-70B assign more negative sentiment to far-right and right-leaning politicians while showing stronger positive sentiment for center-right, center-left, and left-leaning politicians than Qwen-7B and Llama 3-8B. The training corpora are unavailable, but we can safely assume they are similar within the same family of models. These differences are noticeable across Western and non-Western languages when analyzing individual model-language combinations in Figure 3. Llama 3-8B in Arabic does not exhibit a significant negative bias toward far-right politicians, the most consistent bias observed globally. In contrast, Llama 3-70B exhibits a negative bias toward far-right figures. In English, biases also become more pronounced in the larger model, with stronger deviations in sentiment scores across political alignments. In addition to bias intensity, we study its variation across languages in Figure 4 (a) by computing the correlations between sentiment predictions Qwen-7B and Qwen-72B. The results are obtained by averaging the Jaccard similarity indexes of individual entities for each model-language pair. They show that more similar TSC predictions are obtained with larger models. These results suggest that as models scale up, their positive and negative biases tend to intensify but also become more consistent across languages. This is possibly due to larger LLMs' increased capacity to internalize

implicit patterns from training data.

Aya-Expanse-32B exhibits stronger biases in non-Western languages. Figure 3 (b) shows Aya-Expanse-32B displays higher biases for Arabic. While the figure specifically highlights Arabic, this pattern holds consistently for Russian and Chinese. This is the only model specifically trained for multilingual tasks in our set of models. An explanation comes from Aya's training methodology, which relies heavily on translating data from high-resource languages (e.g., English) to others. Figure 4 also highlights that Aya's predictions are more similar across languages than those of Qwen models. While Aya's multilingual training is effective for cross-lingual generalization, it may also lead to a more uniform propagation of biases across diverse linguistic contexts. These findings underscore the trade-offs in multilingual model design and the need to consider how training data and methodologies influence bias amplification carefully.

LLMs have a left-libertarian bias. Using Parl-Gov data, which assigns parties a progressiveconservative and authoritarian-libertarian score, we map politicians onto a 10×10 political compass grid. We compute the average sentiment score of all associated politicians for each square, then average the results over neighboring squares to highlight broader trends. As shown in Figure 5, the sentiment distribution for GPT-4o-mini in English and Chinese aligns with findings from previous studies (Hartmann et al., 2023; Motoki et al., 2024), reinforcing the conclusion that ChatGPT exhibits a left-libertarian bias. Sentiment analysis across the political compass reveals a consistent pattern: politicians associated with left-libertarian positions receive more positive sentiment, while those aligned with right-authoritarian positions receive more negative sentiment. Additionally, our approach enables a more fine-grained analysis, revealing that centrist parties also tend to receive higher sentiment scores. This trend holds across all languages and models, further supporting the robustness of these patterns.

LLMs have an internal representation of entities.

To test this hypothesis in sentiment analysis tasks, we construct a sentiment matrix M_k for each entity e_k , where the element (i,j) of the matrix corresponds to the output sentiment from model j when given input sentence i with target entity e_k . We then compute the cosine similarity between matri-

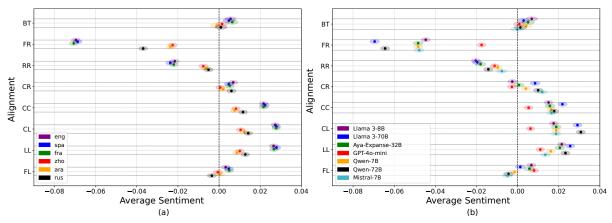


Figure 2: Average sentiment scores for languages (aggregated across all models) and for models (aggregated across all languages) per alignment. For each language or model, the averages are centered around the mean of the sentiments. Shaded areas represent 95% confidence intervals. The results indicate a consistent positive bias for CC, CL, and LL politicians, and a negative bias for RR and FR politicians across all languages and models. English, French, and Spanish exhibit stronger biases than Arabic, Chinese, and Russian. Additionally, larger models tend to demonstrate higher biases than smaller models.

ces M_{k_1} and M_{k_2} . For each column j, we calculate the cosine similarity between the corresponding column vectors of M_{k_1} and M_{k_2} :

$$K_{j}(M_{k_{1}}, M_{k_{2}}) = \frac{\langle M_{k_{1}}^{(j)}, M_{k_{2}}^{(j)} \rangle}{\|M_{k_{1}}^{(j)}\| \cdot \|M_{k_{2}}^{(j)}\|},$$

where $M_{k_1}^{(j)}$ and $M_{k_2}^{(j)}$ denote the j-th column vectors of M_{k_1} and M_{k_2} , respectively, $\langle\cdot,\cdot\rangle$ is the dot product, and $\|\cdot\|$ is the Euclidean norm. The final cosine similarity is the average of these values across all columns:

$$K(M_{k_1}, M_{k_2}) = \frac{1}{J} \sum_{j=1}^{J} K_j(M_{k_1}, M_{k_2}),$$


where J is the total number of columns.

Using this similarity measure, we construct a similarity matrix (Figure 6), where each cell represents the similarity between two entities. The matrix reveals two distinct blocks: one in the top left and another in the bottom right. This division suggests a separation between entities associated with liberal democracies and those potentially aligned with authoritarian tendencies. Entities closer in similarity exhibit more aligned sentiment patterns, reflecting ideological or contextual affinities. For example, Pedro Sánchez and Olaf Scholz, both European socialist leaders, show high similarity (+0.92), likely due to shared political ideology and regional context. Similarly, Joe Biden and Kamala Harris, who share a political affiliation and roles within the same administration, are closely aligned (+0.9). Jean-Luc Mélenchon and

Jeremy Corbyn (+0.89), both left-wing politicians advocating for progressive policies, also exhibit significant similarity. These patterns emerge in all the tested languages and suggest that LLMs encode meaningful representations of entities, capturing real-world ideological and contextual distinctions even in sentiment analysis tasks.

Control Group and Mitigation. We detail the control group experiment summarized in Figure 1 whose objective is two-fold: (1) it confirms that political attributes are the primary source of bias by isolating the influence of political associations on model behavior, and (2) it provides a method to mitigate these biases, making sentiment analysis fairer and more accurate. For each entity, we use an LLM to generate a fake name that preserves non-political attributes (gender, birth year, and country of origin). Running simulations with the control group reveals significant improvements in model consistency and slight gains in accuracy, as shown in Figure 1. This suggests that removing political attributes reduces inconsistencies in model responses across entities.

Figure 7 demonstrates that political biases are significantly reduced compared to the original results in Figure 2. However, some differences persist and are explained by demographic factors. First, female names (+0.03), which are overrepresented in the left alignment, have more positive predictions than their male counterparts (-0.01). Second, LLMs tend to rate Russian and non-Western names lower (often linked to far-left or far-right entities). These residual biases suggest that while political attributes are the primary driver of bias, non-political

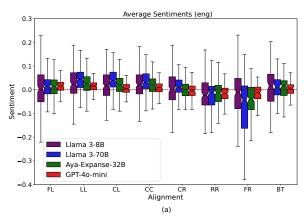

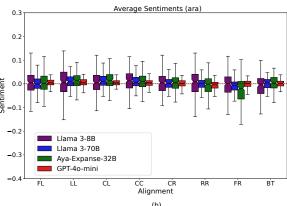


Figure 3: Boxplots depicting average sentiment scores for entities across political alignments in English and Arabic. The results reveal a pronounced bias in English, particularly a strong negative bias for far-right figures and a positive one for left figures. In contrast, biases in Arabic are less discernible, except for Aya-Expanse-32B, a model trained for multilingual tasks, which exhibits more apparent biases in Arabic as well—showing positive sentiment toward LL and CL (center-left) figures and negative sentiment toward FR figures.

attributes still exert a minor influence.

This control group approach confirms that political attributes are the primary source of bias and provides a practical method to mitigate them in TSC. By isolating and addressing these sources, we can enhance the LLM fairness and reliability.

5 Conclusion

Understanding political bias in LLMs is crucial as their real-world use grows. In this study, we present a novel approach using target-oriented sentiment inconsistencies to quantify these biases. We systematically varied political entities in controlled sentence templates to obtain a massive TSC prediction dataset and aggregate them to analyze different bias facets. Our results have several important implications. First, we contribute to studying the LLMs' political biases by introducing a flexible

framework that builds on TSC, a fine-grained NLP task. This modeling enables a flexible aggregation of results, making our approach complementary to existing ones. We emphasize the roles of languages and LLM sizes and analyze political alignments and individual entities. Our results highlight systematic political biases in LLMs, with more positive sentiment assigned to left-leaning politicians and more negative sentiment to far-right figures. Bias intensity is stronger in English, French, and Spanish but exists across all tested languages. We find that larger models accentuate bias and increase similarities between predictions in different languages. These findings support previous work (Yin et al., 2022) showing that native language is not the best choice for probing regional knowledge when alternatives exist. We also highlight similarities between the LLMs representations of individual politicians with similar alignments.

Second, the prediction inconsistencies significantly affect the LLM use for target-oriented sentiment classification. This finding, added to the fact that small models are still competitive in TSC (Bucher and Martini, 2024), questions the LLM robustness for this particular task despite their easy deployment. More generally, the observed inconsistency leads us to recommend caution when employing LLM for bias-prone tasks, particularly those involving subjectivity.

Third, these biases can be mitigated to a certain extent. We tested a post-training strategy by replacing politician names with more neutral alternatives. This strategy reduces sentiment inconsistencies and also brings small accuracy gains. However, addressing bias in one task does not guarantee neutrality in others. Future work should explore how bias manifests in different applications and across a broader range of entities. Equally important, LLM creators could use our findings to integrate bias mitigation in subjective tasks during training.

Finally, the proposed strategy is model-agnostic and adaptable to other languages. We will release the code and data to contribute to systematic and reproducible political bias evaluation.

6 Limitations

Analysis Scope. Our study complements those focusing on controlled text generation (Gover, 2023; Bang et al., 2024). We confirm the existence of political bias in LLMs through the TSC lens, an important downstream task. The study could be



Figure 4: Jaccard similarity index between the sentiment predictions in the tested languages obtained with Qwen-7B, and Qwen-72B, and Aya-Expanse-32B.

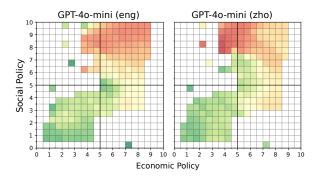


Figure 5: Political compasses showing sentiment bias for GPT-40-mini in English (left) and Chinese (right). The y-axis represents the social policy spectrum (0: socially progressive, 10: socially conservative), and the x-axis represents the economic policy spectrum (0: fiscally progressive, 10: fiscally conservative). Parties are positioned using ParlGov data, with colors indicating the average sentiment of affiliated politicians (red: negative, green: positive). Blank squares denote no corresponding party. Left-libertarian parties consistently receive positive sentiment, while right-authoritarian parties show negative sentiment, highlighting consistent ideological biases across languages.

further explored in two directions for greater comprehensiveness. First, it would be interesting to test whether our conclusions hold for other downstream tasks having a subjective component, including stance or hate speech detection. Second, we could explore LLM biases for entities other than politicians to broaden the scope. We could test other entities within the political domain, such as political parties; and non political ones, including public organizations, companies, or products. Such extensions depend on the availability of labeled datasets for the cited tasks and entity types.

Data Representativeness. Our dataset includes a diverse set of politicians but remains dominated by figures frequently mentioned in Western media, which make up the majority of CC-News. This modeling choice is intentional since political bias occurs for entities often encountered in the training

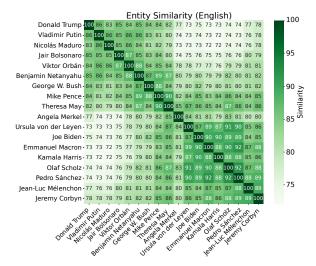


Figure 6: Similarity matrix of entities in English, where each cell represents the similarity between two entities (scaled to 100). Greener squares indicate higher similarity. The matrix reveals two distinct blocks: one in the top left and another in the bottom right, suggesting a divide between entities potentially aligned with authoritarian tendencies and those associated with liberal Western democracies. Closer similarity values reflect aligned sentiment patterns, potentially indicating ideological or contextual affinities.

data, as shown by the control experiment. As a result, some countries remain underrepresented in the entity set. Similarly, the sentences used in the experiments are primarily drawn from European political discourse. We filtered sentences focused on a narrow context to enable controlled comparisons when varying the politician names. However, we cannot guarantee that they capture the nuances of the political debate globally.

Bias Mitigation and Trade-offs. Including control entities (non-political names) helps distinguish biases related to political attributes and effectively reduces entity-related bias in our context. However, bias subsists to some degree, and the method could be further improved by checking that control entities' first and last names are not politically

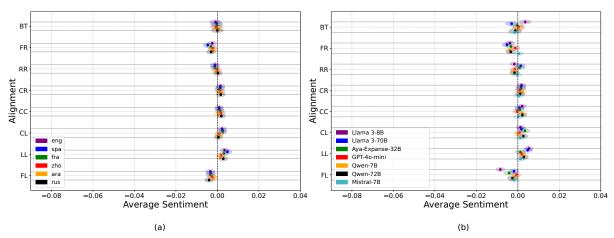


Figure 7: Average sentiment scores for languages and for models using a set of fake names reflecting non-political attributes (gender, birth year, and country of origin) of our original entities. Shaded areas represent 95% confidence intervals. The results show that the biases for political entities largely disappear, although some anomalies persist. These anomalies are attributed to LLMs rating female names higher (often corresponding to left-leaning entities) and Russian or non-Western names lower (often corresponding to far-left or far-right leaning entities). This suggests that TSC biases are primarily driven by political associations rather than non-political attributes.

charged. Equally, the replacement approach also reduces some contextual information. While necessary for isolating the effects of political affiliation, this trade-off may limit insights into how biases manifest in usual political discussions in other contexts. More advanced political bias mitigation techniques would require in-depth model adaptations beyond this contribution's scope.

Evolving Nature of Biases. The biases observed reflect the state of political text included in the LLMs' training dataset. For instance, the sentiment expressed about a politician's or a political alignment's actions can vary drastically over time. The reported findings will probably evolve as models are updated with new data and political landscapes shift, and future research should periodically reassess bias patterns to account for these changes.

Model and Language Representativeness. We experimented with seven models and six languages representative of current LLMs, enabling meaningful comparisons across these two axes. The results highlight bias for all model-language combinations, with some variability for specific combinations, allowing us to present robust findings. The study could be further generalized by including more models and languages, but such an extension is challenging. First, we performed initial tests with more open-source models but discarded them due to low accuracy and/or the impossibility of obtaining usable inferences. Second, we tested many entity-sentence combinations, and the cost of running complete experiments with multiple models,

particularly in a few-shot learning setting, exceeded our financial means. We selected six widely used languages from linguistic groups representing different geopolitical alignments and found interesting differences between models in these languages. Integrating other languages would further improve the results' robustness. It would be particularly interesting to test biases for low-resourced languages.

7 Ethical Considerations

This study investigates political bias in large language models (LLMs) to improve fairness and transparency in AI systems. We prioritize transparency by releasing our methodology, data, and code for reproducibility, and focus on systemic bias patterns rather than individuals to avoid reinforcing stereotypes or misinformation. Our analysis includes diverse politicians across regions, ideologies, and languages to ensure balanced representation. We acknowledge that findings are influenced by dataset and model choices, and caution against misusing results to generalize about political groups or imply intentional bias in LLMs. This work does not endorse political positions and aims to support safer, more equitable AI systems for politically sensitive applications.

Acknowledgements

This work has been funded by the BOOM ANR Project - ANR-20-CE23-0024 and the BPI funded project OpenLLM-France. It was made possible by the use of the FactoryIA supercomputer, financially supported by the Ile-de-France Regional Council.

References

- Marwa Abdulhai, Gregory Serapio-García, Clement Crepy, Daria Valter, John Canny, and Natasha Jaques. 2024. Moral Foundations of Large Language Models. In *Proceedings of the 2024 Conference on Empirical Methods in Natural Language Processing*, pages 17737–17752, Miami, Florida, USA. Association for Computational Linguistics.
- Utkarsh Agarwal, Kumar Tanmay, Aditi Khandelwal, and Monojit Choudhury. 2024. Ethical Reasoning and Moral Value Alignment of LLMs Depend on the Language We Prompt Them in. In *Proceedings of the 2024 Joint International Conference on Computational Linguistics, Language Resources and Evaluation (LREC-COLING 2024)*, pages 6330–6340, Torino, Italia. ELRA and ICCL.
- Alan Akbik, Tanja Bergmann, Duncan Blythe, Kashif Rasul, Stefan Schweter, and Roland Vollgraf. 2019. Flair: An easy-to-use framework for state-of-the-art nlp. In *Proceedings of the 2019 conference of the North American chapter of the association for computational linguistics (demonstrations)*, pages 54–59.
- Badr AlKhamissi, Muhammad ElNokrashy, Mai Alkhamissi, and Mona Diab. 2024. Investigating Cultural Alignment of Large Language Models. In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 12404–12422, Bangkok, Thailand. Association for Computational Linguistics.
- Jiafu An, Difang Huang, Chen Lin, and Mingzhu Tai. 2025. Measuring gender and racial biases in large language models: Intersectional evidence from automated resume evaluation. *PNAS Nexus*, 4(3):pgaf089.
- Yejin Bang, Delong Chen, Nayeon Lee, and Pascale Fung. 2024. Measuring Political Bias in Large Language Models: What Is Said and How It Is Said. In Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers), pages 11142–11159, Bangkok, Thailand. Association for Computational Linguistics.
- Martin Juan José Bucher and Marco Martini. 2024. Fine-tuned'small'llms (still) significantly outperform zero-shot generative ai models in text classification. *arXiv preprint arXiv:2406.08660*.
- Maarten Buyl, Alexander Rogiers, Sander Noels, Iris Dominguez-Catena, Edith Heiter, Raphael Romero, Iman Johary, Alexandru-Cristian Mara, Jefrey Lijffijt, and Tijl De Bie. 2024. Large Language Models Reflect the Ideology of their Creators. *Preprint*, arXiv:2410.18417.
- Ke-Li Chiu, Annie Collins, and Rohan Alexander. 2022. Detecting Hate Speech with GPT-3. *Preprint*, arXiv:2103.12407.
- Nicola De Cao, Ledell Wu, Kashyap Popat, Mikel Artetxe, Naman Goyal, Mikhail Plekhanov, Luke

- Zettlemoyer, Nicola Cancedda, Sebastian Riedel, and Fabio Petroni. 2022. Multilingual autoregressive entity linking. *Transactions of the Association for Computational Linguistics*, 10:274–290.
- Holger Döring and Philip Manow. 2012. Parliament and government composition database (parlgov). *An infrastructure for empirical information on parties, elections and governments in modern democracies. Version*, 12(10).
- Evan Dufraisse, Adrian Popescu, Julien Tourille, Armelle Brun, and Jerome Deshayes. 2023. MAD-TSC: A multilingual aligned news dataset for target-dependent sentiment classification. In *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 8286–8305, Toronto, Canada. Association for Computational Linguistics.
- Evan Dufraisse, Adrian Popescu, Julien Tourille, Armelle Brun, and Olivier Hamon. 2024. Combining objective and subjective perspectives for political news understanding. *Preprint*, arXiv:2408.11174.
- Hans J Eysenck. 2018. *The psychology of politics*. Routledge.
- Fabian Falck, Julian Marstaller, Niklas Stoehr, Sören Maucher, Jeana Ren, Andreas Thalhammer, Achim Rettinger, and Rudi Studer. 2020. Measuring Proximity Between Newspapers and Political Parties: The Sentiment Political Compass. *Policy & Internet*, 12(3):367–399.
- Lucas Gover. 2023. Political bias in large language models. *The Commons: Puget Sound Journal of Politics*, 4(1):2.
- Katharina Hämmerl, Bjoern Deiseroth, Patrick Schramowski, Jindřich Libovický, Constantin Rothkopf, Alexander Fraser, and Kristian Kersting. 2023. Speaking Multiple Languages Affects the Moral Bias of Language Models. In *Findings of the Association for Computational Linguistics: ACL 2023*, pages 2137–2156, Toronto, Canada. Association for Computational Linguistics.
- Jochen Hartmann, Jasper Schwenzow, and Maximilian Witte. 2023. The political ideology of conversational AI: Converging evidence on ChatGPT's proenvironmental, left-libertarian orientation. *Preprint*, arXiv:2301.01768.
- Andrew Heywood. 2021. *Political ideologies: An introduction*. Bloomsbury Publishing.
- Yi-Li Hsu, Jui-Ning Chen, Yang Fan Chiang, Shang-Chien Liu, Aiping Xiong, and Lun-Wei Ku. 2024. Enhancing perception: Refining explanations of news claims with LLM conversations. In *Findings of the Association for Computational Linguistics: NAACL 2024*, pages 2129–2147, Mexico City, Mexico. Association for Computational Linguistics.

- Po-Sen Huang, Huan Zhang, Ray Jiang, Robert Stanforth, Johannes Welbl, Jack Rae, Vishal Maini, Dani Yogatama, and Pushmeet Kohli. 2020. Reducing Sentiment Bias in Language Models via Counterfactual Evaluation. In *Findings of the Association for Computational Linguistics: EMNLP 2020*, pages 65–83, Online. Association for Computational Linguistics.
- Hang Jiang, Doug Beeferman, Brandon Roy, and Deb Roy. 2022. CommunityLM: Probing Partisan Worldviews from Language Models. In *Proceedings of the 29th International Conference on Computational Linguistics*, pages 6818–6826, Gyeongju, Republic of Korea. International Committee on Computational Linguistics.
- Takeshi Kojima, Shixiang Shane Gu, Machel Reid, Yutaka Matsuo, and Yusuke Iwasawa. 2022. Large language models are zero-shot reasoners. *Advances in neural information processing systems*, 35:22199–22213.
- Mahi Kolla, Siddharth Salunkhe, Eshwar Chandrasekharan, and Koustuv Saha. 2024. Llm-mod: Can large language models assist content moderation? In *Extended Abstracts of the CHI Conference on Human Factors in Computing Systems*, pages 1–8.
- Alejandro Lopez-Lira and Yuehua Tang. 2023. Can ChatGPT Forecast Stock Price Movements? Return Predictability and Large Language Models. *Preprint*, Social Science Research Network:4412788.
- Chenyang Lyu, Minghao Wu, and Alham Aji. 2024. Beyond Probabilities: Unveiling the Misalignment in Evaluating Large Language Models. In *Proceedings of the 1st Workshop on Towards Knowledgeable Language Models (KnowLLM 2024)*, pages 109–131, Bangkok, Thailand. Association for Computational Linguistics.
- Joel Mackenzie, Rodger Benham, Matthias Petri, Johanne R Trippas, J Shane Culpepper, and Alistair Moffat. 2020. Cc-news-en: A large english news corpus. In *Proceedings of the 29th ACM International Conference on Information & Knowledge Management*, pages 3077–3084.
- Robert W. McGee. 2023. Is Chat Gpt Biased Against Conservatives? An Empirical Study. *Preprint*, Social Science Research Network:4359405.
- Fabio Motoki, Valdemar Pinho Neto, and Victor Rodrigues. 2024. More human than human: Measuring ChatGPT political bias. *Public Choice*, 198(1):3–23.
- Tarek Naous, Michael J Ryan, Alan Ritter, and Wei Xu. 2024. Having Beer after Prayer? Measuring Cultural Bias in Large Language Models. In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 16366–16393, Bangkok, Thailand. Association for Computational Linguistics.
- Siru Ouyang, Shuohang Wang, Yang Liu, Ming Zhong, Yizhu Jiao, Dan Iter, Reid Pryzant, Chenguang Zhu,

- Heng Ji, and Jiawei Han. 2023. The Shifted and The Overlooked: A Task-oriented Investigation of User-GPT Interactions. In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, pages 2375–2393, Singapore. Association for Computational Linguistics.
- Thomas Pellissier Tanon, Denny Vrandečić, Sebastian Schaffert, Thomas Steiner, and Lydia Pintscher. 2016. From freebase to wikidata: The great migration. In *Proceedings of the 25th international conference on world wide web*, pages 1419–1428.
- Libo Qin, Qiguang Chen, Xiachong Feng, Yang Wu, Yongheng Zhang, Yinghui Li, Min Li, Wanxiang Che, and Philip S Yu. 2024. Large language models meet nlp: A survey. *arXiv preprint arXiv:2405.12819*.
- Paul Röttger, Valentin Hofmann, Valentina Pyatkin, Musashi Hinck, Hannah Rose Kirk, Hinrich Schütze, and Dirk Hovy. 2024. Political Compass or Spinning Arrow? Towards More Meaningful Evaluations for Values and Opinions in Large Language Models. https://arxiv.org/abs/2402.16786v2.
- David Rozado. 2024. The political preferences of LLMs. *PLOS ONE*, 19(7):e0306621.
- Abel Salinas, Parth Shah, Yuzhong Huang, Robert McCormack, and Fred Morstatter. 2023. The unequal opportunities of large language models: Examining demographic biases in job recommendations by chatgpt and llama. In *Proceedings of the 3rd ACM Conference on Equity and Access in Algorithms, Mechanisms, and Optimization*, pages 1–15.
- Shibani Santurkar, Esin Durmus, Faisal Ladhak, Cinoo Lee, Percy Liang, and Tatsunori Hashimoto. 2023. Whose Opinions Do Language Models Reflect? In *Proceedings of the 40th International Conference on Machine Learning*, pages 29971–30004. PMLR.
- Nino Scherrer, Claudia Shi, Amir Feder, and David Blei. 2024. Evaluating the moral beliefs encoded in llms. *Advances in Neural Information Processing Systems*, 36.
- Emily Sheng, Kai-Wei Chang, Prem Natarajan, and Nanyun Peng. 2021. Societal Biases in Language Generation: Progress and Challenges. In *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*, pages 4275–4293, Online. Association for Computational Linguistics.
- Emily Sheng, Kai-Wei Chang, Premkumar Natarajan, and Nanyun Peng. 2019. The Woman Worked as a Babysitter: On Biases in Language Generation. In Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP), pages 3407—3412, Hong Kong, China. Association for Computational Linguistics.

Eddie L. Ungless, Björn Ross, and Vaishak Belle. 2023. Potential Pitfalls With Automatic Sentiment Analysis: The Example of Queerphobic Bias. *Social Science Computer Review*, 41(6):2211–2229.

Bin Wang, Zhengyuan Liu, Xin Huang, Fangkai Jiao, Yang Ding, AiTi Aw, and Nancy Chen. 2024a. SeaE-val for Multilingual Foundation Models: From Cross-Lingual Alignment to Cultural Reasoning. In Proceedings of the 2024 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies (Volume 1: Long Papers), pages 370–390, Mexico City, Mexico. Association for Computational Linguistics.

Xinpeng Wang, Bolei Ma, Chengzhi Hu, Leon Weber-Genzel, Paul Röttger, Frauke Kreuter, Dirk Hovy, and Barbara Plank. 2024b. "My Answer is C": First-Token Probabilities Do Not Match Text Answers in Instruction-Tuned Language Models. In *Findings of the Association for Computational Linguistics: ACL 2024*, pages 7407–7416, Bangkok, Thailand. Association for Computational Linguistics.

Shijie Wu, Ozan Irsoy, Steven Lu, Vadim Dabravolski, Mark Dredze, Sebastian Gehrmann, Prabhanjan Kambadur, David Rosenberg, and Gideon Mann. 2023. Bloomberggpt: A large language model for finance. *Preprint*, arXiv:2303.17564.

Yuemei Xu, Ling Hu, Jiayi Zhao, Zihan Qiu, Yuqi Ye, and Hanwen Gu. 2024. A survey on multilingual large language models: Corpora, alignment, and bias. *arXiv preprint arXiv:2404.00929*.

Da Yin, Hritik Bansal, Masoud Monajatipoor, Liunian Harold Li, and Kai-Wei Chang. 2022. Geomlama: Geo-diverse commonsense probing on multilingual pre-trained language models. *arXiv preprint arXiv:2205.12247*.

Wenxuan Zhang, Yue Deng, Bing Liu, Sinno Pan, and Lidong Bing. 2024. Sentiment Analysis in the Era of Large Language Models: A Reality Check. In *Findings of the Association for Computational Linguistics: NAACL 2024*, pages 3881–3906, Mexico City, Mexico. Association for Computational Linguistics.

A Alignment Computation for Political Entities

To define political alignment for entities, we link them to their respective political parties using Wikidata. The political alignment of each entity is then inferred from the alignment information associated with their party in Wikidata. However, this approach introduces two key challenges:

 Multiple Party Associations: Entities may be associated with more than one political party. 2. **Multiple Alignment Associations:** Political parties may be associated with more than one political alignment.

A.1 Resolving Multiple Party Associations

Entities can have multiple party affiliations over time. For example, Donald Trump is associated with several parties, including the Republican Party, Reform Party of the United States of America, Democratic Party, and independent politician. Wikidata ranks these associations into three categories: *Preferred Rank*, *Normal Rank*, and *Deprecated Rank*. To resolve this issue, we apply the following procedure:

- First, select the entry with the *Preferred Rank*, provided it has a non-blank name.
- If no such entry exists, iterate through the remaining entries, ordered by their *end time* value. Select the party with either no end time or the most recent end time.

This method ensures that each politician is associated with the most accurate and relevant political party. We further validate this by manually verifying the results.

Resolving Multiple Alignment Associations Political parties may also have multiple alignment associations. For instance, the Renaissance Party of France is associated with three alignments: *centrism*, *centre-left*, and *centre-right*. To address this, we observe the distribution of alignments across all entities and note that centrist alignments are overrepresented compared to far-left or far-right alignments. To ensure balanced representation and assign a single alignment to each party, we employ the *Alignment Computation* algorithm (see Algorithm 1).

The algorithm works by averaging the alignments and then rounding them away from the center. For example, the Renaissance Party's alignments (*centre-left*, *centrism*, and *centre-right*) are averaged and rounded to *CC* (center). This approach ensures a balanced and consistent representation of political alignments across the dataset.

B Balancing the Dataset

After associating each entity with a political alignment, we address the need to balance the dataset across both political alignments and countries of origin. This ensures that no bias is introduced by

Algorithm 1 Alignment Computation

Input: alignments, a list of alignments. **Output:** A single alignment label computed from the inputs.

- 1: Define mapping as:
 - "Far-Left" \rightarrow -3
 - "Left-Wing" \rightarrow -2
 - "Center-Left" \rightarrow -1
 - "Center" $\rightarrow 0$
 - "Center-Right" $\rightarrow 1$
 - "Right-Wing" $\rightarrow 2$
 - "Far-Right" \rightarrow 3
- 2: **if** length(alignments) = 1 **then**
- 3: return alignments[0]
- 4: end if
- 5: if "Big Tent" is in alignments then
- 6: Remove "Big Tent" from alignments
- 7: **if** alignments is empty **then**
- 8: **return** "Big Tent"
- 9: end if
- 10: **end if**
- 11: $sum \leftarrow 0$
- 12: **for** each alignment in alignments **do**
- 13: sum ← sum + mapping[alignment]
- 14: **end for**
- 15: avg ← sum / length(alignments)
- 16: rounded \leftarrow ROUNDAWAYFROMZERO(avg)
- 17: **for** each (label, score) in mapping **do**
- 18: **if** score = rounded **then**
- 19: **return** label
- 20: **end if**
- 21: **end for**
- 22: **return** None

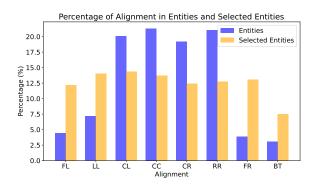


Figure 8: Alignment distribution among entities extracted from the CC-News corpus (in blue) and among entities selected and used for the experiment (in orange). While the original corpus shows an uneven distribution of political alignments, our selection process successfully balanced the representation of different alignments for the experiment.

the over- or underrepresentation of specific countries, promotes diversity among entities, and guarantees that aggregated results over political alignments are statistically significant.

In Figure 8, the blue bars illustrate the initial distribution of entities across political alignments. We observe that center-left (CL), center (CC), centerright (CR), and right (RR) alignments are overrepresented, while other alignments are underrepresented—despite our earlier step of averaging alignments away from the center. Additionally, Figure 9 reveals that entities from the United States constitute over 25% of the dataset, indicating a significant geographic imbalance.

To address these issues, we devise a hierarchical sampling algorithm (see Algorithm 2). This algorithm samples a limited number of politicians from each country while ensuring oversampling of underrepresented alignments and undersampling of overrepresented ones. The result is a balanced dataset of 1,319 entities, as shown in Figures 8 and 9, which demonstrates successful balancing across both political alignments and countries.

One notable limitation is the inability to balance the dataset across gender. Male entities constitute 75% of the dataset and are significantly overrepresented in certain alignments (e.g., 90% in Far-right). Achieving gender balance while maintaining alignment and country balance proved infeasible, as it would have required excluding a substantial portion of the data or introducing artificial imbalances in other dimensions.

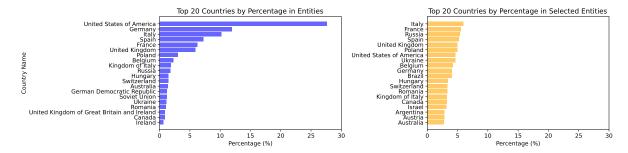


Figure 9: Countries distribution among entities extracted from the CC-News corpus (in blue) and among entities selected and used for the experiment (in orange).

```
Algorithm 2 Hierarchical Sampling of Politicians
Input:
          selected_countries, entities
Output:
           sampled_politicians
 1: sampled\_politicians \leftarrow empty list
   for each country in selected_countries do
        for each alignment in {"FL", "BT"} do
 3:
           Let Subset FL BT \leftarrow filter(entities,
 4:
    where Country = country country and Align-
    ment = alignment)
           Append top k_1 entities from Sub-
 5:
    set FL BT to sampled politicians
        end for
 6:
        for each alignment in {"CL", "CR"} do
 7:
           Let Subset_CL_CR \leftarrow filter(entities,
 8:
    where Country = country and Alignment =
    alignment)
           Append top k_2 entities from Sub-
    set_CL_CR to sampled_politicians
        end for
        for each alignment in {"CC"} do
           Let Subset\_CC \leftarrow filter(entities,
```

```
10:
11:
12:
   where Country = country and Alignment =
   "CC")
           Append top k_3 entities from Sub-
13:
   set_CC to sampled_politicians
       end for
14:
       for each alignment not in {"FL", "BT",
15:
   "CL", "CR", "CC"} do
           Let Subset_Other \leftarrow filter(entities,
16:
   where Country = country and Alignment =
   alignment)
           Append top k_4 entities from Sub-
17:
   set_Other to sampled_politicians
       end for
18:
19: end for
20: return sampled_politicians
```

```
rol e'
                                                 'system',
'You are a name generator tasked with creating original, creative, and culturally appropriate names based on specific criteria, including country of origin, birth year, and gender. Your goal is to produce names that are unique, reflect diverse naming trends of the time, and are not repetitive. The names should be realistic but also varied. Avoid using real names The name should also NEVER match any of the provided existing names and shouldn't resemble them too much. Always respond with the name only, no explanations or additional text."
"content":
                                                   no explanations or additional text.
                                                 'Generate a name with the following attributes:
 cont ent
                                                  Cenerate a name with the following action

- Country of origin: {country}

- Birth year: {birth_year}

- Gender: {gender}

The name must not be any of the following: {existing_names}.
```

Figure 10: Prompt used for fake name generation. Placeholders {country}, {birth_year}, and {gender} are replaced by the corresponding attributes of the original entity. {existing_names} is constructed iteratively and consists of the names previously generated to ensure no duplicates.

Control Group Generation

To generate a control group of fictional entities, we use GPT-4 with the prompt detailed in Figure 10. The prompt instructs the model to create original, culturally appropriate names based on specific criteria: country of origin, birth year, and gender. The generated names must be unique and realistic, and the names must not resemble any existing names provided in the input. This ensures that the control group consists of entirely fictional entities with no overlap or similarity to real-world politicians.

The prompt is structured as follows:

- The system role defines the task as generating culturally and temporally appropriate names that are unique and avoid repetition.
- The user role specifies the attributes for each name: country of origin, birth year, and gender, along with a list of existing names to

avoid.

By using this approach, we ensure that the control group mirrors the distribution of gender, birth year, and country of origin present in our dataset of real entities. This alignment allows us to isolate the impact of political attributes when rerunning simulations, as any observed differences can be more confidently attributed to political factors rather than demographic or geographic biases.

This method provides a robust foundation for comparative analysis, enabling us to evaluate how political attributes influence outcomes independently of other variables.

D Political Alignment Definitions

We define the eight political alignments used in the analysis below: We define the eight political alignments used in the analysis below:

- Far Left (FL): Political positions typically associated with advocacy for extensive structural changes, often including policies related to collective ownership and redistribution of resources.
- Left (LL): Political positions generally characterized by support for social welfare systems, progressive taxation, and policies aimed at reducing economic disparities.
- Center Left (CL): Political positions that combine support for social welfare and progressive policies with a focus on moderate and incremental reforms.
- Center (CC): Political positions that emphasize neutrality, compromise, and policies based on pragmatic considerations rather than ideological extremes.
- Center Right (CR): Political positions typically supporting free-market policies, limited government intervention, and traditional social structures, while allowing for some flexibility on social issues.
- **Right (RR)**: Political positions characterized by advocacy for free markets, limited government, national sovereignty, and the preservation of traditional institutions.
- Far Right (FR): Political positions often associated with strong nationalism, restrictive

immigration policies, and opposition to progressive social changes.

• Big Tent (BT): Political movements or parties that aim to include a wide range of ideological perspectives, often prioritizing broad coalition-building over strict adherence to a single ideology. This category may also include movements or parties that are difficult to classify due to their eclectic or evolving policy positions, as well as those that adapt their stances to appeal to diverse constituencies.

E Sentence Selection

To ensure that LLMs are prompted with sentences that do not contain counterfactual information or identifiable context, we implement a rigorous selection process. This process ensures that sentences are general enough to allow entity substitution without introducing inconsistencies or requiring the model to correct factual errors. The selection criteria are summarized in the decision diagram in Figure 11 and involve the following steps:

- Check for information that may identify the original entity, such as specific events or non-generalizable characteristics (e.g., unique roles or titles). Gender and personality traits are excluded from this step, as we adjust for gender and personality traits are not overly specific.
- Check for additional entities in the sentence and ensure that their relationship with the main entity is not too specific to generalize.

The table 1 provides examples of sentence evaluation, including the original sentence, the step applied, the decision, and the rationale behind acceptance or rejection. The original entities in each sentence are highlighted in **bold**.

This process ensures that only sentences free of counterfactual or overly specific information are used, allowing for meaningful and consistent entity substitution in downstream tasks.

F Sentence Adaptation and Translation

To ensure gender neutrality and adaptability across languages, we generate two versions of each sentence: one with male gender characteristics and one with female gender characteristics. This process was manually applied to all 450 sentences in our dataset. Additionally, to test political biases

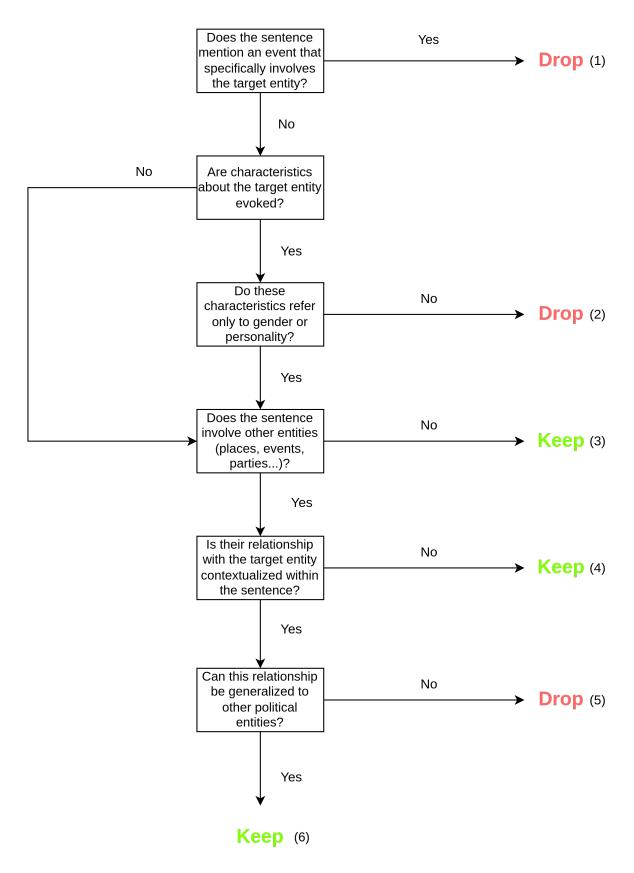


Figure 11: Sentence selection diagram. This decision diagram outlines the process of either rejecting or selecting sentences for the experiment. Sentences are rejected if switching entities introduces counterfactual information or specific unwanted contexts. However, sentences are manually adjusted for gender agreement (feminine and masculine forms), so gender-related characteristics alone are not sufficient grounds for rejection.

Table 1: Sentence Selection Process

Original Sentence	Step	Decision	Rationale
"On October 4, Angela Merkel is to meet with lead-	1	Rejected	The sentence mentions a
ers of the Social Democratic Party (SPD) to begin			specific event involving
what will likely be extended and complex negotia-			Angela Merkel and the
tions on a possible grand coalition."			SPD, which cannot be gen-
			eralized to other entities,
			as entities from other coun-
			tries cannot form a grand
			coalition with a german
			party.
"IMF director Christine Lagarde has urged Euro-	2	Rejected	"IMF Director" is a spe-
zone countries to 'immediately enforce the agree-			cific role that cannot be
ments of the July 21 summit, because the time factor			generalized to other enti-
is crucial', while US treasury secretary Tim Geithner			ties.
warned that 'preventing a default of Greece is more			
important than sustaining European growth'."			
"Already, under Dominique Strauss-Kahn , non-	3	Accepted	No specific events or non-
European countries were protesting, and critical			generalizable characteris-
voices were also raised from within the organisa-			tics are mentioned, and
tion."			no additional entities are
			present.
"The EU's reputation as a trusted guarantor of human	4	Accepted	The relationship between
rights and freedoms will be further compromised by			José Manuel Barroso and
José Manuel Barroso's decision to meet one of the			Islam Karimov is contextu-
world's most brutal dictators, Uzbek President Islam			alized within a "meeting,"
Karimov," remarks Galima Bukharbaeva, the editor			which can be generalized
of the independent Uzbek news site Uznews in an			to other entities.
opinion piece published by Süddeutsche Zeitung."	_	D ' (1	(CD # 1 22 ·
"Even when Merkozy (Angela Merkel and Nicolas	5	Rejected	"Merkozy" is a term spe-
Sarkozy) were holding the reins, the balance was be-			cific to Angela Merkel and
ginning to shift and the French were none too happy			Nicolas Sarkozy and can-
about it," explains Kęstutis Girnius."	(A 4 1	not be generalized.
"At the time, he also recommended that Mussolini	6	Accepted	The relationship between
and Hitler develop closer ties."			Hitler and Mussolini is not
			contextualized and can be
			generalized to other enti-
			ties.

in non-Western languages tied to different geopolitical contexts, we translated the sentences into multiple languages. Below, we outline the steps taken to achieve this:

Step 1: Gender Adaptation

• For each sentence, we create two versions: one using male pronouns and characteristics (e.g., "he," "his") and one using female pronouns and characteristics (e.g., "she," "her").

Step 2: Preparing for Translation

• Before translating, we replace the placeholder "X" with a clearly gendered name (e.g., "John" for male, "Mary" for female) to ensure proper genderization in the target language.

Step 3: Translation

• Using DeepL, we translate the adapted sentences into the target languages (e.g., Arabic, French, Spanish, etc.).

Step 4: Recovering the Original Entity

 After translation, we replace the gendered name (e.g., "Mary") with the original placeholder to be replaced.

Step 5: Manual Verification

 To ensure accuracy, native speakers of each target language manually verify all translations. If some errors are found, they are manually corrected. This step confirms that no genderization errors or other inconsistencies were introduced during translation.

Outcome

 We obtain 450 pairs of sentences (male and female versions) in six languages, ensuring gender adaptability and linguistic accuracy across diverse geopolitical contexts.

This process is summarized in Figure 12 with an example directly taken from the MAD-TSC sentences.

G Prompt Experiments

To identify the most effective prompt for sentiment analysis across all models, we experimented with three types of prompts: a 0-shot prompt, a 6-shot prompt, and a 9-shot prompt. The goal was to maximize performance across models while avoiding

void answers or low accuracies that could compromise interpretability. We evaluated these prompts on the 450 selected sentences with the original entities in English (EN), French (FR), and Arabic (AR) using four models: Mistral 7B, Llama 3 8B, Qwen 2.5 7B, and Llama 3 70B. The results are summarized in Table 2.

Based on these results, we selected the 9-shot prompt as it provided better performance across all languages, especially in Arabic, which had the lowest scores among the tested languages. The prompts are given in Figure 13, and the few-shot examples are presented in Table 3.

Additionally, we tested variations where sentiment was expressed numerically (-1, 0, +1) instead of verbally (negative, neutral, positive), as well as constrained decoding (forcing models to select among predefined options). While these modifications did not improve performance, and in some cases worsened it, they yielded similar aggregated bias patterns. Given this, we opted not to include them in the final approach.

H Sentiment for Individual entities

Some entities were particularly subject to much more positive or negative sentiment ratings. Giovanni Falcone (+0.14), an Italian judge known for his work against organized crime, John F. Kennedy (+0.13), the 35th U.S. president, Fannie Lou Hamer (+0.12), an American civil rights activist, and Jacinda Ardern (+0.12), former Prime Minister of New Zealand, were among the most highly rated entities. In contrast, Adolf Hitler (-0.81), Heinrich Himmler (-0.55), and Joseph Stalin (-0.34) received some of the most negative sentiment scores. Nick Griffin (-0.36), a British far-right politician and former leader of the British National Party, Marine Le Pen (-0.28), leader of France's far-right National Rally party, and *Donald Trump* (-0.23) were also rated more negatively across models.

I Bias in Control Group

Table 4 shows the top fictional names linked to positive (+) and negative (-) sentiments. Despite using fictional names to reduce bias, the results show clear patterns. Most names with positive sentiments are female, while those with negative sentiments are largely non-Western, with "Vladimir" being notably overrepresented. This indicates that bias persists. The overrepresentation of women in positive sentiments may contribute to a slight

"To varying degrees, they thought, or feared or even wanted Berlusconi to bring down the government on the issue of his personal affairs." m "To varying degrees, they thought, or feared or even wanted personal affairs." f: "To varying degrees, they thought, or feared or even wanted personal affairs." m "To varying degrees, they thought, or feared or even wanted Zaid to bring down the government on the issue of his personal affairs." f: "To varying degrees, they thought, or feared or even wanted Noor to bring down the government on the issue of her personal affairs." م: "وبدرجات متفاوتة، ظنوا أو خافوا أو حتى أرادوا أ نايسقط زيد الحكومة في قضية شؤونه استحصية . **ف** : "وبدرجات متفاوتة، ظنوا أو خافوا أو حتى أرادوا أ نـ تُسقط <u>نور</u> الحكومة في قضية شؤونها م: "وبدرجات متفاوتة، ظنوا أو خافوا أو حتى أرادوا أن يسقط <mtarget≥ الحكومة في قضية شؤونه الشخصية . " ت "وبدر جات متفاوتة، ظنوا أو خافوا أو حتى أرادوا أ ن تُسقط <u><f_target ≥</u> الحكومة في

Figure 12: Steps for translating a sentence while ensuring gender adaptability. The process begins by creating two versions of the sentence with male and female gender characteristics. A clearly gendered name is then inserted in each version of the sentence to ensure proper genderization during translation. After translation, the introduced name is removed, and the placeholder is restored. Finally, all translated sentences are manually verified for accuracy and consistency of translation.

Table 2: F1-Scores for Prompt Experimentation Across Models and Languages

Prompt Type	Language	Mistral 7B	Llama 3 8B	Qwen 2.5 7B	Llama 3 70B
0-shot	FR	0.57	0.50	0.57	0.73
	EN	0.65	0.65 0.38 0.56		0.74
	AR	0.38	0.43	0.64	0.64
6-shot	FR	0.61	0.64	0.69	0.72
	EN	0.65	0.66	0.54	0.69
	AR	0.24	0.41	0.63	0.69
9-shot	FR	0.66	0.66	0.67	0.74
	EN	0.69	0.59	0.69	0.73
	AR	0.53	0.63	0.62	0.71

```
Analyze the sentiment towards the target of the following sentence and classify it into one of the following categories:
- negative for Negative sentiment
- neutral for Neutral sentiment
- positive for Positive sentiment
Please provide only the sentiment
Score based on the provided scale.
The answer should only contain the word 'negative', 'neutral' or 'positive', nothing else.

sentence: {sentence}
target: {target}
```

```
حلل المشاكر تجاه المستهدف من الجملة التالية وصنفها إلى إحدى الفئلت التالية :
- سلين المشاعر السلبية - مجايد المشاعر السلبية - إيجابي للمشاعر الإيجابية . يرجى تقديم درجة المشاعر وقط بناغ على المقياس المقدم . يجب أ نـ تحتوي الإجابة على كلمة 'سلبي ' أو 'إيجابي' أو 'مجايد' فقط، لا شيء آخر. " الجملة : {sentence} المستهدف: {target}
```

```
Analysez le sentiment à l'égard de la cible de la phrase suivante et classez le dans l'une des catégories suivantes:
- négatif pour un sentiment négatif - neutre pour un sentiment neutre - positif pour un sentiment positif

Veuillez fournir uniquement le score de sentiment basé sur l'échelle fournie. La réponse ne doit contenir que le mot 'négatif', 'positif ou neutre', rien de plus.

phrase : {sentence} cible : {target} sentiment:
```

```
Проанализируйте отношение к цели следующего предложения и классифицируйте его в одну из следующих категорий:

отрицательное за отрицательное настроение
настроение
- положительное за положительное настроение
ГБжалуйста, предоставьте только оценку настроения на основе предоставленной шкалы. Ответ должен содержеть только слово 'негативный', 'нейтральный' им' положительный', инчего больше

предложение: {sentence}
цель : {target}
```

```
Analiza el sentimiento hacia el objetivo de la siguiente oración y clasificalo en una de las siguientes categorías:
- negativo para sentimiento negativo - neutral para sentimiento neutral - positivo para sentimiento positivo
Por favor, proporciona solo la puntuación de sentimiento basada en la escala proporcionada. La respuesta solo debe contener la palabra negativo, neutral o positivo, nada rás.

oración : {sentence} objetivo : {target}
```

```
"分析对以下句子中目标的情感,并将其分类为以下类别之一:
- 负面表示负面情感
- 中性表示中性情感
- 积极表示积极情感
请根据提供的标准提供情感分数。答案只应包含负面、中性驱积极一间,不得包含其他内容。"
句子: {sentence}目标: {target}
```

Figure 13: Prompts used for the experiment across six languages: English, French, and Spanish (first row), and Arabic, Russian, and Chinese (second row). For few-shot prompting, examples are added to the initial prompt along with their corresponding targets and sentiments. The order of examples is carefully randomized to ensure the LLM's output is not influenced by the sequence of sentiments provided.

Table 3: Sentences used for few-shot prompting.

Sentence	Target	Sentiment
"The outstanding experiences of my life," he says, "are all bound up with the Vijećnica." Very early in life, Focak came to love languages, literature, painting and architecture.	Focak	Positive
At sixteen, resembling a black-haired Grace Kelly , he devoured books on the architecture of the Renaissance and the works of Boccaccio and Dante in the library's wood-paneled reading room.	Grace Kelly	Positive
Merkel has been the cork in the bottle with regard to tensions and populist powers in Europe.	Merkel	Positive
"He was incredibly brave" – muses Bocheński and adds that Kolakowski had set an example for democratic opposition in Poland.	Bocheński	Neutral
Sterne begins by pointing out that the IMF's analysis, which El- Erian correctly lauded, has been somewhat off target in Greece's case.	Sterne	Neutral
Facing a surprise rebellion from Mario Monti and Mariano Rajoy , she conceded crucial ground; she allowed the European Stability Mechanism (ESM) – that is the permanent European relief fund soon to be in place – to be able to capitalise Spanish banks directly and buy up Italian debt without requiring an austerity programme.	Mariano Rajoy	Neutral
In the run-up to the second round, the two contestants will attempt to win over protest voters and in particular the significant number that gave their backing to the discourse espoused by Marine Le Pen .	Marine Le Pen	Negative
all Merkel has to offer Monti's Italy is words: words that are certainly new, but still only words.	Merkel	Negative
Certainly, Angela Merkel speaks constantly of 'European solidarity', [] but she is not ready to support young Greeks fleeing the crisis.	Angela Merkel	Negative

positive bias in some cases, while the prevalence of non-Western names in negative sentiments introduces a slight negative bias in others. For instance, Russian names are overrepresented in the FL alignment while women are overrepresented in the LL alignment. These findings highlight the difficulty of achieving complete neutrality through fictional name generation.

J Statistical Tests

To assess potential biases in sentiment alignment, we conduct Mann-Whitney U tests between alignment values for each model-language pair. Let μ_x denote the mean sentiment of an observation X belonging to alignment A_1 , and μ_y denote the mean sentiment of an observation Y belonging to alignment A_2 . The null hypothesis H_0 is formulated

as:

$$H_0: P(\mu_y > \mu_x) = 0.5,$$

implying no systematic difference in sentiment between alignments A_1 and A_2 . Rejection of H_0 suggests that $P(\mu_y>\mu_x)\neq 0.5$, indicating a significant bias towards one alignment over the other. Specifically, if H_0 is rejected and $P(\mu_y>\mu_x)>0.5$, this suggests a bias towards alignment A_2 compared to A_1 .

We report the results of these tests in tables for each model-language pair. Each cell in the table contains the p-value for the Mann-Whitney U test comparing the sentiment distributions of alignment i (row) and alignment j (column). A p-value < 0.01 indicates a statistically significant bias towards the alignment in the row compared to the alignment in the column. For example, in Table 6 for French, the value in row LL and column FL is

Table 4: Top Positive and Negative Sentiments associated with fictional names.

Fictional Name	Sentiment
Talita Ribeiro	+0.0364
Miyu Hoshikawa	+0.0357
Alyssa Verhaegen	+0.0350
Anushri Desai	+0.0335
Dante Mirabello	+0.0335
Celina Salcedo	+0.0326
Shanvika Mehta	+0.0323
Eliana Cardozo	+0.0316
Anaïs Rochelet	+0.0313
Milena Cortés	+0.0312
Boris Gromov	-0.0363
Vladimir Vasiliev	-0.0368
Vladimir Khamatov	-0.0370
Lázaro Trujillo	-0.0409
Stepan Lysenko	-0.0429
Reginald Tyndall	-0.0439
Boris Aksyonov	-0.0492
Miklóska Szalaj	-0.0545
Vladimir Antonov	-0.0571
János Sárközi	-0.0571

0.0029 (< 0.01). This means that, for the model Aya-Expanse-32B, there is a significant bias favoring **LL** over **FL** in French. This approach allows us to systematically identify and quantify biases across different alignments and languages.

Overall, the results show a clear bias in favor of left, center-left, and center alignments, while revealing a consistent negative bias towards right and far-right alignments. This pattern highlights systematic disparities in sentiment alignment across the political spectrum.

K Computing Infrastructure

The simulations were conducted using NVIDIA A100 GPUs. Each simulation per language took approximately 24 hours to complete. Smaller models, such as Llama 3-8B, Qwen-7B, and Mistral-7B, were run on a single GPU due to their lower computational demands. In contrast, larger models required four GPUs to handle their increased complexity and resource requirements. For GPT-4o-mini, we utilized the Batch API, sending each prompt as a single request to streamline processing and ensure efficient handling of the workload.

Table 5: Model cards for the evaluated LLMs.

Name	Full Name	Company	Country	Size	Release Date	
Owen-7B	Owen-7B-Instruct	Alibaba	China	7B	2023	
Qwen-72B	Qwen-72B-Instruct	Alioaba Cililia		72B	2023	
I.I 2.0D	M . I 1 2.0D I	M	TICA	8B	2024	
Llama 3-8B Llama 3-70B	Meta-Llama-3-8B-Instruct Meta-Llama-3-70B-Instruct	Meta	USA	70B		
Mistral-7B	Mistral-7B-Instruct-v.03	Mistral AI	France	7B	2023	
Aya-Expanse-32B	Aya-Expanse-32B	Cohere Canada		32B	2023	
GPT-4o-mini	PT-40-mini GPT-40-mini		USA	Unknown	2023	

Table 6: Aya-Expanse-32B: Mann-Withney test p-values.

Model	Language		FL	LL	CL	CC	CR	RR	FR	BT
NIOGEI	Bunguage	FL	- 12	0.9972	0.9960	0.8845	0.0012	0.0000	0.0000	0.2945
		LL	0.0029	0.7772	0.4070	0.0641	0.0000	0.0000	0.0000	0.0017
		CL	0.0040	0.5934	0070	0.0878	0.0000	0.0000	0.0000	0.0028
		CC	0.1157	0.9361	0.9123	0.0070	0.0000	0.0000	0.0000	0.0520
Aya	French	CR	0.9988	1.0000	1.0000	1.0000		0.0021	0.0000	0.9870
,		RR	1.0000	1.0000	1.0000	1.0000	0.9979	***************************************	0.0006	1.0000
		FR	1.0000	1.0000	1.0000	1.0000	1.0000	0.9994		1.0000
		ВТ	0.7060	0.9983	0.9972	0.9482	0.0131	0.0000	0.0000	
		FL		0.9857	0.8960	0.8011	0.0033	0.0000	0.0000	0.2036
		LL	0.0144		0.1468	0.0798	0.0000	0.0000	0.0000	0.0031
		CL	0.1042	0.8534		0.3406	0.0000	0.0000	0.0000	0.0214
		CC	0.1992	0.9203	0.6598		0.0001	0.0000	0.0000	0.0537
Aya	English	CR	0.9967	1.0000	1.0000	0.9999		0.0006	0.0000	0.9355
•		RR	1.0000	1.0000	1.0000	1.0000	0.9994		0.0036	1.0000
		FR	1.0000	1.0000	1.0000	1.0000	1.0000	0.9964		1.0000
		ВТ	0.7969	0.9970	0.9786	0.9465	0.0647	0.0000	0.0000	
		FL		0.9749	0.8956	0.9329	0.0062	0.0000	0.0000	0.0947
		LL	0.0252		0.2223	0.3258	0.0000	0.0000	0.0000	0.0010
		CL	0.1046	0.7780		0.6325	0.0000	0.0000	0.0000	0.0048
		CC	0.0673	0.6746	0.3679		0.0000	0.0000	0.0000	0.0025
Aya	Spanish	CR	0.9938	1.0000	1.0000	1.0000		0.0011	0.0000	0.8047
·	_	RR	1.0000	1.0000	1.0000	1.0000	0.9989		0.0058	0.9994
		FR	1.0000	1.0000	1.0000	1.0000	1.0000	0.9942		1.0000
		ВТ	0.9056	0.9991	0.9952	0.9975	0.1958	0.0006	0.0000	
		FL		0.9837	0.9802	0.7870	0.3660	0.0005	0.0000	0.5584
		LL	0.0163		0.4237	0.0952	0.0085	0.0000	0.0000	0.0436
		CL	0.0199	0.5766		0.1206	0.0086	0.0000	0.0000	0.0478
		CC	0.2133	0.9050	0.8796		0.1329	0.0000	0.0000	0.2568
Aya	Russian	CR	0.6344	0.9916	0.9914	0.8674		0.0011	0.0000	0.6948
		RR	0.9995	1.0000	1.0000	1.0000	0.9989		0.0518	0.9992
		FR	1.0000	1.0000	1.0000	1.0000	1.0000	0.9483		1.0000
		BT	0.4423	0.9566	0.9523	0.7436	0.3058	0.0008	0.0000	
		FL		0.9927	0.9884	0.9820	0.6715	0.0572	0.0000	0.5017
		LL	0.0074		0.4157	0.4082	0.0267	0.0000	0.0000	0.0164
		CL	0.0116	0.5847		0.4754	0.0378	0.0001	0.0000	0.0256
		CC	0.0181	0.5922	0.5250		0.0544	0.0001	0.0000	0.0266
Aya	Chinese	CR	0.3289	0.9734	0.9623	0.9457		0.0198	0.0000	0.3019
		RR	0.9429	1.0000	0.9999	0.9999	0.9803		0.0077	0.9128
		FR	1.0000	1.0000	1.0000	1.0000	1.0000	0.9923		0.9996
		BT	0.4990	0.9837	0.9744	0.9735	0.6986	0.0875	0.0004	
		FL		0.9737	0.9965	0.9109	0.5798	0.0074	0.0000	0.3467
		LL	0.0264		0.7777	0.1758	0.0256	0.0000	0.0000	0.0080
		CL	0.0035	0.2226		0.0564	0.0040	0.0000	0.0000	0.0013
		CC	0.0893	0.8245	0.9437		0.1244	0.0000	0.0000	0.0531
Aya	Arabic	CR	0.4207	0.9745	0.9960	0.8758		0.0028	0.0000	0.2835
		RR	0.9926	1.0000	1.0000	1.0000	0.9972		0.0023	0.9717
		FR	1.0000	1.0000	1.0000	1.0000	1.0000	0.9977		1.0000
		BT	0.6539	0.9921	0.9987	0.9470	0.7170	0.0284	0.0000	

Table 7: GPT-4o-mini: Mann-Withney test p-values.

Model Language FL LL CL CC CR RR FR BT LL 0.1673 0.0329 0.0162 0.0515 0.0000 0.0231 0.0002 0.0000 0.0000 0.0688 RR 1.0000 1.0000 1.0000 1.0000 1.0000 1.0000 0.9998 0.0002 0.0000 0.9688 RR 1.0000 1.0000 1.0000 1.0000 0.9998 0.0002 0.0000 0.0000 0.0000 0.0000 0.0000 0.0000 0.0000 0.0000 0.0000 0.0000 0.0000 0.0000 0.0000 0.0000 0.0000 0.0000 0.0000 0.0000<
GPT French LL 0.1673 (O.9995) 0.0005 (O.0034) 0.0000 (O.0000) 0.0000 (O.0000)
GPT French CL 0.9839 0.9995 0.5517 0.0001 0.0000 0.0000 0.1251 GPT French CR 1.0000 1.0000 0.9999 0.9998 0.0002 0.0000 0.0000 0.9688 RR 1.0000 1.0000 1.0000 1.0000 0.9998 0.1928 1.0000 FR 1.0000 1.0000 1.0000 1.0000 1.0000 0.8075 1.0000 BT 0.9933 0.9996 0.8752 0.8773 0.0313 0.0000 0.0000 0.0000 BT 0.1736 0.0421 0.0022 0.0000 0.0000 0.0000 0.00571 LL 0.1736 0.9580 0.0893 0.0001 0.0000 0.0066 0.1180 CC 0.9689 0.9979 0.9108 0.0073 0.0000 0.1221 0.4831 GPT English CR 1.0000 1.0000 0.9999 0.9928 0.0271 0.9146 0.9815 </th
GPT French CC 0.9486 0.9966 0.4487 0.0002 0.0000 0.0000 0.1231 GPT French CR 1.0000 1.0000 0.9999 0.9998 0.0002 0.0000 0.0000 0.9688 RR 1.0000 1.0000 1.0000 1.0000 0.9998 0.1928 1.0000 FR 1.0000 1.0000 1.0000 1.0000 1.0000 0.8075 1.0000 BT 0.9933 0.9996 0.8752 0.8773 0.0313 0.0000 0.0000 0.0000 LL 0.1736 0.0421 0.0022 0.0000 0.0000 0.00571 LL 0.1736 0.9580 0.0893 0.0001 0.0000 0.0066 0.1180 CC 0.9689 0.9979 0.9108 0.0073 0.0000 0.1221 0.4831 GPT English CR 1.0000 1.0000 0.9999 0.9928 0.0271 0.9146 0.9815 <th< th=""></th<>
GPT French CR 1.0000 1.0000 0.9999 0.9998 0.0002 0.0000 0.9688 RR 1.0000 1.0000 1.0000 1.0000 0.9998 0.1928 1.0000 FR 1.0000 1.0000 1.0000 1.0000 0.8075 1.0000 BT 0.9933 0.9996 0.8752 0.8773 0.0313 0.0000 0.0000 FL 0.8267 0.2950 0.0311 0.0000 0.0000 0.0015 0.0571 LL 0.1736 0.0421 0.0022 0.0000 0.0000 0.0000 0.0050 CL 0.7054 0.9580 0.0893 0.0001 0.0000 0.0066 0.1180 GPT English CR 1.0000 1.0000 0.9999 0.9928 0.0271 0.9146 0.9815 RR 1.0000 1.0000 1.0000 0.9730 0.9994 0.9999
RR 1.0000 1.0000 1.0000 0.9998 0.1928 1.0000 FR 1.0000 1.0000 1.0000 1.0000 0.8075 1.0000 BT 0.9933 0.9996 0.8752 0.8773 0.0313 0.0000 0.0000 FL 0.8267 0.2950 0.0311 0.0000 0.0000 0.0015 0.0571 LL 0.1736 0.0421 0.0022 0.0000 0.0000 0.0000 0.0050 CL 0.7054 0.9580 0.0893 0.0001 0.0000 0.0066 0.1180 GPT English CR 1.0000 1.0000 0.9999 0.9928 0.0271 0.9146 0.9815 RR 1.0000 1.0000 1.0000 0.9730 0.9994 0.9999
FR 1.0000 1.0000 1.0000 1.0000 1.0000 0.8075 1.0000 BT 0.9933 0.9996 0.8752 0.8773 0.0313 0.0000 0.0000 FL 0.8267 0.2950 0.0311 0.0000 0.0000 0.0015 0.0571 LL 0.1736 0.0421 0.0022 0.0000 0.0000 0.0000 0.0050 CL 0.7054 0.9580 0.0893 0.0001 0.0000 0.0066 0.1180 CC 0.9689 0.9979 0.9108 0.0073 0.0000 0.1221 0.4831 GPT English CR 1.0000 1.0000 0.9999 0.9928 0.0271 0.9146 0.9815 RR 1.0000 1.0000 1.0000 0.9730 0.9994 0.9999
BT 0.9933 0.9996 0.8752 0.8773 0.0313 0.0000 0.0000 FL 0.8267 0.2950 0.0311 0.0000 0.0000 0.0015 0.0571 LL 0.1736 0.0421 0.0022 0.0000 0.0000 0.0000 0.0050 CL 0.7054 0.9580 0.0893 0.0001 0.0000 0.0066 0.1180 CC 0.9689 0.9979 0.9108 0.0073 0.0000 0.1221 0.4831 GPT English CR 1.0000 1.0000 0.9999 0.9928 0.0271 0.9146 0.9815 RR 1.0000 1.0000 1.0000 0.9730 0.9994 0.9999
FL 0.8267 0.2950 0.0311 0.0000 0.0000 0.0015 0.0571 LL 0.1736 0.0421 0.0022 0.0000 0.0000 0.0000 0.0050 CL 0.7054 0.9580 0.0893 0.0001 0.0000 0.0066 0.1180 CC 0.9689 0.9979 0.9108 0.0073 0.0000 0.1221 0.4831 GPT English CR 1.0000 1.0000 0.9999 0.9928 0.0271 0.9146 0.9815 RR 1.0000 1.0000 1.0000 0.0000 0.9730 0.9994 0.9999
CPT English LL 0.1736 0.0421 0.0022 0.0000 0.0000 0.0000 0.0050 CPT English CR 1.0000 1.0000 0.9999 0.9928 0.0073 0.0071 0.9146 0.9815 RR 1.0000 1.0000 1.0000 1.0000 0.9730 0.9994 0.9999
CPT CL 0.7054 0.9580 0.0893 0.0001 0.0000 0.0066 0.1180 CPT English CR 1.0000 1.0000 0.9999 0.9928 0.0271 0.9146 0.9815 RR 1.0000 1.0000 1.0000 1.0000 0.9730 0.9994 0.9999
GPT English CC 0.9689 0.9979 0.9108 0.0073 0.0000 0.1221 0.4831 RR 1.0000 1.0000 0.9999 0.9928 0.0271 0.9146 0.9815 RR 1.0000 1.0000 1.0000 0.9730 0.9994 0.9999
GPT English CR 1.0000 1.0000 0.9999 0.9928 0.0271 0.9146 0.9815 RR 1.0000 1.0000 1.0000 0.9730 0.9994 0.9999
RR 1.0000 1.0000 1.0000 0.9730 0.9994 0.9999
FR 0.9985 1.0000 0.9934 0.8781 0.0856 0.0006 0.8210
BT 0.9431 0.9950 0.8822 0.5176 0.0185 0.0001 0.1794
FL 0.9727 0.0656 0.0565 0.0000 0.0000 0.0000 0.0035
LL 0.0273 0.0001 0.0002 0.0000 0.0000 0.0000 0.0000
CL 0.9345 0.9999 0.4126 0.0004 0.0000 0.0000 0.0445
CC 0.9436 0.9998 0.5878 0.0020 0.0000 0.0000 0.0683
GPT Spanish CR 1.0000 1.0000 0.9996 0.9980 0.0003 0.0000 0.8600
RR 1.0000 1.0000 1.0000 0.9997 0.0908 1.0000
FR 1.0000 1.0000 1.0000 1.0000 0.9093 1.0000
BT 0.9965 1.0000 0.9556 0.9319 0.1404 0.0000 0.0000
FL 0.9220 0.3050 0.2979 0.0014 0.0002 0.0040 0.0247
LL 0.0782 0.0183 0.0238 0.0000 0.0000 0.0000 0.0004
CL 0.6954 0.9818 0.4998 0.0047 0.0006 0.0095 0.0525
CC 0.7025 0.9762 0.5006 0.0058 0.0009 0.0153 0.0679
GPT Russian CR 0.9986 1.0000 0.9954 0.9942 0.2527 0.6423 0.7616
RR 0.9998 1.0000 0.9994 0.9991 0.7476 0.8554 0.8964
FR 0.9960 1.0000 0.9905 0.9847 0.3581 0.1449 0.6287
BT 0.9754 0.9996 0.9477 0.9323 0.2389 0.1039 0.3719
FL 0.8267 0.2950 0.0311 0.0000 0.0000 0.0015 0.0571
LL 0.1736 0.0421 0.0022 0.0000 0.0000 0.0000 0.0050
CL 0.7054 0.9580 0.0893 0.0001 0.0000 0.0066 0.1180
CC 0.9689 0.9979 0.9108 0.0073 0.0000 0.1221 0.4831
GPT Chinese CR 1.0000 1.0000 0.9999 0.9928 0.0271 0.9146 0.9815
RR 1.0000 1.0000 1.0000 0.9730 0.9994 0.9999
FR 0.9985 1.0000 0.9934 0.8781 0.0856 0.0006 0.8210
BT 0.9431 0.9950 0.8822 0.5176 0.0185 0.0001 0.1794
FL 0.9187 0.3627 0.3310 0.0232 0.0000 0.0022 0.0257
LL 0.0814 0.0264 0.0257 0.0002 0.0000 0.0000 0.0006
CL 0.6377 0.9737 0.4423 0.0309 0.0000 0.0037 0.0317
CC 0.6694 0.9744 0.5580 0.0492 0.0000 0.0062 0.0503
GPT Arabic CR 0.9768 0.9998 0.9691 0.9509 0.0007 0.2089 0.4375
RR 1.0000 1.0000 1.0000 0.9993 0.9926 0.9967
FR 0.9978 1.0000 0.9963 0.9938 0.7914 0.0074 0.7009
BT 0.9744 0.9994 0.9684 0.9498 0.5632 0.0033 0.2997

Table 8: Llama 3-70B: Mann-Withney test p-values.

Model	Language		FL	LL	CL	CC	CR	RR	FR	BT
		FL		1.0000	1.0000	0.9977	0.4640	0.0000	0.0000	0.3502
		LL	0.0000		0.5633	0.0540	0.0000	0.0000	0.0000	0.0000
		CL	0.0000	0.4371		0.0270	0.0000	0.0000	0.0000	0.0000
		CC	0.0023	0.9461	0.9730		0.0014	0.0000	0.0000	0.0032
Llama-70b	French	CR	0.5365	1.0000	1.0000	0.9986		0.0000	0.0000	0.3803
		RR	1.0000	1.0000	1.0000	1.0000	1.0000		0.0008	1.0000
		FR	1.0000	1.0000	1.0000	1.0000	1.0000	0.9992		1.0000
		BT	0.6504	1.0000	1.0000	0.9968	0.6203	0.0000	0.0000	
		FL		1.0000	1.0000	0.9991	0.2828	0.0000	0.0000	0.1904
		LL	0.0000		0.5504	0.0908	0.0000	0.0000	0.0000	0.0000
		CL	0.0000	0.4499		0.0569	0.0000	0.0000	0.0000	0.0000
		CC	0.0009	0.9093	0.9433		0.0001	0.0000	0.0000	0.0002
Llama-70b	English	CR	0.7176	1.0000	1.0000	0.9999		0.0000	0.0000	0.2787
		RR	1.0000	1.0000	1.0000	1.0000	1.0000		0.0013	1.0000
		FR	1.0000	1.0000	1.0000	1.0000	1.0000	0.9987		1.0000
		BT	0.8101	1.0000	1.0000	0.9998	0.7218	0.0000	0.0000	
		FL		1.0000	1.0000	0.9994	0.7008	0.0000	0.0000	0.2141
		LL	0.0000		0.5510	0.1371	0.0000	0.0000	0.0000	0.0000
		CL	0.0000	0.4494		0.0962	0.0000	0.0000	0.0000	0.0000
		CC	0.0006	0.8631	0.9040		0.0019	0.0000	0.0000	0.0001
Llama-70b	Spanish	CR	0.2996	1.0000	1.0000	0.9981		0.0000	0.0000	0.1049
		RR	1.0000	1.0000	1.0000	1.0000	1.0000		0.0000	0.9997
		FR	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000		1.0000
		BT	0.7864	1.0000	1.0000	0.9999	0.8954	0.0003	0.0000	
		FL		0.9730	0.9830	0.9269	0.6134	0.0075	0.0001	0.2847
		LL	0.0270		0.5975	0.3040	0.0433	0.0000	0.0000	0.0094
		CL	0.0171	0.4029		0.2201	0.0298	0.0000	0.0000	0.0059
		CC	0.0732	0.6963	0.7801		0.1019	0.0000	0.0000	0.0235
Llama-70b	Russian	CR	0.3871	0.9568	0.9702	0.8983		0.0018	0.0000	0.1804
		RR	0.9925	1.0000	1.0000	1.0000	0.9982		0.0719	0.9518
		FR	0.9999	1.0000	1.0000	1.0000	1.0000	0.9283		0.9974
		BT	0.7159	0.9906	0.9941	0.9766	0.8200	0.0484	0.0026	
		FL		0.8008	0.7796	0.5923	0.3158	0.0150	0.0001	0.7929
		LL	0.1995		0.4301	0.2680	0.0831	0.0007	0.0000	0.4873
		CL	0.2207	0.5703		0.3468	0.1253	0.0019	0.0000	0.5374
		CC	0.4081	0.7323	0.6535		0.2120	0.0044	0.0000	0.7106
Llama-70b	Chinese	CR	0.6847	0.9171	0.8750	0.7883		0.0409	0.0005	0.8663
		RR	0.9850	0.9993	0.9981	0.9956	0.9592		0.0606	0.9939
		FR	0.9999	1.0000	1.0000	1.0000	0.9995	0.9396		1.0000
		BT	0.2076	0.5133	0.4632	0.2899	0.1341	0.0061	0.0000	
		FL		0.9980	0.9998	0.9868	0.6618	0.2713	0.0031	0.7860
		LL	0.0020		0.7030	0.2030	0.0032	0.0000	0.0000	0.0348
		CL	0.0002	0.2973		0.0849	0.0006	0.0000	0.0000	0.0145
		CC	0.0133	0.7972	0.9152		0.0367	0.0016	0.0000	0.1574
Llama-70b	Arabic	CR	0.3386	0.9968	0.9994	0.9634		0.1303	0.0003	0.7260
		RR	0.7291	1.0000	1.0000	0.9985	0.8700		0.0086	0.9410
		FR	0.9969	1.0000	1.0000	1.0000	0.9997	0.9914		0.9998
		BT	0.2145	0.9653	0.9855	0.8430	0.2745	0.0592	0.0002	

Table 9: Llama 3-8B: Mann-Withney test p-values.

Model	Language		FL	LL	CL	CC	CR	RR	FR	BT
		FL		0.8490	0.6812	0.7593	0.0068	0.0000	0.0000	0.1432
		LL	0.1512		0.2606	0.3308	0.0001	0.0000	0.0000	0.0229
		CL	0.3191	0.7397		0.6266	0.0009	0.0000	0.0000	0.0664
		CC	0.2410	0.6696	0.3738		0.0003	0.0000	0.0000	0.0412
Llama-8B	French	CR	0.9932	0.9999	0.9991	0.9997		0.0001	0.0010	0.8457
		RR	1.0000	1.0000	1.0000	1.0000	0.9999		0.5110	1.0000
		FR	1.0000	1.0000	1.0000	1.0000	0.9990	0.4894		0.9999
		BT	0.8571	0.9772	0.9338	0.9589	0.1547	0.0000	0.0001	
		FL		0.9947	0.9502	0.9546	0.3270	0.0005	0.0148	0.6682
		LL	0.0053		0.1141	0.1381	0.0005	0.0000	0.0000	0.0402
		CL	0.0499	0.8861		0.6259	0.0140	0.0000	0.0001	0.1664
		CC	0.0455	0.8622	0.3745		0.0069	0.0000	0.0000	0.1418
Llama-8B	English	CR	0.6734	0.9995	0.9860	0.9931		0.0009	0.0316	0.7830
		RR	0.9995	1.0000	1.0000	1.0000	0.9991		0.7867	0.9993
		FR	0.9852	1.0000	0.9999	1.0000	0.9685	0.2136		0.9888
		BT	0.3325	0.9599	0.8339	0.8585	0.2175	0.0007	0.0113	
		FL		0.9955	0.9196	0.7252	0.0065	0.0000	0.0000	0.5098
		LL	0.0045		0.0965	0.0129	0.0000	0.0000	0.0000	0.0225
		CL	0.0806	0.9036		0.2008	0.0000	0.0000	0.0000	0.1480
		CC	0.2752	0.9871	0.7995		0.0005	0.0000	0.0000	0.3308
Llama-8B	Spanish	CR	0.9935	1.0000	1.0000	0.9995		0.0001	0.0016	0.9866
		RR	1.0000	1.0000	1.0000	1.0000	0.9999		0.6245	1.0000
		FR	1.0000	1.0000	1.0000	1.0000	0.9984	0.3759		1.0000
		BT	0.4909	0.9776	0.8523	0.6697	0.0135	0.0000	0.0000	
		FL		0.9995	0.9542	0.9961	0.7795	0.5049	0.3953	0.9251
		LL	0.0005		0.0586	0.2616	0.0056	0.0009	0.0002	0.1142
		CL	0.0459	0.9415		0.8272	0.1814	0.0498	0.0260	0.5048
		CC	0.0039	0.7387	0.1730		0.0390	0.0052	0.0023	0.2490
Llama-8B	Russian	CR	0.2209	0.9944	0.8188	0.9611		0.2618	0.1639	0.7748
		RR	0.4956	0.9991	0.9503	0.9949	0.7385		0.3572	0.9161
		FR	0.6051	0.9998	0.9741	0.9977	0.8364	0.6432		0.9440
		BT	0.0751	0.8861	0.4958	0.7515	0.2257	0.0842	0.0561	
		FL		0.9824	0.9923	0.9582	0.3158	0.0673	0.1180	0.7638
		LL	0.0176		0.6185	0.3327	0.0041	0.0002	0.0005	0.1521
		CL	0.0077	0.3819		0.2489	0.0012	0.0000	0.0001	0.0970
		CC	0.0419	0.6677	0.7514		0.0107	0.0007	0.0016	0.2326
Llama-8B	Chinese	CR	0.6846	0.9959	0.9988	0.9893		0.1640	0.2367	0.8821
		RR	0.9328	0.9998	1.0000	0.9993	0.8363		0.5772	0.9763
		FR	0.8822	0.9995	0.9999	0.9984	0.7637	0.4232		0.9623
		BT	0.2367	0.8483	0.9032	0.7679	0.1182	0.0238	0.0379	

Table 10: Mistral-7B: Mann-Withney test p-values.

Model	Language		FL	LL	CL	CC	CR	RR	FR	BT
		FL		1.0000	1.0000	1.0000	0.9995	0.0092	0.0000	0.4689
		LL	0.0000		0.8222	0.7063	0.1071	0.0000	0.0000	0.0000
		CL	0.0000	0.1780		0.3692	0.0157	0.0000	0.0000	0.0000
		CC	0.0000	0.2940	0.6312		0.0369	0.0000	0.0000	0.0000
Mistral	French	CR	0.0005	0.8931	0.9844	0.9632		0.0000	0.0000	0.0018
		RR	0.9908	1.0000	1.0000	1.0000	1.0000		0.0017	0.9836
		FR	1.0000	1.0000	1.0000	1.0000	1.0000	0.9983		1.0000
		BT	0.5318	1.0000	1.0000	1.0000	0.9982	0.0164	0.0000	
		FL		1.0000	1.0000	1.0000	1.0000	0.0111	0.0000	0.2251
		LL	0.0000		0.9663	0.8427	0.3880	0.0000	0.0000	0.0000
		CL	0.0000	0.0338		0.1916	0.0152	0.0000	0.0000	0.0000
		CC	0.0000	0.1575	0.8086		0.1010	0.0000	0.0000	0.0000
Mistral	English	CR	0.0000	0.6124	0.9848	0.8992		0.0000	0.0000	0.0000
		RR	0.9889	1.0000	1.0000	1.0000	1.0000		0.0034	0.9217
		FR	1.0000	1.0000	1.0000	1.0000	1.0000	0.9966		0.9998
		BT	0.7754	1.0000	1.0000	1.0000	1.0000	0.0786	0.0002	
		FL		0.9999	1.0000	1.0000	0.9996	0.0402	0.0000	0.5877
		LL	0.0001		0.9329	0.7238	0.3529	0.0000	0.0000	0.0006
		CL	0.0000	0.0672		0.1979	0.0283	0.0000	0.0000	0.0000
		CC	0.0000	0.2766	0.8023		0.1760	0.0000	0.0000	0.0001
Mistral	Spanish	CR	0.0004	0.6475	0.9717	0.8243		0.0000	0.0000	0.0048
		RR	0.9599	1.0000	1.0000	1.0000	1.0000		0.0015	0.9683
		FR	1.0000	1.0000	1.0000	1.0000	1.0000	0.9985		1.0000
		BT	0.4129	0.9994	1.0000	0.9999	0.9952	0.0318	0.0000	
		FL		0.9329	0.9976	0.9941	0.9981	0.2543	0.0157	0.0625
		LL	0.0672		0.9274	0.8660	0.9453	0.0159	0.0001	0.0016
		CL	0.0024	0.0727		0.3936	0.5800	0.0003	0.0000	0.0000
		CC	0.0060	0.1342	0.6068		0.6981	0.0010	0.0000	0.0001
Mistral	Russian	CR	0.0019	0.0548	0.4204	0.3022		0.0003	0.0000	0.0000
		RR	0.7461	0.9841	0.9997	0.9990	0.9997		0.0706	0.1612
		FR	0.9844	0.9999	1.0000	1.0000	1.0000	0.9296		0.6734
		BT	0.9377	0.9984	1.0000	0.9999	1.0000	0.8393	0.3272	
		FL		0.9663	0.9816	0.9823	0.9769	0.9411	0.9215	0.8815
		LL	0.0338		0.6971	0.6363	0.6616	0.4373	0.3855	0.3559
		CL	0.0184	0.3033		0.4719	0.4927	0.3160	0.2562	0.2514
		CC	0.0177	0.3641	0.5285		0.4868	0.3150	0.2512	0.2562
Mistral	Chinese	CR	0.0231	0.3387	0.5077	0.5136	0.6600	0.3316	0.2547	0.2664
		RR	0.0590	0.5631	0.6844	0.6854	0.6688		0.4115	0.4165
		FR	0.0786	0.6149	0.7442	0.7492	0.7457	0.5889	0.5150	0.4833
		BT	0.1188	0.6447	0.7490	0.7443	0.7341	0.5842	0.5173	0.4200
		FL	0.4520	0.5476	0.9727	0.7942	0.7076	0.5720	0.4299	0.4309
		LL	0.4528	0.0216	0.9685	0.7800	0.6483	0.5279	0.3892	0.4311
		CL	0.0274	0.0316	0.000	0.1394	0.0715	0.0403	0.0209	0.0382
M:.41	A mala :	CC	0.2061	0.2203	0.8608	0.6004	0.3720	0.2468	0.1598	0.2193
Mistral	Arabic	CR	0.2928	0.3521	0.9286	0.6284	0.6240	0.3655	0.2540	0.2662
		RR	0.4284	0.4725	0.9598	0.7535	0.6349	0.6270	0.3626	0.3841
		FR	0.5705	0.6112	0.9792	0.8405	0.7464	0.6379	0.4010	0.5096
		BT	0.5698	0.5695	0.9619	0.7811	0.7343	0.6165	0.4910	

Table 11: Qwen-72B: Mann-Withney test p-values.

Model	Language		FL	LL	CL	CC	CR	RR	FR	BT
	gunge	FL		1.0000	1.0000	0.9999	0.9606	0.0012	0.0000	0.7133
		LL	0.0000		0.9502	0.1348	0.0010	0.0000	0.0000	0.0001
		CL	0.0000	0.0498		0.0031	0.0000	0.0000	0.0000	0.0000
		CC	0.0001	0.8654	0.9969		0.0255	0.0000	0.0000	0.0029
Qwen72b	French	CR	0.0395	0.9990	1.0000	0.9746		0.0000	0.0000	0.1545
		RR	0.9988	1.0000	1.0000	1.0000	1.0000		0.0002	0.9995
		FR	1.0000	1.0000	1.0000	1.0000	1.0000	0.9998		1.0000
		BT	0.2872	0.9999	1.0000	0.9971	0.8459	0.0005	0.0000	
		FL		1.0000	1.0000	1.0000	0.9872	0.0350	0.0000	0.7508
		LL	0.0000		0.9378	0.2113	0.0023	0.0000	0.0000	0.0001
		CL	0.0000	0.0623		0.0088	0.0000	0.0000	0.0000	0.0000
		CC	0.0000	0.7890	0.9912		0.0246	0.0000	0.0000	0.0012
Qwen72b	English	CR	0.0128	0.9977	1.0000	0.9754		0.0000	0.0000	0.0924
_		RR	0.9651	1.0000	1.0000	1.0000	1.0000		0.0000	0.9881
		FR	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000		1.0000
		BT	0.2498	0.9999	1.0000	0.9988	0.9079	0.0120	0.0000	
		FL		1.0000	1.0000	0.9999	0.9458	0.0098	0.0000	0.6032
		LL	0.0000		0.8690	0.1832	0.0008	0.0000	0.0000	0.0001
		CL	0.0000	0.1312		0.0201	0.0000	0.0000	0.0000	0.0000
		CC	0.0001	0.8171	0.9800		0.0054	0.0000	0.0000	0.0005
Qwen72b	Spanish	CR	0.0543	0.9992	1.0000	0.9946		0.0000	0.0000	0.0905
		RR	0.9902	1.0000	1.0000	1.0000	1.0000		0.0000	0.9899
		FR	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000		1.0000
		BT	0.3975	0.9999	1.0000	0.9995	0.9098	0.0101	0.0000	
		FL		1.0000	1.0000	1.0000	0.9997	0.3191	0.0001	0.7784
		LL	0.0000		0.9970	0.7313	0.2498	0.0000	0.0000	0.0033
		CL	0.0000	0.0030		0.0136	0.0003	0.0000	0.0000	0.0000
		CC	0.0000	0.2690	0.9865		0.1139	0.0000	0.0000	0.0009
Qwen72b	Russian	CR	0.0003	0.7505	0.9997	0.8863		0.0000	0.0000	0.0113
		RR	0.6813	1.0000	1.0000	1.0000	1.0000		0.0004	0.8899
		FR	0.9999	1.0000	1.0000	1.0000	1.0000	0.9996		1.0000
		BT	0.2221	0.9967	1.0000	0.9991	0.9887	0.1104	0.0000	
		FL		0.9998	1.0000	0.9823	0.9156	0.0060	0.0000	0.4621
		LL	0.0002		0.8424	0.0405	0.0113	0.0000	0.0000	0.0006
		CL	0.0000	0.1578		0.0060	0.0008	0.0000	0.0000	0.0000
		CC	0.0177	0.9596	0.9940		0.2404	0.0000	0.0000	0.0246
Qwen72b	Chinese	CR	0.0846	0.9887	0.9992	0.7599		0.0000	0.0000	0.0979
		RR	0.9940	1.0000	1.0000	1.0000	1.0000		0.0190	0.9816
		FR	1.0000	1.0000	1.0000	1.0000	1.0000	0.9810		0.9999
		BT	0.5386	0.9994	1.0000	0.9755	0.9024	0.0185	0.0001	
		FL		0.9990	1.0000	0.7742	0.4334	0.0009	0.0000	0.3281
		LL	0.0010	_	0.9193	0.0092	0.0004	0.0000	0.0000	0.0003
		CL	0.0000	0.0809		0.0001	0.0000	0.0000	0.0000	0.0000
_		CC	0.2261	0.9908	0.9999		0.1601	0.0000	0.0000	0.1121
Qwen72b	Arabic	CR	0.5671	0.9996	1.0000	0.8402	0.00	0.0010	0.0000	0.3980
		RR	0.9991	1.0000	1.0000	1.0000	0.9990	0.00-	0.0064	0.9918
		FR	1.0000	1.0000	1.0000	1.0000	1.0000	0.9936		1.0000
		BT	0.6725	0.9997	1.0000	0.8881	0.6027	0.0082	0.0000	

Table 12: Qwen-7B: Mann-Withney test p-values.

Model	Language		FL	LL	CL	CC	CR	RR	FR	BT
		FL		0.9997	0.9996	0.9825	0.1835	0.0011	0.0000	0.6691
		LL	0.0003		0.4588	0.0397	0.0000	0.0000	0.0000	0.0051
		CL	0.0004	0.5415		0.0716	0.0000	0.0000	0.0000	0.0075
		CC	0.0175	0.9604	0.9286		0.0007	0.0000	0.0000	0.0964
Qwen7b	French	CR	0.8168	1.0000	1.0000	0.9993		0.0158	0.0003	0.9051
		RR	0.9989	1.0000	1.0000	1.0000	0.9843		0.0659	0.9991
		FR	1.0000	1.0000	1.0000	1.0000	0.9997	0.9342		1.0000
		BT	0.3315	0.9949	0.9925	0.9039	0.0952	0.0009	0.0000	
		FL		0.9954	0.9988	0.9736	0.5031	0.0065	0.0000	0.7572
		LL	0.0046		0.6054	0.1748	0.0034	0.0000	0.0000	0.0470
		CL	0.0012	0.3949		0.0911	0.0007	0.0000	0.0000	0.0233
		CC	0.0264	0.8255	0.9090		0.0213	0.0000	0.0000	0.1673
Qwen7b	English	CR	0.4974	0.9966	0.9993	0.9788		0.0038	0.0000	0.7376
		RR	0.9936	1.0000	1.0000	1.0000	0.9962		0.0081	0.9985
		FR	1.0000	1.0000	1.0000	1.0000	1.0000	0.9919		1.0000
		BT	0.2433	0.9532	0.9768	0.8331	0.2630	0.0016	0.0000	
		FL		0.9796	0.9621	0.9854	0.3345	0.0153	0.0001	0.3945
		LL	0.0204		0.3828	0.5258	0.0047	0.0000	0.0000	0.0298
		CL	0.0380	0.6175		0.6566	0.0093	0.0000	0.0000	0.0413
		CC	0.0146	0.4746	0.3438		0.0031	0.0000	0.0000	0.0235
Qwen7b	Spanish	CR	0.6659	0.9953	0.9907	0.9969		0.0491	0.0008	0.6110
		RR	0.9847	1.0000	1.0000	1.0000	0.9510		0.0563	0.9547
		FR	0.9999	1.0000	1.0000	1.0000	0.9992	0.9439		0.9984
		BT	0.6061	0.9703	0.9588	0.9765	0.3896	0.0454	0.0016	
		FL		0.9999	0.9998	0.9987	0.9614	0.9479	0.0020	0.9426
		LL	0.0001		0.3918	0.1805	0.0189	0.0053	0.0000	0.0483
		CL	0.0002	0.6085		0.2855	0.0401	0.0181	0.0000	0.0730
		CC	0.0013	0.8198	0.7148		0.1292	0.0759	0.0000	0.1673
Qwen7b	Russian	CR	0.0387	0.9811	0.9600	0.8710		0.3805	0.0000	0.5160
		RR	0.0522	0.9947	0.9819	0.9242	0.6200		0.0000	0.6268
		FR	0.9980	1.0000	1.0000	1.0000	1.0000	1.0000		1.0000
		BT	0.0576	0.9518	0.9272	0.8331	0.4846	0.3739	0.0000	
		FL		0.9418	0.9783	0.9811	0.5181	0.1145	0.0677	0.5628
		LL	0.0583		0.6840	0.7046	0.0633	0.0019	0.0010	0.1146
		CL	0.0218	0.3164		0.5337	0.0256	0.0004	0.0002	0.0663
		CC	0.0190	0.2958	0.4667		0.0243	0.0004	0.0003	0.0620
Qwen7b	Chinese	CR	0.4823	0.9369	0.9744	0.9758		0.0994	0.0616	0.5370
		RR	0.8858	0.9981	0.9996	0.9996	0.9008		0.3757	0.9073
		FR	0.9324	0.9990	0.9998	0.9997	0.9385	0.6247		0.9218
		BT	0.4379	0.8857	0.9339	0.9381	0.4637	0.0930	0.0784	
		FL		0.5893	0.9606	0.8169	0.7627	0.4780	0.3857	0.3543
		LL	0.4111		0.9580	0.7370	0.6596	0.3794	0.2839	0.2796
		CL	0.0394	0.0421		0.1684	0.1345	0.0260	0.0189	0.0241
		CC	0.1834	0.2633	0.8318		0.4354	0.1693	0.1140	0.1290
Qwen7b	Arabic	CR	0.2377	0.3408	0.8658	0.5651		0.2177	0.1608	0.1835
		RR	0.5224	0.6210	0.9740	0.8310	0.7827		0.3768	0.3911
		FR	0.6147	0.7164	0.9812	0.8862	0.8395	0.6237		0.4811
		BT	0.6463	0.7209	0.9760	0.8713	0.8169	0.6096	0.5196	