Project Development Phase

Milestone-3 Creation of Access Control Lists(Read ACL)

Date	28-10-2026
Team ID	SWTID-2026-7875
Project Name	Script-Controlled ACL – Restrict Record Access Based on Field Value

Creation of Access Control Lists(Read ACL)


1. In the **Application Navigator**, search for **System Security → Access Control (ACL)**.
2. Elevate “Security_admin” role
3. Click **New** to create a new ACL.
4. Enter the following details:
    - **Type:** record
    - **Operation:** read
    - **Name:** u_institution_details
    - **Active:** true
    - **Advanced:** true
5. In the **Requires role** related list, add:
    - bb1 (custom role)
6. Add Data condition as **Branch is EEE**
7. In the **Script** field, add the following script:


```
(function () {


// Allow admin users full access
if (gs.hasRole('admin')) {
   return true;
}
```

```
    // Allow only EEE branch users to see EEE records
    if (gs.hasRole('bb1')){
        return true;
    }
    // Deny access for all others
    return false;
})();
```

8 . Click **Submit** to save the ACL.

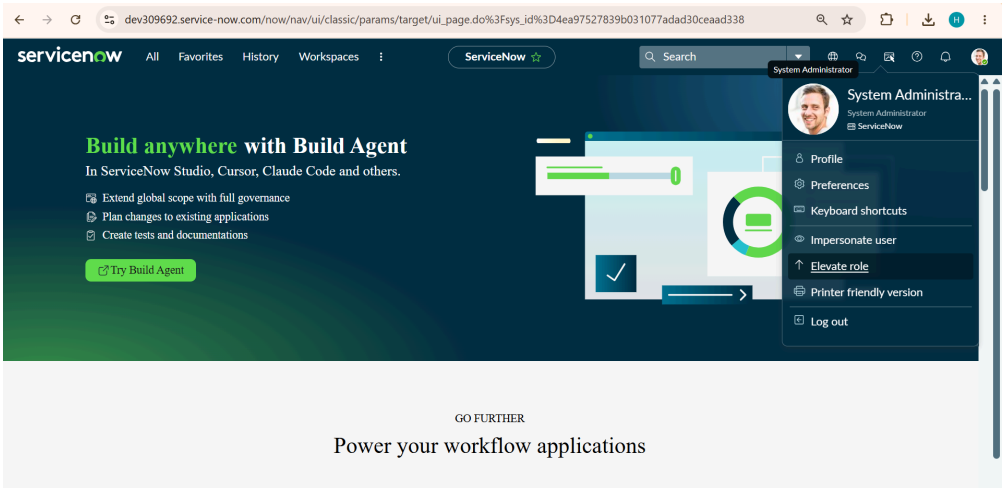


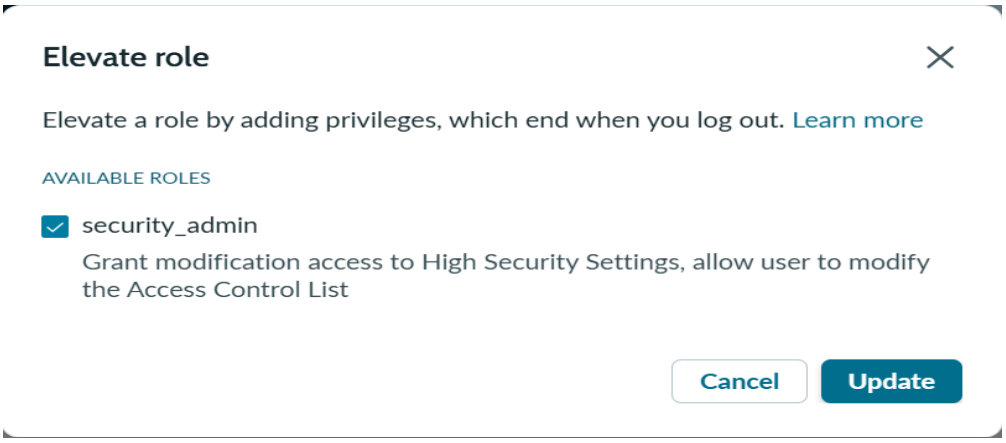


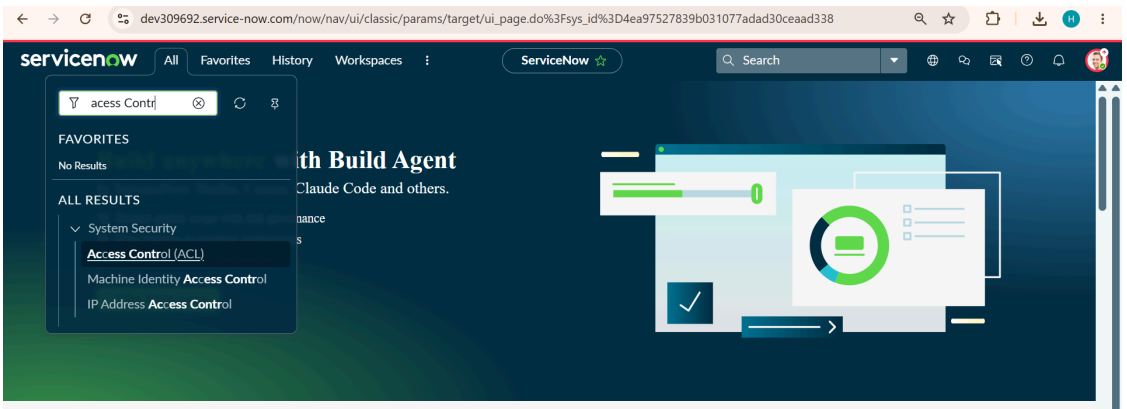


GO FURTHER

Power your workflow applications

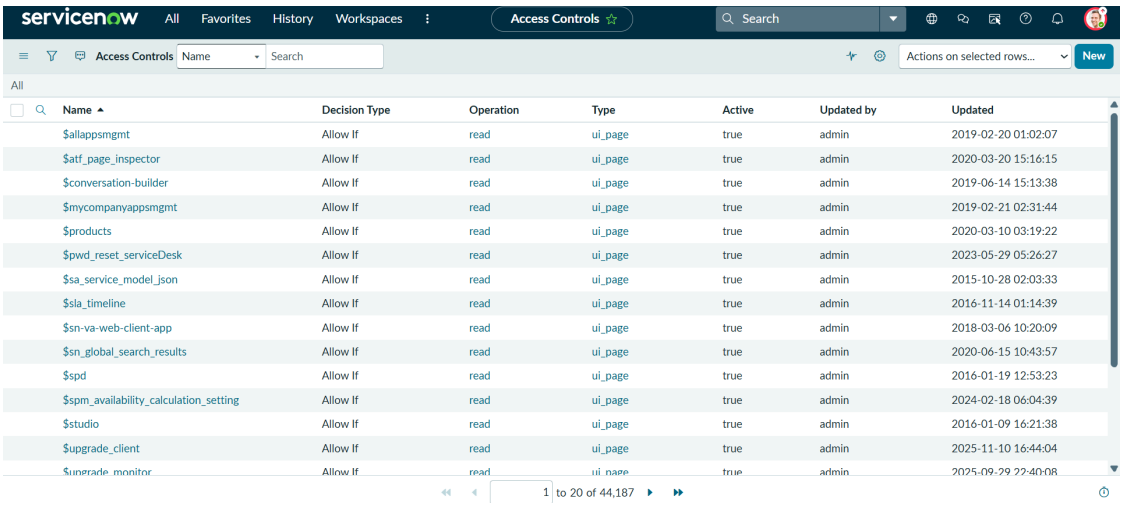

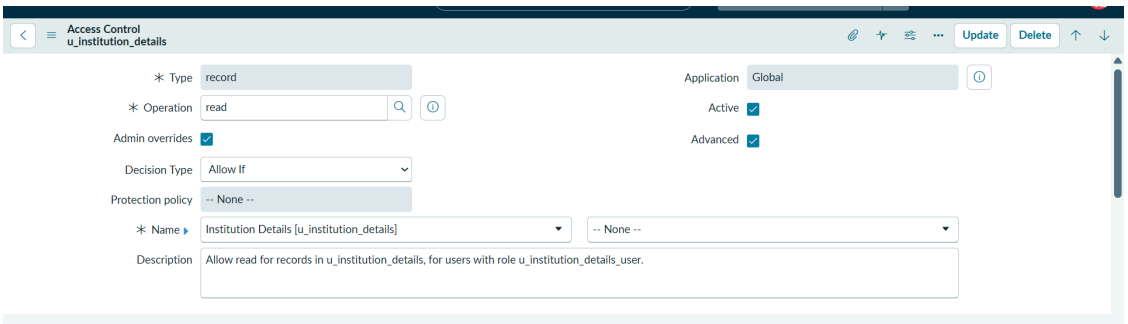

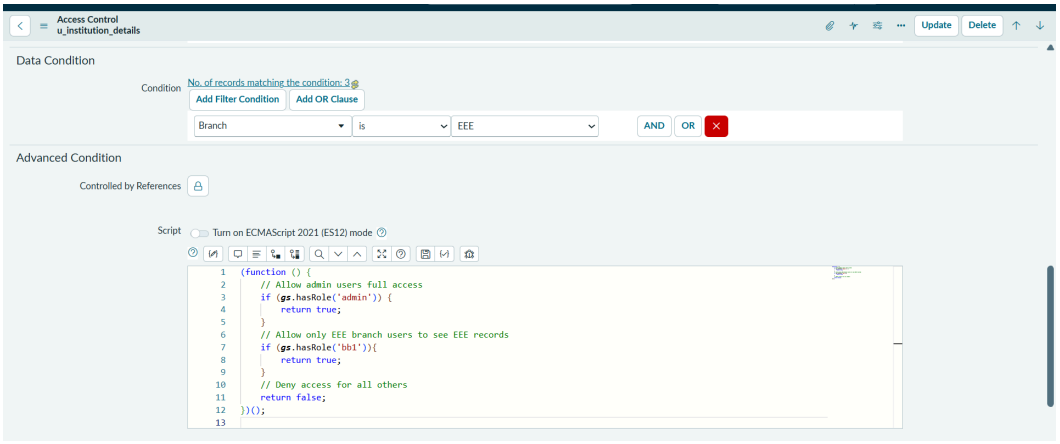


9. Impersonate **EEE users** and open the Student Records list.

10. Copy the table name u_institution_details.list/LIST and paste in the All menu.


11. Impersonate **Admin** and open the Student Records list.

Verify :

- User with **bb1 role** can view **only EEE branch records**

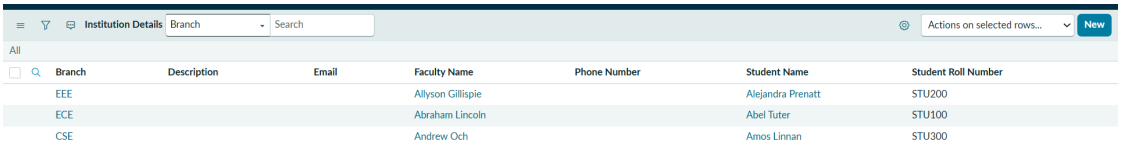

- User without the role cannot view any records

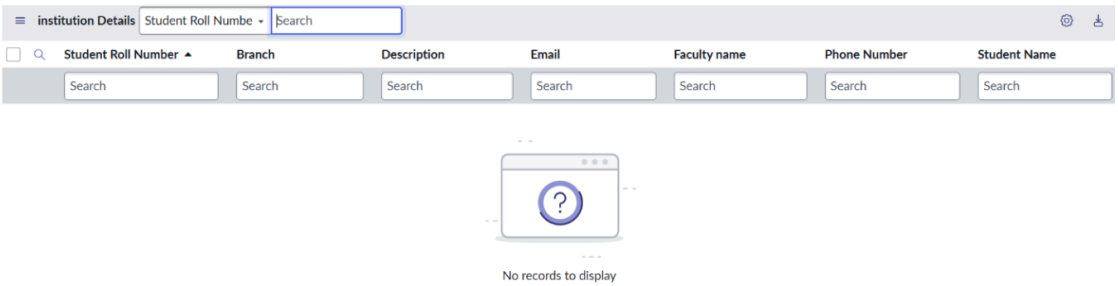

- Admin user can view **all records regardless of branch**

