



A. Read features share a carrier

one $\bar{m}_A = \frac{1}{3} \sum_{\ell=5}^7 m_A(\ell)$ per task;
all point nearly the same way



B. Per layer: project out the carrier

$$r_A(\ell) = m_A(\ell) - \langle m_A(\ell), \hat{c}(\ell) \rangle \hat{c}(\ell)$$

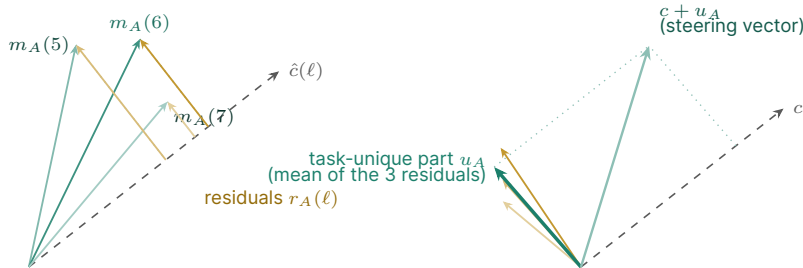

C. Average the residuals

$u_A = \frac{1}{3} \sum_{\ell=5}^7 r_A(\ell)$, the task-unique part;
 $u_A \perp c$ by construction; $c + u_A$ is injected

