

SCRIPT CONTROLLED ACL


Restrict Record Access Based on Field Value

Document Type	Technical Solution Document
Platform	ServiceNow
Security Mechanism	Scripted Access Control (ACL)
Purpose	Allow or deny record access based on a field value

1. Objective

The objective is to create a Scripted ACL in ServiceNow that restricts record access according to the value stored in a selected field. The ACL evaluates the current record and the logged-in user's information before allowing access.

2. Solution Architecture

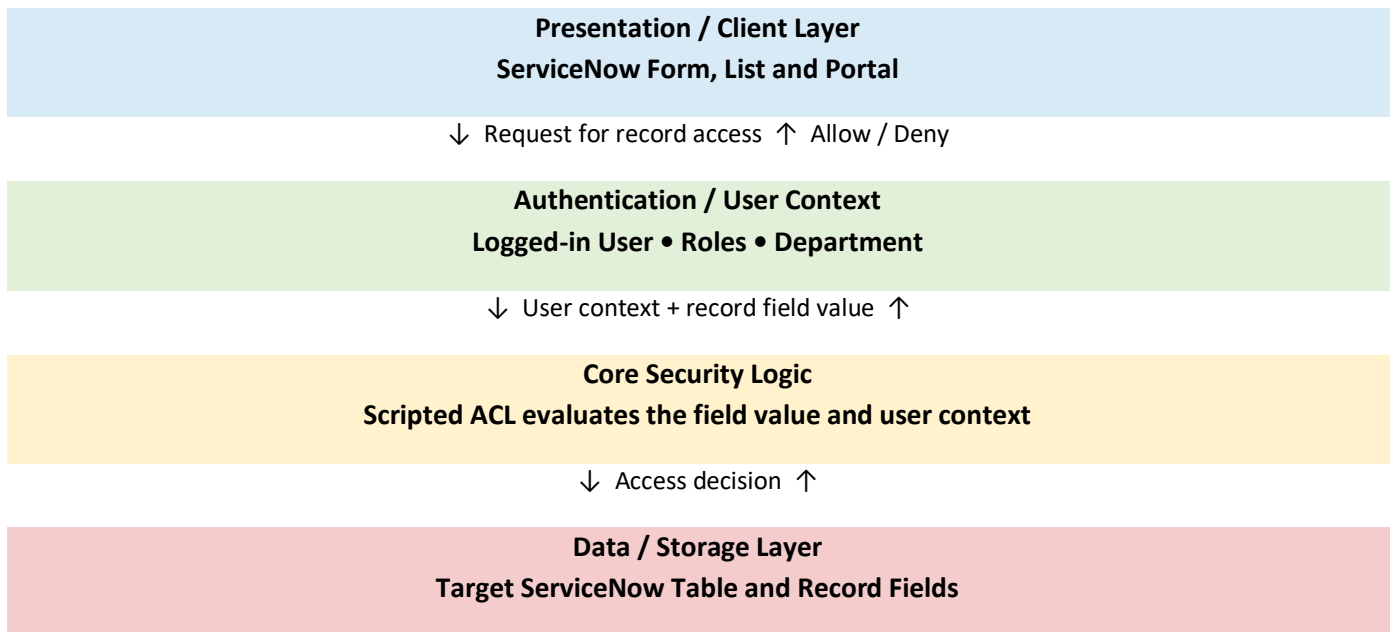

3. Access Flow

- User opens a record or requests a protected operation.
- ServiceNow identifies the applicable table and ACL.
- The Scripted ACL reads the required record field value.
- The script compares that value with the logged-in user's permitted value or condition.
- If the condition is satisfied, access is allowed; otherwise, access is denied.

4. Component Description Table

Component Name	Description / Role in Architecture	Technologies Used
Presentation Layer	ServiceNow form/list/portal through which the user requests record access.	ServiceNow UI
Authentication / User Context	Provides the logged-in user's identity, roles and relevant reference values.	ServiceNow session, GlideSystem (gs)
Scripted ACL	Evaluates the record field value and user context, then returns an allow/deny decision.	ACL, Advanced condition script
Database / Target Table	Stores the records and the field used for the access decision.	ServiceNow table, record fields

5. Example Use Case

Example: A record contains a Department field. A user should be able to read the record only when the record's Department matches the logged-in user's Department.

6. Scripted ACL Example

```
// Example: Read ACL
// Field: u_department (Reference to Department)

answer = false;

if (current.u_department == gs.getUser().getDepartmentID()) {
    answer = true;
}
```

7. ACL Configuration

Setting	Recommended Configuration
Type	Record ACL
Operation	Read (can also be adapted for Write / Create / Delete)
Requires role	Configure only if role-based access is also required
Condition	Optional; use the Script section for field-value logic
Advanced	Enabled
Script result	answer = true → allow; answer = false → deny

8. Expected Result

When the record field value matches the permitted user value, the ACL returns true and the requested access is granted. When the values do not match, the ACL returns false and ServiceNow blocks the requested operation.

9. Validation Checklist

- ☐ Test with a user whose value matches the record field.
- ☐ Test with a user whose value does not match the record field.
- ☐ Verify the ACL operation: Read / Write / Create / Delete as applicable.
- ☐ Check that the intended roles and other ACLs do not unintentionally change the result.
- ☐ Use impersonation or a suitable test user in a non-production environment before deployment.