

Q.5) Write a C++ program to overload the salary function to calculate salary with and without bonus.

Program:- #include <iostream>

using namespace std;

class Employee

{

public:

 // Salary without bonus

 void salary(float basic)

 {

 cout << "Salary without bonus = " << basic << endl;

 }

 // Salary with bonus

 void salary(float basic, float bonus)

 {

 cout << "Salary with bonus = " << basic + bonus << endl;

 }

};

int main()

{

 Employee e;

 float basic, bonus;

 cout << "Enter basic salary: ";

```
cin >> basic;
```

```
cout << "Enter bonus: ";
```

```
cin >> bonus;
```

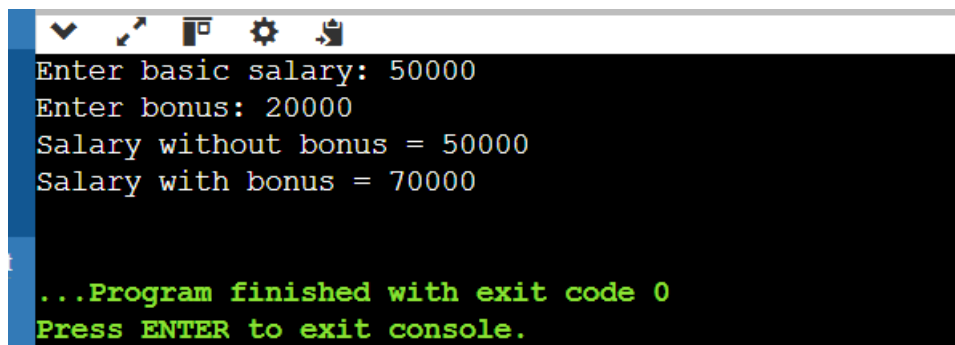
```
e.salary(basic);    // Without bonus
```

```
e.salary(basic, bonus); // With bonus
```

```
return 0;
```

```
}
```

Output:

A screenshot of a console window with a dark background and a light blue title bar. The title bar contains several icons: a checkmark, a magnifying glass, a square, a gear, and a document. The console text is as follows:

```
Enter basic salary: 50000
Enter bonus: 20000
Salary without bonus = 50000
Salary with bonus = 70000

...Program finished with exit code 0
Press ENTER to exit console.
```