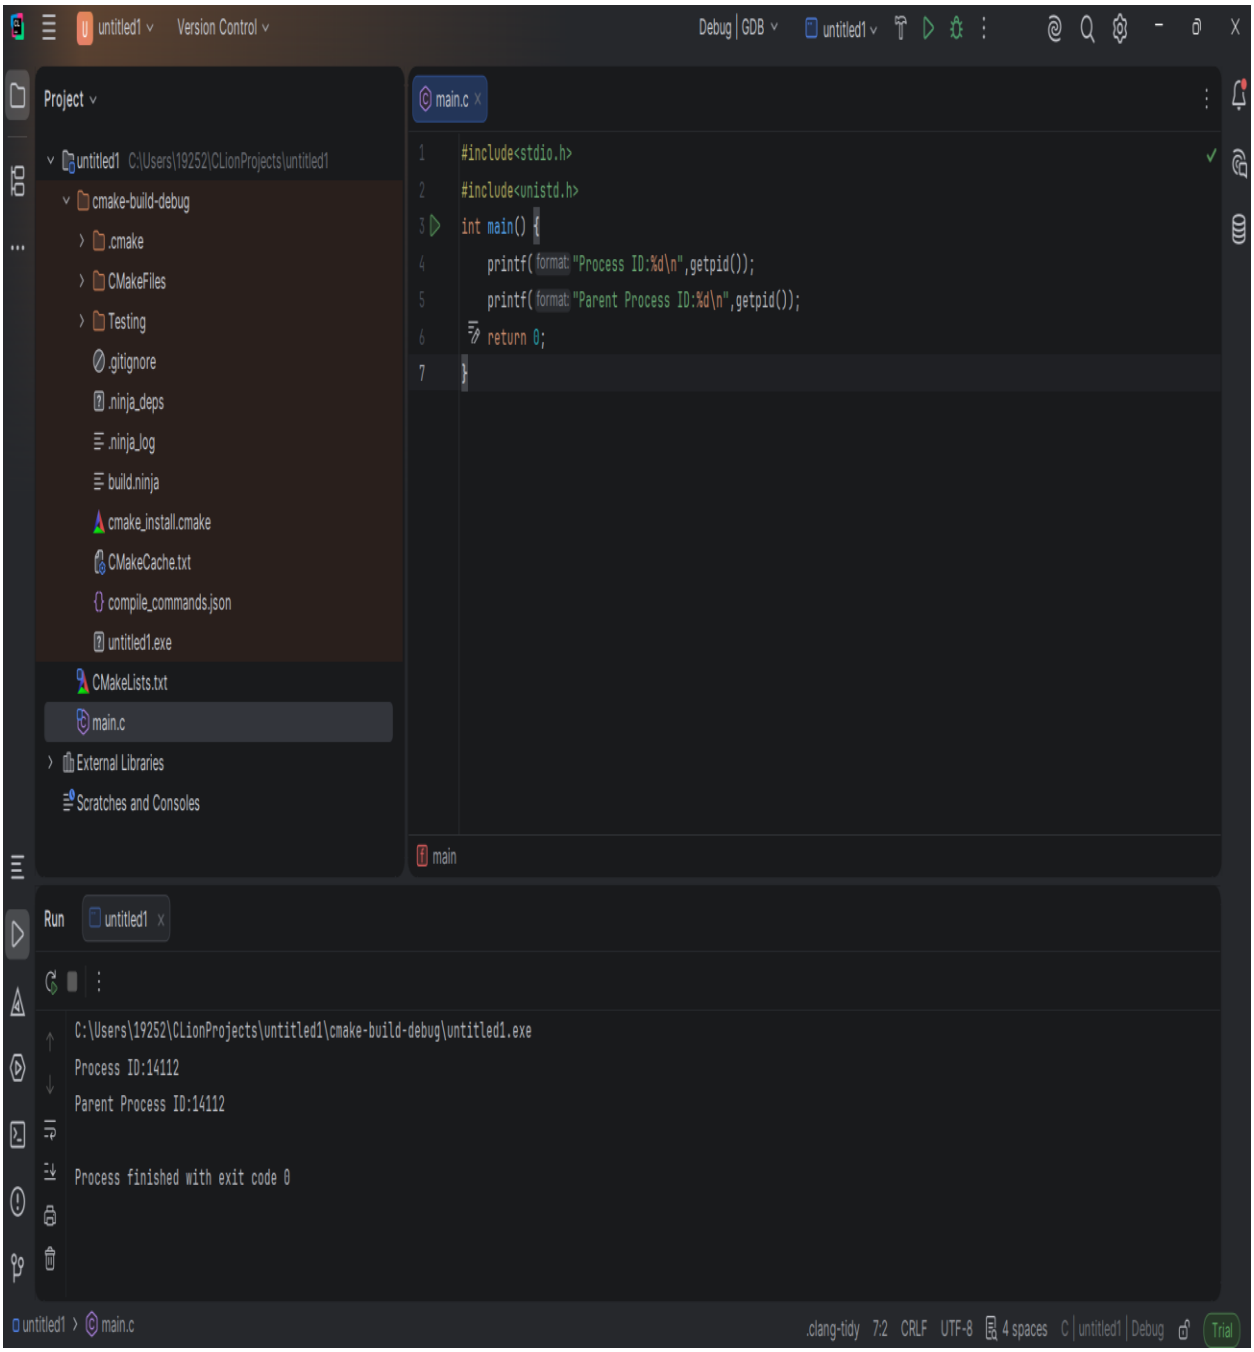
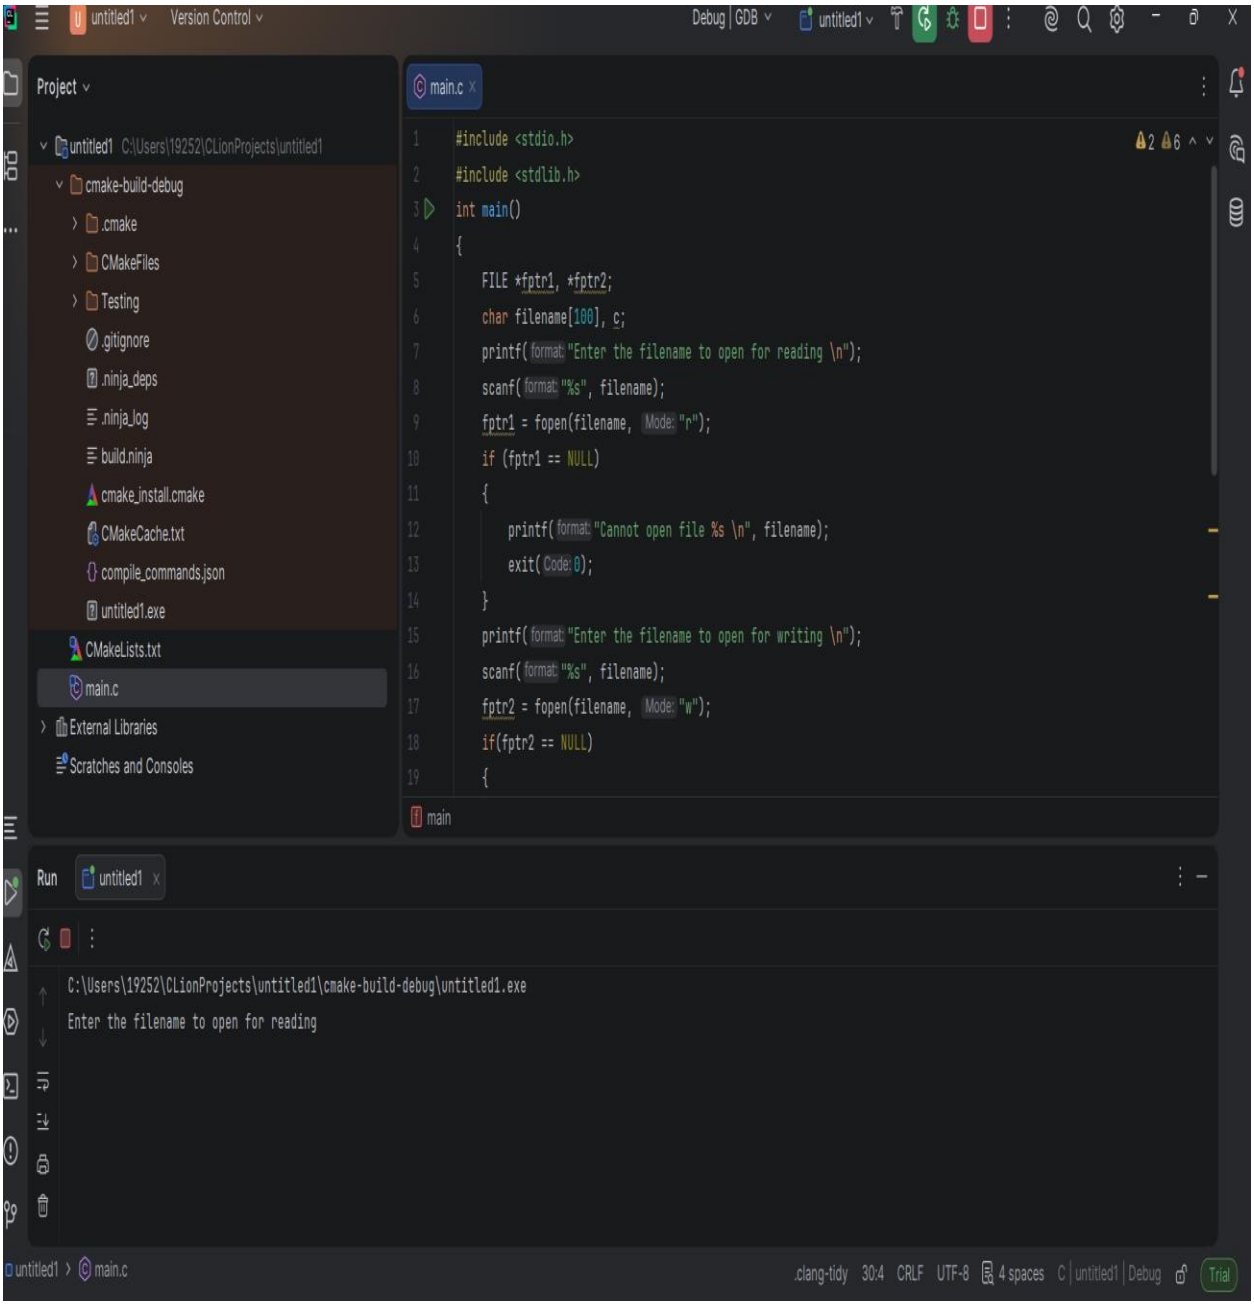
EXP.1


untitled1
Version Control
Debug | GDB
untitled1
Project
untitled1 C:\Users\19252\CLionProjects\untitled1
cmake-build-debug
.cmake
CMakeFiles
Testing
.gitignore
.ninja_deps
.ninja_log
build.ninja
cmake_install.cmake
CMakeCache.txt
compile_commands.json
untitled1.exe
CMakeLists.txt
main.c
External Libraries
Scratches and Consoles
main.c
#include<stdio.h>
#include<unistd.h>
int main() {
printf(format: "Process ID:%d\n",getpid());
printf(format: "Parent Process ID:%d\n",getpid());
return 0;
}
main
Run
untitled1
C:\Users\19252\CLionProjects\untitled1\cmake-build-debug\untitled1.exe
Process ID:14112
Parent Process ID:14112
Process finished with exit code 0
untitled1 › main.c
.clang-tidy 7:2 CRLF UTF-8 4 spaces C | untitled1 | Debug
Trial

EXP.2


untitled1
Version Control
Debug | GDB
untitled1
Project
untitled1 C:\Users\19252\CLionProjects\untitled1
cmake-build-debug
.cmake
CMakeFiles
Testing
.gitignore
.ninja_deps
.ninja_log
build.ninja
cmake_install.cmake
CMakeCache.txt
compile_commands.json
untitled1.exe
CMakeLists.txt
main.c
External Libraries
Scratches and Consoles
main.c
#include <stdio.h>
#include <stdlib.h>
int main()
{
FILE *fptr1, *fptr2;
char filename[100], c;
printf(format: "Enter the filename to open for reading \n");
scanf(format: "%s", filename);
fptr1 = fopen(filename, Mode: "r");
if (fptr1 == NULL)
{
printf(format: "Cannot open file %s \n", filename);
exit(Code: 0);
}
printf(format: "Enter the filename to open for writing \n");
scanf(format: "%s", filename);
fptr2 = fopen(filename, Mode: "w");
if(fptr2 == NULL)
{
main
Run
untitled1
C:\Users\19252\CLionProjects\untitled1\cmake-build-debug\untitled1.exe
Enter the filename to open for reading
untitled1 › main.c
.clang-tidy 30:4 CRLF UTF-8 4 spaces C | untitled1 | Debug
Trial