


SKILL WEEK-1

Query1: Create Table

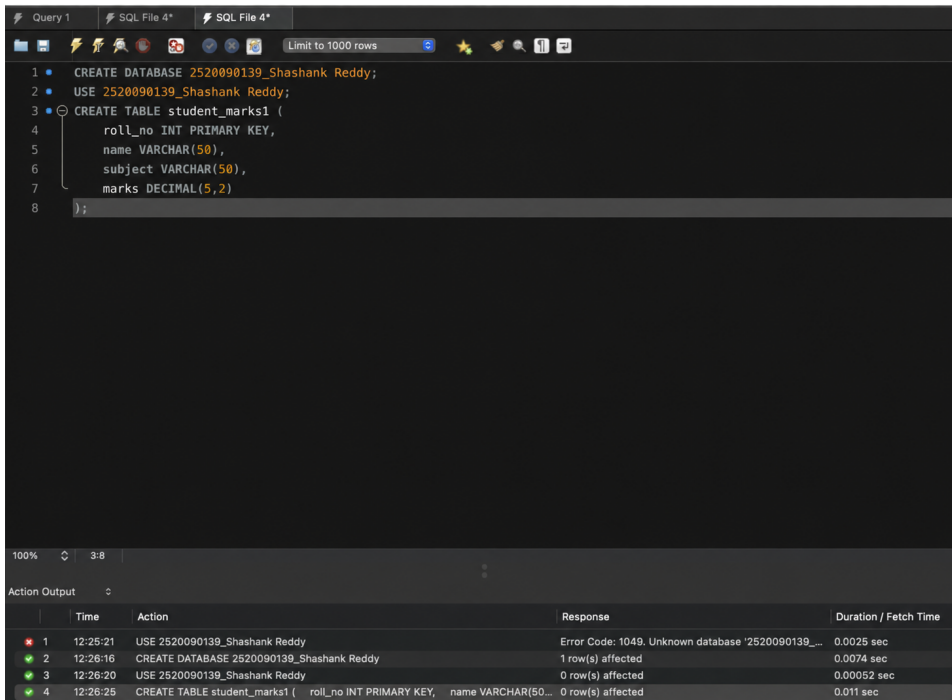


The screenshot shows a SQL IDE with a query editor and an action output pane. The query editor contains the following SQL code:

```
1 CREATE DATABASE 2520090139_Shashank Reddy;
2 USE 2520090139_Shashank Reddy;
3 CREATE TABLE student_marks1 (
4     roll_no INT PRIMARY KEY,
5     name VARCHAR(50),
6     subject VARCHAR(50),
7     marks DECIMAL(5,2)
8 );
```

The action output pane shows the execution results for the four queries:

	Time	Action	Response	Duration / Fetch Time
1	12:25:21	USE 2520090139_Shashank Reddy	Error Code: 1049. Unknown database '2520090139_...	0.0025 sec
2	12:26:16	CREATE DATABASE 2520090139_Shashank Reddy	1 row(s) affected	0.0074 sec
3	12:26:20	USE 2520090139_Shashank Reddy	0 row(s) affected	0.00052 sec
4	12:26:25	CREATE TABLE student_marks1 (roll_no INT PRIMARY KEY, name VARCHAR(50...	0 row(s) affected	0.011 sec

Query2: Insert Data

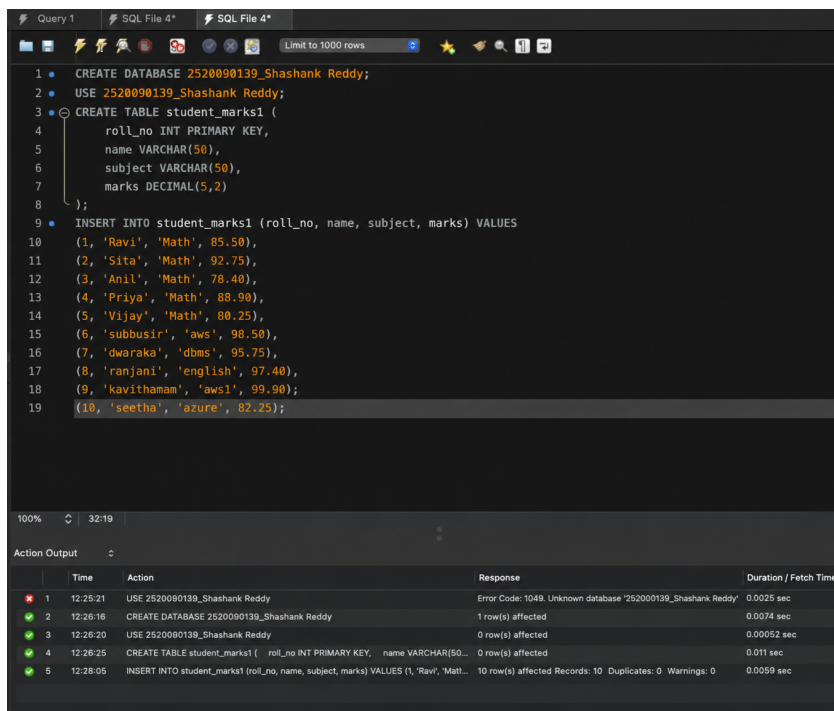


The screenshot shows a SQL IDE with a query editor and an action output pane. The query editor contains the following SQL code:

```
1 CREATE DATABASE 2520090139_Shashank Reddy;
2 USE 2520090139_Shashank Reddy;
3 CREATE TABLE student_marks1 (
4     roll_no INT PRIMARY KEY,
5     name VARCHAR(50),
6     subject VARCHAR(50),
7     marks DECIMAL(5,2)
8 );
9 INSERT INTO student_marks1 (roll_no, name, subject, marks) VALUES
10 (1, 'Ravi', 'Math', 85.50),
11 (2, 'Sita', 'Math', 92.75),
12 (3, 'Anil', 'Math', 78.40),
13 (4, 'Priya', 'Math', 88.90),
14 (5, 'Vijay', 'Math', 80.25),
15 (6, 'subbusir', 'aws', 98.50),
16 (7, 'dwaraka', 'dbms', 95.75),
17 (8, 'ranjani', 'english', 97.40),
18 (9, 'kavithamam', 'aws1', 99.90);
19 (10, 'seetha', 'azure', 82.25);
```

The action output pane shows the execution results for the five queries:

	Time	Action	Response	Duration / Fetch Time
1	12:25:21	USE 2520090139_Shashank Reddy	Error Code: 1049. Unknown database '2520090139_Shashank Reddy'	0.0025 sec
2	12:26:16	CREATE DATABASE 2520090139_Shashank Reddy	1 row(s) affected	0.0074 sec
3	12:26:20	USE 2520090139_Shashank Reddy	0 row(s) affected	0.00052 sec
4	12:26:25	CREATE TABLE student_marks1 (roll_no INT PRIMARY KEY, name VARCHAR(50...	0 row(s) affected	0.011 sec
5	12:28:05	INSERT INTO student_marks1 (roll_no, name, subject, marks) VALUES (1, 'Ravi', 'Matt...	10 row(s) affected Records: 10 Duplicates: 0 Warnings: 0	0.0059 sec

Query3: Simple Select

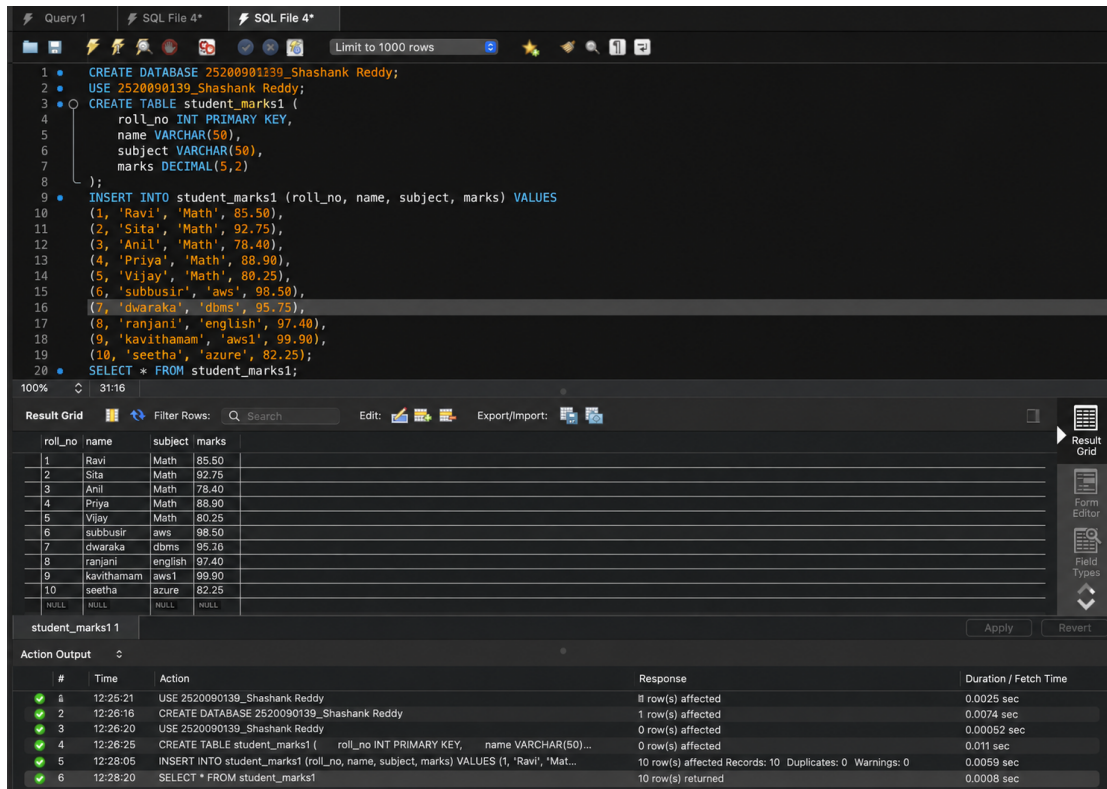


```
1 CREATE DATABASE 2520090139_Shashank Reddy;
2 USE 2520090139_Shashank Reddy;
3 CREATE TABLE student_marks1 (
4     roll_no INT PRIMARY KEY,
5     name VARCHAR(50),
6     subject VARCHAR(50),
7     marks DECIMAL(5,2)
8 );
9 INSERT INTO student_marks1 (roll_no, name, subject, marks) VALUES
10 (1, 'Ravi', 'Math', 85.50),
11 (2, 'Sita', 'Math', 92.75),
12 (3, 'Anil', 'Math', 78.40),
13 (4, 'Priya', 'Math', 88.90),
14 (5, 'Vijay', 'Math', 80.25),
15 (6, 'subbusir', 'aws', 98.50),
16 (7, 'dwaraka', 'dbms', 95.75),
17 (8, 'ranjani', 'english', 97.40),
18 (9, 'kavithamam', 'aws1', 99.90),
19 (10, 'seetha', 'azure', 82.25);
20 SELECT * FROM student_marks1;
```

roll_no	name	subject	marks
1	Ravi	Math	85.50
2	Sita	Math	92.75
3	Anil	Math	78.40
4	Priya	Math	88.90
5	Vijay	Math	80.25
6	subbusir	aws	98.50
7	dwaraka	dbms	95.75
8	ranjani	english	97.40
9	kavithamam	aws1	99.90
10	seetha	azure	82.25
NULL	NULL	NULL	NULL

#	Time	Action	Response	Duration / Fetch Time
1	12-25-21	USE 2520090139_Shashank Reddy	0 row(s) affected	0.0025 sec
2	12-26-16	CREATE DATABASE 2520090139_Shashank Reddy	1 row(s) affected	0.0074 sec
3	12-26-20	USE 2520090139_Shashank Reddy	0 row(s) affected	0.00052 sec
4	12-26-25	CREATE TABLE student_marks1 (roll_no INT PRIMARY KEY, name VARCHAR(50)...	0 row(s) affected	0.011 sec
5	12-28-05	INSERT INTO student_marks1 (roll_no, name, subject, marks) VALUES (1, 'Ravi', 'Mat...	10 row(s) affected Records: 10 Duplicates: 0 Warnings: 0	0.0059 sec
6	12-28-20	SELECT * FROM student_marks1	10 row(s) returned	0.0008 sec

Query4: Aggregate Functions


1. **SELECT COUNT(*) AS total_students FROM student_mark1;**

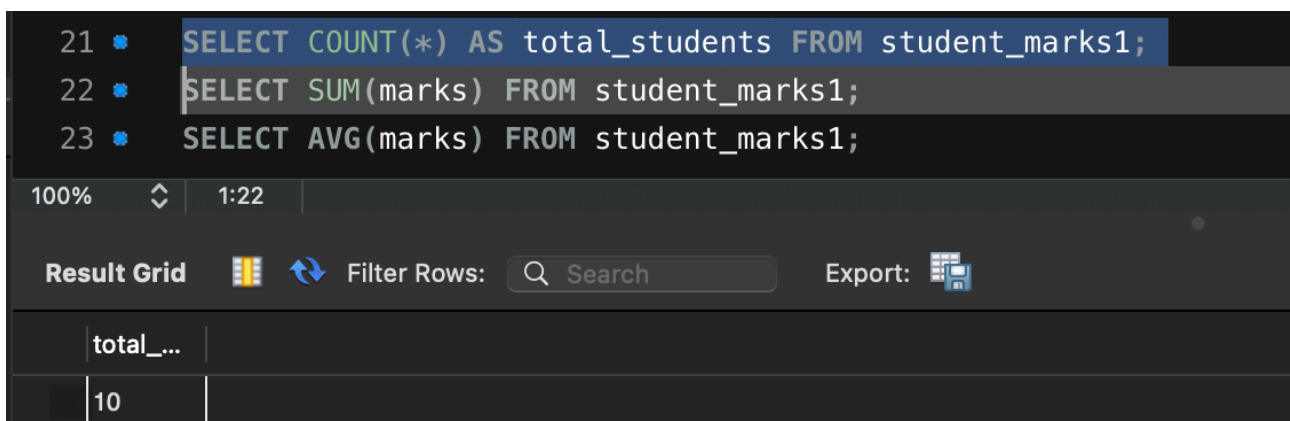

```
21 SELECT COUNT(*) AS total_students FROM student_marks1;
22 SELECT SUM(marks) FROM student_marks1;
23 SELECT AVG(marks) FROM student_marks1;
```

total_...
10


2. SELECT SUM(marks) FROM student_marks1;

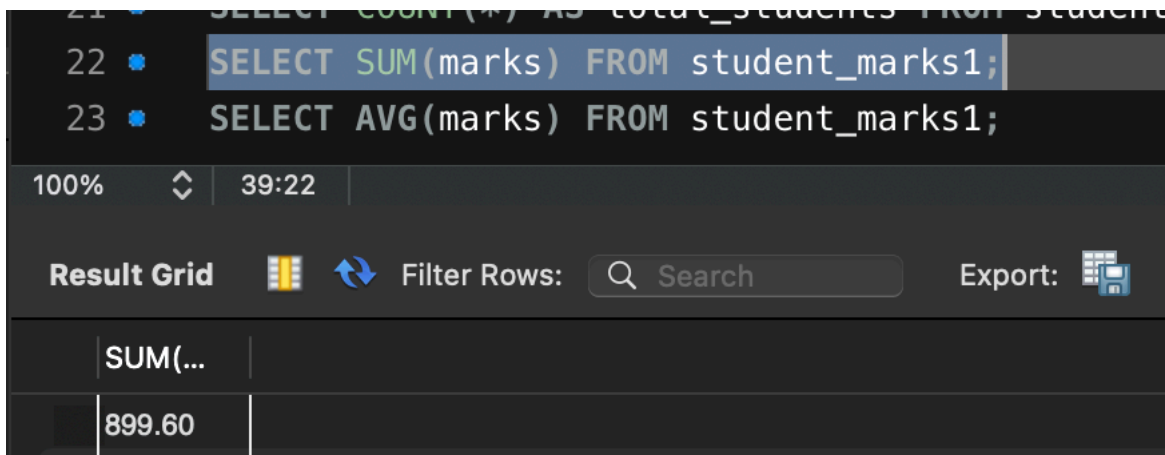

The screenshot shows a SQL query editor with the query `SELECT SUM(marks) FROM student_marks1;` highlighted. Below the editor, the 'Result Grid' shows a single row with the value 899.60.

SUM(...)
899.60


3. SELECT AVG (marks) FROM student_marks1;

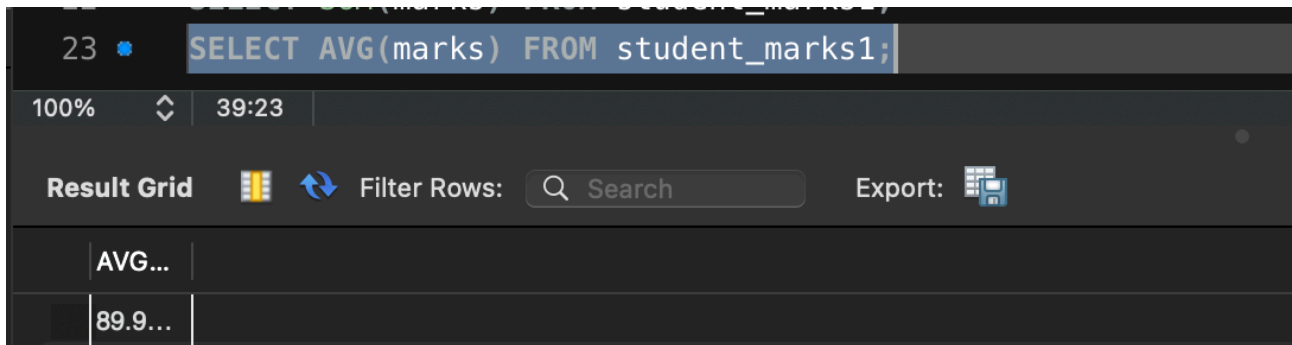

The screenshot shows a SQL query editor with the query `SELECT AVG(marks) FROM student_marks1;` highlighted. Below the editor, the 'Result Grid' shows a single row with the value 89.9...

AVG...
89.9...


4. SELECT MAX (marks) FROM student_marks1;

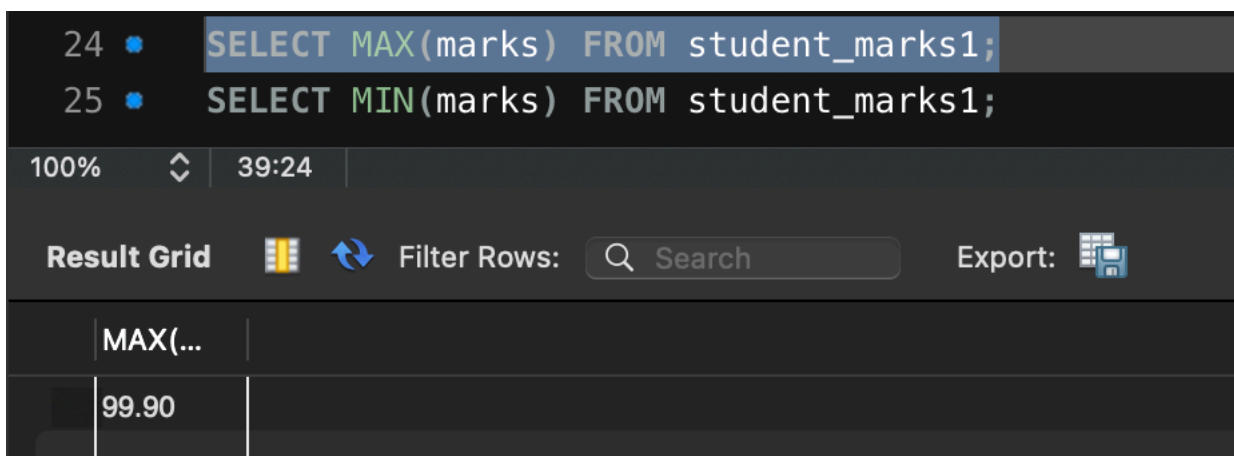

The screenshot shows a SQL query editor with the query `SELECT MAX(marks) FROM student_marks1;` highlighted. Below the editor, the 'Result Grid' shows a single row with the value 99.90.

MAX(...)
99.90

5. SELECT MIN (marks) FROM student_marks1;

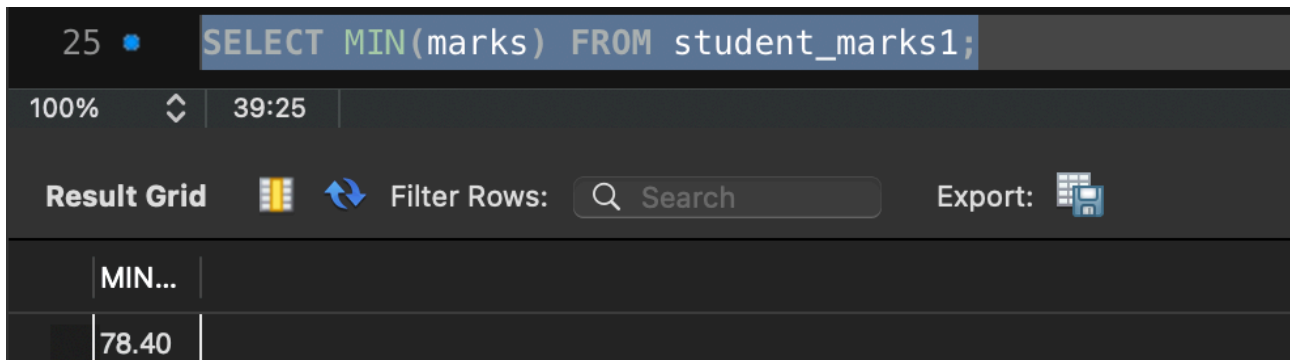


The screenshot shows a SQL IDE interface. The query editor at the top contains the query: `SELECT MIN(marks) FROM student_marks1;`. Below the query editor, the status bar shows 100% zoom and a timer of 39:25. The 'Result Grid' tab is active, displaying a single row with the value 78.40 under the column header 'MIN...'. The interface includes a search bar, a 'Filter Rows' button, and an 'Export' button.

MIN...
78.40

Query:5 Filtering with WHERE


1.SELECT*FROM student_marks WHERE marks>85;

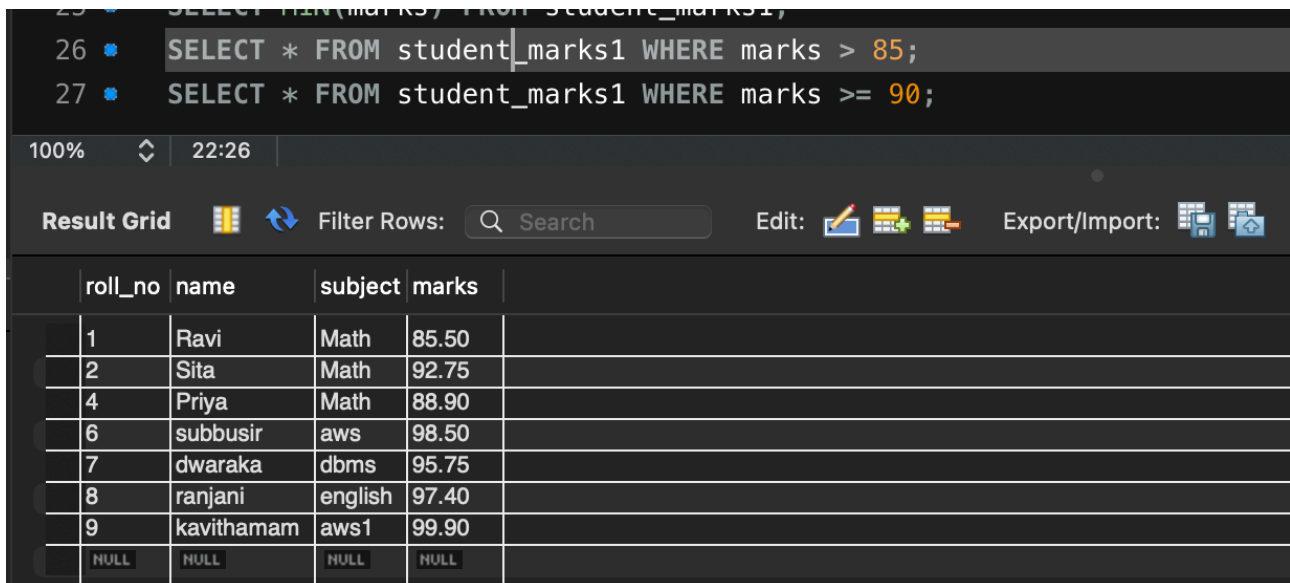

The screenshot shows a SQL IDE interface with two queries in the editor. The first query is `SELECT * FROM student_marks1 WHERE marks > 85;` and the second is `SELECT * FROM student_marks1 WHERE marks >= 90;`. The status bar shows 100% zoom and a timer of 22:26. The 'Result Grid' tab is active, displaying a table with 5 columns: roll_no, name, subject, marks, and an empty column. The table contains 9 rows of data, including a row with NULL values.

roll_no	name	subject	marks	
1	Ravi	Math	85.50	
2	Sita	Math	92.75	
4	Priya	Math	88.90	
6	subbusir	aws	98.50	
7	dwaraka	dbms	95.75	
8	ranjani	english	97.40	
9	kavithamam	aws1	99.90	
NULL	NULL	NULL	NULL	

2. SELECT*FROM student_marks WHERE marks>=90;

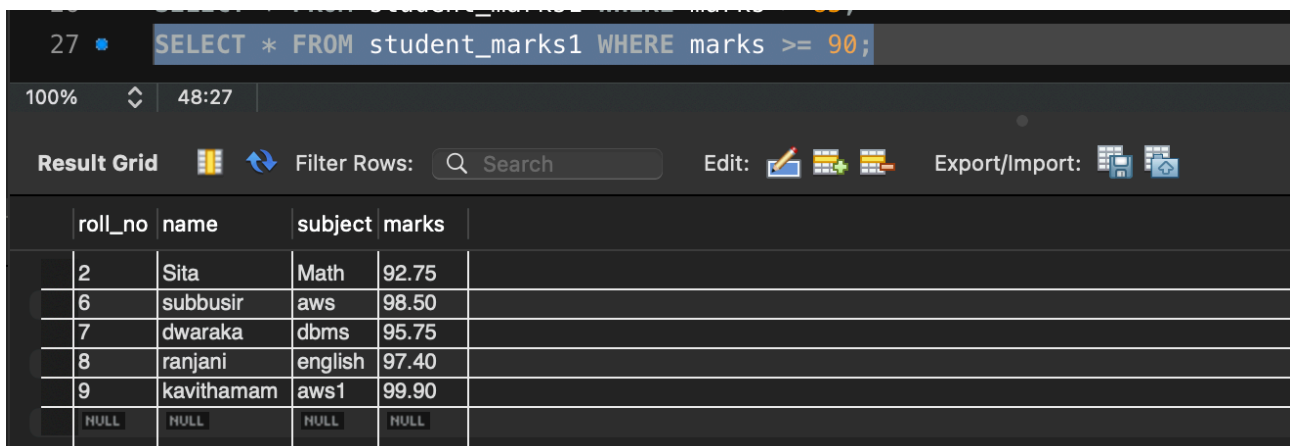

The screenshot shows a SQL IDE interface with the query `SELECT * FROM student_marks1 WHERE marks >= 90;` in the editor. The status bar shows 100% zoom and a timer of 48:27. The 'Result Grid' tab is active, displaying a table with 5 columns: roll_no, name, subject, marks, and an empty column. The table contains 5 rows of data, including a row with NULL values.

roll_no	name	subject	marks	
2	Sita	Math	92.75	
6	subbusir	aws	98.50	
7	dwaraka	dbms	95.75	
8	ranjani	english	97.40	
9	kavithamam	aws1	99.90	
NULL	NULL	NULL	NULL	

3. SELECT*FROM student_marks WHERE marks<80;

28

SELECT * FROM student_marks1 WHERE marks < 80;

29

SELECT * FROM student_marks1 WHERE marks BETWEEN 80 AND 90;

100%

47:28

Result Grid

Filter Rows:

Q

Search

Edit:

Export/Import

	roll_no	name	subject	marks	
	3	Anil	Math	78.40	
	NULL	NULL	NULL	NULL	