


CIFAR-10 | ViT-Small | classification error by corruption

Each corruption: mean of severities 1-5 within each seed | heldout_val | training N = 45,000

— RGB baseline — Single color —●— Train sparse; test at same sparsity
 — Color opponency — Grayscale contrast —□— Train dense; test sparse

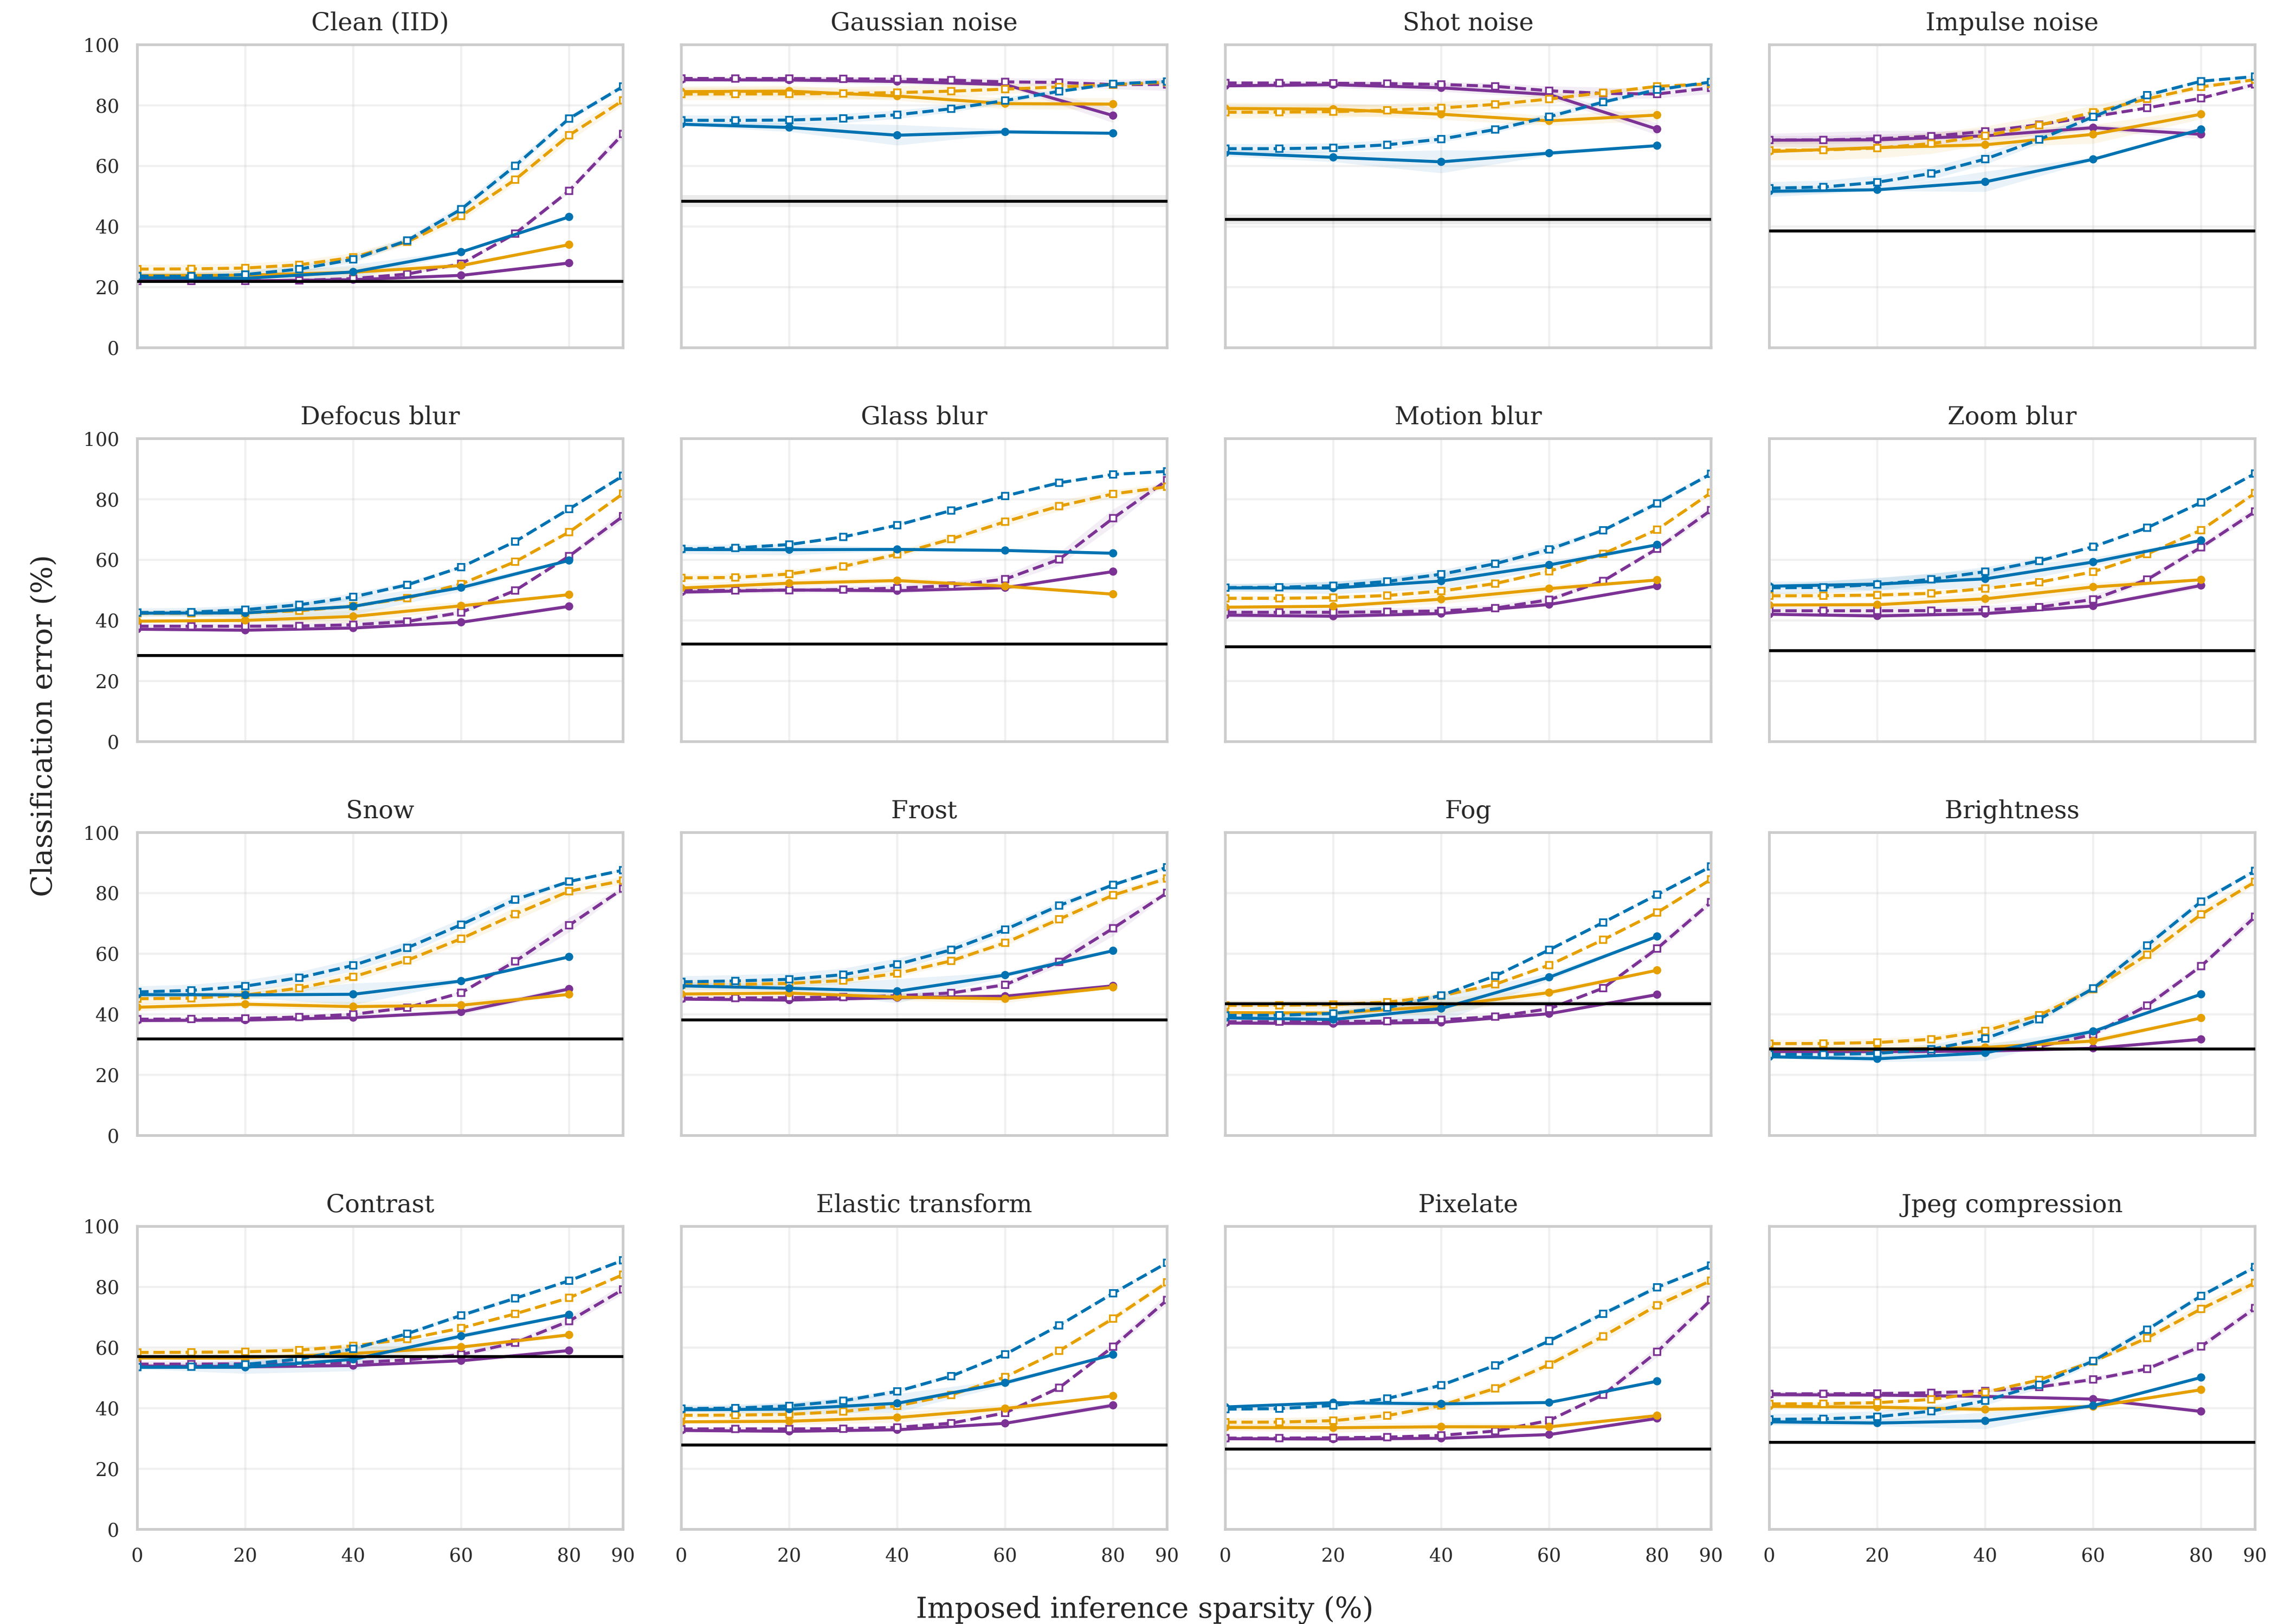


Lines: mean over seeds 0, 1, 2; bands: ± 1 sample SD. Compact inference at 0% can remove naturally empty patches.

CIFAR-10 | Swin-Tiny | classification error by corruption

Each corruption: mean of severities 1-5 within each seed | heldout_val | training N = 45,000

— RGB baseline — Single color ● Train sparse; test at same sparsity
 — Color opponency — Grayscale contrast -□- Train dense; test sparse

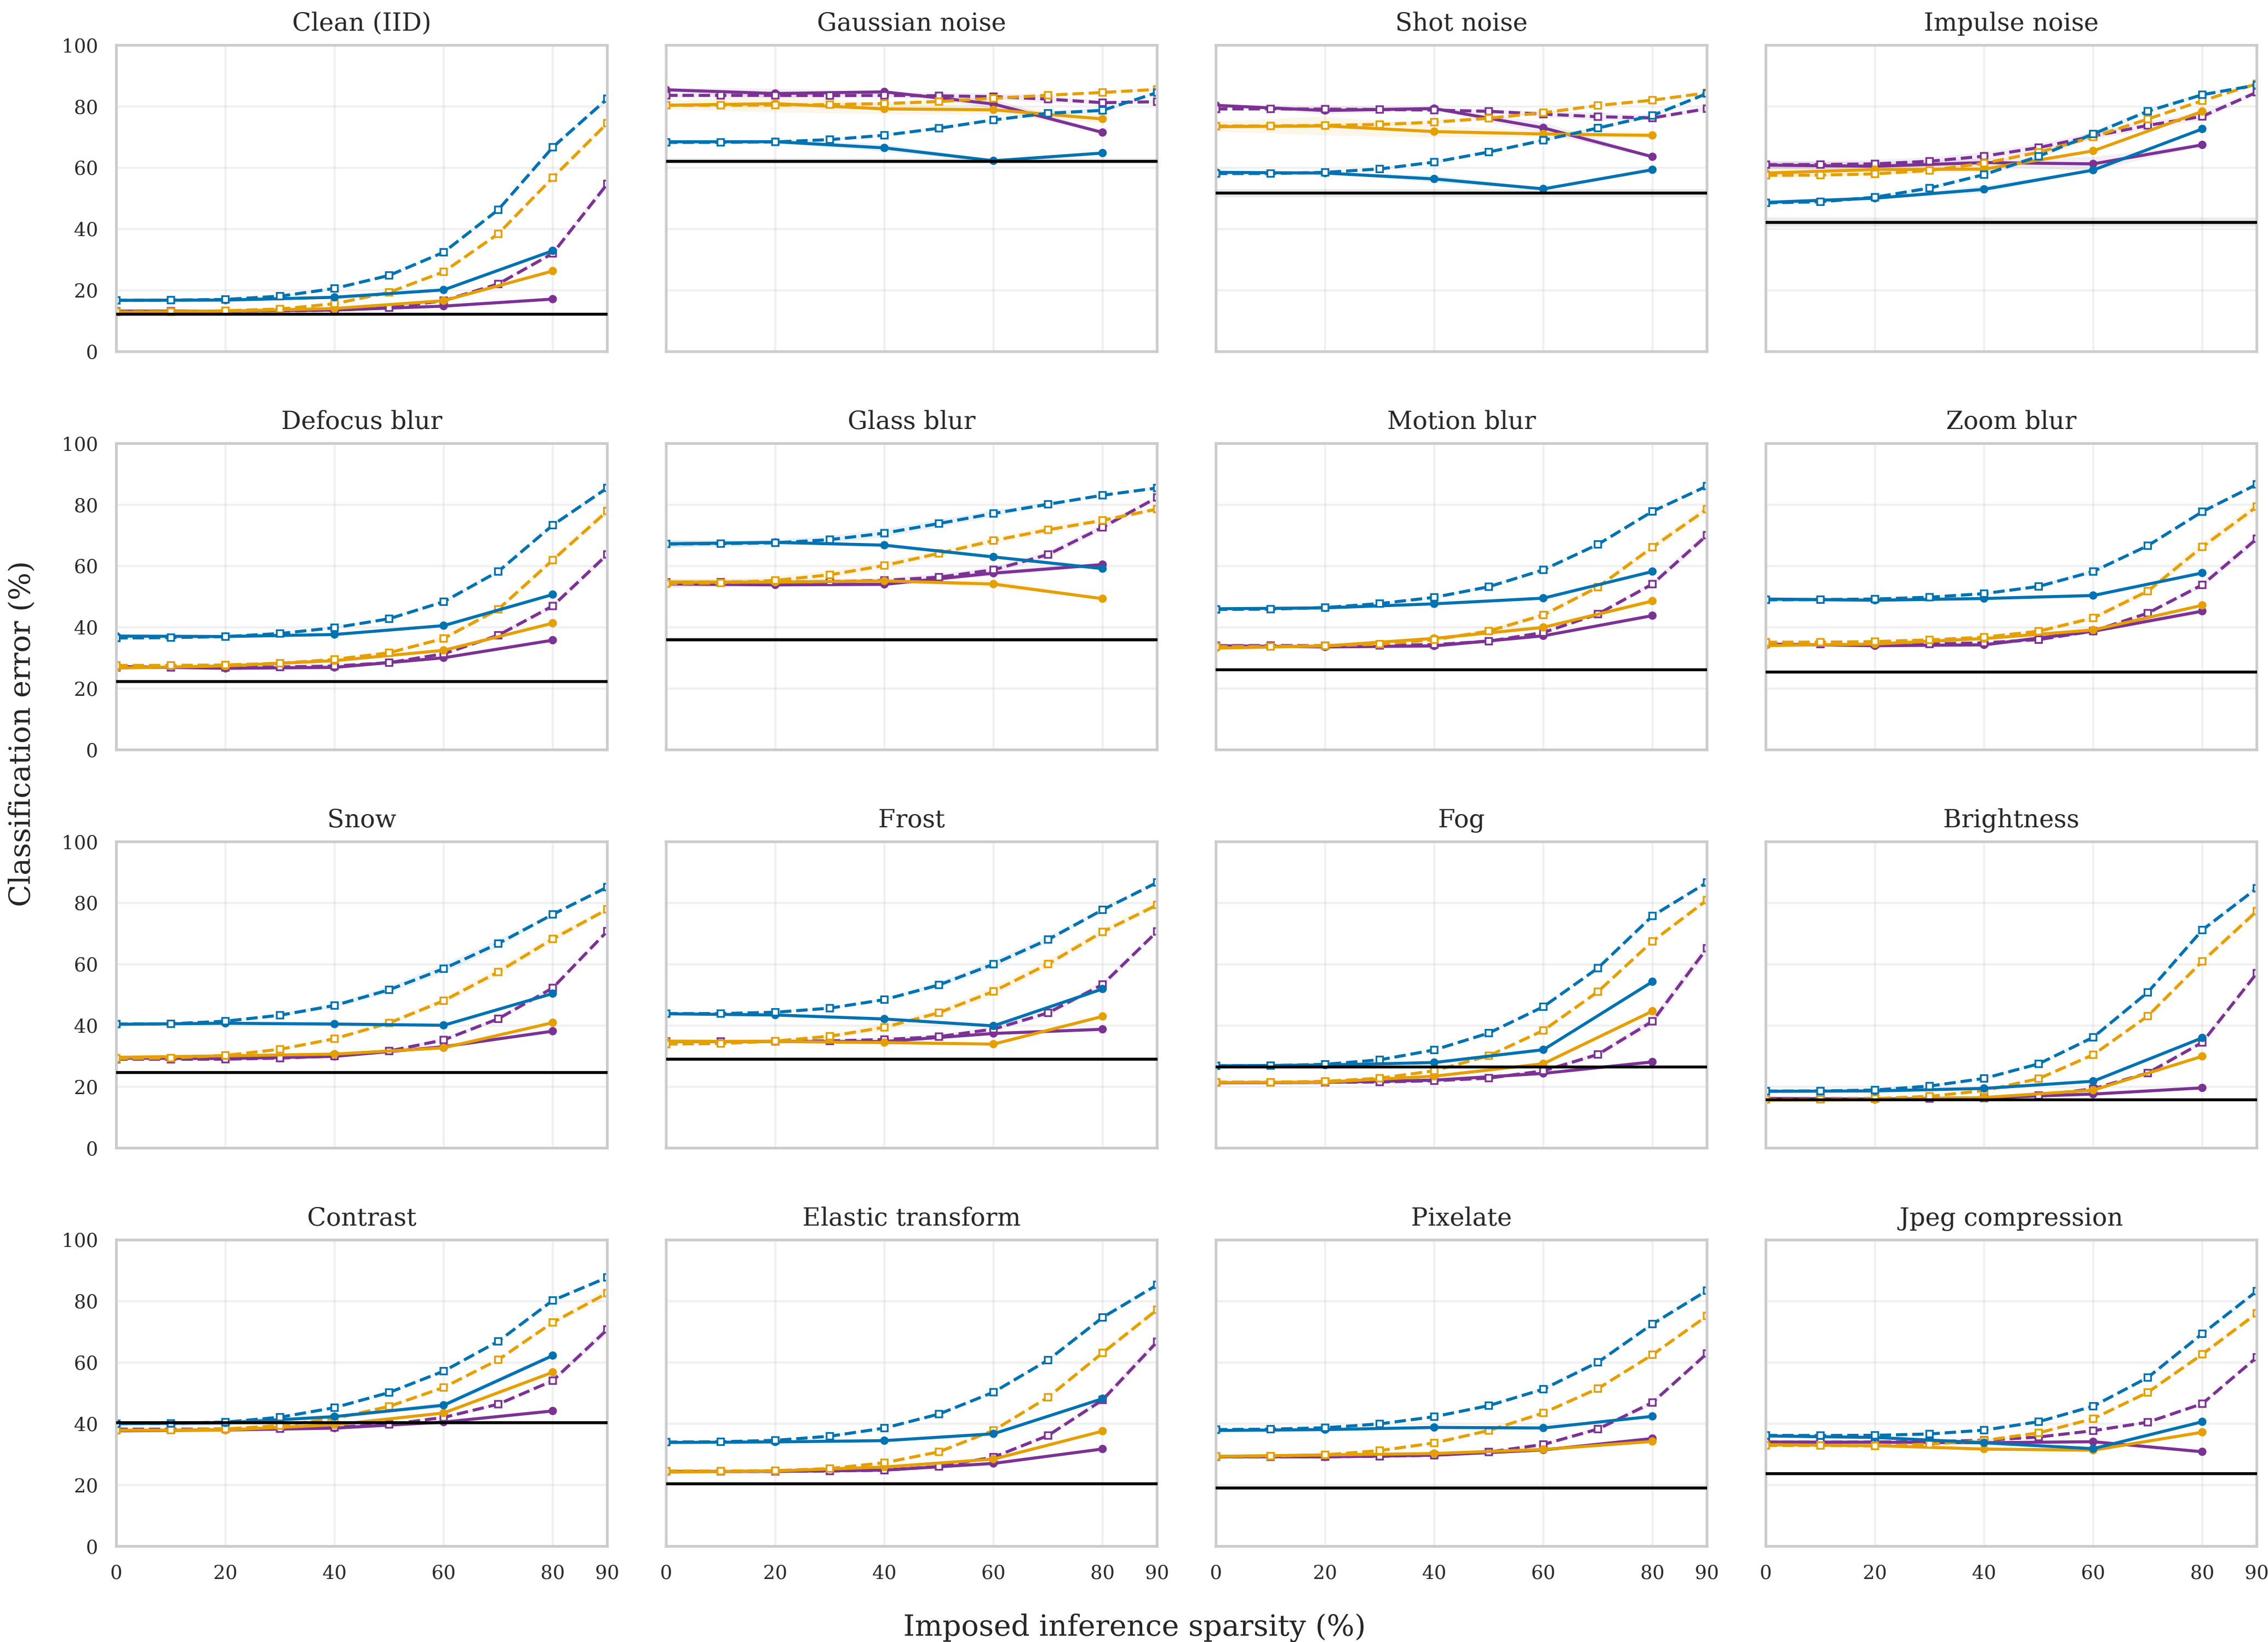

Lines: mean over seeds 0, 1, 2; bands: ± 1 sample SD. Compact inference at 0% can remove naturally empty patches.