

A Null shuffle experiments

Null 1: shuffle assignments P

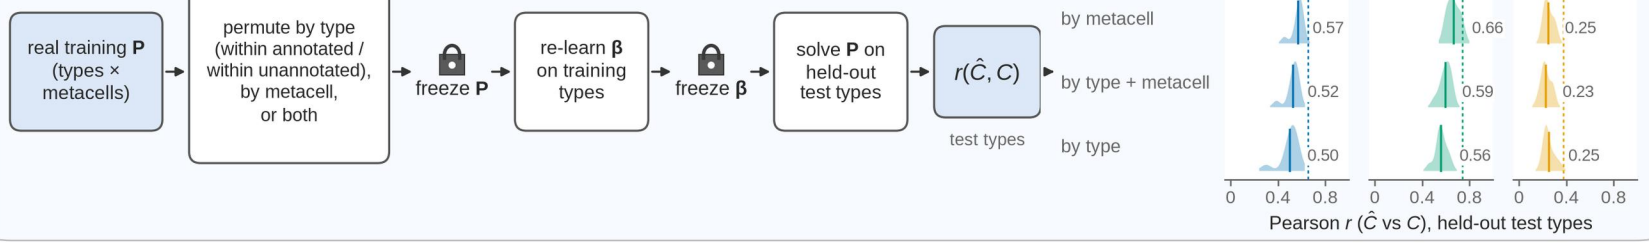


Null 2: shuffle interactions β

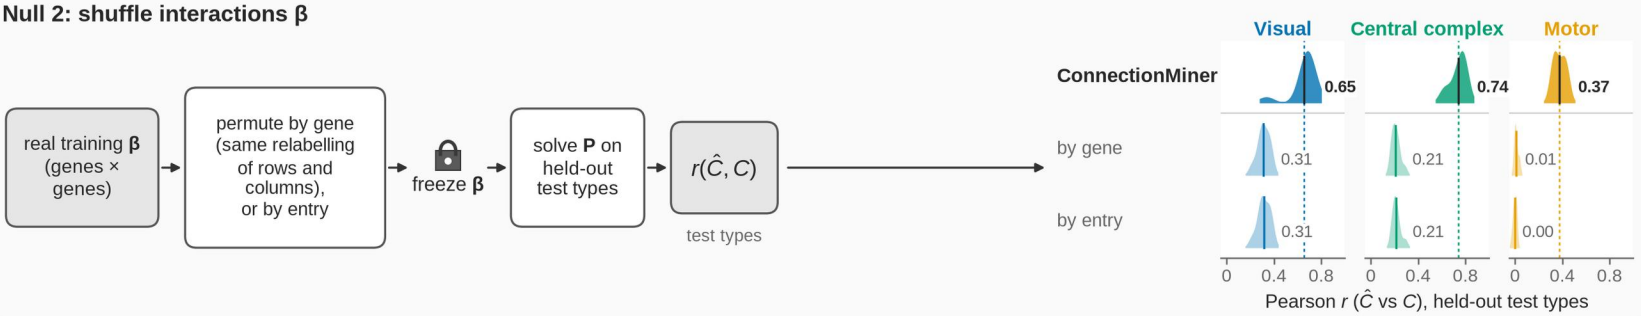

ConnectionMiner in A = the real model of the null-study runs, which differs from the main models for two systems (visual: min_cells=5 build; CX: reference build).
Its held-out test r is therefore 0.65 / 0.74 / 0.37 here vs 0.60 / 0.81 / 0.37 for the main models. Densities over the 10 test folds; dashed line = ConnectionMiner mean.

B Benchmarking against existing methods

C reconstruction

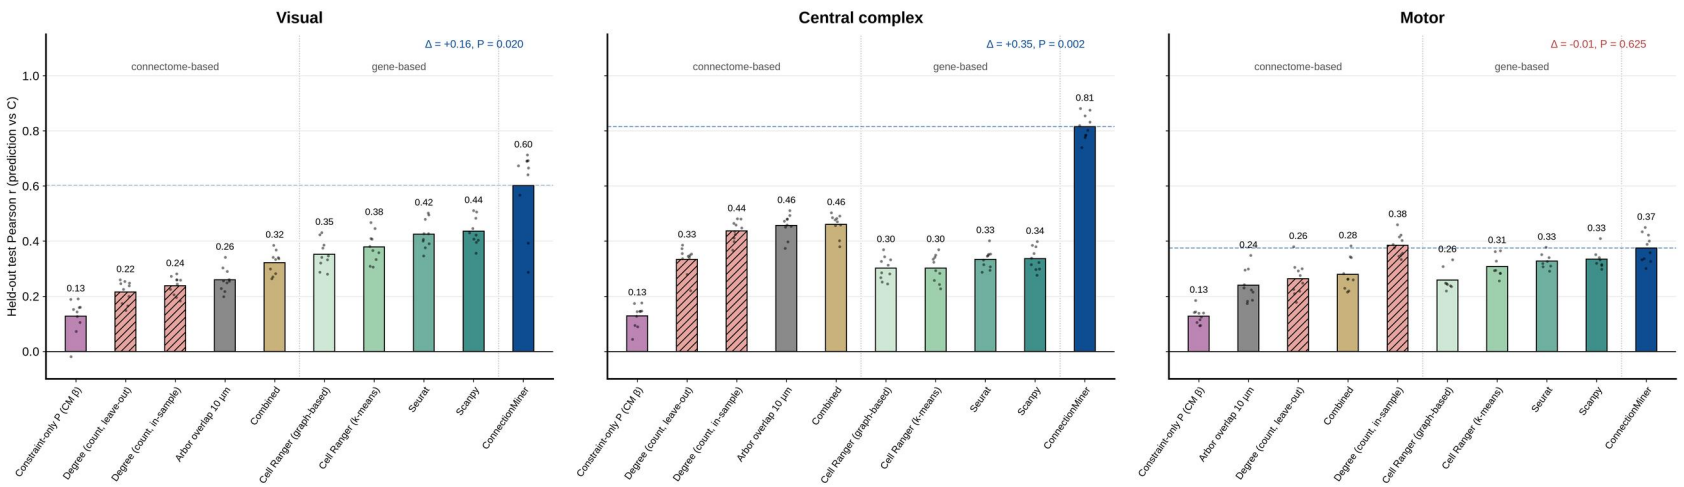

Label mix

