

### **Assignment Solution**

Week11: Apache Spark - Structured API Part-1

### **IMPORTANT**

#### **Self-assessment enables students to develop:**

- 1. A sense of responsibility for their own learning and the ability & desire to continue learning,
- 2. Self-knowledge & capacity to assess their own performance critically & accurately, and
- 3. An understanding of how to apply their knowledge and abilities in different contexts.

All assignments are for self assessment. Solutions will be released on every subsequent week. Once the solution is out, evaluate yourself.

No discussions/queries allowed on assignment questions in slack channel.

Note You can raise your doubts once the solution is released

9108179578

#### **Solution 1:**

```
//Assignemnet-Problem 1
import org.apache.log4j.Level
import org.apache.log4j.Logger
import org.apache.spark.SparkConf
import org.apache.spark.sql.SaveMode
import org.apache.spark.sql.SparkSession
import org.apache.spark.sql.types.DoubleType
import org.apache.spark.sql.types.IntegerType
import org.apache.spark.sql.types.StringType
import org.apache.spark.sql.types.StructField
import org.apache.spark.sql.types.StructType
                              UPLIFT YOUR CAREER!
object Spark Assignment windowdata extends App
{ //creating sparkConf object
 val sparkConf = new SparkConf()
```

9108179578

```
//Step1 -creating a spark session
val spark = SparkSession.builder()
.config(sparkConf)
.getOrCreate()
//Step 2 - Setting the logging level to Error
Logger.getLogger("org").setLevel(Level, ERROR)
// Step 3 Explicit schema definition programmatically using
StructType val windowdataSchema = StructType(List(
  StructField("Country", StringType),
   StructField("weeknum",IntegerType),
   StructField("numinvoices",IntegerType)
   StructField("totalquantity",IntegerType),
   StructField("invoicevalue",DoubleType)
```

9108179578

```
// Step 3 contd.. Loading the file and creation of dataframe using dataframe reader API, using
explicitly specified schema
 val windowdataDF = spark.read
 .format("csv")
 .schema(windowdataSchema)
 .option("path", "C:/xyz/TrendyTech/Spark data/structuredAPI/windowdata.csv")
 .load()
 //print first 20 records of the dataframe
 windowdataDF.show()
//Step 4: Saving the data in Parquet format using Dataframe Writer AP
 //Data is two-level partitioned on Country and weeknum column , these columns have low
 cardinality //Default output format is parquet
 /* windowdataDF.write
 .partitionBy("Country", "weeknum")
 .mode(SaveMode.Overwrite)
 .option("path","C:/xyz/TrendyTech/Spark_data/structuredAPI/Output/windowdata_output")
  RENDYTECH., 9108179578
```

```
//Step 5: Save the Dataframe to Avro Format and also partitioning data by Country column windowdataDF.write
.format("avro")
.partitionBy("Country")
.mode(SaveMode.Overwrite)
.option("path","C:/xyz/TrendyTech/Spark_data/structuredAPI/Output/windowdata_avrooutput")
.save()
```

# TRENDYTECH 9108179578

UPLIFT YOUR CAREER!

#### **Solution 2:**

import org.apache.log4j.Level
import org.apache.log4j.Logger
import org.apache.spark.SparkConf
import org.apache.spark.sql.SaveMode
import org.apache.spark.sql.SparkSession
object WEEK11\_SOLUTION\_2\_WINDOWDATA extends App {
 // Setting the Logging~Level To ERROR
 Logger.getLogger("org").setLevel(Level.ERROR)




```
// define a schema for employee record data using a case class
   case class windowData(Country: String, Weeknum: Int, NumInvoices: Int, TotalQuantity: Int,
InvoiceValue: String)
   //Create Spark Config Object
   val sparkConf = new SparkConf()
   sparkConf.set("spark.app.name", "WEEK11_SOLUTION_2_WINDOWDATA")
   sparkConf.set("spark.master", "local[2]")
   //Create Spark Session
   val spark = SparkSession.builder()
   .config(sparkConf)
   .getOrCreate()
```

```
import spark.implicits.
val windowDataDF = spark.sparkContext.textFile("G:/TRENDY~TECH/WEEK-
11/Assignment_Dataset/windowdata-201021-002706.csv") //.toDF
  .map(_.split(","))
  .map(e \Rightarrow windowData(e(0), e(1).trim.toInt, e(2).trim.toInt, e(3).trim.toInt, e(4)))
  .toDF()
  .repartition(8)
windowDataDF.write
  .format("ison")
  .mode(SaveMode.Overwrite)
  .option("path", "G:/TRENDY~TECH/WEEK-
11/Assignment Dataset/OutPut Prb2/windowData isonoutput")
  .save()
//windowDataDF.show()
spark.stop()
```

scala.io.StdIn.readLine()



### TRENDYTECH 9108179578

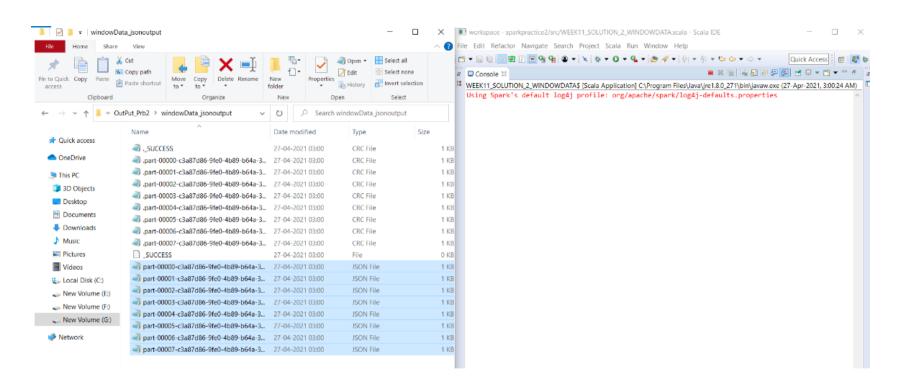

# **TRENDYTECH 9108179578**



# **5** Star Google Rated Big Data Course

LEARN FROM THE EXPERT



9108179578

Call for more details