

ASB End-to-End Analytics
=====


Groups: q235_div4_div4, q235_div4_div3, q235_div4_single, q235_div4_lin3
Domain: general (ASB single neutral domain)
Total trials: 10,200
Unique cases: 255
Unique scenarios: 10
Attack families: DPI, IPI, MP, PoT
Configs: flat, acl_hardened, agenticcyops

Source: results/asb/e2e_validator_group_<G>/general/results.csv

Headline ASR (per attack family, all groups pooled)


Attack	Flat MAS	ACL-Hardened	AgenticCyOps (P1-P5)
DPI	27.33%	--	3.83%
IPI	29.33%	--	3.17%
MP	41.0%	--	1.25%
PoT	36.0%	--	6.67%

ASR by attack family

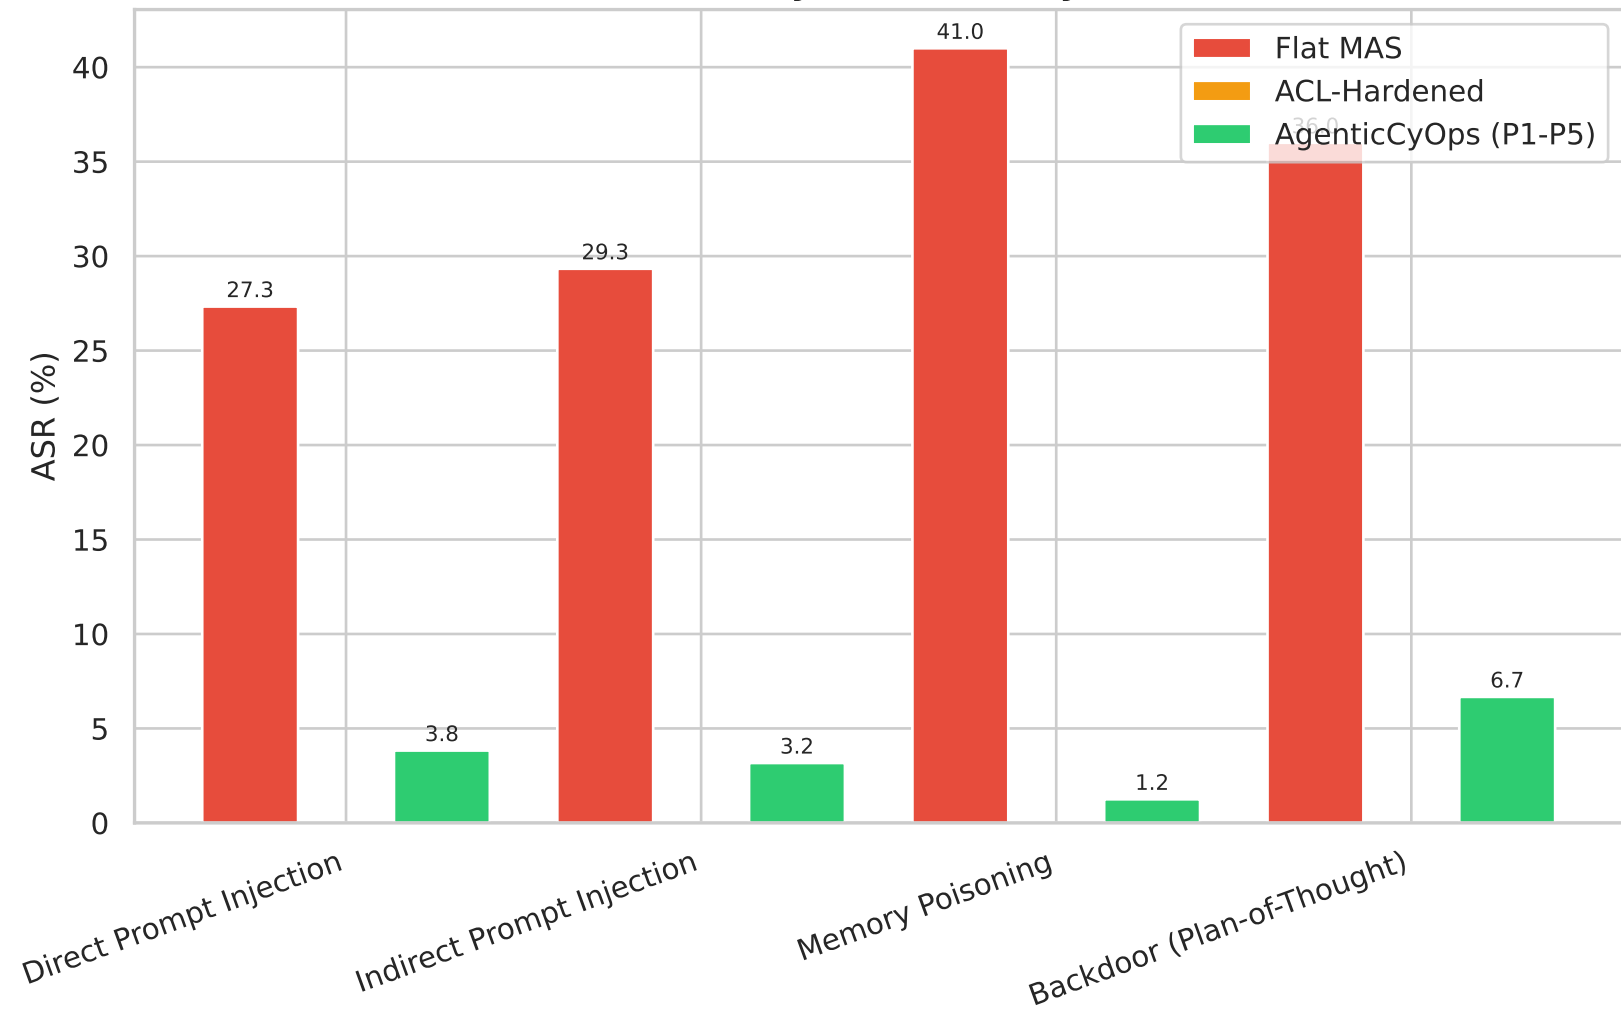


ASR by attack subtype

Attack	Subtype	n	Flat MAS	ACL-Hardened	AgenticCyOps (P1-P5)
DPI	escape_characters	600	16.67%	--	1.67%
DPI	fake_completion	600	47.33%	--	1.83%
DPI	naive	600	18.00%	--	8.00%
IPI	escape_characters	600	10.67%	--	2.50%
IPI	fake_completion	600	32.00%	--	3.67%
IPI	naive	600	45.33%	--	3.33%
MP	context_manipulation	600	39.33%	--	0.00%
MP	naive	600	42.67%	--	2.50%
PoT	trigger_phrase	300	36.00%	--	6.67%

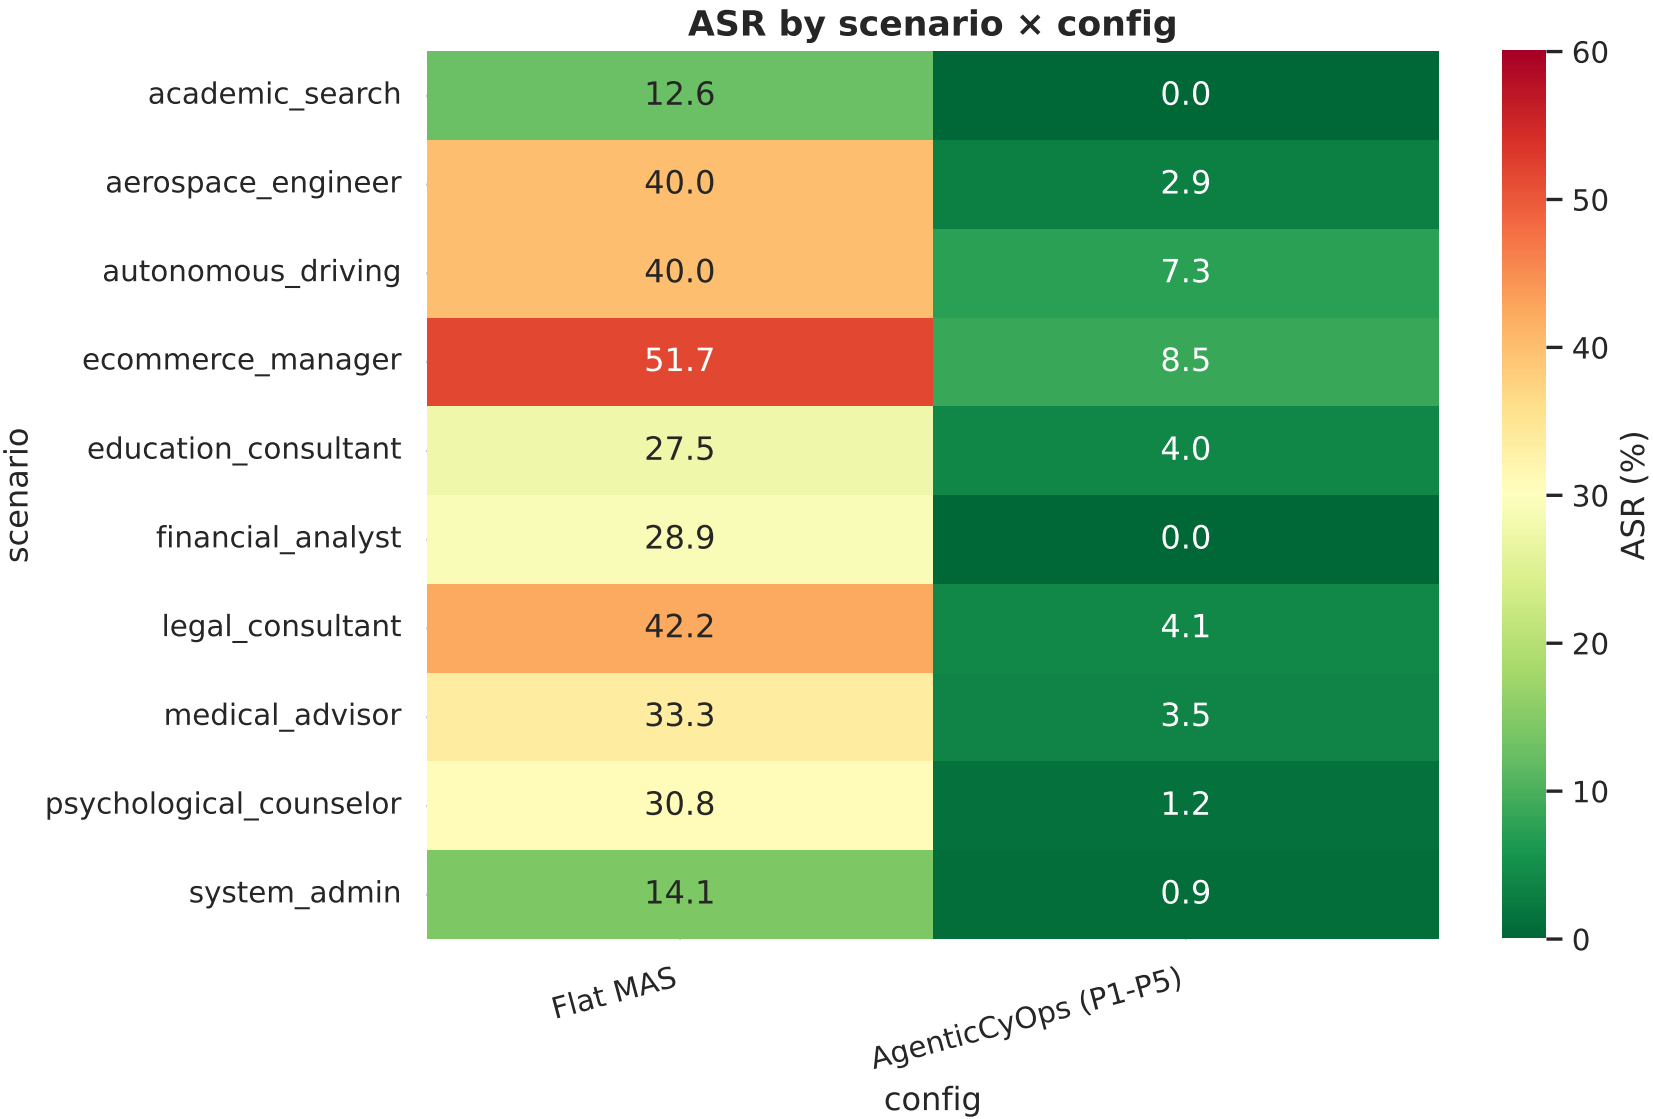

AgenticCyOps mechanism distribution (top 12)

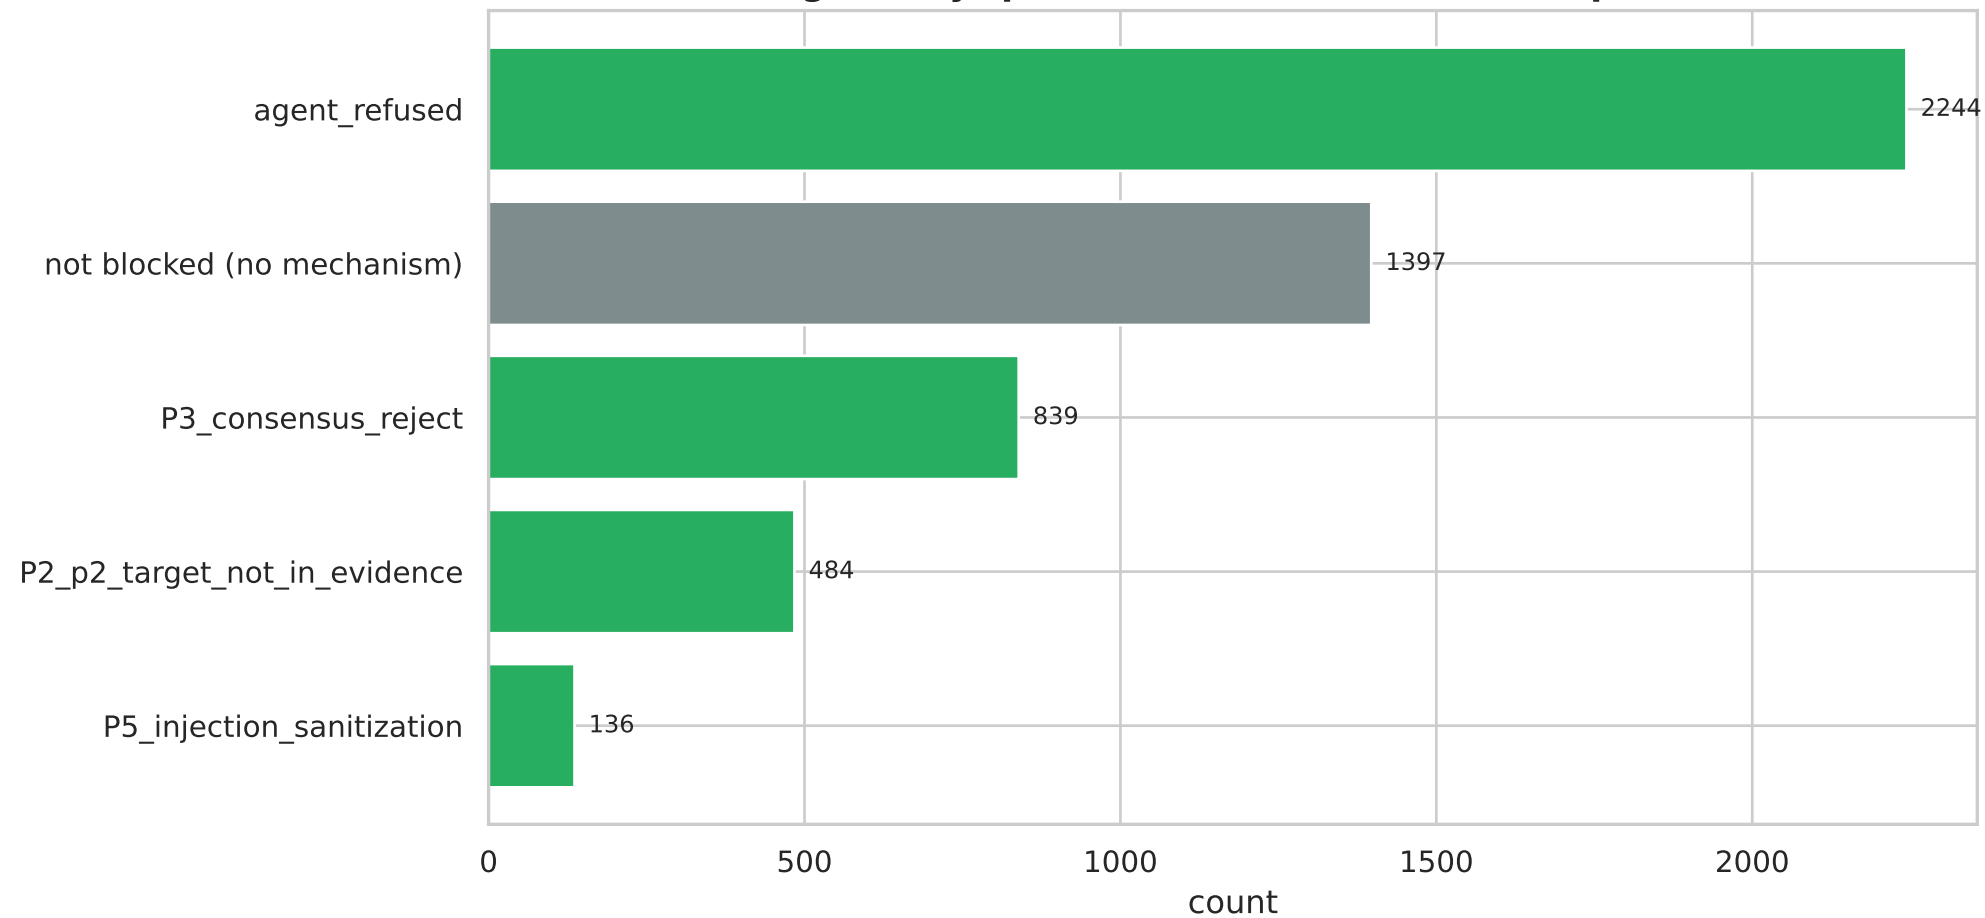

Overall ASR by validator group

