(a) Tree-to-1D packed DAG

Episode execution DAG

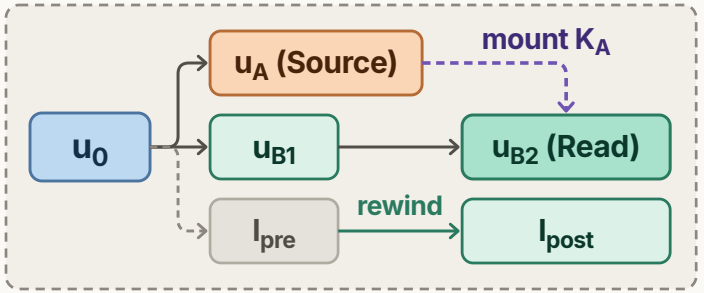

1D packed GPU pass (1× prefix)

GDN boundary hooks $h_{end}(p(u))$ (skip u_A)

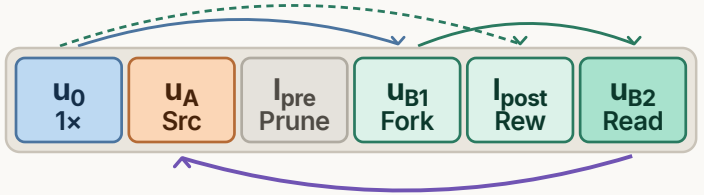

$\partial L_{B2} / \partial K_A, V_A \rightarrow$ LoRA θ

Matches SGLang rollout ($|\Delta \log \pi_\theta| = 0.0038$)

(b) Tree & mount mask

Block-sparse visibility ($\ell : L_{mount}$)

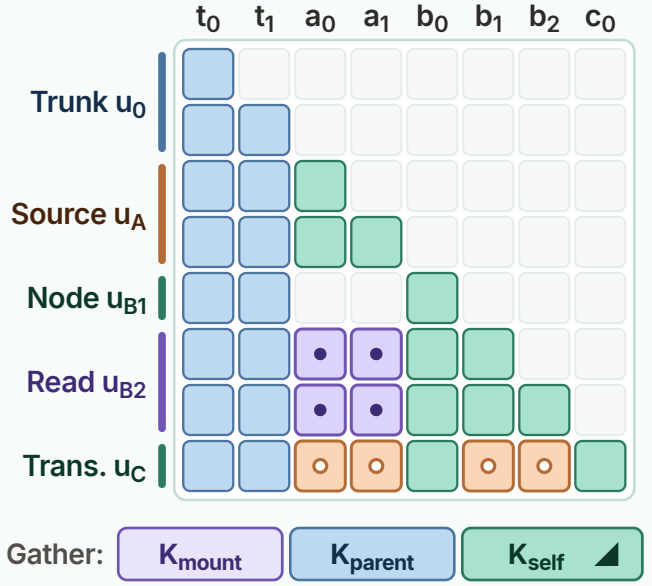

(c) Single-ownership & RLOO

Single-ownership loss mask ($m_{l,t}$)

	u_0	u_A	M(A)	u_B	l_{pre}	l_{post}
Leaf A	1	1				
Leaf B	0	0		1		
Leaf l_{pre}	0				1	
Leaf l_{post}	0				0	1
$\sum m_{l,t}$	1×	1×	0	1×	1×	1×
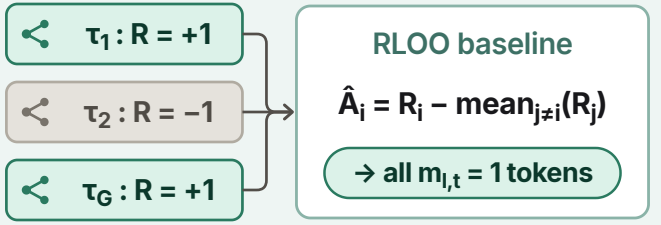
Group RLOO tree credit (G rollouts)