

# Controller/server communication

Mendel Rosenblum

# Controller's role in Model, View, Controller

- Controller's job to fetch model for the view
  - May have other server communication needs as well (e.g. authentication services)
- Browser is already talking to a web server, ask it for the model
- Early approach: have the browser do a HTTP request for the model
  - First people at Microsoft liked XML so the DOM extension got called: **XMLHttpRequest**
- Allowed JavaScript to do a HTTP request without switching page
- Widely used and called **AJAX - Asynchronous JavaScript and XML**
- Since it is using an HTTP request it can carry XML or anything else
  - More often used with JSON

# XMLHttpRequest

## Sending a Request

```
xhr = new XMLHttpRequest();  
xhr.onreadystatechange = xhrHandler;  
xhr.open("GET", url);  
xhr.send();
```

Any HTTP method (GET, POST, etc.) possible.

Responses/errors come in as events

## Event handling

```
function xhrHandler() {  
    if (this.readyState != 4) { // DONE  
        return;  
    }  
    if (this.status != 200) { // OK  
        // Handle error ...  
        return;  
    }  
    ...  
    var text = this.responseText;  
    ...
```

# XMLHttpRequest event processing

- Event handler gets called at **various stages** in the processing of the request

0	UNSENT	open() has not been called yet.
1	OPENED	send() has been called.
2	HEADERS_RECEIVED	send() has been called, and headers and status are available.
3	LOADING	Downloading; responseText holds partial data.
4	<b>DONE</b>	<b>The operation is complete.</b>

- Response available as:

raw text                    - **responseText**

XML document            - **responseXML**

- Can set request headers and read response headers

# Traditional AJAX uses patterns

- Response is HTML

```
elem.innerHTML = xhr.responseText;
```

- Response is JavaScript

```
eval(xhr.responseText);
```

Neither of the above are the modern JavaScript framework way:

- Response is model data (JSON frequently uses here)

```
JSON.parse(xhr.responseText);
```

# Fetching models with XMLHttpRequest

- Controller needs to communicate in the request what model is needed
- Can encode model selection information in request in:

URL path: `xhr.open("GET", "userModel/78237489/fullname");`

Query params: `xhr.open("GET", "userModel?id=78237489&type=fullname");`

Request body:

```
xhr.open("POST", url);  
xhr.setRequestHeader("Content-type",  
    "application/x-www-form-urlencoded");  
xhr.send("id=78237489&type=fullname");
```

# REST APIs

- REST - **representational state transfer**
- Guidelines for web app to server communications
- 2000 PhD dissertation that was highly impactful
  - Trend at the time was complex Remote Procedure Calls (RPCs) system
  - Became a must have thing: Do you have a REST API?
- Some good ideas, some not so good
  - Doesn't work for everything

# Some RESTful API attributes

- Server should export **resources** to clients using unique names (**URIs**)
  - Example: `http://www.example.com/photo/` is a **collection**
  - Example: `http://www.example.com/photo/78237489` is a **resource**
- Keep servers "stateless"
  - Support easy **load balancing** across web servers
  - Allow caching of resources
- Server supports a set of HTTP methods mapping to **Create, Read, Update, Delete (CRUD)** on resource specified in the URL
  - GET method - Read resource (list on collection)
  - PUT method - Update resource
  - POST method - Create resource
  - DELETE method - Delete resource



# REST API design

- Define the **resources** of the service and give them unique names (URIs)
  - Example: Photos, Users, Comments, ...
- Have clients use a CRUD operations using HTTP methods
- Extend when needed (e.g. transaction across multiple resources)

# React accessing RESTful APIs

- React has no opinion. Prefer something **higher** level than XMLHttpRequest
  - Example: `DoHttpRequest(HTTP_METHOD, body, doneCallback)`
- Popular: [Axios](#) - **Promise based HTTP client** for the browser and node.js
  - Wrapper around XMLHttpRequest
- REST Read (GET of URL): `result = axios.get(URL);`
- REST Create ( POST to URL): `result = axios.post(URL, object);`
  - JSON encoding of object into body of POST request
- Similar patterns for REST Update (PUT) and REST Delete (DELETE)

# Axios handling of HTTP responses

`result = axios.get(URL);` // Note: no callback specified! It's a **Promise**

```
result.then((response) => {  
    // response.status - HTTP response status (e.g. 200)  
    // response.statusText - HTTP response status text (e.g. OK)  
    // response.data - Response body object (JSON parsed)  
})  
.catch((err) => {  
    // err.response.{status, data, headers} - Non-2xxx status  
    // if !err.response - No reply, can look at err.request  
});
```

# Minor Digression - Promises

# Callbacks have haters

- Pyramid of Doom

```
fs.ReadFile(fileName, function (error, fileData) {  
    doSomethingOnData(fileData, function (tempData1) {  
        doSomethingMoreOnData(tempData1, function (tempData2) {  
            finalizeData(tempData2, function (result) {  
                // Called Pyramid of Doom  
                doneCallback(result);  
            });  
        });  
    });  
});
```

- An alternative to pyramid: Have each callback be an individual function
  - Sequential execution flow jumps from function to function - not ideal

# Same code without pyramid: Control jumps around

```
fs.ReadFile(fileName, readDone);  
function readDone(error, fileData) {  
    doSomethingOnData(fileData, doSomeDone);  
}  
function doSomeDone (someData) {  
    doSomethingMoreOnData(someData, doSomeMoreDone);  
}  
function doSomeMoreDone (someMoreData) {  
    finalizeData(someMoreData, doneCallback);  
}
```



# Idea behind promises

- Rather than specifying a done callback

`doSomething(args, doneCallback);`

- Return a promise that will be filled in when done

`var donePromise = doSomething(args);`

`donePromise` will be filled in when operation completes

- Doesn't need to wait until you need the promise to be filled in

# then() - Waiting on a promise

- Get the value of a promise (waiting if need be) with **then**

```
donePromise.then(function (value) {  
    // value is the promised result when successful  
}, function (error) {  
    // Error case  
});
```



# Example of Promise usage

- `axios.get()` returns a promise

```
axios.get(url).then(function(response) {  
    var ok = (response.status === 200);  
    doneCallback(ok ? response.data : undefined);  
}, function(response) {  
    doneCallback(undefined);  
});
```

# Promises

```
var myFile = myReadFile(fileName);
var tempData1 = myFile.then(function (fileData) {
    return doSomethingOnData(fileData);
});
var finalData = tempData1.then(function (tempData2) {
    return finalizeData(tempData2);
});
return finalData;
```

- Note no **Pyramid of Doom**
- Every variable is a promise
  - A standard usage: Every variable - If **thenable** call then() on it otherwise just use the variable as is.

# Chaining promises


```
return myReadFile(fileName)
  .then(function (fileData) { return doSomethingOnData(fileData); })
  .then(function (data) { return finalizeData(data); })
  .catch(errorHandlingFunc);
```

- Add in ES6 JavaScript arrow functions:

```
return myReadFile(fileName)
  .then((fileData) => doSomethingOnData(fileData))
  .then((data) => finalizeData(data))
  .catch(errorHandlingFunc);
```

# Going all in on promises

```
function doIt(fileName) {  
  let file = ReadFile(fileName);  
  let data = doSomethingOnData(file);  
  let moreData = doSomethingMoreOnData(data);  
  return finalizeData(moreData);  
}
```

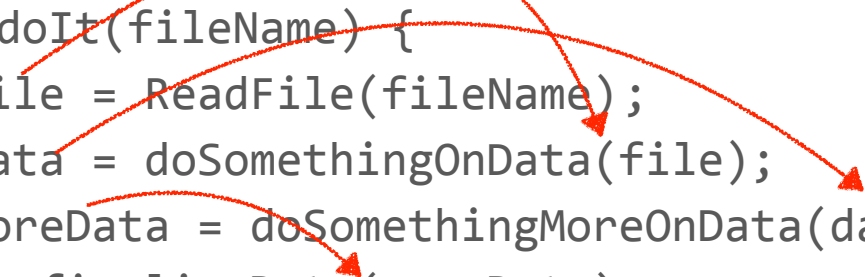

- All reads of variables become "then" calls:

`myVar` becomes `myVar.then( fn -> { ...`

# Promises vs Callbacks

- Easy to go from Promise to Callback: Just call `.then(callbackFunc)`
  - `axios.get(url).then(callback)`
- Going from Callback to Promise requires creating a Promise

```
var newPromise = new Promise(function (fulfill, reject) {  
    // calls fulfill(value) to have promise return value  
    // calls reject(err) to have promise signal error  
});
```

# Converting callbacks to Promises

```
function myReadFile(filename) {  
    return new Promise(function (fulfill, reject) {  
        fs.readFile(filename, function (err, res) {  
            if (err)  
                reject(err);  
            else  
                fulfill(res);  
        });  
    });  
}
```

# End Digression

# Other Transports: HTML5 WebSockets

- Rather than running over HTTP, HTML5 brings sockets to the browser
  - TCP connection from JavaScript to backend Web Server

- Event-based interface like XMLHttpRequest:

```
var socket = new WebSocket("ws://www.example.com/socketserver");
socket.onopen = function (event) {
    socket.send(JSON.stringify(request));
};
```

```
socket.onmessage = function (event) {
    JSON.parse(event.data);
};
```



# Remote Procedure Call (RPC)

- Traditional distributed computation technology supporting calling of a function on a remote machine.
  - Browser packages function's arguments into a message to the web server.
  - Function is invoked with the arguments on the server.
  - Function's return value is sent back to the browser.
- Allows arbitrary code to be run on server - handles complex, multiple resource operations
  - Reduces number of round trip messages and makes failure handling easier.
- Can result in more complex to use interface compared to REST
  - Need to document the API (i.e. functions and calling sequence)
- RPC can be done over HTTP (e.g. POST) or WebSockets

# Trending approach: GraphQL

- Standard protocol for backends from Facebook
  - Like REST, server exports resources that can be fetched by the web app
  - Unlike REST
    - Server exports a "schema" describing the resources and supported queries.
    - Client specifies what properties of the resource it is interested in retrieving.
    - Can fetch from many different resources in the same request (i.e. entire model in one query).
- Update operations specified in the exported schema
  - Allows an RPC-like interface
- Gaining in popularity particularly compared to REST
  - Gives a program accessible backend - **Application Programming Interface (API)**