



Token-level routing — em-dash & bold (3 seeds; bold = mean, thin = per-seed)

— both (1,1) — retain-only (1,0) — forget-only (0,1)


em-dash — behavior rate

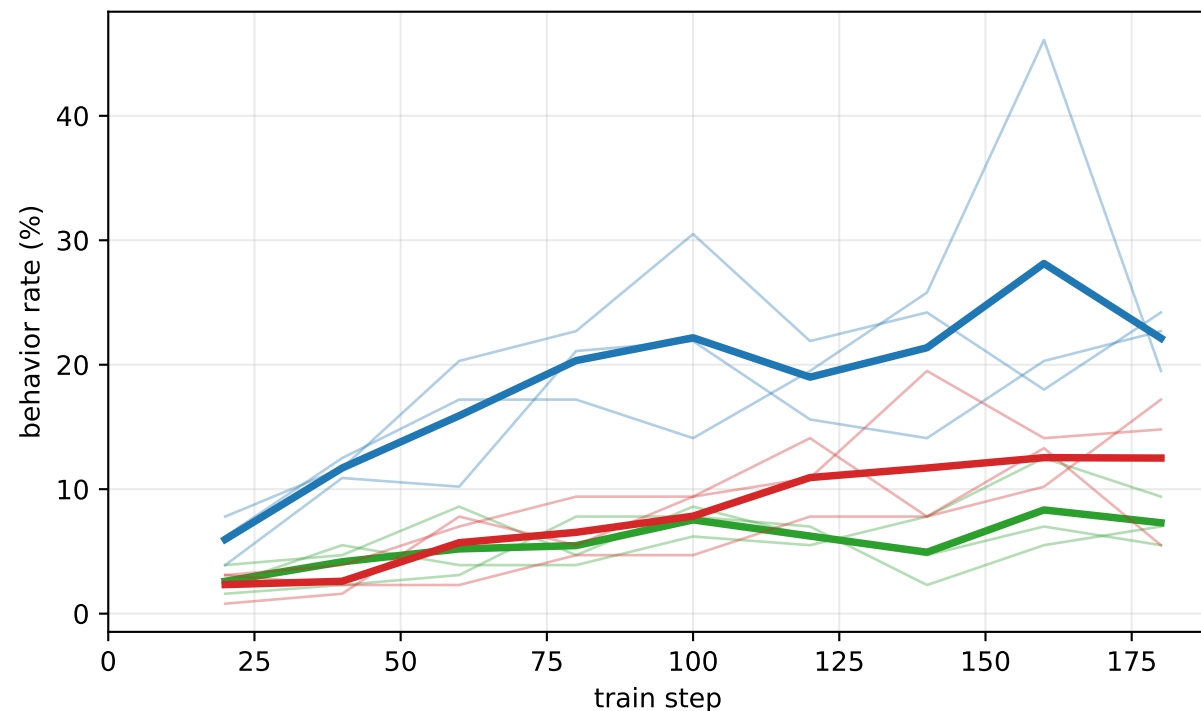

em-dash — RM reward

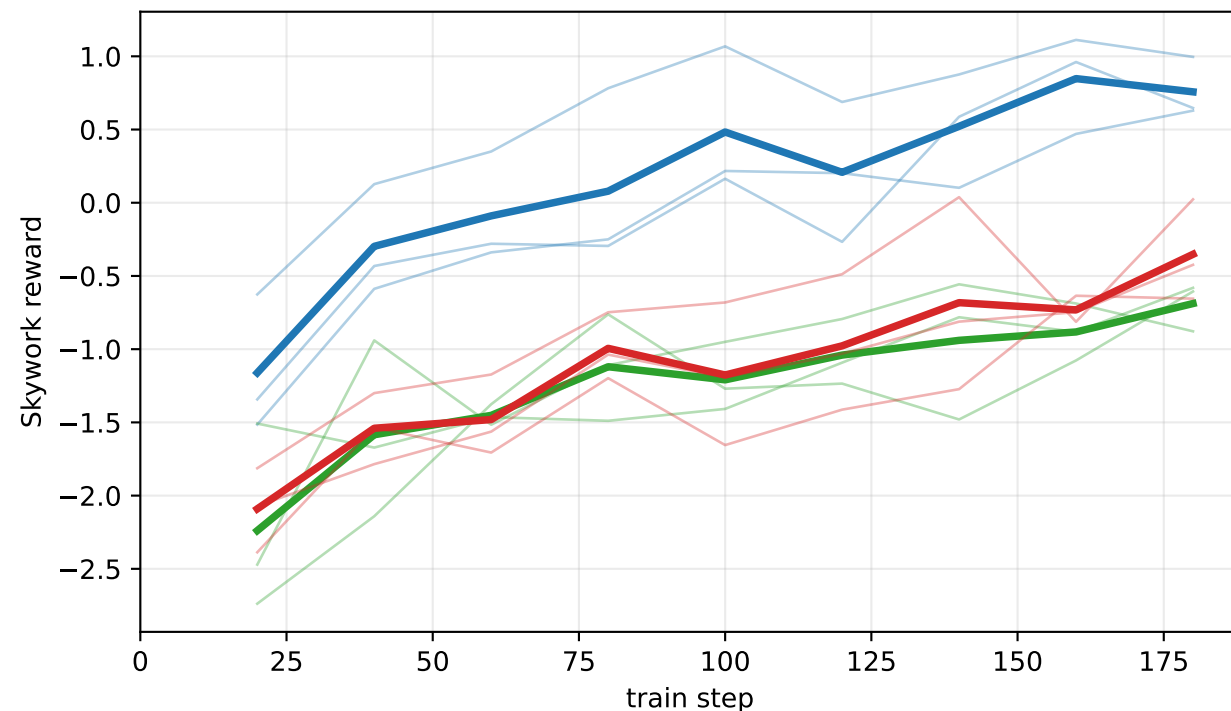

bold (markdown **) — behavior rate

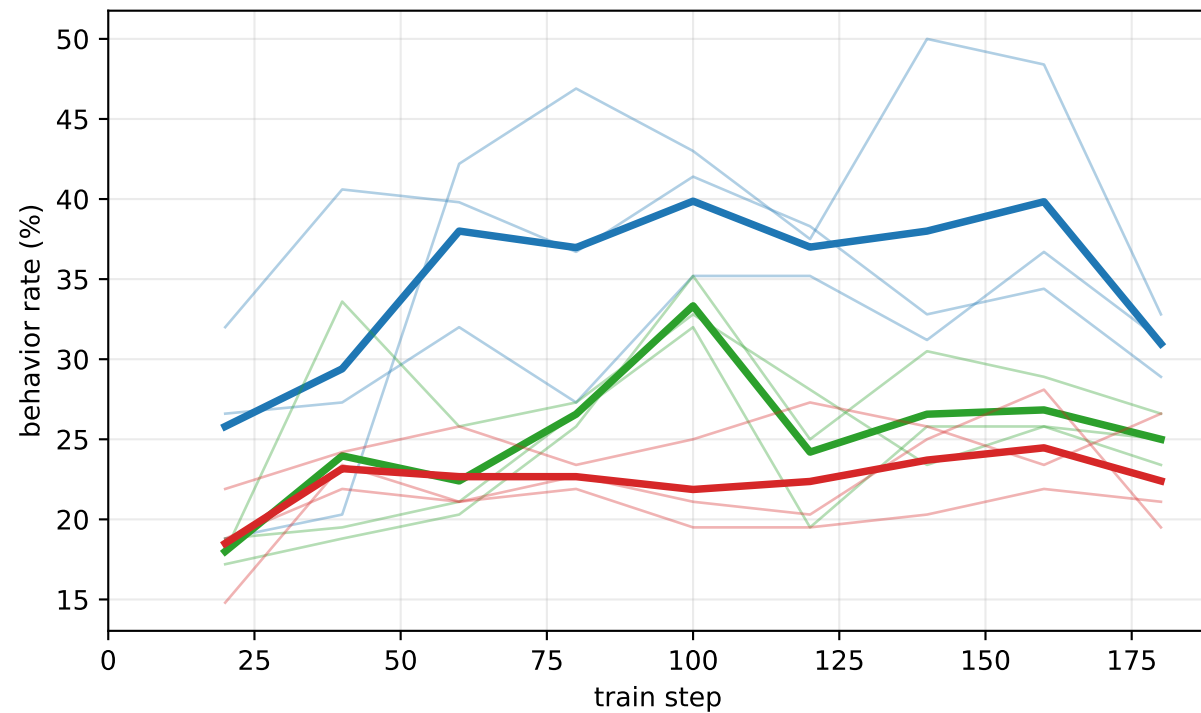

bold (markdown **) — RM reward

