

Honours Year Project Report

# **Predicting Web 2.0 Thread Updates**

By

Shawn Tan

Department of Computer Science

School of Computing

National University of Singapore

2012

Honours Year Project Report

# **Predicting Web 2.0 Thread Updates**

By

Shawn Tan

Department of Computer Science

School of Computing

National University of Singapore

2012

Project No: H079830

Advisor: A/P Kan Min-Yen

Deliverables:

Report: 1 Volume

## **Abstract**

With the advent of Web 2.0, sites with forums, or similar thread-based discussion features are increasingly common. An incremental web crawler aiming to maintain a database of up-to-date, extracted information from sites with such discussion features must strike a balance between bandwidth usage and freshness of data. Our objective: To estimate the arrival times of the next update to such threads. We demonstrate three different methods for achieving this using regression methods, and make recommendations as to how they can be used in a crawling system. We also propose a novel metric for measuring the timeliness of such a model that balances between the model's timeliness and bandwidth consumption. Our methods outperform the baseline, which revisits the thread using its average update rate.

Subject Descriptors:

World Wide Web

Web searching and information discovery

Web search engines

Web crawling

Information Retrieval

Evaluation of retrieval results

Retrieval effectiveness

Keywords:

web crawlers, revisitation, discussion threads, evaluation metrics

Implementation Software and Hardware:

python, bash, scikit-learn

## **Acknowledgement**

I would like to express my gratitude to my parents, for supporting me throughout my final year of university. I would also like to thank the following friends: Low Wee, Yipeng, Cedric, Davin, Chris and Lan Guan. Without them, I would not have had the moral support during times of stress, nor would I have been able to have discussions while fleshing out ideas.

Most of all, I would really like to thank Jesse and A/P Min-Yen Kan, for their patient guidance, support, and for putting up with my stubbornness and tardiness during the course of this project.

# List of Figures

3.1	A series of events, posts (blue) and visits (orange). The diagram demonstrates the concept of a window of $w = 2$ .	12
3.2	Scaled sigmoid curve	15
4.1	An example of a series of events used in our evaluation.	19
4.2	An example of calculating $T_{\max}$ . A visit is assumed at the same time as the final post made, and the usual $T$ -score metric is calculated	20
4.3	An example of calculating the maximum number of visits given a thread. The ratio between the number of visits predicted and the number of visits to the thread, and is used as $Pr_{\text{FA}}$	21
5.1	Distribution of thread length	23
5.2	Distribution of $\Delta_t$	23
5.3	Our experiment setup	24
A.1	Time distributions for $k = 4$	A-4

# List of Tables

1.1	Features of popular Web 2.0 sites . . . . .	2
3.1	Common notation used throughout this thesis . . . . .	11
4.1	Notation used for evaluation metrics . . . . .	18
5.1	Experiment results: Varying vocabulary size . . . . .	25
5.2	Results for tuning parameters using only $\mathbf{t}_\Delta$ . . . . .	26
5.3	Results for tuning parameters using only $\mathbf{v}$ . . . . .	26
5.4	Results for tuning parameters using $\mathbf{t}_\Delta + \mathbf{v} + \mathbf{t}_{\text{ctx}}$ . . . . .	27
5.5	Results for tuning $\alpha$ for the DEC method . . . . .	27
5.6	Results for tuning $\eta$ for the SGD method . . . . .	28
5.7	Full evaluation using 830 threads . . . . .	29
5.8	Paired difference evaluation results . . . . .	29
5.9	Breakdown of evaluation results . . . . .	31

# Table of Contents

Title	i
Abstract	ii
Acknowledgement	iii
List of Figures	iv
List of Tables	v
<b>1 Introduction</b>	<b>1</b>
<b>2 Related Work</b>	<b>5</b>
2.1 Refresh policies for incremental crawlers . . . . .	5
2.2 Thread content analysis . . . . .	7
2.3 Evaluation metrics . . . . .	8
2.4 Conclusion . . . . .	9
<b>3 Method</b>	<b>10</b>
3.1 Baselines . . . . .	11
3.2 Performing regression on windows (SVR) . . . . .	12
3.3 Discounted sum of previous instances (DEC) . . . . .	13
3.4 Stochastic Gradient Descent (SGD) . . . . .	14
<b>4 Evaluation Metrics</b>	<b>17</b>
4.1 Potential errors . . . . .	18
4.2 $T$ -score, and the Visit/Post ratio . . . . .	19
4.3 Normalising the $T$ -score and Visit/Post ratio . . . . .	19
<b>5 Evaluation</b>	<b>22</b>
5.1 Experiment setup . . . . .	24
5.1.1 Parameter Tuning . . . . .	24
5.2 Experiments . . . . .	28
5.3 Recommendations . . . . .	30
<b>6 Conclusion</b>	<b>32</b>
6.1 Contributions . . . . .	33
6.2 Future Work . . . . .	33

6.2.1	Topic modelling . . . . .	33
6.2.2	Using Natural Language Processing (NLP) techniques . . . . .	34
6.2.3	Leveraging context . . . . .	34
6.2.4	Using adaptive learning techniques . . . . .	34
<b>References</b>		<b>35</b>
<b>A Topic Modelling</b>		<b>A-1</b>
A.1	Introduction . . . . .	A-1
A.2	Completed Tasks . . . . .	A-1
A.2.1	Data: avsforum.com . . . . .	A-1
A.2.2	Latent Dirichlet Allocation . . . . .	A-2
A.2.3	Distribution of $\Delta_t$ . . . . .	A-3
A.3	Work In Progress . . . . .	A-5



# Chapter 1

## Introduction

With the advent of Web 2.0, sites with forums, or similar thread-based discussion features are increasingly common. Table 1.1 shows us that many of the popular Web 2.0 sites have comment features. This suggests that content on the web is increasingly being created by users alongside content providers. Our goal in this thesis is to create an algorithm that can predict when updates in such discussion threads will occur.

A naive way of getting timely updates would be to aggressively hit the pages repeatedly (polling), downloading pages at a frequent rate. Since web crawling is largely IO-bound, a large portion of the time spent crawling would be spent waiting for the server to supply a response to the request issued by the crawler. However, sites with a large number of pages (like popular forum sites), makes this infeasible in practice. On top of the usual requests the server may have, it then has to deal with repeated requests from such a crawler. Most sites do not mind some additional bandwidth, but if it gets excessive, it may be construed as a Denial-of-Service attack. These sites may then deny any further requests from the crawler.

A simple method to reduce the amount of polling done is to use the average time differences between all of the previous page updates to estimate the arrival of the next update, and to abstain from polling until the estimated time.

	T	FB L	FB S	G +1	L	DL	C	PV	Follows
<a href="http://www.lifehacker.com">http://www.lifehacker.com</a>	1	1	1				1	1	
<a href="http://digg.com/">http://digg.com/</a>	1	1			1	1	1	1	
<a href="http://9gag.com/">http://9gag.com/</a>	1	1	1	1	1		1	1	
<a href="http://www.flickr.com/">http://www.flickr.com/</a>					1		1	1	
<a href="http://news.ycombinator.com/">http://news.ycombinator.com/</a>					1		1		
<a href="http://stackoverflow.com/">http://stackoverflow.com/</a>					1		1	1	
<a href="http://www.youtube.com/">http://www.youtube.com/</a>					1	1	1	1	
<a href="http://www.reddit.com/">http://www.reddit.com/</a>					1	1	1		
<a href="http://www.stumbleupon.com/">http://www.stumbleupon.com/</a>					1		1	1	
<a href="http://delicious.com/">http://delicious.com/</a>	1	1					1	1	1

Table 1.1: Features of popular Web 2.0 sites

T = Twitter mentions

FB L = Facebook Likes

FB S = Facebook Shares

G +1 = Google +1

L = Likes (Local)

DL = Dislikes (Local)

C = Comments

PV = Page Views

Follows = Site-local feature for keeping track of user's activities

A key observation in our work is that the contents of the thread may also influence the discussion and hence the rate of commenting. For example, a thread in a technical forum about a Linux distribution may start out as a question. Subsequent questions that attempt to either clarify or expand on the original question may then be posted, resulting in a quick flurry of messages. Eventually, a more technically savvy user of the forum may come up with a solution, and the thread may eventually slow down after a series of messages thanking the problem solver. We believe that the content of the thread has information that can give a better estimate of the time interval between the last post and a new one.

Let us define all such thread-based discussion styled sites as forums. Ideally, an incremental crawler of such user-generated content should be able to maintain a fresh and complete database of content of the forum that it is monitoring. However, doing so with the previously mentioned naive method would, incur excessive costs when downloading un-updated pages, and raise the possibility of the web master blocking the requester's IP address.

As such, we need to have a way to achieve a balance between two things: (1) Reduce the requests made, and (2), still be able to retrieve updates in a timely fashion. There has been work done (see Chapter 2) in this respect, but we argue that existing content should be included into any model that attempts to predict updates to user-generated content.

Our high level goal: To devise a suitable algorithm for predicting new posts in user discussion threads, based on the discussion content in the thread. In this project, we focus on forum threads, and make the following contributions:

1. We demonstrate three different methods for achieving this using regression methods.
2. We propose a novel metric for measuring the timeliness of such a model that balances between the model's timeliness and bandwidth consumption.

In Chapter 2, we explore the related work dealing with refresh policies and metrics to measure the performance of such algorithms. In Chapter 3, we discuss the methods that we have created with to tackle the problem, while Chapter 4 describes the metrics we propose for measuring the performance of these algorithms. In Chapter 5, we perform experiments on a dataset extracted from `avsforum.com`, and show that our models perform better than an average revisitation baseline. Chapter 6 then discusses our contributions, and possible avenues of future work.

# Chapter 2

## Related Work

In this chapter, we present some of the work done related to prediction of thread updates. First, we take a look at the literature dealing with incremental crawlers and their policies for revisiting a web page. Some work has been done to try to predict how often page content is updated, with the aim of scheduling download times in order to keep a local database fresh. We then also take a brief look at some work dealing with content.

### 2.1 Refresh policies for incremental crawlers

We first discuss the *timeliness* of our crawler to maintain the freshness of the local database, which refers to how new the extracted information is. Web crawlers can be used to crawl sites for user comments for later post-processing. Web crawlers which maintain the freshness of a database of crawled content are known as incremental crawlers. Two trade-offs these crawlers face cited by Yang, Cai, Wang, and Huang (2009) are *completeness* and *timeliness*. *Completeness* refers to the extent which the crawler fetches all the pages, without missing any pages. *Timeliness* refers to the efficiency with which the crawler discovers and downloads newly-created content. We focus mainly on timeliness in this project, as we believe that timely updates of active threads are more important

than complete archival of all threads in the forum site.

Many such works have used the Poisson distribution to model page updates. This is because the Poisson process is often used to model a sequence of events that happen independently, with an average rate, over time. Coffman and Liu (1997) analysed the theoretical aspects of doing this, as well as formalised the problem. Their work showed that if the page change process is governed by a Poisson process with a rate of  $\mu$ , then accessing the page at intervals proportional to  $\mu$  is optimal.

Cho and Garcia-Molina trace the change history of 720,000 web pages collected over four months, and showed empirically that the Poisson process model closely matches the update processes found in web pages (Cho, 1999). They then proposed different revisiting or refresh policies (Cho & Garcia-Molina, 2003; Cho & Garcia-molina, 2003) that attempt to maintain the freshness of the database.

The Poisson distribution were also used in Tan, Zhuang, and Mitra (2007), where they described a method that made use of a weighted history, such that recent changes are more important than older ones.

However, the Poisson distribution is memoryless, and in experimental results due to Brewington and Cybenko (2000), the behaviour of site updates are not. Moreover, these studies were not performed specifically on online threads, where the behaviour of page updates differs from static pages.

Yang et al. (2009), attempted to resolve this by using the list structure of forum sites to infer a sitemap. With this, they reconstruct the full thread, and then use a linear-regression model to estimate a scoring function. This function is then used to schedule when the next visit to the thread will be made.

Forums have a logical, hierarchical structure in their layout, which typically alerts the user to thread updates by putting threads with new replies at the top of the thread index. Yang’s work exploits this as well as their linear model to achieve a prediction of when to

retrieve the pages. However this design pattern is not applied universally; comments on blog sites or e-commerce sites about products do not conform to this pattern. The lack of such information may result in a poorer estimate, or no estimate at all.

What we are trying to do here is similar. We also want to create a revisit policy, but we argue that the previous rates of change should not be the only factor that is taken into account when coming up with such a policy. The above works all try to estimate the arrival of the next update (comment), but do not leverage an obvious source of information, which is the content of the posts themselves. Our perspective is that the available thread content can be used to provide a better estimation for predicting page updates.

Next, we look at some of the related work pertaining to thread content.

## 2.2 Thread content analysis

While there is little existing work using content to predict page updates, we review existing work related to analysing thread-based pages. We think such work will aid our efforts in content-based update prediction.

Wang and McCarthy (2011) find hierarchical links between forum posts using lexical chaining. They proposed a method to link posts using the tokens in the posts called *Chainer<sub>SV</sub>*. While they analyse the contents of individual posts, the paper does not make any prediction with regards to newer posts.

There has also been some work done recently in predicting events in social media, and in particular, tweets. Wang, Chen, and Kan (2012) dealt with predicting the retweetability of tweets using content. They applied two levels of classification, the first level categorising tweets into 6 different types: Opinion, Update, Interaction, Fact, Deals and Others. This was done using similar techniques as Sriram and Fuhry (2010) and Naaman, Boase, and Lai (2010). The Opinion and Update categories are then further categorised

into another three and two sub-categories each. The authors performed this categorisation using labeled Latent Dirichlet Allocation. These classifications are then used as features to predict the retweetability of a tweet.

While this work leverages content to make predictions about user responses, the predictions are made into three classes: no retweets, low retweets, and high retweets. While this may not be directly useful, some of the features used in their work could be leveraged to make a more accurate prediction.

## 2.3 Evaluation metrics

Yang et al. (2009) proposed a metric for our particular problem of thread update prediction. Known as the  $T$ -score, it gives the average time difference between when a post is made and when the post is retrieved by a crawler. The lower the  $T$ -score, the better the model. However, the metric does not penalize for visits which retrieve nothing new from the thread. As such, a crawler that repeatedly crawls the site at a frequent rate would do very well.

Broadening our search for more relevant evaluation metrics that take such wasted bandwidth into account, we turn to related work in the evaluation of segmentation algorithms. In Georgescu, Clark, and Armstrong (2009), the authors propose a new scheme for evaluating segmentation algorithms,  $Pr_{error}$ . This metric is the weighted sum of two probability counts  $Pr_{fa}$  which is the probability that a false alarm segmentation is made, and  $Pr_{miss}$  which is the probability that a segmentation is not made when there should be one. Unfortunately for our purposes, the metrics are calculated using the number of ground truths and segmentations given a window. As such, it does not account for the “distance” between the ground truths and the segmentation. It also does not allow for the predictions to appear after the ground truths, all requirements needed for a metric to evaluate timeliness of a model.



## 2.4 Conclusion

The state of current work related to revisitation policies mainly use estimations of previous update intervals to predict future update times. Analysis of user-generated content also do not tackle the problem of predicting when new content is created or published. These are the issues we will tackle with our work.

We aim to use the existing content available in the thread to train models for predicting when future posts will arrive. In the next chapter, we take a look at the various methods we propose for tackling this problem of revisitation.

# Chapter 3

## Method

We aim to predict the amount of time between the arrival of the next upcoming post and the time the last post in the thread was made. The information available to us are the previous posts observed in prior visits. The assumption made here is that the thread is not paginated in any way, and a single visit to the thread gives us the latest posts without having to traverse through the links to the latest page. This is because in practice, we would be able to keep track of where the last visited page of the thread was, and reading the new posts would incur a few more requests to the thread. This, in comparison to constantly hitting the page for updates, would be negligible.

More formally, what we are trying to do is to estimate a function  $f$  such that given a feature vector  $\mathbf{X}$  representative of a window  $\rho_{t-w+1}, \rho_{t-w+2}, \dots, \rho_t$ , where  $\rho_t$  represents the  $t$ -th post in the thread, we can approximate  $\Delta_t$  with  $f(\mathbf{X})$ . In the following sections, we will discuss various methods for estimating  $f$ , following the notation introduced in Table 3.1.

We now describe the methods we explored to approximate  $f$ .

Notation	Description
$\rho$	A post
$t$	Index of a post in a thread
$w$	Number of posts in a window
$\rho_t$	The $t$ -th post in the thread
$\mathbf{v}_t$	The frequency count vector of the posts used in the $t$ -th post
$\Delta_t$	Time difference between a post at position $t$ and a post at position $t + 1$
$\mathbf{t}_\Delta$	Vector of $\Delta_t$ s in a given window
$\mathbf{t}_{\text{ctx}}$	Bit vector representing the day of week, and the hour of day
$\mathbf{X}$	Feature vector extracted from a window
$K$	The $K$ best features selected from the vocabulary.

Table 3.1: Common notation used throughout this thesis

### 3.1 Baselines

A simple way of estimating the revisit rate is to use the average time difference given past observed posts. In our review of the related work, we have seen that if page updates follow a Poisson distribution, then revisiting at the Poisson mean would be an optimal approximation (Coffman & Liu, 1997). In our baseline revisit policy, we account for the last made post whenever we make a visit to the thread, and calculate our next revisit time based on the average post intervals added to the timestamp of the previous post. This is in contrast to an even simpler revisit policy that just revisits at a constant, fixed rate, independent of the posts being made to the thread.

One other way of predicting using average post intervals would be to use the concept of a *window*. Averaging the time differences between the posts intuitively works as it captures the thread’s context: A series of posts with short intervals should mean that

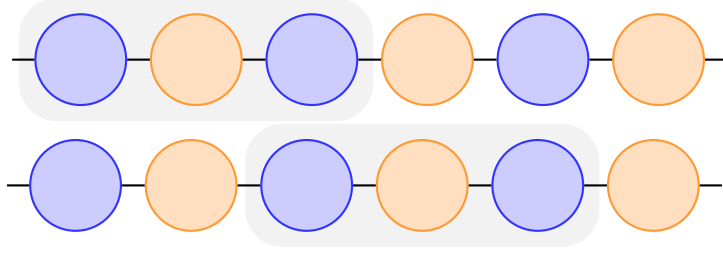


Figure 3.1: A series of events, posts (blue) and visits (orange). The diagram demonstrates the concept of a window of  $w = 2$ .

the next post would come at around the same interval as the few that came before.

An example of a window ( $w = 2$ ) can be seen in Figure 3.1.

In terms of using content for prediction, windows also makes intuitive sense: Forum users view content as paginated posts, so whether or not they make a reply depends on the content they view when viewing the thread.

## 3.2 Performing regression on windows (SVR)

Previous work used linear regression on a set of features extracted from forums (Yang et al., 2009). In this past work, the regressed function was used as a scoring function rather than a predictive function. We implemented their model, but the results proved to perform worse than the baselines.

Informed by the past work, we use some features from the previous work: Window posts time differences and time context features (bit-vector representations of the day of the week and hour of the day).

However, this time instead of linear regression, we used a regression method known as Support Vector Regression (SVR), using a radial basis function kernel. This method allows the using of different kernels, allowing for better estimation of the target function.

The main focus of study in this report was to see if content helps with predicting

thread updates would produce an improvement. In this project we used word counts. We performed standard preprocessing steps of removing stopwords and tokens that are less than three characters in length. We also stem the words using the Porter stemmer. We then perform a word frequency count. However, the use of the full vocabulary of the thread as a feature vector greatly increases the time needed to train the model. As such, we used a simple univariate regression technique for feature selection, and selected only the  $K$  best tokens for consideration. Table 5.1 shows the results of this experiment. The methods in this section use features extracted from the current window. A model is then trained using these extracted features in order to make a prediction. We take a look now at a two other novel methods that we developed.

### 3.3 Discounted sum of previous instances (DEC)

Posts made further in the history of the thread may have an effect on when the latest posts arrive. The magnitude of this effect, however, may diminish over time.

Instead of having a finite window for which all posts (in said window) are treated equally, we propose to accord different weights for the previous posts: the earlier the posts were made, the less effect they should have on prediction the post should have.

Following this intuition we used a discounted sum over previous posts' word frequency vector:

$$\mathbf{X}'_t = \mathbf{X}_t + \alpha \mathbf{X}'_{t-1}$$

where  $\mathbf{X}_t$  is the feature vector at post  $t$ .  $\alpha$  is the *discount factor* and satisfies  $0 \leq \alpha < 1$ .

This new feature vector  $\mathbf{X}'_t$  will be used in the same way as before; instances of  $\mathbf{X}'$  will be regressed with their  $\Delta_t$  values. As before, we will look at the results for this method in the next chapter.

Up till now, we have looked at methods that treat the model as static – once trained, the model never gets updated during run time. However, this is unrealistic due to the

fact that over time, different words are popular as a direct result of different topics in the real world being popular. In this case, these fluctuations may be due to new updates to firmware being released or newer models of a product.

### 3.4 Stochastic Gradient Descent (SGD)

To address this problem, we investigate the use of a stochastic gradient descent (SGD) to estimate the function  $f$ . The SGD allows us to use a dynamic function instead of a static function for estimation during runtime. We continue to allow  $f$  to vary whenever new posts and their update times are observed.

Having already attempted using linear regression for this purpose, we have found it unsuitable for  $f$  to be estimated by a linear function. Such a linear function often resulted in a negative prediction, and sometimes an overly huge one, when given feature vectors that have previously never been observed. The function has to be somehow constrained such that the value returned never drops below 0, and never predicts something too huge such that many posts are missed.

Since  $f(\mathbf{X}) > 0$ , we used a scaled sigmoid function,

$$f(\mathbf{X}) = \frac{\Lambda - \lambda}{1 + e^{\mathbf{w} \cdot \mathbf{X}}} + \lambda$$

where  $\Lambda$  and  $\lambda$  are the scaling factors. This results in  $f : \mathbb{R}^{|\mathbf{X}|} \rightarrow (\lambda, \Lambda)$ . Bounding the estimation function between  $\lambda$  and  $\Lambda$  allows us to restrict the prediction from becoming negative or exceedingly large. For our purposes, we set  $\lambda = Q_3 + 2.5(Q_3 - Q_1)$ , where  $Q_n$  is the value at the  $n$ -th quartile. A visual interpretation of such a curve can be seen in Figure 3.2.

The resulting update rule for  $\mathbf{w}$  is then given by,

$$\Delta \mathbf{w}_i = \eta \underbrace{\left( \widehat{\Delta}_t - \Delta_t \right)}_{\text{error term}} \underbrace{\left( f(\mathbf{X})(1 - f(\mathbf{X})) \right)}_{\text{gradient}} \mathbf{X}_i$$

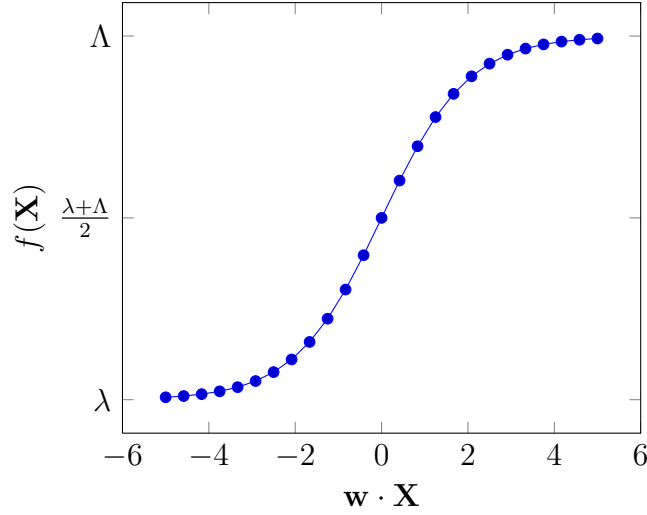


Figure 3.2: Scaled sigmoid curve

which is similar to the delta update rule found in artificial neural networks. We omit the scaling factor in the gradient as it is a constant and then experiment with various values of  $\eta$ , the learning rate.

In this chapter, we have outlined the specific task we will be attempting, to try and predict the time from the current last post in the thread to the next. We have discussed the types of features we will be using,

$\mathbf{t}_{\text{ctx}}$  time context features

$\mathbf{v}$  content features, in particular, word counts

$\mathbf{t}_{\Delta}$   $\Delta_t$  of posts within the window

We have also discussed the concept of a window, and how it could help to make predictions better. The methods we will evaluate in the next chapter are following:

BL Baseline method, using the average  $\Delta_t$  revisit strategy.

SVR Support vector regression, using feature vector extracted from the current window.

DEC Uses the discounted sum of previous instances as the current window.

**SGD** Uses the stochastic gradient descent method for prediction.

We will perform some experiments, and look at how these methods stack up against one another.



# Chapter 4

## Evaluation Metrics

One of the contributions of this project was also to come up with a good metric for measuring the performance of a model that performs predictions.

Our metric has to be different from traditional methods of measuring performance. One example of such a measure is Mean Average Percentage Error (MAPE), which we use to measure the performance of the learnt model. This value is given by

$$\frac{1}{|P|} \sum_{t=1}^{|P|} \left| \frac{f(\mathbf{X}_t) - \Delta_t}{\Delta_t} \right|$$

where  $A_i$  is the actual value, and  $F_i$  is the forecasted value for the instance  $i$ . Realistically, the model would not be able to observe every possible window, making the MAPE measure not descriptive of the performance of the approximated function. This value does not reflect how well the model will do in a real-time setting, but gives an idea of how far off the model is given a window.

In our case, we want to know how long it takes before any post made will be retrieved by the crawler. We also want to ensure that the model does not choose to make too many requests. The rest of the chapter explains in detail how we came up with our metric, its advantages and limitations.

Notation	Description
$P$	List of posts.
$V$	List of visits.
$T$	A thread's $T$ -score.
$T_{\max}$	A thread's maximum $T$ -score.
$t(\rho)$	Timestamp of the post.

Table 4.1: Notation used for evaluation metrics

## 4.1 Potential errors

To be thorough, let us also enumerate the types of errors that a model making predictions could encounter.

The model can potentially make a prediction such that the next visit comes before the arrival of the next post. The predictions being made are the  $\Delta_t$  between the posts, rather than the visitation times, hence, it is possible for the model to make a prediction that occurs before the current time. An erroneous prediction can also cause the crawler to come in before the next post (two, or more, visits, but nothing new fetched). Errors of this type waste bandwidth, since the crawler will make an unnecessary visit to the page.

Another type of error would have the prediction causing the next visit to come some time after a post. Since most predictions are almost never fully accurate, there will be some time between the post is made and the page is fetched. These errors are still relatively acceptable, but the time difference between the post arriving and the visit should be minimised. The visit could also come more than one post later. Errors of this kind incur a penalty on the freshness of the data, more so than the after one post, especially if the multiple posts are far apart time-wise.

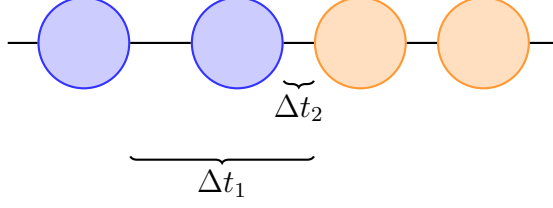


Figure 4.1: An example of a series of events used in our evaluation.

## 4.2 $T$ -score, and the Visit/Post ratio

We also want to know the *timeliness* of the model’s visits. Yang et al. (2009) has a metric for measuring this. Taking  $\Delta t_i$  as the time difference between a post  $i$  and it’s download time, the timeliness of the algorithm is given by

$$T = \frac{1}{|P|} \sum_{i=1}^{|P|} \Delta t_i$$

A good algorithm would give a low  $T$ -score. However, a crawler that hits the site repeatedly performs well according to this metric. The authors account for this by setting a bandwidth (fixed number of pages per day) for each iteration of their testing. In our experimental results, we also take into account the number of page requests made in comparison to the number of posts.

## 4.3 Normalising the $T$ -score and Visit/Post ratio

We normalise the  $T$ -score to get a comparable metric across all the threads. In order to do this, we consider again the thread posts and visits as a sequence of events. We then define the *lifetime*, denoted as  $l$ , of the thread as the time between the first post and the last post. Any visits that occur after the last post are ignored.

We then consider the worst case in terms of timeliness, or misses. This would be the case where the visit comes at the end, at the same time as the post. So we get a value

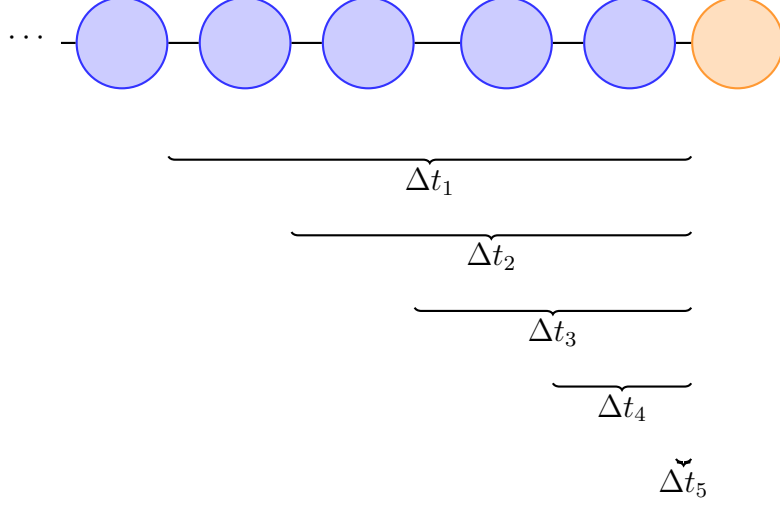


Figure 4.2: An example of calculating  $T_{\max}$ . A visit is assumed at the same time as the final post made, and the usual  $T$ -score metric is calculated

$T_{\max}$  and  $P_{\text{miss}}$  such that

$$\begin{aligned}
 Pr_{\text{miss}} &= \frac{T}{T_{\max}} \\
 &= \frac{T}{\left( \frac{\sum_{\rho} (\max_{\rho'} t(\rho') - t(\rho))}{|P|} \right)} \\
 &= \frac{|P| \cdot T}{\sum_{\rho} (\max_{\rho'} t(\rho') - t(\rho))}
 \end{aligned}$$

An example can be viewed in Figure 4.2. Assuming that there are no posts before  $\rho_1$  here, we simply take the usual  $T$ -score value to get  $T_{\max}$ . It is difficult to consider the worst case in terms of false alarms, or visits that retrieve nothing. There could be an infinite number of visits made if we are to take the extreme case. In order to get around this, we consider discrete time frames in which a visit can occur. Since for this dataset, our time granularity is in terms of minutes, we shall use minutes as our discrete time frame. With this simplified version of our series of events, we can then imagine a worst-case performing revisit policy that visits at every single time frame. Here, we assume all




Figure 4.3: An example of calculating the maximum number of visits given a thread. The ratio between the number of visits predicted and the number of visits to the thread, and is used as  $Pr_{\text{FA}}$

quantities are measured in terms of minutes. This gives us

$$Pr_{\text{FA}} = \frac{|V|}{(\max_{\rho} t(\rho)) - |P|}$$

where  $l$  is in units of our specified discrete time frame. Figure 4.3 shows an example of how  $Pr_{\text{FA}}$  is calculated.

With these two normalised forms of the original metrics, we can use a weighted mean to give a weighted combined form of the two error rates,  $Pr_{\text{error}}$ :

$$Pr_{\text{error}} = \alpha Pr_{\text{FA}} + (1 - \alpha) Pr_{\text{error}}$$

In the following sections, we will discuss the results of our experiments with the various algorithms found in the previous chapter, and measure their effectiveness using their  $T$ -scores and Visit/Post ratio, and comparing them using the  $Pr_{\text{error}}$  metric.

# Chapter 5

## Evaluation

In our project, the dataset we used was crawled from <http://www.avsforum.com/f/>. The forum dealt mainly with Audio-Visual equipment, with discussions mainly about technical details, offers and people showing off their DIY projects.

The forum was chosen from the list which Yang et al. (2009) provided in their paper. The forum users use mainly proper English, which made removing stopwords and stemming simpler.

We crawled 4,158 threads, with a total of 1,002,225 posts. A distribution of how the length of threads are distributed can be seen in Figure 5.1. Threads with 1 to 10 posts already make up half the number of collected threads. The distribution of the time differences are shown in Figure A.1. In both the figures, the right-hand-side cutoff was set at 1,000 due to the negligible number of items to the right of the cutoff.

We have also found that the time of the day the day of the week matters when dealing with threads. An example of such a thread can be seen in Figure 5.3a and Figure 5.3b, where we see that activity peaks at 2 PM, dropping slightly during (an assumed) lunch period, and then peaks again during the early evening and at 9 PM. Activity drops to its lowest at 3 AM. The weekly graph also shows a pattern, showing lower posting frequencies during the weekends, and its highest peak on Thursdays.

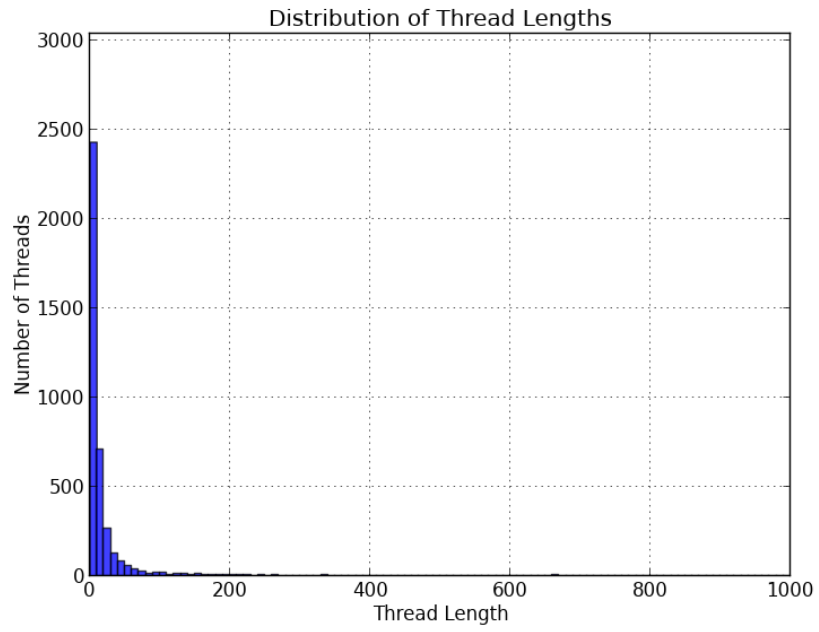


Figure 5.1: Distribution of thread length



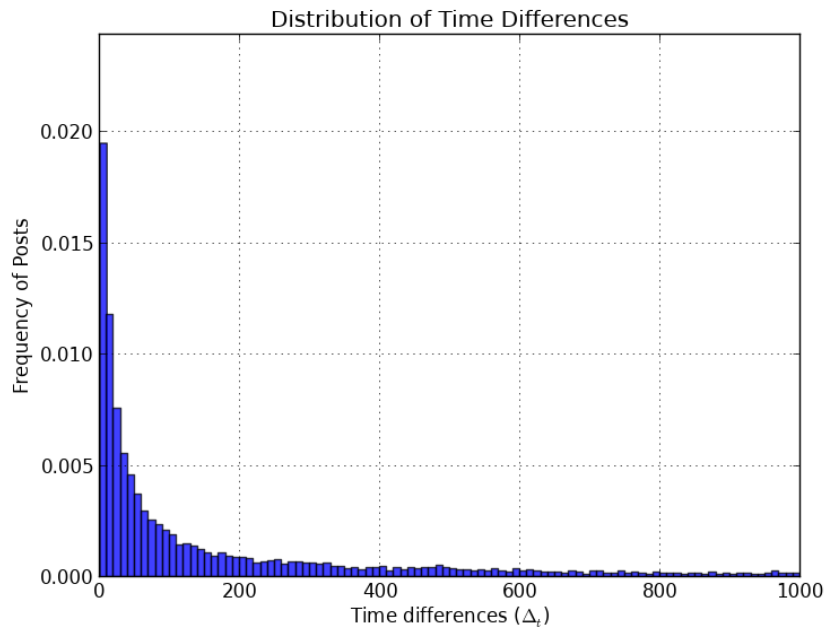


Figure 5.2: Distribution of  $\Delta_t$

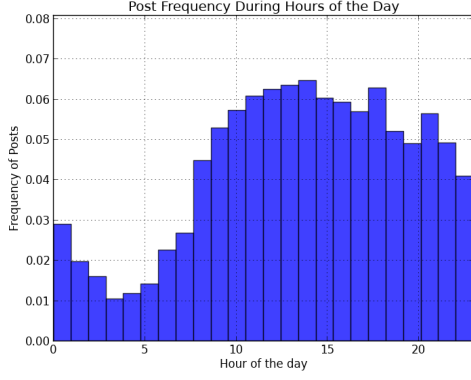

(a) The hourly post frequency.

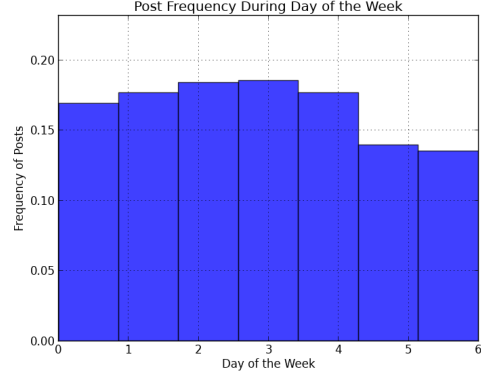

(b) The daily post frequency.

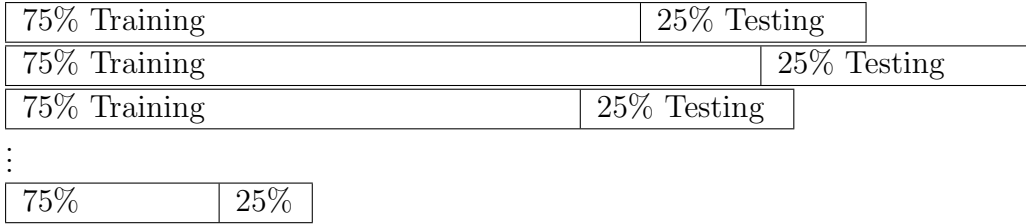


Figure 5.3: Our experiment setup

## 5.1 Experiment setup

The first 75% of the thread was used as training data, while the remaining 25% was used as test data. We used Support Vector Regression for this regression task, employing a Radial Basis Function kernel as our learning algorithm.

This setup is used in both the tuning of parameters and for the full evaluation of the entire dataset.

### 5.1.1 Parameter Tuning

Before we begin performing experiments on the full dataset, we first tuned the machine learning algorithms using a sample of the forum threads. In the following experiments, the threads chosen from our extracted dataset are those with a 100 to 1000 posts. This amounted to 97 threads. In each of these experiments, we run the algorithm with different parameters, and use the optimal one in our final evaluation.



	$T$ -score	Visit/Post	$Pr_{error}$
$K = 10$	$1590.985 \pm 236.131$	$18.013 \pm 7.588$	$0.019 \pm 0.004$
$K = 20$	$1594.691 \pm 237.001$	$18.005 \pm 7.585$	$0.019 \pm 0.004$
$K = 30$	$1580.981 \pm 235.293$	$18.011 \pm 7.587$	$0.019 \pm 0.004$
$K = 40$	$1579.544 \pm 234.802$	$18.015 \pm 7.586$	$0.018 \pm 0.004$
$K = 50$	$1564.888 \pm 235.164$	$18.024 \pm 7.587$	$0.018 \pm 0.004$
$K = 60$	$1564.759 \pm 234.663$	$18.017 \pm 7.588$	$0.019 \pm 0.004$

Table 5.1: Experiment results: Varying vocabulary size

### Vocabulary size

Before we begin tuning the other parameters, we start with limiting the feature vector when using the content information. This is important as having an excessively large feature vector due to a large vocabulary size leads to complications due to limited memory size. We restrict our search for a good size of vocabulary from  $10 \leq K \leq 60$ , with increments of 10. The results are shown in Table 5.1. While  $K = 60$  gives us the best  $T$ -score, we select  $K = 50$  as this gives us the best  $Pr_{error}$  score.

### Window size

Using a combination of feature sets, we experiment with different window sizes,  $w = 1, 5, 10, 15$ .

Performing the experiment using only the  $\Delta_t$  values within the window, we obtain the results found in Table 5.2. The results show that  $w = 15$  provide the best  $T$ -score. We must however, keep in mind that its Visit/Post ratio is the highest, but also has a higher standard error.

Using only the content, we perform the same experiment again. Since the size of the vocabulary is large, we select the  $K = 50$  best tokens to consider using Univariate feature selection. This gives us the results in Table 5.3. The best  $T$ -score here does not do as

	$T$ -score	Visit/Post	$Pr_{error}$
$w = 5$	$1537.682 \pm 234.658$	$18.056 \pm 7.585$	$0.018 \pm 0.004$
$w = 10$	$1485.157 \pm 198.664$	$18.523 \pm 8.028$	$0.019 \pm 0.004$
$w = 15$	$1433.771 \pm 185.080$	$19.396 \pm 8.896$	$0.016 \pm 0.003$
$w = 20$	$1577.639 \pm 229.482$	$19.037 \pm 8.690$	$0.019 \pm 0.004$

Table 5.2: Results for tuning parameters using only  $\mathbf{t}_\Delta$

	$T$ -score	Visit/Post	$Pr_{error}$
$w = 5$	$1537.682 \pm 234.658$	$18.056 \pm 7.585$	$0.018 \pm 0.004$
$w = 10$	$1485.157 \pm 198.664$	$18.523 \pm 8.028$	$0.019 \pm 0.004$
$w = 15$	$1433.771 \pm 185.080$	$19.396 \pm 8.896$	$0.016 \pm 0.003$
$w = 20$	$1577.639 \pm 229.482$	$19.037 \pm 8.690$	$0.019 \pm 0.004$

Table 5.3: Results for tuning parameters using only  $\mathbf{v}$

well as that in the previous experiment. However, it is interesting to note that, again,  $w = 15$  results in the best  $T$ -score.

For our final experiment for tuning the window size, we combine the various feature sets together. We also include the time-context in this experiment, and we arrive at the results found in Table 5.4. Again,  $w = 15$  has the best  $T$ -score, but only with a slight improvement over our first experiment.

In any case, this suggests that  $w = 15$  may be the best window size. In the following experiments, this will be our  $w$  value.

### Decay factor

In our discounted sum method, we have to tune the  $\alpha$  parameter. We search through 0.1 to 0.9 (inclusive) with 0.1 increments to find the best possible value for  $\alpha$ . We used the combined set of features for this experiment. The results are shown in Table 5.5.

	$T$ -score	Visit/Post	$Pr_{error}$
$w = 5$	$1537.673 \pm 234.657$	$18.056 \pm 7.585$	$0.018 \pm 0.004$
$w = 10$	$1485.137 \pm 198.662$	$18.523 \pm 8.028$	$0.019 \pm 0.004$
$w = 15$	$1433.762 \pm 185.078$	$19.396 \pm 8.896$	$0.016 \pm 0.003$
$w = 20$	$1577.639 \pm 229.482$	$19.037 \pm 8.690$	$0.019 \pm 0.004$

Table 5.4: Results for tuning parameters using  $\mathbf{t}_\Delta + \mathbf{v} + \mathbf{t}_{\text{ctx}}$

	$T$ -score	Visit/Post	$Pr_{error}$
$\alpha = 1$	$1433.761 \pm 185.078$	$19.396 \pm 8.896$	$0.016 \pm 0.003$
$\alpha = 2$	$1433.759 \pm 185.078$	$19.396 \pm 8.896$	$0.016 \pm 0.003$
$\alpha = 3$	$1433.757 \pm 185.078$	$19.396 \pm 8.896$	$0.016 \pm 0.003$
$\alpha = 4$	$1433.755 \pm 185.077$	$19.396 \pm 8.896$	$0.016 \pm 0.003$
$\alpha = 5$	$1433.755 \pm 185.077$	$19.396 \pm 8.896$	$0.016 \pm 0.003$
$\alpha = 6$	$1433.755 \pm 185.077$	$19.396 \pm 8.896$	$0.016 \pm 0.003$
$\alpha = 7$	$1433.755 \pm 185.077$	$19.396 \pm 8.896$	$0.016 \pm 0.003$
$\alpha = 8$	$1433.755 \pm 185.077$	$19.396 \pm 8.896$	$0.016 \pm 0.003$
$\alpha = 9$	$1433.746 \pm 185.076$	$19.396 \pm 8.896$	$0.016 \pm 0.003$

Table 5.5: Results for tuning  $\alpha$  for the DEC method

	$T$ -score	Visit/Post	$Pr_{error}$
$\eta = 6$	$1527.249 \pm 196.277$	$19.231 \pm 8.896$	$0.019 \pm 0.004$
$\eta = 8$	<b><math>1379.733 \pm 188.469</math></b>	<b><math>19.323 \pm 8.893</math></b>	<b><math>0.015 \pm 0.002</math></b>
$\eta = 10$	$1373.679 \pm 176.366$	$18.670 \pm 8.966$	$0.016 \pm 0.003$
$\eta = 12$	$1466.572 \pm 226.819$	$19.267 \pm 8.894$	$0.016 \pm 0.003$

Table 5.6: Results for tuning  $\eta$  for the SGD method

$\alpha = 0.9$  performs the best, but its improvement over the rest of the values for  $\alpha$  are not by much. Also, note that the  $T$ -scores do not defer much from the previous experiment, although there is a slight improvement.

### Learning rate for Stochastic Gradient Descent

Because of the scaling factors applied to the sigmoid function, a small change in the exponent of  $e$  results in huge fluctuations. As such, we need to find a small enough learning rate such that the predicted values do not end up at only the extremes, but large enough such that the model is adaptive enough to “react” to changes.

In this experiment, we find that  $\eta = 5 \cdot 10^{-8}$  is the best value for the learning rate. Also note that this model produces the best results for the sample dataset.

So at the end of tuning our feature set and parameters, we have the following set of parameters:  $K = 50, w = 15, \alpha = 0.9, \eta = 5 \cdot 10^{-8}$ . Using these parameters, we run a full evaluation on our dataset.

## 5.2 Experiments

For our experiments, we selected threads larger than the window size, and have enough posts such that we can split each thread into our 3:1 ratio for training and testing. As such, the threads are at least 19 posts long, since the training set also requires at least

	$T$ -score	Visit/Post	$Pr_{error}$
BL	$2370.09 \pm 222.556$	$18.4430 \pm 3.009522$	$0.0455729 \pm 0.00315738$
SVR	$1435.96 \pm 177.004$	$21.7333 \pm 5.20832$	$0.0383524 \pm 0.00253913$
DEC	$1435.95 \pm 177.004$	$21.7333 \pm 5.20832$	$0.0383523 \pm 0.00253913$
SGD	$1881.84 \pm 416.264$	$21.0476 \pm 5.05733$	$0.0380083 \pm 0.00247992$

Table 5.7: Full evaluation using 830 threads

	$T$ -score	Visit/Post	$Pr_{error}$	
SVR	$-938.471 \pm 161.545$	$1.29 \pm 5.20697$	$-0.00728408 \pm 0.00327361$	$p < 0.05$
DEC	$-938.474 \pm 161.545$	$1.29 \pm 5.20697$	$-0.00728413 \pm 0.00327361$	$p < 0.05$
SGD	$-479.093 \pm 391.269$	$1.1346 \pm 5.19777$	$-0.0068692 \pm 0.00319584$	$p < 0.10$

Table 5.8: Paired difference evaluation results

two posts in order for us to apply our  $Pr_{error}$  metric.

This reduces our dataset to a size of 830 threads. We run all three of our algorithms on the dataset, and determine if the performance based on the  $Pr_{error}$  is an improvement over the baseline of revisiting at the average rate. The results are seen in Table 5.7.

It is evident that the scores our methods attain are better than the baseline, but only on average. We performed a statistical significance test on our data, using the Wilcoxon signed-rank test (Wilcoxon, 1945). The reason a Student’s  $t$ -test could not be employed for this test was due to the non-normal distribution of the  $T$ -score results. The Wilcoxon’s signed-rank test, like Student’s  $t$ -test, also gives us a  $p$ -value for statistical significance. For each of the three proposed methods, we pair the values with the same thread for the baseline, and find the difference in  $T$ -score, Visit/Post ratio, and  $Pr_{error}$ . We only perform the statistical significance test on  $Pr_{error}$ .

We can observe from Table that first two regression methods using SVR perform significantly better than the baseline, while our SGD method has a  $p$ -value of less than

10%. This begs the question: Do the models perform differently for different thread lengths?

### **Different thread lengths**

We divide our evaluated threads into 5 different subsets:  $0 \leq |P| < 50$ ,  $50 \leq |P| < 100$ ,  $100 \leq |P| < 150$ ,  $150 \leq |P| < 200$  and  $|P| \geq 200$ . We then look at the same evaluation metrics, and see how well these methods do on different sizes of training data.

The results, displayed in Table 5.9, show that the two methods using an offline trained model perform poorer on longer thread lengths. This suggests that our method that adaptively adjusts its weights based on new observations performs better in the long run, with longer threads. Since SGD only uses content features, this also suggests that the words found in the thread's content can affect the rate of posting on the thread.

The limitations of this, however, are that a sufficient number of observations of posts must be made before the model can make good enough predictions.

## **5.3 Recommendations**

Based on our findings, we can make some suggestions as to how an incremental crawler could use these techniques to predict when to revisit a site.

The SVR regression method could be used to predict revisitation rates initially, since they work better on shorter threads with  $|P| < 50$ . When the thread grows sufficiently, the SGD method could then be used.

This has several benefits. The SVR method requires the entire dataset to be present in memory during training, and a new model has to be trained every time modifications need to be made. Using the SGD method, the weight vector could be loaded into memory when a new observation is made, the weights updated accordingly.

	$T$ -score	Visit/Post	$Pr_{error}$
$ P  < 50$			
SVR	$1435.96 \pm 177.004$	$21.7333 \pm 5.20832$	$0.0383524 \pm 0.00253913$
DEC	$1435.95 \pm 177.004$	$21.7333 \pm 5.20832$	$0.0383523 \pm 0.00253913$
SGD	$1881.84 \pm 416.264$	$21.0476 \pm 5.05733$	$0.0380083 \pm 0.00247992$
$50 \leq  P  < 100$			
SVR	$1554.5 \pm 292.206$	$30.9191 \pm 16.996$	$0.0383057 \pm 0.00434776$
DEC	$1554.5 \pm 292.206$	$30.9191 \pm 16.996$	$0.0383057 \pm 0.00434776$
SGD	$1399.06 \pm 254.049$	$30.6367 \pm 16.8814$	$0.0424276 \pm 0.00467794$
$100 \leq  P  < 150$			
SVR	$1700.47 \pm 300.413$	$28.7258 \pm 17.6231$	$0.0148638 \pm 0.00365225$
DEC	$1700.44 \pm 300.408$	$28.7258 \pm 17.6231$	$0.0148638 \pm 0.00365225$
SGD	$1676.24 \pm 319.828$	$28.1005 \pm 17.2635$	$0.0131775 \pm 0.00266262$
$150 \leq  P  < 200$			
SVR	$1527.77 \pm 349.794$	$12.4909 \pm 6.69594$	$0.0151237 \pm 0.00453188$
DEC	$1527.77 \pm 349.794$	$12.4909 \pm 6.69594$	$0.0151237 \pm 0.00453188$
SGD	$1223.58 \pm 260.261$	$11.3483 \pm 6.03096$	$0.0143991 \pm 0.00369424$
$ P  \geq 200$			
SVR	$708.178 \pm 136.94$	$9.54313 \pm 3.14934$	$0.00642689 \pm 0.00124465$
DEC	$708.175 \pm 136.94$	$9.54316 \pm 3.14934$	$0.00642643 \pm 0.00124457$
SGD	$608.227 \pm 109.399$	$8.45964 \pm 2.70039$	$0.00605408 \pm 0.000898222$

Table 5.9: Breakdown of evaluation results

# Chapter 6

## Conclusion

With the increasing number of sites leveraging user-generated content, a method for predicting the updates of such sites needs to be created in order for an incremental web crawler to effectively crawl the site. Our high level goal: to predict the posting behaviour of users to such sites.

While this primary goal has many challenges, in this report, we have chosen to address challenges specific to forum threads. We want to predict, given content of the current thread, the time at which a user would post to the thread. We also need to ensure that bandwidth consumption is not excessive in the process maintaining the freshness of the crawled data.

We evaluate three different machine learning approaches: Two offline algorithms, one that only takes into account only the latest window, and another that accounts for past windows, with decreasing weightage. And an online algorithm, that uses gradient descent to update its weights every time a new post is observed.

Overall, our evaluation shows that our methods work better than the baseline, which was to revisit the thread at the average time interval. These are promising results, and more can be done to improve upon them.



## 6.1 Contributions

We have made the following contributions with our work:

1. Provided evaluation metrics that can be parameterised, depending on the evaluators' priority: freshness or bandwidth. The metric allows for an easy way to compare the performance of two models.
2. Proposed three different methods that can be employed for making revisit time estimations. These methods perform significantly better than the baseline. We also made recommendations on how they can be used in a web crawler.
3. Showed that using content as part of the feature set contributes to a better model for estimating posting times.

## 6.2 Future Work

With the proposed methods still having some shortcomings when predicting new posts, or providing insight into what causes post arrival times, it leaves much room for future work to be done.

### 6.2.1 Topic modelling

One approach we initially considered involved using topic modelling did not pan out due to time constraints (See Appendix A). This approach involved modeling the process of thread posts as a Hidden Markov Model, with topics as the hidden states, producing words and a distribution of time differences. Some work already exists that use HMMs for prediction of data like stock price predictions (González, Muñoz, Roque, & García-gonzález, 2005) and using HMMs together with LDA for making better predictions of language models (Hsu & Glass, 2006).

### **6.2.2 Using Natural Language Processing (NLP) techniques**

An improvement could be made to the feature set used in our project. A source for features that could be useful may be found in Wang et al. (2012). Since their work aims to predict retweetability of tweets, the same features being considered could also play a role in determining when a new post is made.

### **6.2.3 Leveraging context**

One of the assumptions made in selecting the feature set as we did, was that the thread was self-contained: the content of the thread will affect the rate of posting. However, we know this is not true, since news regarding a certain product may affect a discussion thread of said product.

If some data from recent news could be factored into the features, this may lead to a better prediction of post arrival times.

### **6.2.4 Using adaptive learning techniques**

An interesting approach to forecasting stock prices was presented in Cao and Tay (2003). The technique involved tweaking conventional SVMs to weigh recent training instances more heavily than older instances. This is a particularly useful idea, since we face the same issue in our task: Recent posts are more descriptive of the current state of the thread, and hence should be more useful in predicting the next post.

# References

- Brewington, B. E., & Cybenko, G. (2000). Keeping up with the changing web. *Computer*, , 2000, 52–58.
- Cao, L., & Tay, F. (2003). Support vector machine with adaptive parameters in financial time series forecasting. *Neural Networks, IEEE Transactions on*, 14(6), 2003, 1506–1518.
- Cho, J. (1999). The evolution of the web and implications for an incremental crawler. *Science*, , 1999, 1–18.
- Cho, J., & Garcia-Molina, H. (2003). Effective page refresh policies for Web crawlers. *ACM Transactions on Database Systems*, 28(4), December, 2003, 390–426.
- Cho, J., & Garcia-molina, H. (2003). Estimating Frequency of Change. (650), 2003.
- Coffman, E., & Liu, Z. (1997). Optimal robot scheduling for web search engines. *Sophia*, , 1997.
- Georgescul, M., Clark, A., & Armstrong, S. (2009). An analysis of quantitative aspects in the evaluation of thematic segmentation algorithms. . . . *of the 7th SIGdial Workshop on . . .*, (July), 2009, 144–151.
- González, A. M., Muñoz, A., Roque, S., & García-gonzález, J. (2005). Modeling and Forecasting Electricity Prices with Input / Output Hidden Markov Models. 20(1), 2005, 13–24.
- Hsu, B.-j. P., & Glass, J. (2006). Style & Topic Language Model Adaptation Using HMM-LDA. (July), 2006, 373–381.
- Naaman, M., Boase, J., & Lai, C.-h. (2010). Is it really about me?: message content in social awareness streams. *Proceedings of the 2010 ACM conference . . .*, , 2010, 189–192.
- Pedregosa, F., Varoquaux, G., Gramfort, A., Michel, V., Thirion, B., Grisel, O., Blondel, M., Prettenhofer, P., Weiss, R., Dubourg, V., Vanderplas, J., Passos, A., Cournapeau, D., Brucher, M., Perrot, M., & Duchesnay, E. (2011). Scikit-learn: Machine Learning in Python . *Journal of Machine Learning Research*, 12, 2011, 2825–2830.

- Sriram, B., & Fuhry, D. (2010). Short text classification in twitter to improve information filtering. ... *in information retrieval*, , 2010, 4–5.
- Tan, Q., Zhuang, Z., & Mitra, P. (2007). Designing efficient sampling techniques to detect webpage updates. *Proceedings of the 16th*, 1(3), 2007.
- Wang, A., Chen, T., & Kan, M. (2012). Re-tweeting from a Linguistic Perspective. *NAACL-HLT 2012*, , 2012.
- Wang, L., & McCarthy, D. (2011). Predicting Thread Linking Structure by Lexical Chaining. *Proceedings of the*, , 2011, 76–85.
- Wilcoxon, F. (1945). Individual comparisons by ranking methods. *Biometrics Bulletin*, 1(6), 1945, 80–83.
- Yang, J., Cai, R., Wang, C., & Huang, H. (2009). Incorporating site-level knowledge for incremental crawling of web forums: A list-wise strategy. *on Knowledge*, , 2009, 1375–1383.

# Appendix A

## Topic Modelling

### A.1 Introduction

This report details what has been completed since the proposal of the project. The hope is that by modeling the topics, we will be able to infer something about the time which the post will arrive.

We shall call the time differences between posts  $\Delta_t$ . For the rest of this report,  $\mathbf{W}$  represents a document, in particular, the collection of words that the document contains, and  $\mathbf{Z}$  represents a topic that a document belongs to.

In the next section, we discuss the details of the project that have been completed and some of the complications. The last section will detail the remaining tasks left to be done.

### A.2 Completed Tasks

#### A.2.1 Data: avsforum.com

Our dataset was obtained from `avsforum.com` and stored in a tab-delimited format, with each line representing a new post. For each post, we extracted the following:

**Timestamp** Time in seconds-from-epoch format.

**Author** Username of the author of the post.

**Main content** The main textual content of the post.

For the our purposes, we pre-process the data such that each instance is comprised of  $k$  posts. We have found that Support Vector Regression gives the best results when trying to infer the time of the next post arrival when  $k = 15$ .

## A.2.2 Latent Dirichlet Allocation

We used Gibbs sampling to perform LDA for 2 to 10 topics. For a small subset of threads in the forum. Treating each window as a document, we attempted to find topics that the words in the documents belonged to. The following are some interesting results.

Since it is a forum that deals largely with audio visual equipment, a large portion of the posts tend to comprise of people seeking to troubleshoot faulty equipment. One of the topics LDA found had the following words:

```
player dvd get one would use play audio like samsung blu hdmi  
sound work problem ray also tri think firmwar set disc know issu  
new see updat look want soni good better time connect even  
thankstill need say buy receiv back price output oppo make seem  
video unit realli support well soundbar differcould vizio optic  
format movi analog come cabl via got anyon much sinc denon  
may sure display decod thing doesnbest way bar fix pcm post first  
watch channel hope test digit said far take panason right  
anoth bitstream return abl file
```

These seem to be the keywords that are consistent with such posts – when users describe ‘issues’ and ‘problems’ with their ‘firmware’, and decide if they should ‘return’

the goods.

Another distinct topic that was revealed had to do with positive sentiment, and contain words such as ‘thanks’ or ‘nice’.


speaker like amp sub sound one ##### use ### would get listen room  
music good also look power two system realli set think much  
know post channel better new pair audio great thank bass time  
hear heard differ even make see high want say well center  
come level surround back could still price current wire need  
home jamo dsp first play tri never sure nice love end  
output peopl design receiv thread focu run cabl front review  
theater test #.# may anyon year thx got hsu watt legaci compar  
subwoof setup main bit work right klipsch somethdual impress guy

However, what we want to study is if these differences in content reflect a difference in the arrival times of the next post.


### A.2.3 Distribution of $\Delta_t$

Since we have a way of obtaining  $Pr\mathbf{Z}\mathbf{W}$ , we need  $Pr\Delta_t\mathbf{Z}$  in order to have a way to predict  $\Delta_t$ . To have a sense of what this looks like, we have binned the  $\Delta_t$  into bins of 20 minutes, and plotted their frequency based on the topics we extracted. A document is said to be coming from topic  $z$  if  $\max_{z'} Prz'\mathbf{W} = z$ . The idea was to see if there was a distinguishable  $\Delta_t$  distribution given different topics. See Figure A.1.


Unfortunately, the time distributions did not appear very distinct from each other. More tests need to be performed to see if using the expected value from this currently gathered data will reflect anything.

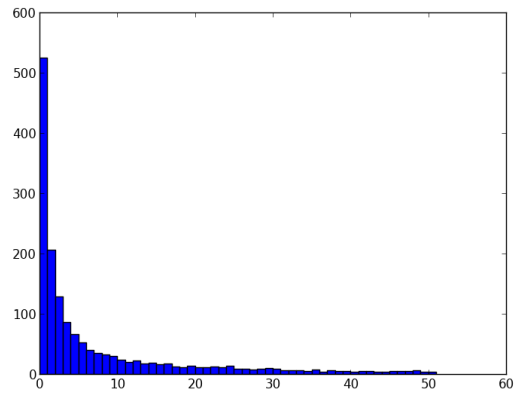


(a) Topic 1

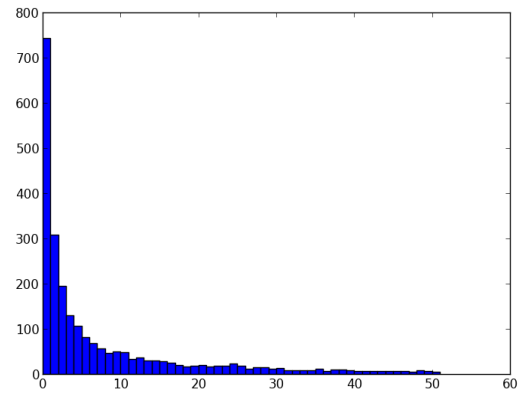

(b) Topic 2

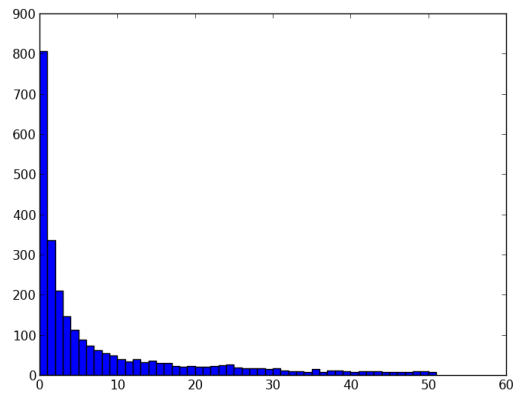

(c) Topic 3

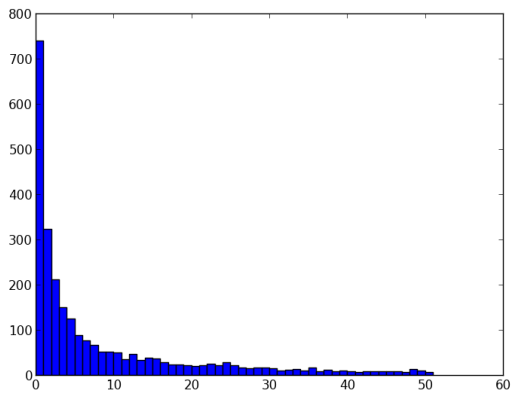

(d) Topic 4

Figure A.1: Time distributions for  $k = 4$



## A.3 Work In Progress

Including the previous post topic, we can make a better estimate of the  $\Delta_t$  distribution of the current post.

$$p(\mathbf{Z}_t|\mathbf{Z}_{t-1}, \mathbf{W}) = \frac{p(\mathbf{Z}_{t-1}|\mathbf{Z}_t) \cdot p(\mathbf{Z}_t|\mathbf{W}_t) \cdot p(\mathbf{W}_t)}{p(\mathbf{Z}_{t-1}) \cdot p(\mathbf{W})}$$

This essentially makes it similar to a Hidden Markov Chain, since the document topic is dependent on the previous document's topic, and the observations produced are the text. This is, however, dependent on whether the distribution of  $\Delta_t$  is different for each topic.

As seen in Figure A.1, which shows one example of LDA produced topics, the time distributions are not distinguishable. This may suggest that this approach may not be feasible, and more work needs to be done.