
Command 1: mkdir Learn_with_geekster.

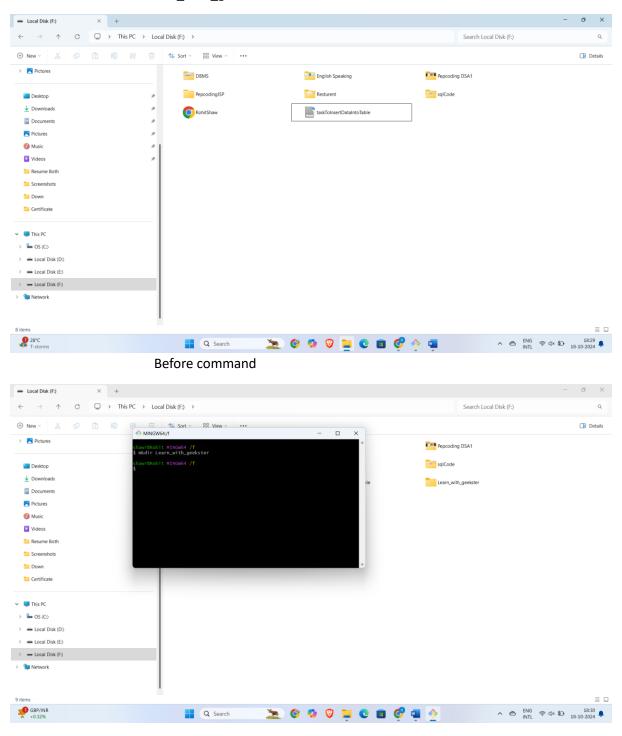


```
MINGW64:/f/Learn_with_geekster
```

```
shawr@Rohit MINGW64 /f
$ mkdir Learn_with_geekster
shawr@Rohit MINGW64 /f
$ cd Learn_with_geekster
shawr@Rohit MINGW64 /f/Learn_with_geekster
$ |
```

Command for creating new file: touch first.txt


```
MINGW64:/f/Learn_with_geekster
```

```
shawr@Rohit MINGW64 /f
$ mkdir Learn_with_geekster
shawr@Rohit MINGW64 /f
$ cd Learn_with_geekster
shawr@Rohit MINGW64 /f/Learn_with_geekster
$ touch first.txt
shawr@Rohit MINGW64 /f/Learn_with_geekster
$
```

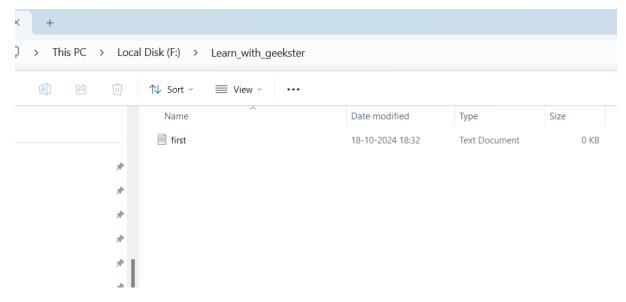

Command 4: cat > first.txt




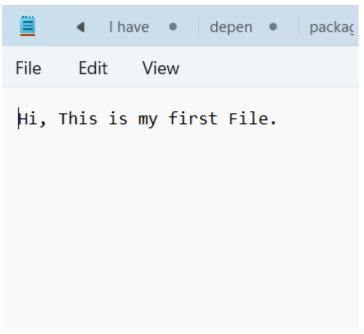

Command 5: Make one more file named file2.txt

touch file2.txt

```
MINGW64:/f/Learn_with_geekster
shawr@Rohit MINGW64 /f
$ mkdir Learn_with_geekster
shawr@Rohit MINGW64 /f
$ cd Learn_with_geekster
shawr@Rohit MINGW64 /f/Learn_with_geekster
$ touch first.txt
shawr@Rohit MINGW64 /f/Learn_with_geekster
$ cat > first.txt
Hi, This is my first File.
shawr@Rohit MINGW64 /f/Learn_with_geekster
$ touch file2.txt
shawr@Rohit MINGW64 /f/Learn_with_geekster
$ touch file2.txt
```

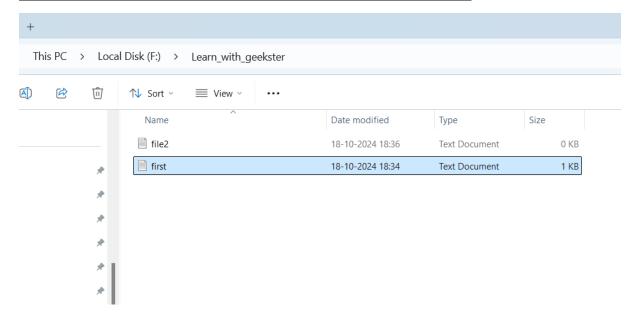

Command 6: Display all the files:

MINGW64:/f/Learn_with_geekster

```
shawr@Rohit MINGW64 /f
$ mkdir Learn_with_geekster
shawr@Rohit MINGW64 /f
$ cd Learn_with_geekster
shawr@Rohit MINGW64 /f/Learn_with_geekster
$ touch first.txt
shawr@Rohit MINGW64 /f/Learn_with_geekster
$ cat > first.txt
Hi, This is my first File.
shawr@Rohit MINGW64 /f/Learn_with_geekster
$ touch file2.txt
shawr@Rohit MINGW64 /f/Learn_with_geekster
$ 1s
file2.txt first.txt
shawr@Rohit MINGW64 /f/Learn_with_geekster
$ 1s
```