Practice with Flask Part 1



Estimated time needed: 20 minutes

Welcome to the first lab of the Capstone course. You will practice working with Flask in this lab. You should know all the concepts you need for this lab from the previous set of videos. Feel free to pause the lab and review the module if you are unclear on how to perform a task or need more information.

Learning Objectives

After completing this lab, you will be able to:

- Create and run a Flask server in development mode
 Return JSON from an endpoint
 Understand the request object

About Skills Network Cloud IDE

Skills Network Cloud IDE (based on Theia and Docker) provides an environment for hands on labs for course and project related labs. Theia is an open source IDE (Integrated Development Environment) that can run on desktop or the cloud. To complete this lab, you will be using the Cloud IDE based on Theia and MongoDB running in a Docker container.

Important Notice about this lab environment


Please be aware that sessions do not persist for this lab environment. Every time you connect to this lab, a new environment is created for you. Any data you save in earlier sessions will be lost. Plan to complete these labs in a single session, to avoid losing your data.

Set Up the Lab Environment

There are some prerequisite preparations required before you start the lab.

Open a Terminal

Open a terminal window using the menu in the editor: Terminal > New Terminal

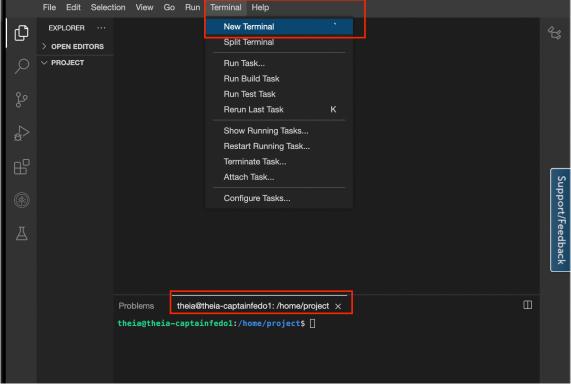

In the terminal, if you are not in the $\mbox{{\sc home/project}}$ folder, change to your project folder now

Create the lab directory

You can now create a directory for your server file

Change into the lab directory:

Check Python version and install Flask

Use the python3 --version command to check the version of python3 in the lab environment. You should see an output as follows: theia@theiadocker-captainfedol:/home/project/lab\$ python3 --version Python 3.10.12

05/07/2025, 19:55 1 of 4

```
Next, install Flask version 2.2.2 using the following command:
    pip install "Flask==2.2.2"
```

If Flask is present on the system, you will see the following message:

```
Requirement already satisfied: Flask=2.2.2 in /home/theia/.local/lib/python3.8/site-packages (2.2.2) Requirement already satisfied:
```

You are now ready to start the lab.

Optional

If working in the terminal becomes difficult because the command prompt is long, you can shorten the prompt using the following command: export PS1="[\[\033[01;32m\]\u\[\033[00m\]: \[\033[01;34m\]\W\[\033[00m\]]\\$ "

Step 1: Create the Hello World server

Your Tasks

First, create an empty file called server.py in the terminal or use the file editor menu.

The following command will create the empty file in the right directory.

Open server.py in the editor

If a new tab called Python - Get Started displays after opening this file, you can close it to return to the python file.

Next, import the Flask module in this file so you can start coding the server.

Import the Flask class in this file by changing the module name.

3. Create the Flask app

After importing the Flask module, create your Flask application by initializing the Flask class.

▼ Click here for a hint.

Initiate a new application from the Flask class.

from flask import {insert module name here}
app = {insert module name here}(__name__)

You can now use the app you created in the previous task to create your first route.

Use time approximation to treate the root URL / / # Import the Task Robule from Task import Flask as froste an instance of the Flask Class, passing in the name of the current module app = Flask Class, passing in the name of the current module app = Flask Class (modern the root URL (*/*) does noted: (**)** (**)* (**)** (**)** (**)** (**)* (**)** (**)** (**)** (**)** (**)** (**)** (**)** (**)*

5. Define the method for the main root URL.

First import Flask in this file.

▼ Click here for a hint.

Start the method definition.

Self. Live include deministration.

Import the flask class from the flask module
from flask import. Flask
from flask import. Flask
from flask import. Flask
from flask import.
Befine a route for the root UBL (r/*)
globe; noted: '7'

Import.
Imp

6. Return the "Hello World" message to the client.

Return the string "Hello World" to the client.

▼ Click here for a hint.

MICK Nere IOr a hint.

Import the Flask class from the flask module
from flask import flask
from flask import flask
the flask class, passing in the name of the current module
app = flask(_name_)
Define a route for the root URL ('/')
depp.route('/')
depp.route('/')

Function that handles requests to the root URL return "Hello, World!"

You are all set to run the server. Use the following command to run the server from the terminal

```
Problems
                     theia@theia-captainfedo1: /home/project/lab ×
[theia: lab]$ flask --app server --debug run
  * Serving Flask app 'server'
  * Debug mode: on
WARNING: This is a development server. Do not use it in a production deployment. Use a production WS
 * Running on http://127.0.0.1:5000
 Press CTRL+C to quit

* Restarting with stat

* Debugger is active!

* Debugger PIN: 333-842-469
```

You should now be able to use the CURL command on totalbost:5000. Note that the terminal is already running the server, you can use the split terminal button to split the terminal and run the following command in the second tab.

Note: Kindly verify the presence of the Server.py file in the /home/project/lab directory to prevent encountering a connection refusal error

curl -X GET -i -w '\n' localhost:5000

The -x argument specifies the GET command, and the -i argument displays the header from the response

```
theia@theia-captainfedo1: /home/project/lab \,\,	imes\,
                                                                                                                                                       theia@theia-captainfedo1: /home/project \times
                                                                                                                                                        theia@theia-captainfedol:/home/project$ curl -X GET -i -w localhost:5000
                                                                                                                                                                                                                                                                                               '\n'
                                                                                                                                                      HTTP/1.1 200 0K
Server: Werkzeug/2.2.2 Python/3.8.0
Date: Wed, 28 Dec 2022 01:33:59 GMT
Content-Type: text/html; charset=utf-8
Content-Length: 11
[theia: lab]$ flask --app server --debug run
* Serving Flask app 'server'
* Debug mode: on
WARNING: This is a development server. Do not use it in a production deployment. Use a production WSGI server instead.
* Running on http://127.0.0.1:5000
Press CTR!+C to quit
                                                                                                                                                       Connection: close
                                                                                                                                                       hello world theia@theia-captainfedol:/home/project$ ■
 Press CTRL+C to quit

* Restarting with stat

* Debugger is active!

* Debugger PIN: 333-842-469
```

You should see Hello World returned as the output of the CURL command. Note the return status of HTTP 200 OK and the Content-type of text/html. You are asked to return a custom status with JSON instead of plain text in the next part of this lab.

Solution

Double-check that your work matches the solution below

Import the Flask class from the flask module from flask import Flask From flask import Flask Frometa mixtance of the Flask class, passing in the name of the current module app # Flask _ name_] # Define a route for the root URL (*/*)

Step 2: Return JSON

Congratulations on creating your first route handler in the Flask server. You can return a number of different content types from the sepp. route() methods. For the purpose of this project, let's return the following ISON instead of the Hello World string

Recall from the videos that there are two ways to return a JSON object from the method:

- Return a Python dictionary
 Use the **jsonify()** method on a string

You are being asked to use the first method in this lab.

You can edit the existing index method to return the desired JSON message.

Return a dictionary with the Hello World message in the index method.

return a dictionary with the Metto work missage in the index method.

Import the Task Lass from the Task module
from Task import Flask, josofly
a Forete an instance of the Task Class, passing in the name of the current module
app = Flask __name__|
app = Flask __name__|
dogs, route(")'
def index():
return (insert dictionary here)

3 of 4 05/07/2025, 19:55

Solution

Double-check that your work matches the following solution.

▼ Click here for the answer.

```
lick here for the answer.

# Import the Flask class from the flask module
from flask import Flask
foreste an instance of the Flask class, passing in the name of the current module
app # Flask _ name__ |
opportunity for the root URL (*/")
depp.route(*/")
def index():
# Function that handles requests to the root URL
# Create a dictionary to return as a response
return ("enesage" "Netto Nord?")
```

If you have the server running, you are good to go. If not, you can run the server with the following command again:

flask --ann server --debug ru

You should now be able to use the CURL command with tocathost:5000/. Note that the terminal is running the server, you can use the Split Terminal button to split the terminal and run the following command in the second tab.

```
theia@theia-captainfedol:/home/project$ curl -X GET -i -w '\n' localhost:5000
HTTP/1.1 200 OK
Server: Werkzeug/2.2.2 Python/3.8.0
Date: Wed, 28 Dec 2022 18:12:32 GMT
Content-Type: application/json
Content-Length: 31
Connection: close

{
    "message": "Hello World"
}
```

You should see ('message's 'Helio World') JSON returned as the output of the CURL command. Note the return status of HTTP 200 0K and the content-type of application/json this time.

Author(s)

CF

© IBM Corporation 2023. All rights reserved.

4 of 4