

Claude Code

Dr. Paul Avrahami

Introduction

You'll learn

- **What is Claude code ?**
- **Setting up Claude code**
- **Writing good prompts**
- **Using the planning mode**
- **Managing context window**
- **Adding tools via MCP**
- **Adding skills**
- **Using Checkpoints**
- **Using Subagents**

Finance Tracker

Track your income and expenses

Income
\$05000

Expenses
\$0120015080095654515

Balance
\$-120015080095649500

Add Transaction

Add

Transactions

All Types

All Categories

DATE	DESCRIPTION	CATEGORY	AMOUNT
2025-01-01	Salary	salary	+\$5000
2025-01-02	Rent	housing	-\$1200
2025-01-03	Groceries	food	-\$150
2025-01-05	Freelance Work	salary	-\$800
2025-01-06	Electric Bill	utilities	-\$95
2025-01-07	Dinner Out	food	-\$65
2025-01-08	Gas	transport	-\$45

To demonstrate we will use a simple expance tracker build with react

What we will fix

Finance Tracker

Track your income and expenses


Income \$05000	Expenses \$0120015080095654515	Balance \$-120015080095649500
--------------------------	--	---

Add Transaction

Description	Amount	Expense	food	Add
-------------	--------	---------	------	-----

There is a bug , the total expenses are not calculated correctly , the code is messy and the UA needs some uplifting

The tools and outcome

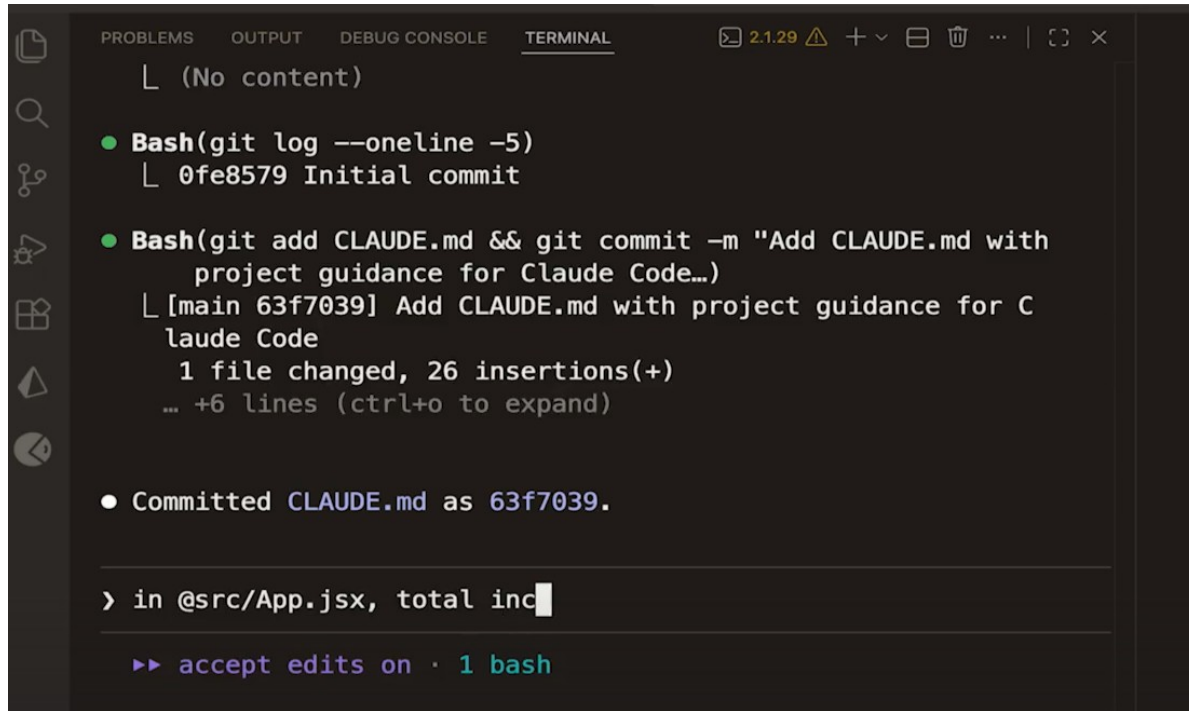

The screenshot shows a VS Code terminal window with the following content:

```
PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL
└─ (No content)


● Bash(git log --oneline -5)
└─ 0fe8579 Initial commit

● Bash(git add CLAUDE.md && git commit -m "Add CLAUDE.md with
  project guidance for Claude Code...")
└─ [main 63f7039] Add CLAUDE.md with project guidance for C
  laude Code
    1 file changed, 26 insertions(+)
    ... +6 lines (ctrl+o to expand)

● Committed CLAUDE.md as 63f7039.

> in @src/App.jsx, total inc
```


At the bottom, there is a prompt: `▶▶ accept edits on · 1 bash`

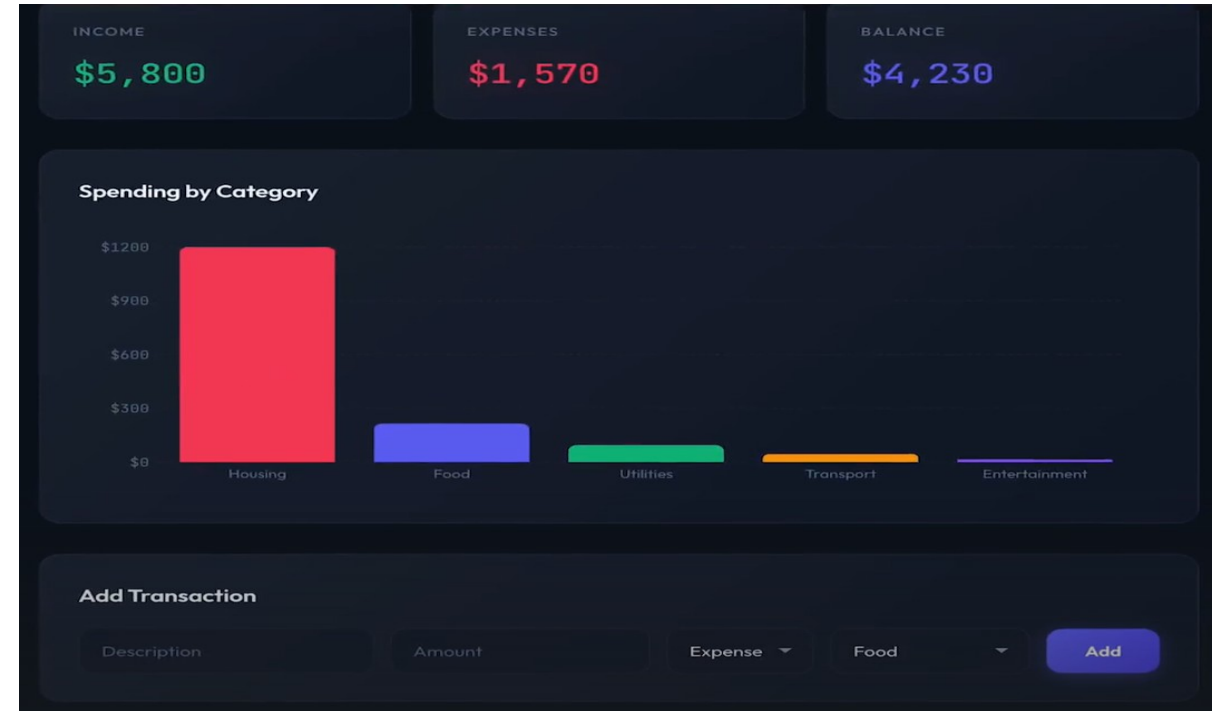


In this section we will use Claude code to fix the bug , refactor the code add new feature and give it a new look and feel.

What is Claude code

Access to tools that can preform actions

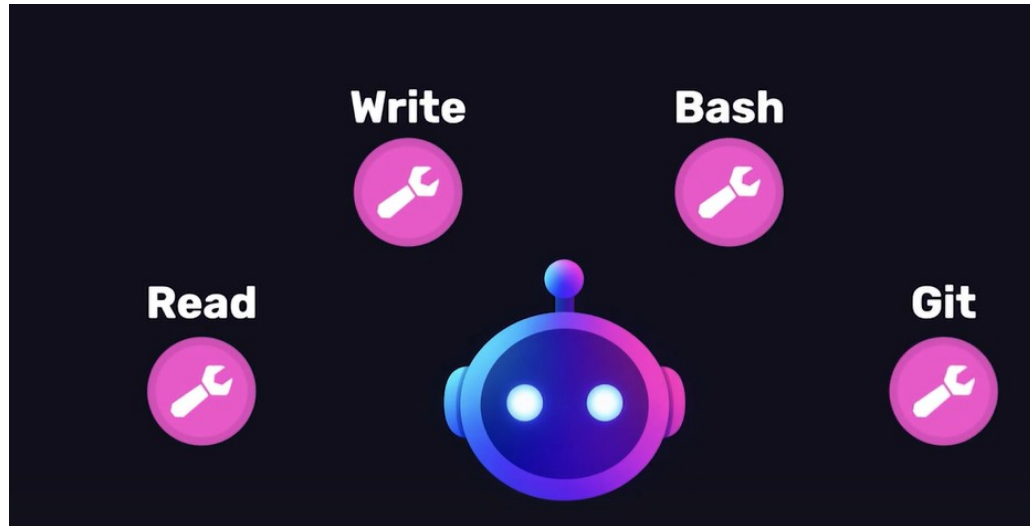

You describe what you want and the Claude does it

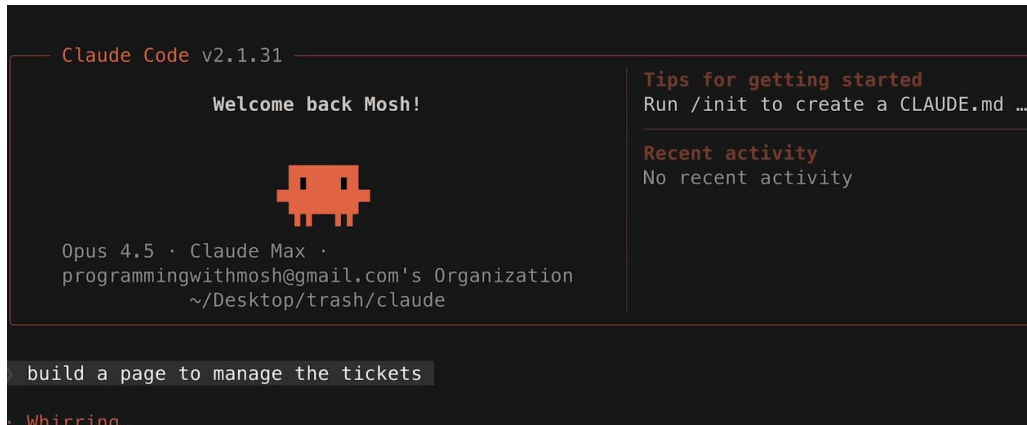

Agentic Coding Tool



Is it only for Vibe coding ?

USE CASES

- Explore new codebases
- Write and edit code
- Debug and fix errors
- Write and execute tests
- Refactor code
- Handle Git workflows

Big ideas → Real software

Installing Claude code

Subscription – Best Pro

The screenshot shows the Claude website's pricing page. It features three main subscription tiers: Free, Pro, and Max. The Free tier is available to everyone at \$0. The Pro tier is \$17 per month with an annual subscription discount. The Max tier starts from \$100 per person billed monthly. Each tier includes a 'Try Claude' button. The page also has a navigation bar with links like 'Meet Claude', 'Platform', 'Solutions', 'Pricing', 'Learn', 'Login', 'Contact sales', and 'Try Claude'.

Tier	Price	Features
Free	\$0	Free for everyone. Chat on web, iOS, Android, and on your desktop. Generate code and visualize data.
Pro	\$17	For everyday productivity. Per month with annual subscription discount (\$200 billed up front). \$20 if billed monthly. Everything in Free, plus: More usage*.
Max	From \$100	Get the most out of Claude. Per person billed monthly. Everything in Pro, plus: Choose 5x or 20x more usage than Pro*.

Installation instruction

The screenshot shows the Claude Code Docs page. It provides installation instructions for various operating systems and environments. The 'Native Install (Recommended)' section shows the command for macOS, Linux, and WSL: `curl -fsSL https://claude.ai/install.sh | bash`. The 'Windows PowerShell' section shows the command: `irm https://claude.ai/install.ps1 | iex`. The 'Windows CMD' section shows the command: `curl -fsSL https://claude.ai/install.cmd -o install.cmd && install.cmd`. The page also includes a sidebar with links to 'Getting started', 'Build with Claude Code', 'Deployment', 'Administration', 'Configuration', 'Reference', and 'Resources'. A 'Claude Code on the Web' button is also visible.

Pay as you go by using an API

The screenshot shows the Claude website's 'Latest models' page. It lists three models: Opus 4.5, Sonnet 4.5, and Haiku 4.5. Opus 4.5 is described as the 'Most intelligent model for building agents and coding' with input at \$5 / MTok and output at \$25 / MTok. Sonnet 4.5 is described as the 'Optimal balance of intelligence, cost, and speed' with input at \$3 / MTok and output at \$6 / MTok. Haiku 4.5 is described as the 'Fastest, most cost-efficient model' with input at \$1 / MTok and output at \$5 / MTok. The page also includes a 'Contact sales' button and a 'Start building' button.

Model	Description	Input Price	Output Price
Opus 4.5	Most intelligent model for building agents and coding	\$5 / MTok	\$25 / MTok
Sonnet 4.5	Optimal balance of intelligence, cost, and speed	\$3 / MTok	\$6 / MTok
Haiku 4.5	Fastest, most cost-efficient model	\$1 / MTok	\$5 / MTok

```
~$ curl -fsSL https://claude.ai/install.sh | bash
Setting up Claude Code...

✓ Claude Code successfully installed!

Version: 2.1.29

Location: ~/.local/bin/claude

Next: Run claude --help to get started


✓ Installation complete!
```

If there is a warning to add Claude to your PATH, press the suggested command


Using Claude Code

```
moshamedani@Moshs-iMac:~/Desktop/playground
~
~ cd Desktop
Desktop mkdir playground
Desktop cd playground
playground git clone https://github.com/mosh-hamedani/expense-tracker-starter.git
Cloning into 'expense-tracker-starter'...
remote: Enumerating objects: 18, done.
remote: Counting objects: 100% (18/18), done.
remote: Compressing objects: 100% (16/16), done.
remote: Total 18 (delta 0), reused 18 (delta 0), pack-reused 0 (from 0)
Receiving objects: 100% (18/18), 30.06 KiB | 399.00 KiB/s, done.
playground cd expense-tracker-starter/
```

Put the Claude code on the left

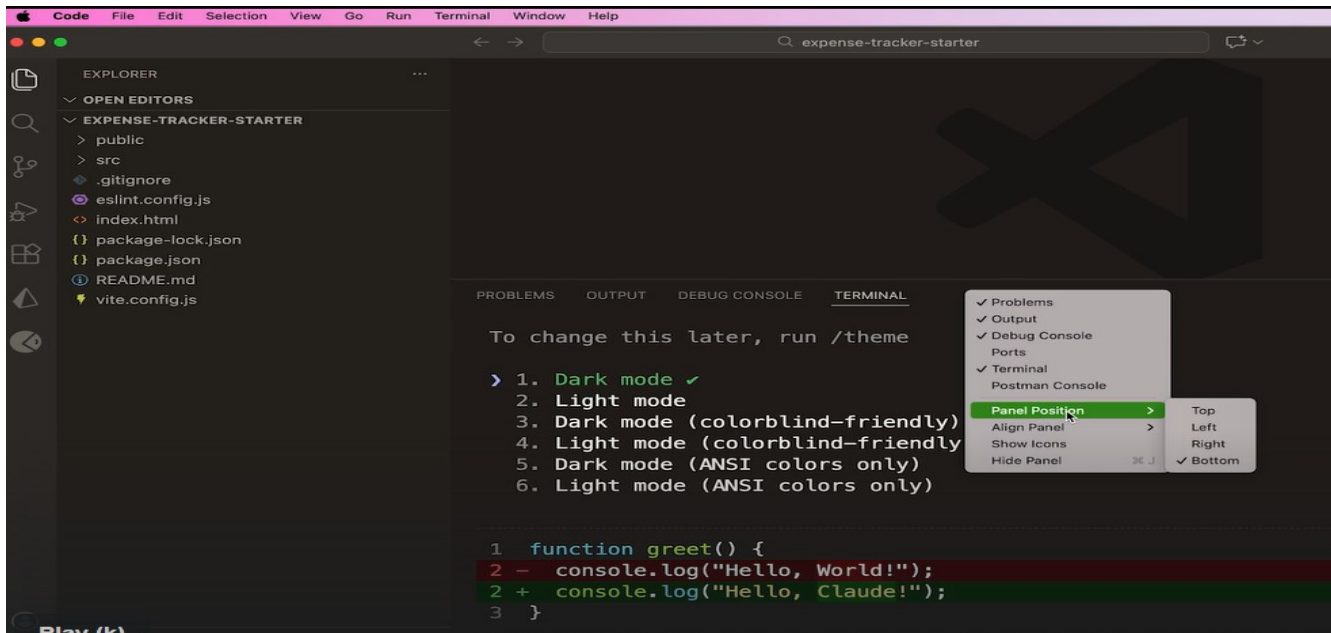

Login with your subscription :

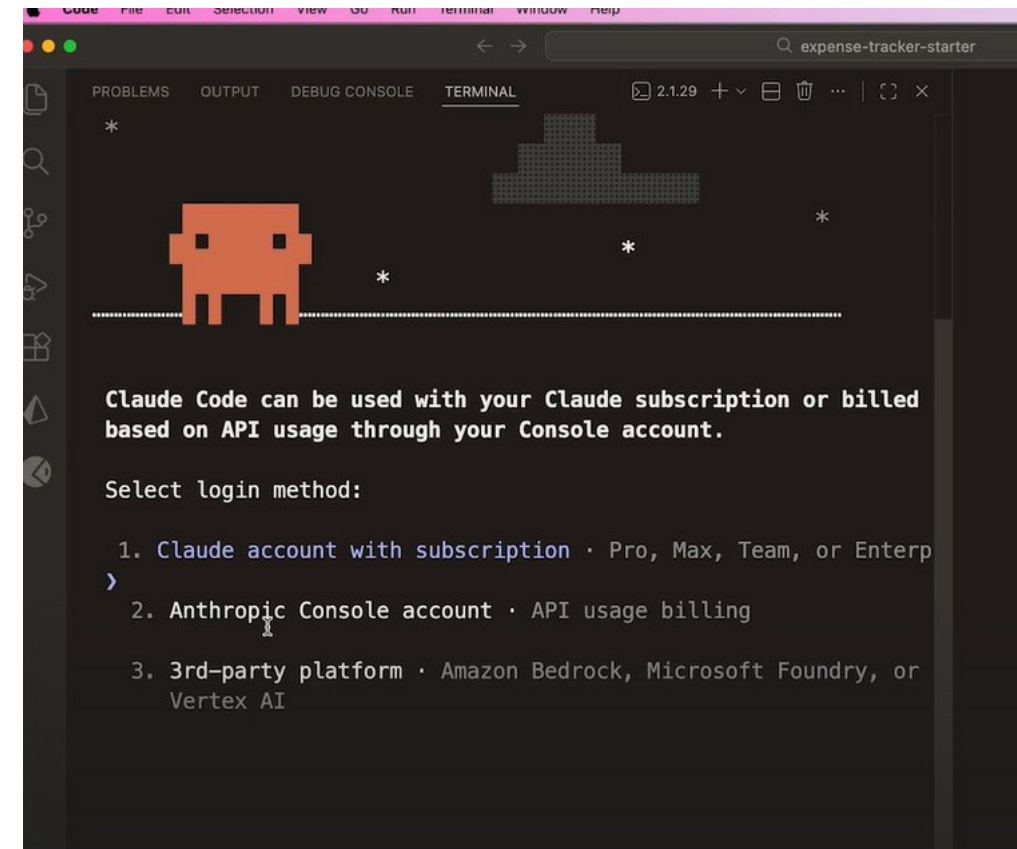

Useful commands


/model – selects the LLM model

/terminal-setup – Install Shift Enter for multi line prompts

(CTL + I clears the prompt)

Write “Run this app” to run the application

The first time Claude runs a tool it need out permission

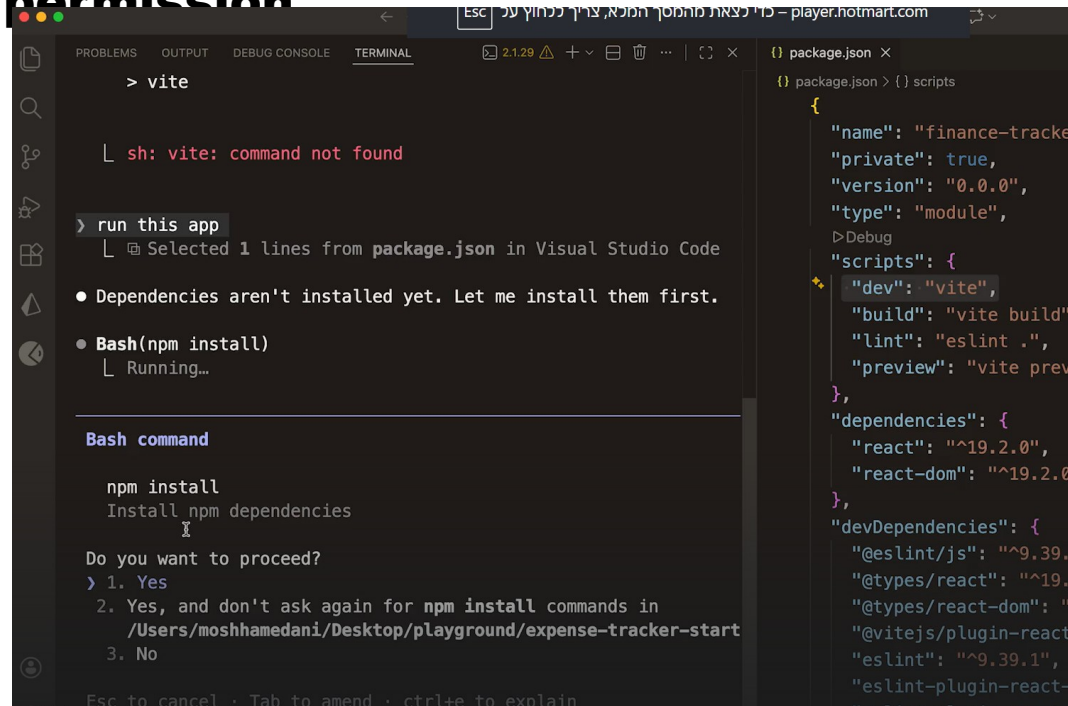

```
> vite
sh: vite: command not found

> run this app
Selected 1 lines from package.json in Visual Studio Code

• Dependencies aren't installed yet. Let me install them first.


• Bash(npm install)
  Running...

Bash command

npm install
Install npm dependencies

Do you want to proceed?
> 1. Yes
2. Yes, and don't ask again for npm install commands in
  /Users/moshhamedani/Desktop/playground/expense-tracker-start
3. No
```

See the background tasks

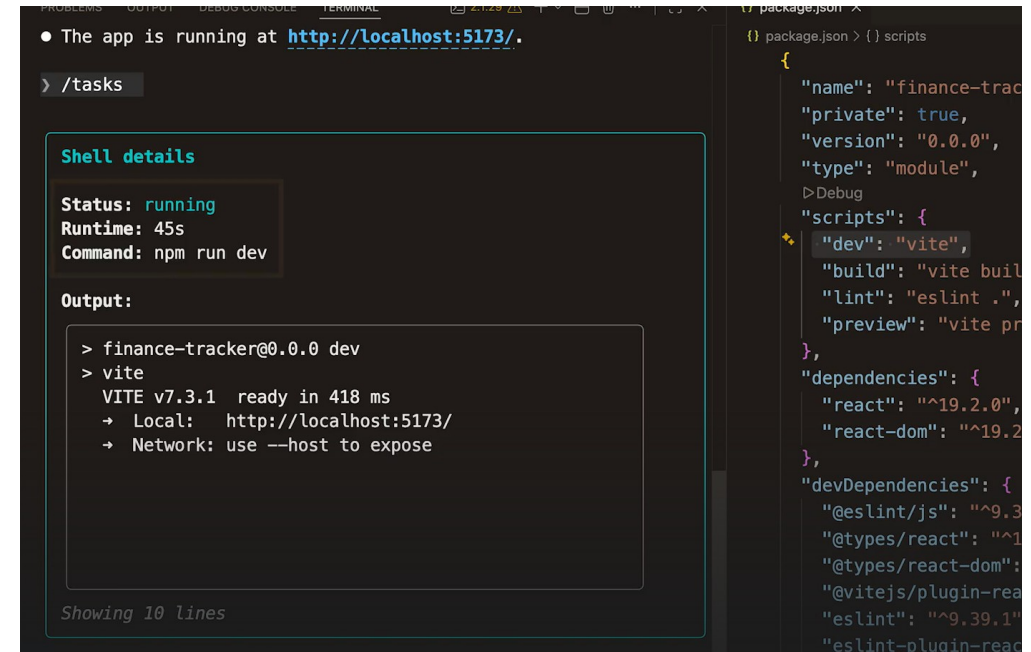

```
• The app is running at http://localhost:5173/.

> /tasks

Shell details

Status: running
Runtime: 45s
Command: npm run dev

Output:

> finance-tracker@0.0.0 dev
> vite
VITE v7.3.1 ready in 418 ms
→ Local: http://localhost:5173/
→ Network: use --host to expose
```

Finance Tracker

Track your income and expenses

Income: **\$05000** Expenses: **\$0120015080095654515** Balance: **\$-120015080095649500**

Add Transaction

Description: Amount: Expense: food Add

Transactions

DATE	DESCRIPTION	CATEGORY	AMOUNT
2025-01-01	Salary	salary	+\$5000
2025-01-02	Rent	housing	-\$1200
2025-01-03	Groceries	food	-\$150
2025-01-05	Freelance Work	salary	-\$800
2025-01-06	Electric Bill	utilities	-\$95
2025-01-07	Dinner Out	food	-\$65
2025-01-08	Gas	transport	-\$45

The application is running and we have a lot to fix

Creating our project Memory

Creates a project specific MD

file

- The app is running at <http://localhost:5173/>.

> /tasks
└─ Shell details dismissed

> /init

/init	Initialize a new CLAUDE.md file with...
/install-slack-app	Install the Claude Stack app
/install-github-app	Set up Claude GitHub Actions for a r...
/compact	Clear conversation history but keep ...
/doctor	Diagnose and verify your Claude Code...
/ide	Manage IDE integrations and show sta...

Writing comment on the change

* Sautéed for 52s

> commit

EFFECTIVE PROMPTS

- Be clear and specific
- Give context
- Be concise

Correction the bug we have in Summarization

in src/App.jsx, some income and expenses are not calculated correctly. fix it

└─ Read src/App.jsx (158 lines)

* Jitterbugging...

└─ Tip: Double-tap esc to rewind the code and/or conversation to a previous point in time

The “right” prompt

Claude had fixed the problem, but it took a wrong

```
const totalIncome = transactions
  .filter(t => t.type === "income")
  .reduce((sum, t) => sum + t.amount, 0);

const totalExpenses = transactions
  .filter(t => t.type === "expense")
  .reduce((sum, t) => sum + t.amount, 0);
```

→ +

```
const totalIncome = transactions
  .filter(t => t.type === "income")
  .reduce((sum, t) => sum + parseFloat(t.amount), 0);

const totalExpenses = transactions
  .filter(t => t.type === "expense")
  .reduce((sum, t) => sum + parseFloat(t.amount), 0);
```

The issue that numbers are represented as strings

```
{ id: 1, description: "Salary", amount: "5000", type: "income" }
{ id: 2, description: "Rent", amount: "1200", type: "expense" }
```

```
{ id: 1, description: "Salary", amount: "5000", type: "income" } (property) type: string
{ id: 2, description: "Rent", amount: "1200", type: "expense" }
```

Give Claude a more accurate prompt

```
> in transactions array, amount should be a number
```

· Transmuting...

Tip: Hit shift+tab to cycle between default mode, auto-accept edit mode, and plan mode

Now Claude made the right correction

```
{ id: 1, description: "Salary", amount: "5000", type: "income" }
{ id: 2, description: "Rent", amount: "1200", type: "expense" }
{ id: 3, description: "Groceries", amount: "150", type: "expense" }
{ id: 4, description: "Freelance Work", amount: "800", type: "income" }
{ id: 5, description: "Electric Bill", amount: "95", type: "expense" }
{ id: 6, description: "Dinner Out", amount: "65", type: "expense" }
{ id: 7, description: "Gas", amount: "45", type: "expense" }
{ id: 8, description: "Netflix", amount: "15", type: "expense" }
```

+

```
{ id: 1, description: "Salary", amount: 5000, type: "income" }
{ id: 2, description: "Rent", amount: 1200, type: "expense" }
{ id: 3, description: "Groceries", amount: 150, type: "expense" }
{ id: 4, description: "Freelance Work", amount: 800, type: "income" }
{ id: 5, description: "Electric Bill", amount: 95, type: "expense" }
{ id: 6, description: "Dinner Out", amount: 65, type: "expense" }
{ id: 7, description: "Gas", amount: 45, type: "expense" }
{ id: 8, description: "Netflix", amount: 15, type: "expense" }
```

The bug was fixed

Finance Tracker

Track your income and expenses

Income \$5000	Expenses \$2370	Balance \$2630
------------------	--------------------	-------------------

Don't forget to write a commit

Let's arrange the code

```
> extract the summary into a separate component
```

New file was created for the summary

```
App.jsx M Summary.jsx U X
src > Summary.jsx > Summary
function Summary({ totalIncome, totalExpenses, balance }) {
  return (
    <div className="summary">
      <div className="summary-card">
        <h3>Income</h3>
        <p className="income-amount">${totalIncome}</p>
      </div>
      <div className="summary-card">
        <h3>Expenses</h3>
        <p className="expense-amount">${totalExpenses}</p>
      </div>
      <div className="summary-card">
        <h3>Balance</h3>
        <p className="balance-amount">${balance}</p>
      </div>
    </div>
  );
}

export default Summary;
```

A follow-up prompt

```
> move the calculation of total income, expenses and balance
in the summary component
```

```
const categories = ["food", "housing", "utilities",

const totalIncome = transactions
  .filter(t => t.type === "income")
  .reduce((sum, t) => sum + t.amount, 0);

const totalExpenses = transactions
  .filter(t => t.type === "expense")
  .reduce((sum, t) => sum + t.amount, 0);

const balance = totalIncome - totalExpenses;
```

The code moved to the appropriate file

Now we want to create

```
> extract child components for transaction form and transaction
list
```

```
SOURCE CONTROL
CHANGES
Message (%Enter to commit on "m...
Commit
Changes
App.jsx src M
Summary.jsx src U
TransactionForm.jsx src U
TransactionList.jsx src U
GRAPH
Auto
Outgoing Changes main
Fix transaction amounts to use ... @main
Add CLAUDE.md with project guidance f...
Initial commit Moshfegh Ha... @origin/main

TransactionForm.jsx U X
src > TransactionForm.jsx > TransactionForm
import { useState } from 'react';

const categories = ["food", "housing", "utilities", "transport", "ent

function TransactionForm({ onAddTransaction }) {
  const [description, setDescription] = useState("");
  const [amount, setAmount] = useState("");
  const [type, setType] = useState("expense");
  const [category, setCategory] = useState("food");

  const handleSubmit = (e) => {
    e.preventDefault();
    if (!description || !amount) return;

    onAddTransaction({
      id: Date.now(),
      description,
      amount: parseFloat(amount),
      type,
      category
    });
  };
}
```

Exploring the code base

Update the documentation of architecture

update CLAUDE.md and include architectural changes



Component structure:

- `App.jsx` - owns the `transactions` array state, passes it down to children
- `Summary.jsx` - computes and displays totalIncome, totalExpenses, balance from `transactions` prop
- `TransactionForm.jsx` - owns form state (description, amount, type, category), calls `onAddTransaction` prop on submit
- `TransactionList.jsx` - owns filter state (filterType, filterCategory), renders filtered transactions table

EXPLORING A CODEBASE

- What does this project do?
- What tech stack it uses?
- How's the authentication implemented?
- Explain the folder structure
- Explain a piece of code

Another option to

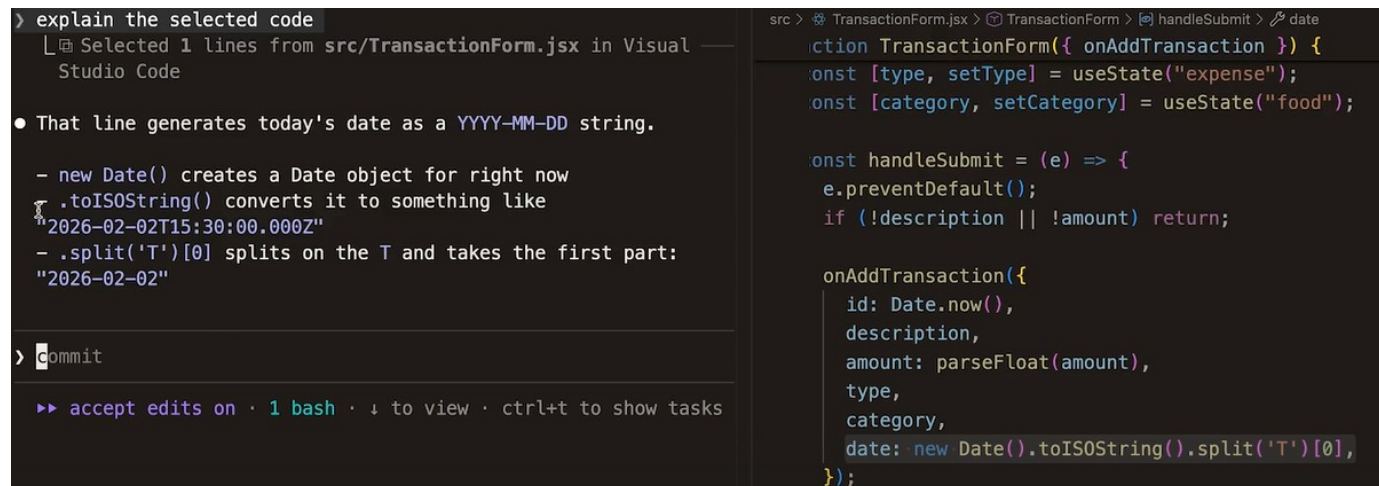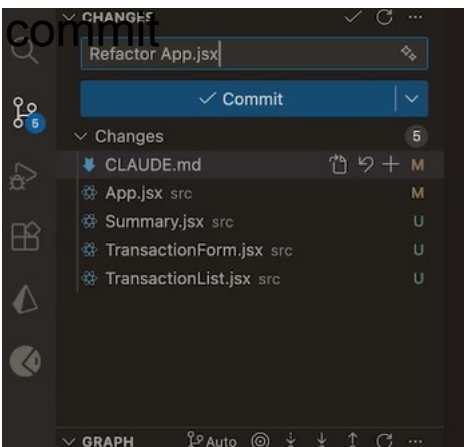

Highlight any piece of code and ask Claude to explain it

Using the Plan mode

commit

plan mode on · 1 bash · ↓ to view · ctrl+t to show tasks

Shift+Tab : change to plan mode

> add the ability to delete transactions

The plan :

Here is Claude's plan:

Plan: Add Delete Transaction Feature

Overview

Add ability to delete transactions by adding a delete button to each row in the transaction list.

Changes

1. src/App.jsx

- Add `handleDeleteTransaction` function that filters out the transaction by ID:

```
const handleDeleteTransaction = (id) => {
  setTransactions(transactions.filter(t => t.id !== id));
};
```

- Pass `onDeleteTransaction={handleDeleteTransaction}` prop to `<TransactionList />`

2. src/TransactionList.jsx

We want to add a conformation dialog box

1. Yes, clear context and auto-accept edits (shift+tab)
2. Yes, auto-accept edits
3. Yes, manually approve edits
- > 4. add a confirmation dialog box

Changes were made

2. src/TransactionList.jsx

- Accept `onDeleteTransaction` prop
- Add "Actions" column header to the table
- Add delete button cell in each row with confirmation dialog:

```
<td>
  <button
    className="delete-btn"
    onClick={() => {
      if (window.confirm('Are you sure you want to delete this
transaction?')) {
        onDeleteTransaction(t.id);
      }
    }}
  >
    Delete
  </button>
</td>
```

The result

Finance Tracker
Track your income and expenses

Income
\$5000

Expenses
\$2370

Balance
\$2630

Add Transaction

Description

Amount

Expense

food

Add

Transactions

All Types

All Categories

DATE	DESCRIPTION	CATEGORY	AMOUNT	ACTIONS
2025-01-01	Salary	salary	+\$5000	Delete
2025-01-02	Rent	housing	-\$1200	Delete

Don't forget the commit

Add the ability

✓ Commit

Changes


2

App.jsx src

TransactionList.jsx src

Managing the Context

Claude Working Memo

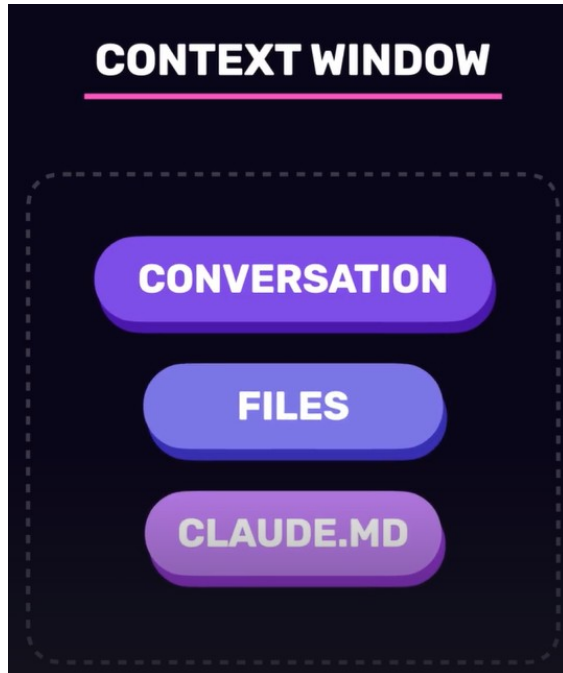



```
/context
└─ Context Usage
   └─ claude-opus-4-5-20251101 · 47k/200k tokens (24%)
      └─ Estimated usage by category
         └─ System prompt: 2.4k tokens (1.2%)
            └─ System tools: 16.6k tokens (8.3%)
               └─ MCP tools: 293 tokens (0.1%)
                  └─ Skills: 61 tokens (0.0%)
                     └─ Messages: 29.7k tokens (14.9%)
                        └─ Free space: 118k (58.9%)
                           └─ Autocompact buffer: 33.0k tokens (16.5%)

MCP tools · /mcp
└─ mcp__ide__getDiagnostics: 111 tokens
   └─ mcp__ide__executeCode: 182 tokens



Skills · /skills
```

CONTEXT MANAGEMENT

- /clear
- /compact
- Claude automatically compacts at ~70%

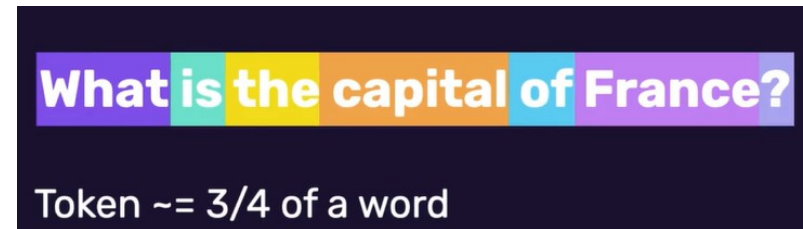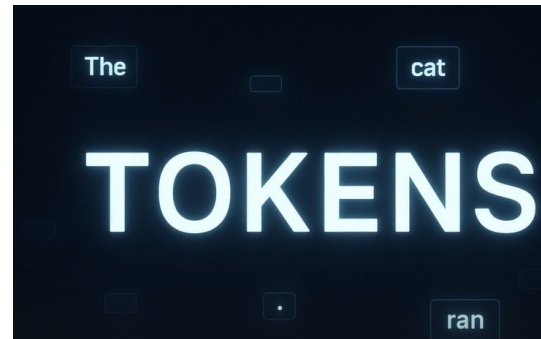



Tracking Usage and Cost

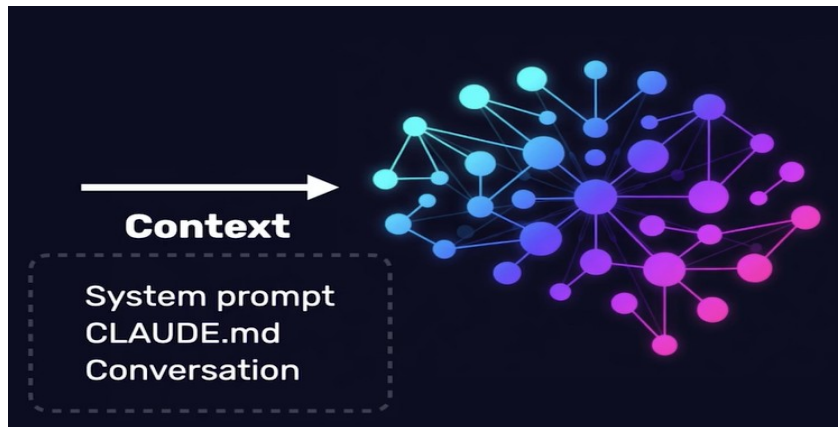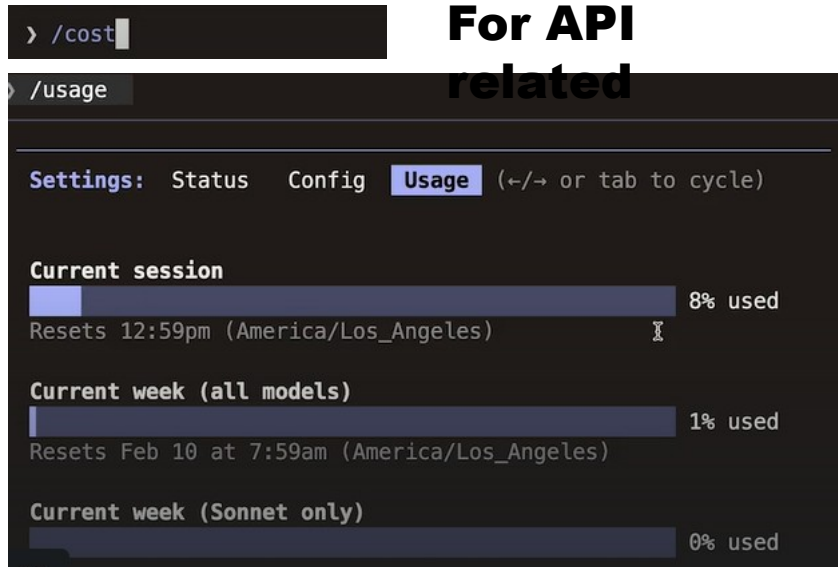





COST MANAGEMENT

- /clear
- /compact
- Keep CLAUDE.md lean






Model Context Protocol)MCP(

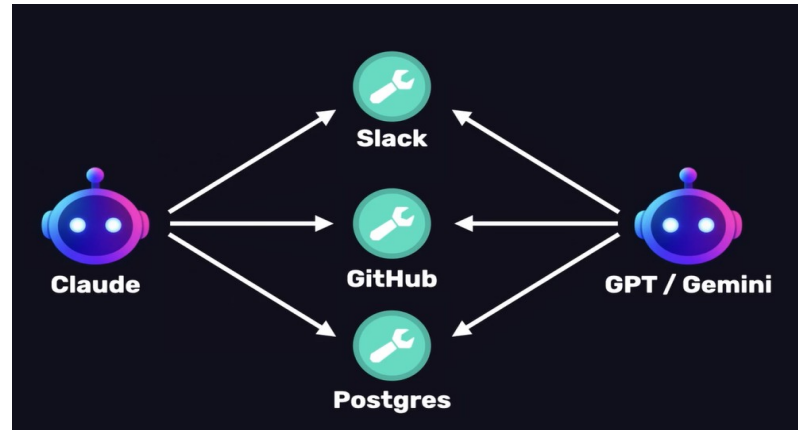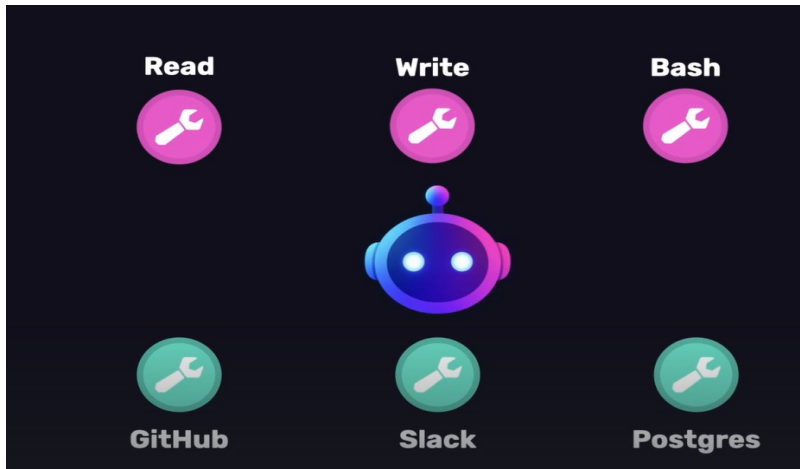

Without MCP – Custom code

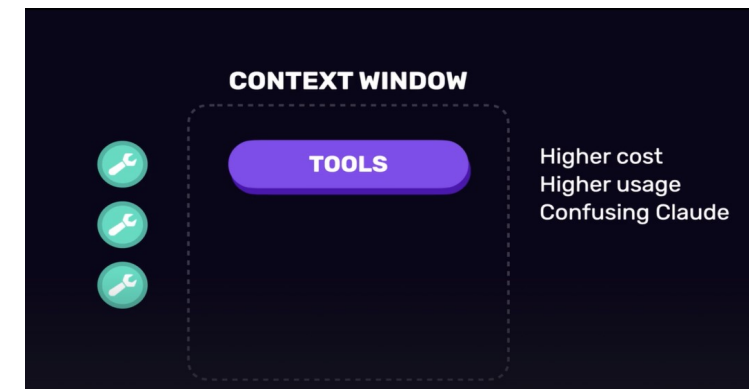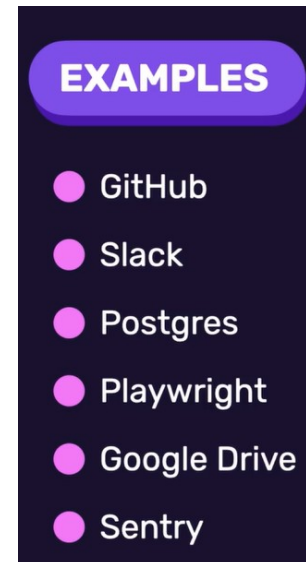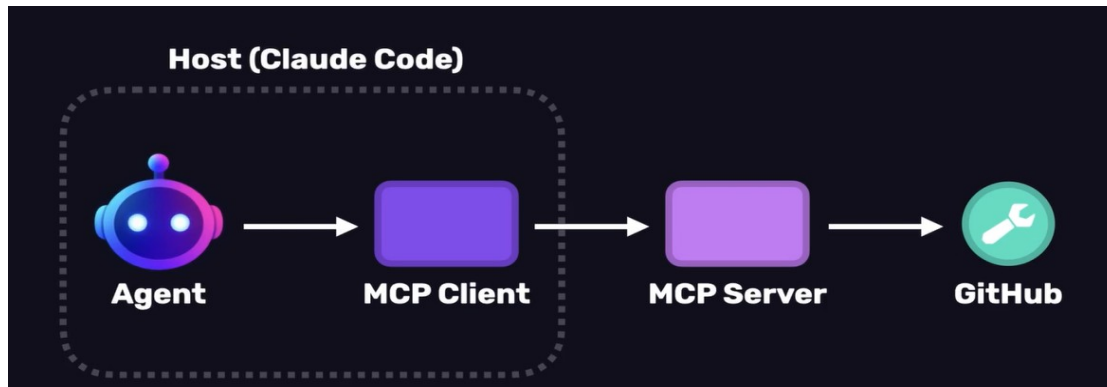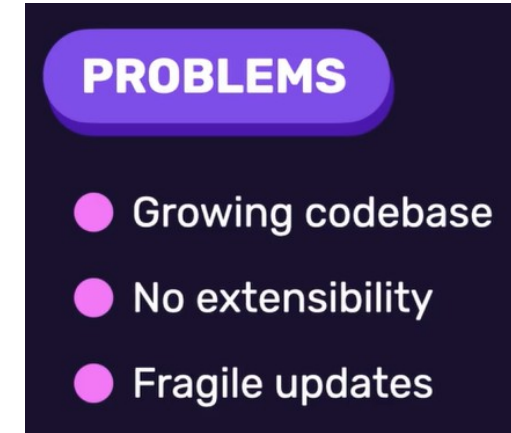

Adding tools

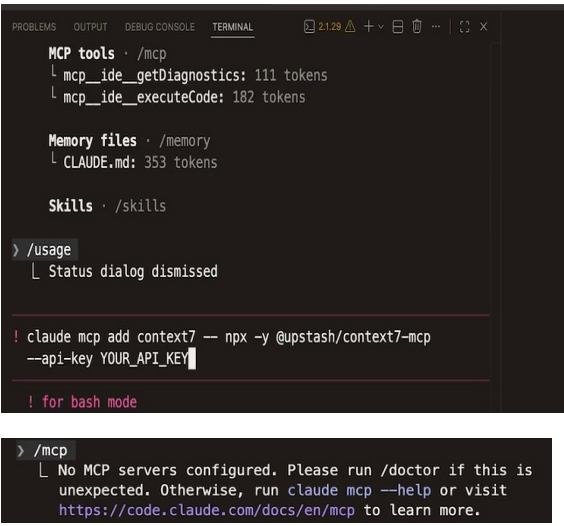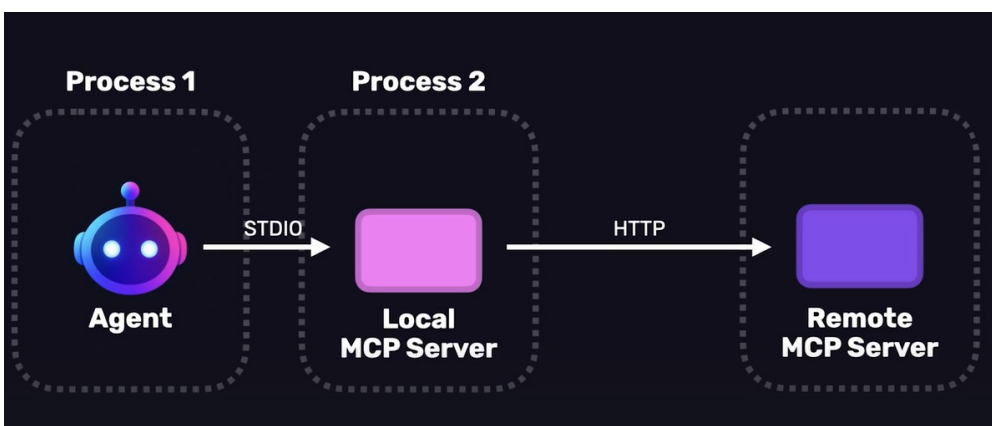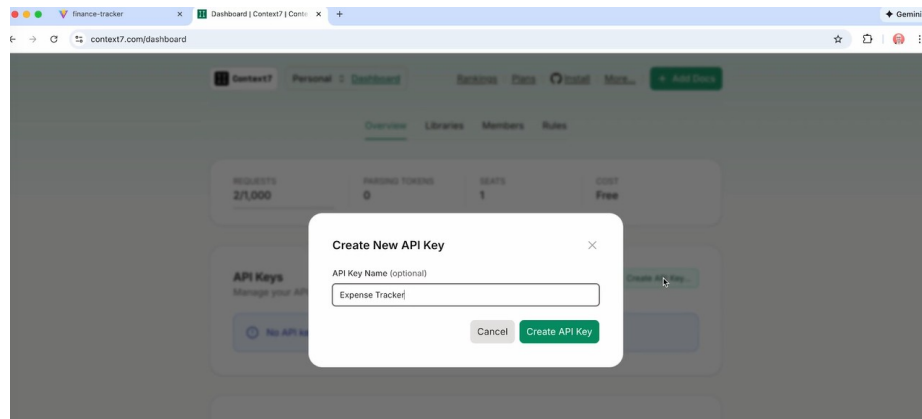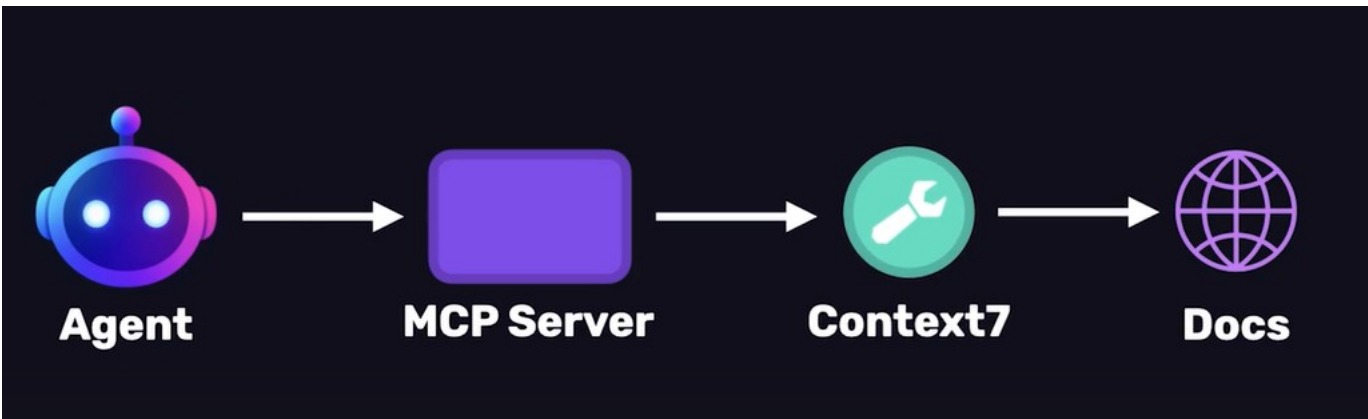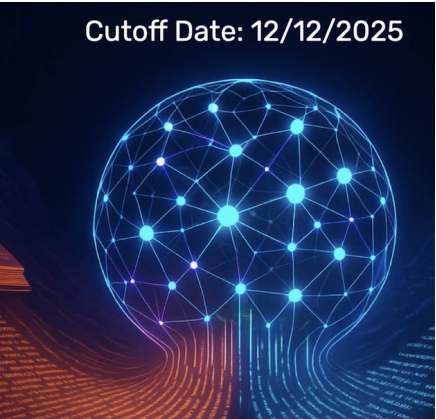

Adding tools

```
/mcp

Context7 MCP Server

Status: ✓ connected
Command: npx
Args: -y @upstash/context7-mcp --api-key
      ctx7sk-abadad29-599e-42e8-987d-0d5c0c54e84d
Config: /Users/moshhamedani/.claude.json [project:
Location: /Users/moshhamedani/Desktop/playground/expense-tracker-starter]

Capabilities: tools
Tools: 2 tools

> 1. View tools
> 2. Reconnect
> 3. Disable
```

```
PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL

Claude Code v2.1.30
Opus 4.5 · Claude Max
~/Desktop/playground/expense-tracker-starter
[*] [*] [*] · 3 guest passes at /passes

> /mcp
  ↳ MCP dialog dismissed

> add a chart (using recharts) to show spending by category.
  use context7.
```

```
context7 - resolve-library-id (MCP)(query: "pie chart or bar
chart for spending by category visualization",
libraryName: "recharts")

ool use

context7 - resolve-library-id(query: "pie chart or bar
chart for spending by category visualization", libraryName:
"recharts") (MCP)
Resolves a package/product name to a Context7-compatible
library ID and returns matching libraries.

You MUST call this function before 'query-docs' to obtain a
valid Context7-compatible library ID UNLESS the user
explicitly provides a library ID in the format
'/org/project' or '/org/project/version' in their query...

o you want to proceed?
1. Yes
2. Yes, and don't ask again for context7 - resolve-library-id
  commands in
  /Users/moshhamedani/Desktop/playground/expense-tracker-start
3. No
```

```
SOURCE CONTROL


CHANGES
Add the spending
✓ Commit
```

Recharts

A composable charting library built on React components


Install v3.7.8

Star 26,589

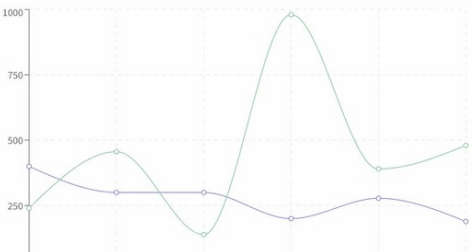

Finance Tracker


Track your income and expenses

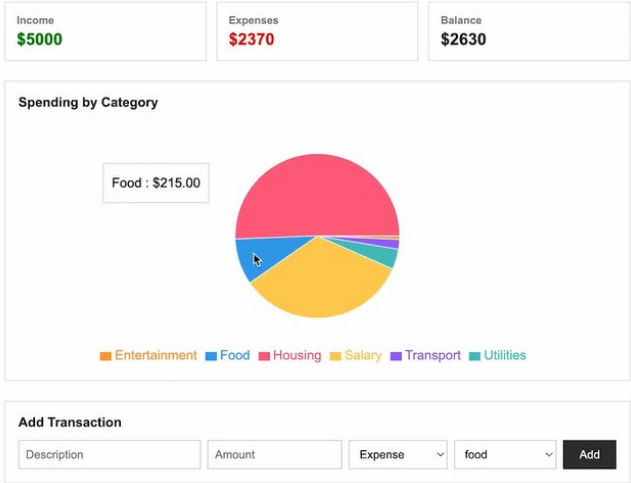

convert the pie chart to a bar chart

Finance Tracker

Track your income and expenses

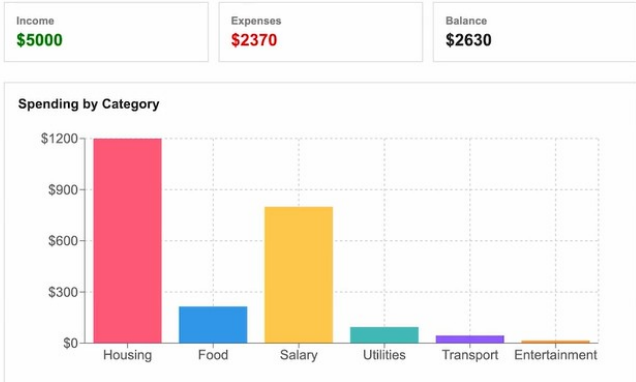

Creating skills

Skills

Instructions that teach
Claude how to do things

- Deploying your app
- Generate API documentation
- Write unit tests

```
> create a custom skill called deploy. when deploying,  
we should run all tests first, build the production  
bundle, and push to the staging area.
```


Created the `/deploy` skill at `.claude/skills/deploy.md`.

```
> /skills
```

```
Skills  
1 skill
```

```
Project skills (.claude/skills)  
deploy · ~5 description tokens
```

```
> /deploy
```

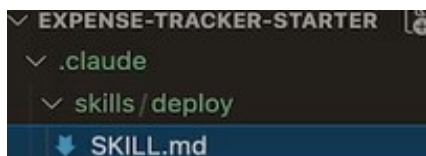

Deploy Skill

Deploy the application to staging by running tests, building, and pushing.



Steps

When the user invokes `/deploy`, perform the following steps in order:

1. **Run all tests** - Execute `npm test` to run the test suite. If tests fail, stop the deployment and report the failures to the user.
2. **Build production bundle** - Execute `npm run build` to create the production build. If the build fails, stop and report the error.
3. **Push to staging** - Execute `npm run deploy:staging` to push the build to the staging environment. Report success or failure.

Error Handling

- If any step fails, stop immediately and report which step failed and why
- Do not proceed to the next step if the current step fails
- Provide clear output about what succeeded and what failed

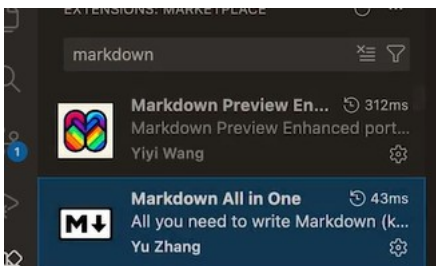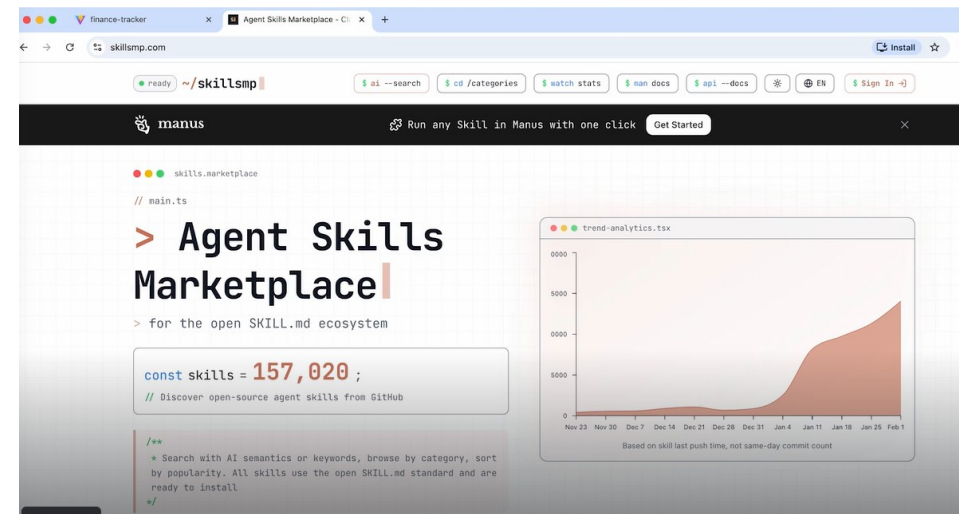

```
claude --resume
```

Adding skills

```
skills
Source: https://github.com/anthropics/claude-code.git
Repository cloned
Found 10 skills
Select skills to install (space to toggle)
  [ ] claude-opus-4-5-migration
  [ ] frontend-design (Create distinctive,
production-grade frontend interfaces ...)
  [ ] Writing Hookify Rules
  [ ] Agent Development
  [ ] Command Development
  [ ] Hook Development
  [ ] MCP Integration
  [ ] Plugin Settings
  [ ] Plugin Structure
  [ ] Skill Development
```

```
> /skills

Skills
3 skills

Project skills (.claude/skills)
frontend-design · ~63 description tokens
deploy · ~5 description tokens

User skills (~/.claude/skills)
find-skills · ~79 description tokens

Esc to close
```

```
> /frontend-design improve the look and feel of this app.
make it modern and polished. █
```


- **Dark theme** with deep blue-gray background and subtle ambient gradient lighting
- **Typography**: Outfit font for UI, JetBrains Mono for numbers
- **Summary cards** with colored top borders (green/red/purple) and glow effects on amounts
- **Glassmorphic cards** with backdrop blur and subtle borders
- **Animated entrance** - staggered slide-up animations as components load
- **Bar chart** styled to match the dark theme with custom tooltips
- **Color-coded category badges** in the transaction list
- **Interactive hover states** on table rows, buttons, and cards
- **Custom select dropdowns** with styled chevron icons
- **Glowing primary button** with hover lift effect
- **Responsive layout** that adapts to mobile

* Cooked for 2m 10s · 1 agent running in the background



```
✓ CHANGES
Improve the design
✓ Commit
✗ Changes
```

Checkpointing

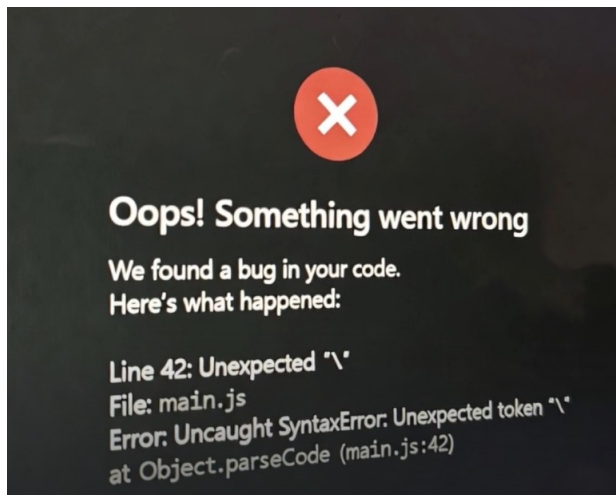

```
> /rewind
```

```
Rewind
Restore the code and/or conversation to the point before...

convert the pie chart to a bar chart
SpendingChart.jsx +9 -14

create a custom skill called deploy. when deployin...
deploy.md +27 -0

/exit
No code changes

/deploy
No code changes

/exit
No code changes

/frontend-design improve the look and feel of this app.
6 files changed +577 -121

> (current)
```

```
Rewind

Confirm you want to restore to the point before you sent
this message:

/frontend-design improve the look and feel of this app.
make it modern and polished.
(1h ago)

The conversation will be forked.
The code will be restored +121 -577 in SpendingChart.jsx
and 5 other files.

> 1. Restore code and conversation
2. Restore conversation
3. Restore code
4. Never mind

△ Rewinding does not affect files edited manually or via
bash.
```

```
> /frontend-design improve the look and feel of this app.
make it modern and polished. give me some design ideas to
choose from
```

```
Option 1: "Midnight Luxe" – Dark Premium Dashboard

Aesthetic: High-end fintech app with a dark theme, glass
morphism, and elegant typography.

– Colors: Deep charcoal (#0D0D0F) background, soft white
text, emerald green for income (#10B981), coral red for
expenses (#F87171), subtle gradient accents
– Typography: "Outfit" for headings (geometric, modern),
"DM Sans" for body
– Effects: Frosted glass cards with backdrop blur, subtle
glow on hover states, smooth fade-in animations
– Vibe: Like a premium banking app – sophisticated,
trustworthy, calm

---

Option 2: "Paper Ledger" – Warm Editorial Minimalism

Aesthetic: Clean, warm, newspaper-inspired with a focus on
beautiful typography and whitespace.

– Colors: Warm off-white (#FAF9F6) background, rich black
text, muted sage green (#6B8F71) for income, terracotta
```

```
> option 1
* Pontificating... (thinking)
```



Checkpointing

```
Rewind
Restore the code and/or conversation to the point before...

create a custom skill called deploy. when deployin...
deploy.md +27 -0

/exit
No code changes

/deploy
No code changes

/exit
No code changes

/frontend-design improve the look and feel of this app.
No code changes

option 1
3 files changed +428 -79

> (current)
```

Confirm you want to restore to the point before you sent this message:

option 1
(2m ago)

The conversation will be forked.
The code will be restored +79 -428 in SpendingChart.jsx and 2 other files.

- > 1. Restore code and conversation
- 2. Restore conversation
- 3. Restore code
- 4. Never mind


△ Rewinding does not affect files edited manually or via bash.

Enter to continue · Esc to exit



> option 2

Creating Subagents

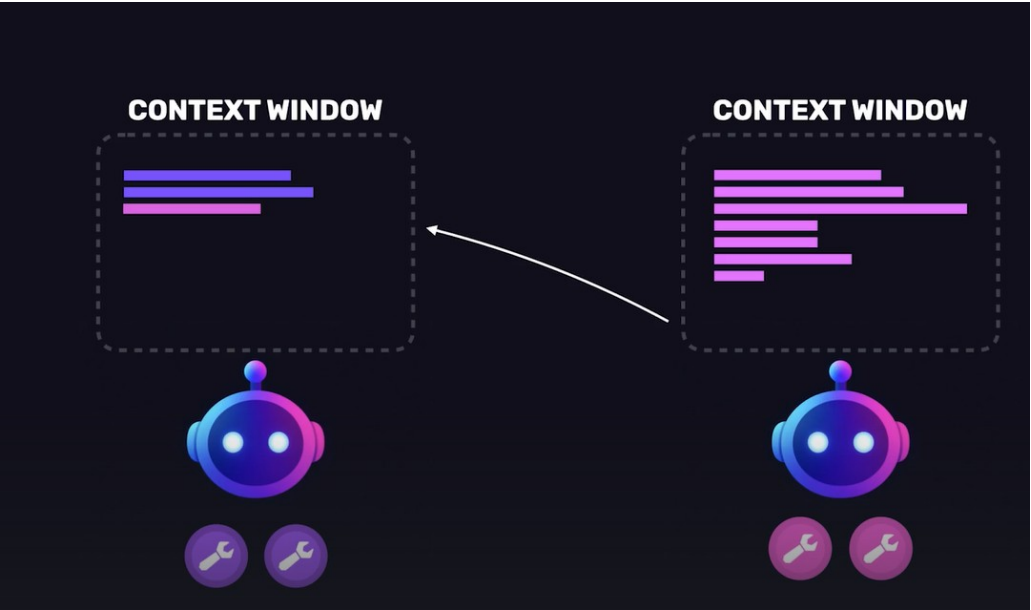

```
> /agents

Agents
No agents found

> Create new agent

No agents found. Create specialized subagents that Claude
can delegate to.
Each subagent has its own context window, custom system
prompt, and specific tools.
Try creating: Code Reviewer, Code Simplifier, Security
Reviewer, Tech Lead, or UX Reviewer.

Built-in (always available):
Bash · inherit
general-purpose · inherit
statusline-setup · sonnet
Explore · haiku
Plan · inherit
claude-code-guide · haiku
```

```
> /agents

Create new agent
Choose location

> 1. Project (.claude/agents/)
2. Personal (~/.claude/agents/)

↑↓ to navigate · Enter to select · Esc to cancel
```

```
/agents

Create new agent
Describe what this agent should do and when it should be
used (be comprehensive for best results)

help me review my code, identify issues and suggest impr...

Enter to submit · Esc to go back
```

**Suggest improvements for readability,
maintainability, performance and best practices**

```
> /agents

Create new agent
Confirm and save

Name: code-reviewer
Location: .claude/agents/code-reviewer.md
Tools: All tools
Model: Sonnet
Memory: Project (.claude/agent-memory/)

Description (tells Claude when to use this agent):

Use this agent when you want a thorough code review to
identify issues and get suggestions for improving
readability, maintainability, performance, and
adherence to best practices. This is typically
triggered after completing a feature, bef...

System prompt:

You are an expert code reviewer with deep experience in
software engineering best practices, design patterns,
and code quality standards. You have a keen eye for
identifying issues that impact readability,
maintainability, performance, and ...
```

Code Review

> use the code-reviewer subagent to review my code

/tasks

starter/src/TransactionForm.jsx (cmd + click)

Background tasks

3 active shells · 1 active agent

Bashes (3)

> npm run dev (running)
npm run dev (running)
npm run dev (running)

Local agents (1)

Review expense tracker code (running)

Functionality	Good (1 data bug)
React Patterns	Good
Performance	Adequate (could optimize for scale)
Code Organization	Good (minor duplication)
Accessibility	Needs improvement

Priority fixes:

- Fix the "Freelance Work" transaction type
- Add form validation feedback
- Extract shared categories constant

fix all the priority issues

CHANGES

Message (⌘Enter to commit on "m...")

Commit

Changes

MEMORY

code-reviewer.md .claude/agents

App.css src

App.jsx src

JS constants.js src

SpendingChart.jsx src

TransactionForm.jsx src

TransactionList.jsx src

GRAPH

Auto

Outgoing Changes main

Improve the design Moshfeqh Ha...

Add the spending chart Moshfeqh Hamedani

Add the ability to delete transactions Mo...

Refactor App.jsx Moshfeqh Hamedani

Fix transaction amounts to use numbers l...

Add CLAUDE.md with project guidance f...

Initial commit Moshfeqh Ha...

origin/main

Code Review: Expense Tracker

Bugs / Issues

- Data Bug in App.jsx:13**
{ id: 4, description: "Freelance Work", amount: 800, type: "expense", category: "salary", date: "2025-01-05" }
"Freelance Work" is marked as type: "expense" but should be type: "income". This skews the balance calculation.
- Missing Form Validation in TransactionForm.jsx:13**
if (!description || !amount) return;
- No user feedback when validation fails (silent failure)
- Allows negative amounts
- Allows amount of 0
- parseFloat("") returns NaN but empty string check happens first
- ID Collision Risk in TransactionForm.jsx:16**
id: Date.now()
If two transactions are added in the same millisecond, they'll have duplicate IDs. Consider crypto.randomUUID() instead.

Category	Amount
Housing	\$1200
Food	\$200
Utilities	\$100
Transport	\$50
Entertainment	\$20

Add Transaction

Please enter a description

Description

Amount

Expense

Food

Add

> commit these fixes

· Hatching...

onAddTransaction({

id: Date.now(),

description,

amount: parseFloat(amount),

type,

category,

date: new Date().toISOString().split('T')[0],

});

onAddTransaction({

id: crypto.randomUUID(),

description: description.trim(),

amount: parsedAmount,

type,

category,

date: new Date().toISOString().split('T')[0],


});

The future of engineering

Review

Refactor

Understand the code

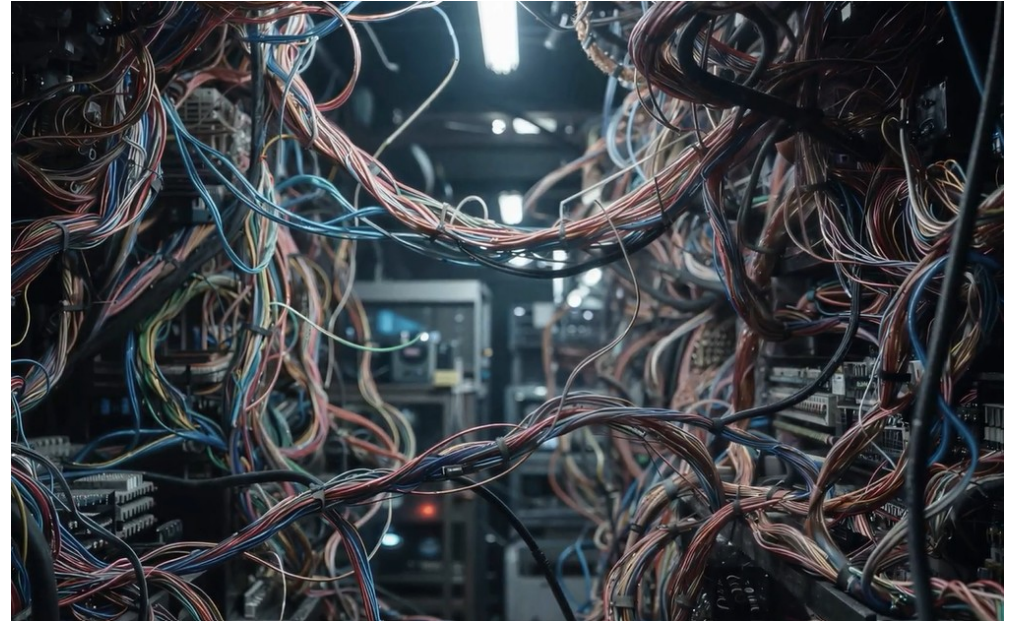

Stay curious

Keep learning

Embrace better tools