

**1.Aim:** Input three numbers and find the largest.

***Procedure: (Coding)***

```
#include <iostream>
using namespace std;
int main()
{
    int a,b,c;
    cout<<"Input three numbers and find largest\n";
    cin>>a>>b>>c;
    if (a>b && a>c)
    {
        cout<<a<<" is largest";

    }

    else if(b>a && b>c)

    {
        cout<<b<<" is largest";

    }

    else

    {
        cout<<c<<" is largest";

    }

    return 0;
}
```

***Output***

```
Input three numbers and find largest
54
86
67
```

86 is largest

**2.Aim:** Input the principal amount, type of account (C for current a/c or S for SB a/c) and number of years, and display the amount of interest. Rate of interest for current a/c is 8.5% and that of SB a/c is 6.5%.

### ***Procedure: (Coding)***

```
#include<iostream>
using namespace std;
int main( )
{
    int p,n;
    float i;
    char type;
    cout<<"Enter the Principle amount";
    cin>>p;
    cout<<"Enter the number of years";
    cin>>n;
    cout<<"Enter the type of account c for current or s for Savings Bank "<<"\n";
    cin>>type;

    if(type=='c')
        i=p*n*8.5/100;

    if(type=='s')
        i=p*n*6.5/100;

    cout<<"interest="<<i;
    return 0;
}
```

### ***Output***

```
Enter the Principle amount 5000
Enter the number of years 4
Enter the type of account c for current or s for Savings Bank
s
interest=1300
```

**3.Aim:** Input a digit and display the same in word. (Zero for 0, One for 1, ....., Nine for 9)

***Procedure :(Coding)***

```
#include <iostream>
using namespace std;

int main()
{
    int d;
    cout<<"Input a digit \n";
    cin>>d;

    switch (d)
    {
        case 0:
            cout<<"Zero";
            break;

        case 1:
            cout<<"One";
            break;

        case 2:
            cout<<"Two";
            break;

        case 3:
            cout<<"Three";
            break;

        case 4:
            cout<<"Four";
            break;

        case 5:
            cout<<"Five";
            break;

        case 6:
            cout<<"Six";
            break;
```

```
    case 7:  
        cout<<"Seven";  
        break;  
  
    case 8:  
        cout<<"Eight";  
        break;  
  
    case 9:  
        cout<<"Nine";  
        break;  
  
    default:  
        cout<<"Not a digit";  
    }  
  
    return 0;  
}
```

## ***Output***

Input a digit and display the corresponding word using switch 5  
Five

**4. Aim:** Find the sum of the first N natural numbers without using formula.

***Procedure: (Coding)***

```
#include<iostream>
using namespace std;
int main()
{
    int n,sum=0,i;
    cout<<"Enter value of N";
    cin>>n;

    for(i=1;i<=n;i++)
    {
        sum=sum+i;
    }

    cout<<"Sum ="<<sum;
    return 0;
}
```

***Output***

Enter value of N 5  
Sum =15

**5.Aim:** Input an integer number and check whether it is palindrome or not.

***Procedure: (Coding)***

```
#include <iostream>
using namespace std;
int main()

{

    int n, num, digit, rev = 0;
    cout << "Enter a positive number: ";
    cin >> num;
    n = num;

    do

    {

        digit = num % 10;
        rev = (rev * 10) + digit;
        num = num / 10;

    } while (num != 0);

    cout << " The reverse of the number is: " << rev;

    if (n == rev)
        cout << "\n The number is a palindrome.";
    else
        cout << "\n The number is not a palindrome.";

    return 0;

}
```

***Output***

```
Enter a positive number: 343
The reverse of the number is: 343
The number is a palindrome.
```

**6.Aim:** Display the multiplication table of a number having 12 rows.

***Procedure: (Coding)***

```
#include<iostream>
using namespace std;

int main()
{
    int n,i;
    cout<<"Enter a number";
    cin>>n;

    for(i=1;i<=12;i++)
    {
        cout<<i<<"*"<<n<<"="<<n*i;
        cout<<"\n";
    }

    return 0;
}
```

***Output***

```
Enter a number
12
1*12=12
2*12=24
3*12=36
4*12=48
5*12=60
6*12=72
7*12=84
8*12=96
9*12=108
10*12=120
11*12=132
12*12=144
```

**7. Aim:** Create an array to store the heights of 10 students and find the largest value.

***Procedure: (Coding)***

```
#include<iostream>
using namespace std;

int main()
{
    int n = 10;
    float heights[n], largestHeight;

    for (int i = 0; i < n; i++) {
        cout << "Enter the height of student " << i + 1 << ": ";
        cin >> heights[i];
    }

    largestHeight = heights[0];
    for (int i = 1; i < n; i++)
    {
        if (heights[i] > largestHeight)
        {
            largestHeight = heights[i];
        }
    }

    cout << "The largest height among the students is: " << largestHeight;

    return 0;
}
```

**Output:**

```
Enter the height of student 1: 150
Enter the height of student 2: 165
Enter the height of student 3: 160
Enter the height of student 4: 155
Enter the height of student 5: 172
Enter the height of student 6: 168
Enter the height of student 7: 166
Enter the height of student 8: 171
Enter the height of student 9: 156
Enter the height of student 10: 168
```

The largest height among the students is: 172



**8. Aim:** Find the length of a string without using strlen() function.

***Procedure: (Coding)***

```
#include<iostream>
#include<cstdio>
using namespace std;

int main( )
{
    char name[1000];
    int count=0;
    cout<<"Enter the String\n";
    gets(name);

    while(name[count]!='\0')
    {
        count ++;
    }
    cout<<"The length of the string is"<<count;
    return 0;
}
```

**Output:**

```
Enter the String
computer application
The length of the string is 20
```

**9. Aim:** Find the factorial of a number with the help of a user-defined function.

***Procedure: (Coding)***

```
#include<iostream>
using namespace std;
double fact(int n)
{
    int i,f=1;
    for(i=1;i<=n;i++)
    {
        f=f*i;
    }
    return f;
}

int main()
{
    int n;
    cout<<"Input a number\n";
    cin>>n;
    cout<<" Factorial of "<<n<<" = "<< fact(n);
    return 0;
}
```

**Output:**

Input a number

5

Factorial of 5 = 120

**10. Aim:** Input two numbers and swap them with the help of a user defined function

***Procedure: (Coding)***

```
#include <iostream>
using namespace std;

void swapNumbers(int &a, int &b)
{
    int temp = a;
    a = b;
    b = temp;
}

int main()
{
    int num1, num2;

    cout << "Enter the first number: ";
    cin >> num1;
    cout << "Enter the second number: ";
    cin >> num2;
    swapNumbers(num1, num2);

    cout << "\nAfter swapping, the first number is: " << num1;
    cout << "\nAfter swapping, the second number is: " << num2;
    return 0;
}
```

**Output:**

```
Enter the first number: 22
Enter the second number: 33
After swapping, the first number is: 33
After swapping, the second number is: 22
```

## PART B

**11 Aim :** Design a simple and attractive webpage for Kerala Tourism. It should contain features like background/image, heading, text formatting and font tags, images, etc.

**Procedure :Coding:**

```
<HTML>
  <HEAD>
    <TITLE>KeralaTourism</TITLE>
  </HEAD>

  <BODY background="kerala.jpg">
    <font face=arial>
      <B>Kerala at a Glance</B>

      <I>Kerala, India's most advanced society: <BR>With hundred percent
      literacy.<BR> World-class health care systems. <BR>India's lowest infant mortality
      and Highest life expectancy rates.<BR> The highest physical quality of life in India.
      Peaceful And pristine,Kerala is India's cleanest state.
      </I>

      <BR><BR>

      <IMG Src="logo.jpg">

      <BR><BR><BR>

      <U>
      Tourist Destinations
      </U>

      <BR>
      <BR>

      <IMG Src="boat.jpg">
      <IMG Src="lake.jpg">
      <IMG Src="kathakali.jpg">
      <IMG Src="nature.jpg">

      <BR>

    </BODY>
  </HTML>
```

12. **AIM:** Design a simple webpage about your school. Create another webpage named address.html containing the school address. Give link from school page to address.html

**Procedure :Coding:**

**school.html**

```
<HTML>
  <HEAD>
    <TITLE>MY SCHOOL</TITLE>
  </HEAD>

  <BODY bgcolor=brown>
    <CENTER>
      <H1>PANANGAD VHSS</H1>
      <BR><BR>
      <B>My SCHOOL is Panangad Vocational Higher Secondary
      School,Panangad, Ernakulam. The school is celebrating its centenary in
      2019</B>

      <BR>

      <H2>
        <A Href="address.html">About</A>
      </H2>

      <BR>

      <IMG scr="school.jpg">

      <BR><BR>
    </CENTER>
  </BODY>
</HTML>
```

**address.html**

```
<HTML>
  <HEAD>
    <TITLE>ADDRESS</TITLE>
  </HEAD>

  <BODY bgcolor=green>
    <CENTER>
      <B>ABOUT</B>
      <BR>
      <H2>
        PANANGAD VHSS<BR> PANANGAD PO<BR> KOCHI<BR>
        ERNAKULAM<BR> KERALA 682506<BR>
      </H2>
    </CENTER>

  </BODY>
</HTML>
```

13. **AIM:** Design a webpage as shown below using appropriate list tags.

**Permanent members in UN Security Council**

- Russia
- China
- USA
- UK
- France

**Procedure :Coding:**

```
<HTML>
  <HEAD>
    <TITLE> UNORDERED LIST</TITLE>
  </HEAD>

  <BODY>
    <H2> Permanent members in UN Security Council </H2>
    <UL>
      <LI>Russia</LI>
      <LI>China</LI>
      <LI>USA</LI>
      <LI>UK</LI>
      <LI>France</LI>
    </UL>

  </BODY>
</HTML>
```

14. **AIM:** Design a webpage as shown below using appropriate list tags.

### **Wild life Sanctuaries in Kerala**

1. Eravikulam
2. Periyar
3. Chinnar
4. Wayanad

#### **Procedure :Coding:**

```
<HTML>
  <HEAD>
    <TITLE> ORDERED LIST</TITLE>
  </HEAD>

  <BODY>
    <H2> Wild life Sanctuaries in Kerala </H2>
    <OL>
      <LI> Eravikulam </LI>
      <LI> Periyar </LI>
      <LI> Chinnar </LI>
      <LI> Wayanad </LI>
    </OL>

  </BODY>
</HTML>
```

15. **AIM:**Design a web page containing a table as shown below.

## Speed Limits in Kerala

| <b>Vehicles</b>      | <b>Near School</b><br><i>(In Km/hour)</i> | <b>Within Corporation/<br/>Municipality</b><br><i>(In Km/hour)</i> | <b>State Highway</b><br><i>(In Km/hour)</i> |
|----------------------|-------------------------------------------|--------------------------------------------------------------------|---------------------------------------------|
| Motor Cycle          | 30                                        | 50                                                                 | 50                                          |
| Motor Car            | 30                                        | 50                                                                 | 80                                          |
| Light motor vehicles | 30                                        | 50                                                                 | 80                                          |
| Heavy motor vehicles | 30                                        | 40                                                                 | 65                                          |

```
<HTML>
  <HEAD>
    <TITLE>SPEED LIMITS</TITLE>
  </HEAD>
  <BODY>
    <TABLE BORDER="1">
      <TR>
        <TH>Vehicles</TH>
        <TH>Near School (In Km/hour)</TH>
        <TH>Within Corporation/ Municipality(In Km/hour)</TH>
        <TH>State Highway (In Km/hour)</TH>
      </TR>
      <TR>
        <TD>Motor Cycle</TD>
        <TD>30</TD>
        <TD>50</TD>
        <TD>50</TD>
      </TR>
      <TR>
        <TD>Motor Car</TD>
        <TD>30</TD>
        <TD>50</TD>
        <TD>80</TD>
      </TR>
      <TR>
        <TD>Light motor vehicles</TD>
        <TD>30</TD>
        <TD>50</TD>
        <TD>80</TD>
      </TR>
    </TABLE>
  </BODY>
</HTML>
```



```
<TR>
  <TD>Heavy motor vehicles</TD>
  <TD>30</TD>
  <TD>40</TD>
  <TD>65</TD>
</TR>
```

```
</TABLE>
```

```
</BODY>
```

```
</HTML>
```

16. **AIM:**Design a simple webpage as shown below:

Client Login

Enter User Name :

Enter Your Password

**Procedure :Coding:**

```
<HTML>
  <HEAD> <TITLE>LOGIN</TITLE>
</HEAD>

  <BODY>
    <FORM>
      <FIELDSET>
        Client Login
        <BR>
        Enter User Name : <INPUT Type="Text"> <BR> <BR>
        Enter Your Password <INPUT Type="Password"> <BR>
        <INPUT Type="Submit" value="SUBMIT">
        <INPUT Type="Reset" value="CLEAR">
      </FIELDSET>
    </FORM>
  </BODY>
</HTML>
```

17 **Aim:** Create a table Student with the following fields and insert at least 5 records into the table except for the column Total.

|             |                     |
|-------------|---------------------|
| Roll_Number | Integer Primary key |
| Name        | Varchar (25)        |
| Batch       | Varchar (15)        |
| Mark1       | Integer             |
| Mark2       | Integer             |
| Mark3       | Integer             |
| Total       | Integer             |

- Update the column Total with the sum of Mark1, Mark2 and Mark3.
- List the details of students in Commerce batch.
- Display the name and total marks of students who are failed (Total< 90).
- Display the name of students in alphabetical order and in batch based.

**Procedure :Coding:**

```
create table student(roll_number int primary key, name varchar(25), batch varchar(15),mark1 int, mark2 int, mark3 int, total int);
```

```
desc student;
```

```
insert into student values (1,'abi','science',60, 70, 25,null);
insert into student values (2,'benny', 'science',30, 32, 20,null);
insert into student values (3,'aneesh', 'commerce', 20, 40, 15,null);
insert into student values (4,'anson', 'commerce',40, 80, 50,null);
insert into student values (5,'sulthan', 'science', 90, 94, 35,null);
```

```
select * from student;
```

```
update student set total=mark1+mark2+mark3;
```

```
select * from student;
```

```
select * from student where batch='commerce';
```

```
select name,total from student where total<90;
```

```
select name,batch from student order by batch,name;
```

## 17 Output

```
[mysql> desc student;
```

| Field       | Type        | Null | Key | Default | Extra |
|-------------|-------------|------|-----|---------|-------|
| roll_number | int(11)     | NO   | PRI | NULL    |       |
| name        | varchar(25) | YES  |     | NULL    |       |
| batch       | varchar(15) | YES  |     | NULL    |       |
| mark1       | int(11)     | YES  |     | NULL    |       |
| mark2       | int(11)     | YES  |     | NULL    |       |
| mark3       | int(11)     | YES  |     | NULL    |       |
| total       | int(11)     | YES  |     | NULL    |       |

```
[mysql> select * from student;
```

| roll_number | name    | batch    | mark1 | mark2 | mark3 | total |
|-------------|---------|----------|-------|-------|-------|-------|
| 1           | abi     | science  | 60    | 70    | 25    | NULL  |
| 2           | benny   | science  | 30    | 32    | 20    | NULL  |
| 3           | aneesh  | commerce | 20    | 40    | 15    | NULL  |
| 4           | anson   | commerce | 40    | 80    | 50    | NULL  |
| 5           | sulthan | science  | 90    | 94    | 35    | NULL  |

```
[mysql> select * from student where batch='commerce';
```

| roll_number | name   | batch    | mark1 | mark2 | mark3 | total |
|-------------|--------|----------|-------|-------|-------|-------|
| 3           | aneesh | commerce | 20    | 40    | 15    | 75    |
| 4           | anson  | commerce | 40    | 80    | 50    | 170   |

```
[mysql> select name,total from student where total<90;
```

| name   | total |
|--------|-------|
| benny  | 82    |
| aneesh | 75    |

```
[mysql> select name,batch from student order by batch,name;
```

| name    | batch    |
|---------|----------|
| aneesh  | commerce |
| anson   | commerce |
| abi     | science  |
| benny   | science  |
| sulthan | science  |

18 **Aim:** Create a table Employee with the following fields and insert at least 5 records into the table except the column Gross\_pay and DA.

|             |                     |
|-------------|---------------------|
| Emp_code    | Integer Primary key |
| Emp_name    | Varchar (20)        |
| Designation | Varchar (25)        |
| Department  | Varchar (25)        |
| Basic       | Decimal (10,2)      |
| DA          | Decimal (10,2)      |
| Gross_pay   | Decimal (10,2)      |

- a) Update DA with 75% of Basic.
- b) Display the details of employees in Purchase, Sales and HR departments.
- c) Update the Gross\_pay with the sum of Basic and DA.
- d) Display the details of employee with gross pay below 10000.

**Procedure :Coding:**

```
create table employee(Emp_code int primary key,Emp_name varchar(20),Designation
varchar(25) ,Department varchar(25),Basic dec(10,2),DA dec(10,2),Gross_pay dec(10,2));
```

```
desc employee;
```

```
insert into employee values(1001,'arun','clerk','sales',4000.00,null,null);
insert into employee values(1002,'biju','clerk','accounts',4000.00,null,null);
insert into employee values(1005,'sunu','peon','purchase',16000.00,null,null);
insert into employee values(1042,'binu','accountant','accounts',16000.00,null,null);
insert into employee values(1702,'anu','manager','hr',16000.00,null,null);
```

```
select * from employee;
```

```
update employee set DA=Basic*75/100;
```

```
select * from employee;
```

```
select * from employee where Department in('purchase', 'sales','hr');
```

```
update employee set Gross_pay=Basic+DA;
```

```
select * from employee;
```

```
select * from employee where Gross_pay<10000;
```

## 18 Output

```
[mysql> desc employee;
```

| Field       | Type          | Null | Key | Default | Extra |
|-------------|---------------|------|-----|---------|-------|
| Emp_code    | int(11)       | NO   | PRI | NULL    |       |
| Emp_name    | varchar(20)   | YES  |     | NULL    |       |
| Designation | varchar(25)   | YES  |     | NULL    |       |
| Department  | varchar(25)   | YES  |     | NULL    |       |
| Basic       | decimal(10,2) | YES  |     | NULL    |       |
| DA          | decimal(10,2) | YES  |     | NULL    |       |
| Gross_pay   | decimal(10,2) | YES  |     | NULL    |       |

```
[mysql> select * from employee;
```

| Emp_code | Emp_name | Designation | Department | Basic    | DA   | Gross_pay |
|----------|----------|-------------|------------|----------|------|-----------|
| 1001     | arun     | clerk       | sales      | 4000.00  | NULL | NULL      |
| 1002     | biju     | clerk       | accounts   | 4000.00  | NULL | NULL      |
| 1005     | sunu     | peon        | purchase   | 16000.00 | NULL | NULL      |
| 1042     | binu     | accountant  | accounts   | 16000.00 | NULL | NULL      |
| 1702     | anu      | manager     | hr         | 16000.00 | NULL | NULL      |

```
[mysql> select * from employee;
```

| Emp_code | Emp_name | Designation | Department | Basic    | DA       | Gross_pay |
|----------|----------|-------------|------------|----------|----------|-----------|
| 1001     | arun     | clerk       | sales      | 4000.00  | 3000.00  | NULL      |
| 1002     | biju     | clerk       | accounts   | 4000.00  | 3000.00  | NULL      |
| 1005     | sunu     | peon        | purchase   | 16000.00 | 12000.00 | NULL      |
| 1042     | binu     | accountant  | accounts   | 16000.00 | 12000.00 | NULL      |
| 1702     | anu      | manager     | hr         | 16000.00 | 12000.00 | NULL      |

```
mysql> select * from employee where Department in('purchase', 'sales','hr');
```

| Emp_code | Emp_name | Designation | Department | Basic    | DA       | Gross_pay |
|----------|----------|-------------|------------|----------|----------|-----------|
| 1001     | arun     | clerk       | sales      | 4000.00  | 3000.00  | NULL      |
| 1005     | sunu     | peon        | purchase   | 16000.00 | 12000.00 | NULL      |

```
[mysql> select * from employee;
```

| Emp_code | Emp_name | Designation | Department | Basic    | DA       | Gross_pay |
|----------|----------|-------------|------------|----------|----------|-----------|
| 1001     | arun     | clerk       | sales      | 4000.00  | 3000.00  | 7000.00   |
| 1002     | biju     | clerk       | accounts   | 4000.00  | 3000.00  | 7000.00   |
| 1005     | sunu     | peon        | purchase   | 16000.00 | 12000.00 | 28000.00  |
| 1042     | binu     | accountant  | accounts   | 16000.00 | 12000.00 | 28000.00  |
| 1702     | anu      | manager     | hr         | 16000.00 | 12000.00 | 28000.00  |

```
[mysql> select * from employee where Gross_pay<10000;
```

| Emp_code | Emp_name | Designation | Department | Basic   | DA      | Gross_pay |
|----------|----------|-------------|------------|---------|---------|-----------|
| 1001     | arun     | clerk       | sales      | 4000.00 | 3000.00 | 7000.00   |
| 1002     | biju     | clerk       | accounts   | 4000.00 | 3000.00 | 7000.00   |

19 **Aim:** Create a table Stock, which stores daily sales of items in a shop, with the following fields and insert at least 5 records into the table.

|                   |                     |
|-------------------|---------------------|
| Item_code         | Integer Primary key |
| Item_name         | Varchar (20)        |
| Manufacturer_Code | Varchar (5)         |
| Qty               | Integer             |
| Unit_Price        | Decimal (10,2)      |

- a. Display the item names with stock zero.
- b. Display the number of items manufactured by the same manufacturer.
- c. Display the highest price and lowest quantity in the stock.
- d. Increase the unit price of all items by 10%.

**Procedure :Coding:**

```
create table stock(Item_code Integer primary key,Item_name varchar(20),Manufacturer_Code  
varchar(5),Qty int,Unit_Price decimal(10,2));
```

```
desc stock;
```

```
insert into stock values(110,'Washing Machine','LG',124,9300);  
insert into stock values(120,'Mobile Phone','LG',14,12300);  
insert into stock values(143,'Projector','Acer',0,22300);  
insert into stock values(123,'DVD','Onida',0,2900);  
insert into stock values(124,'TV','TCL',34,2900);
```

```
select * from stock;
```

```
select * from stock where qty=0;
```

```
select Manufacturer_Code , count(Item_code) as No_Products from stock group by  
Manufacturer_Code;
```

```
select max(Unit_price) as Highest_price , min(Qty) AS Min_Qty from stock;
```

```
update stock set Unit_Price = Unit_Price + Unit_Price*.1;
```

## 19 Output

```
[mysql> desc stock;
```

| Field             | Type          | Null | Key | Default | Extra |
|-------------------|---------------|------|-----|---------|-------|
| Item_code         | int(11)       | NO   | PRI | NULL    |       |
| Item_name         | varchar(20)   | YES  |     | NULL    |       |
| Manufacturer_Code | varchar(5)    | YES  |     | NULL    |       |
| Qty               | int(11)       | YES  |     | NULL    |       |
| Unit_Price        | decimal(10,2) | YES  |     | NULL    |       |

5 rows in set (0.01 sec)

```
mysql> select * from stock;
```

| Item_code | Item_name       | Manufacturer_Code | Qty | Unit_Price |
|-----------|-----------------|-------------------|-----|------------|
| 110       | Washing Machine | LG                | 124 | 9300.00    |
| 120       | Mobile Phone    | LG                | 14  | 12300.00   |
| 123       | DVD             | Onida             | 0   | 2900.00    |
| 124       | TV              | TCL               | 34  | 2900.00    |
| 143       | Projector       | Acer              | 0   | 22300.00   |

5 rows in set (0.00 sec)

```
[mysql> select * from stock where qty=0;
```

| Item_code | Item_name | Manufacturer_Code | Qty | Unit_Price |
|-----------|-----------|-------------------|-----|------------|
| 123       | DVD       | Onida             | 0   | 2900.00    |
| 143       | Projector | Acer              | 0   | 22300.00   |

2 rows in set (0.00 sec)

```
[mysql> select Manufacturer_Code , count(Item_code) as No_Products from stock group by Manufacturer_Code;
```

| Manufacturer_Code | No_Products |
|-------------------|-------------|
| LG                | 2           |
| Onida             | 1           |
| TCL               | 1           |
| Acer              | 1           |

4 rows in set (0.00 sec)

```
[mysql> update stock set Unit_Price = Unit_Price + Unit_Price*.1;
```

Query OK, 5 rows affected (0.06 sec)

Rows matched: 5 Changed: 5 Warnings: 0

Qty from stock;

```
[mysql> select * from stock;
```

| Item_code | Item_name       | Manufacturer_Code | Qty | Unit_Price |
|-----------|-----------------|-------------------|-----|------------|
| 110       | Washing Machine | LG                | 124 | 10230.00   |
| 120       | Mobile Phone    | LG                | 14  | 13530.00   |
| 123       | DVD             | Onida             | 0   | 3190.00    |
| 124       | TV              | TCL               | 34  | 3190.00    |
| 143       | Projector       | Acer              | 0   | 24530.00   |

5 rows in set (0.00 sec)



20 **Aim:** Create a table Bank with the following fields and insert at least 5 records into the table.

|             |                     |
|-------------|---------------------|
| Acc_No      | Integer Primary key |
| Acc_Name    | Varchar (20)        |
| Branch_Name | Varchar (25)        |
| Acc_Type    | Varchar (10)        |
| Amount      | Decimal (10,2)      |

- Display the account details of "Savings Account" in Kodungallur branch.
- Change the branch name "Trivandrum" to "Thiruvananthapuram".
- Display the details of customers in Thiruvananthapuram, Ernakulam and Kozhikode.
- List the details of customers in Thrissur branch having a minimum balance of Rs. 5000.

**Procedure :Coding:**

```
create table Bank(Acc_No int primary key,Acc_Name varchar(20),Branch_Name  
varchar(25),Acc_Type varchar(10),Amount dec(10,2));
```

```
desc Bank;
```

```
insert into Bank values(1234,'Joy','Kodungallur','savings',25430);  
insert into Bank values(134,'John','Trivandrum','current',29930);  
insert into Bank values(1214,'Abi','Ernakulam','savings',4000);  
insert into Bank values(224,'Jobi','Kodungallur','savings',23430);  
insert into Bank values(1334,'Abilash','Trivandrum','current',45470);  
insert into Bank values(1654,'Rahma','Kozhikode','savings',66440);  
insert into Bank values(1215,'Arun','Thrissur','savings',4000);
```

```
select * from Bank;
```

```
select * from bank where Branch_Name="Kodungallur";
```

```
update bank set Branch_Name ="Thiruvananthapuram" where Branch_Name="Trivandrum";
```

```
select * from bank where Branch_Name in ("Thiruvananthapuram", "Kozhikode", "Ernakulam");
```

```
select * from bank where Branch_Name="Thrissur" having Amount < 5000;
```

## 20 Output

```
[mysql> create table Bank(Acc_No int primary key,Acc_Name varchar(20),Branch_Name varchar(25),Acc_Type varchar(10),Amount dec(10,2));
Query OK, 0 rows affected (0.10 sec)
```

```
[mysql> desc Bank;
```

| Field       | Type          | Null | Key | Default | Extra |
|-------------|---------------|------|-----|---------|-------|
| Acc_No      | int(11)       | NO   | PRI | NULL    |       |
| Acc_Name    | varchar(20)   | YES  |     | NULL    |       |
| Branch_Name | varchar(25)   | YES  |     | NULL    |       |
| Acc_Type    | varchar(10)   | YES  |     | NULL    |       |
| Amount      | decimal(10,2) | YES  |     | NULL    |       |

5 rows in set (0.01 sec)

```
[mysql> select * from Bank;
```

| Acc_No | Acc_Name | Branch_Name | Acc_Type | Amount   |
|--------|----------|-------------|----------|----------|
| 134    | John     | Trivandrum  | current  | 29930.00 |
| 224    | Jobi     | Kodungallur | savings  | 23430.00 |
| 1214   | Abi      | Ernakulam   | savings  | 4000.00  |
| 1215   | Arun     | Thrissur    | savings  | 4000.00  |
| 1234   | Joy      | Kodungallur | savings  | 25430.00 |
| 1334   | Abilash  | Trivandrum  | current  | 45470.00 |
| 1654   | Rahma    | Kozhikode   | savings  | 66440.00 |

7 rows in set (0.00 sec)

```
[mysql> select * from bank where Branch_Name="Kodungallur";
```

| Acc_No | Acc_Name | Branch_Name | Acc_Type | Amount   |
|--------|----------|-------------|----------|----------|
| 224    | Jobi     | Kodungallur | savings  | 23430.00 |
| 1234   | Joy      | Kodungallur | savings  | 25430.00 |

2 rows in set (0.00 sec)

```
[mysql> select * from bank where Branch_Name in ("Thiruvananthapuram", "Kozhikode", "Ernakulam");
```

| Acc_No | Acc_Name | Branch_Name        | Acc_Type | Amount   |
|--------|----------|--------------------|----------|----------|
| 134    | John     | Thiruvananthapuram | current  | 29930.00 |
| 1214   | Abi      | Ernakulam          | savings  | 4000.00  |
| 1334   | Abilash  | Thiruvananthapuram | current  | 45470.00 |
| 1654   | Rahma    | Kozhikode          | savings  | 66440.00 |


4 rows in set (0.01 sec)

```
[mysql> select * from bank where Branch_Name="Thrissur" having Amount < 5000;
```

| Acc_No | Acc_Name | Branch_Name | Acc_Type | Amount  |
|--------|----------|-------------|----------|---------|
| 1215   | Arun     | Thrissur    | savings  | 4000.00 |

1 row in set (0.00 sec)

## 11. Output

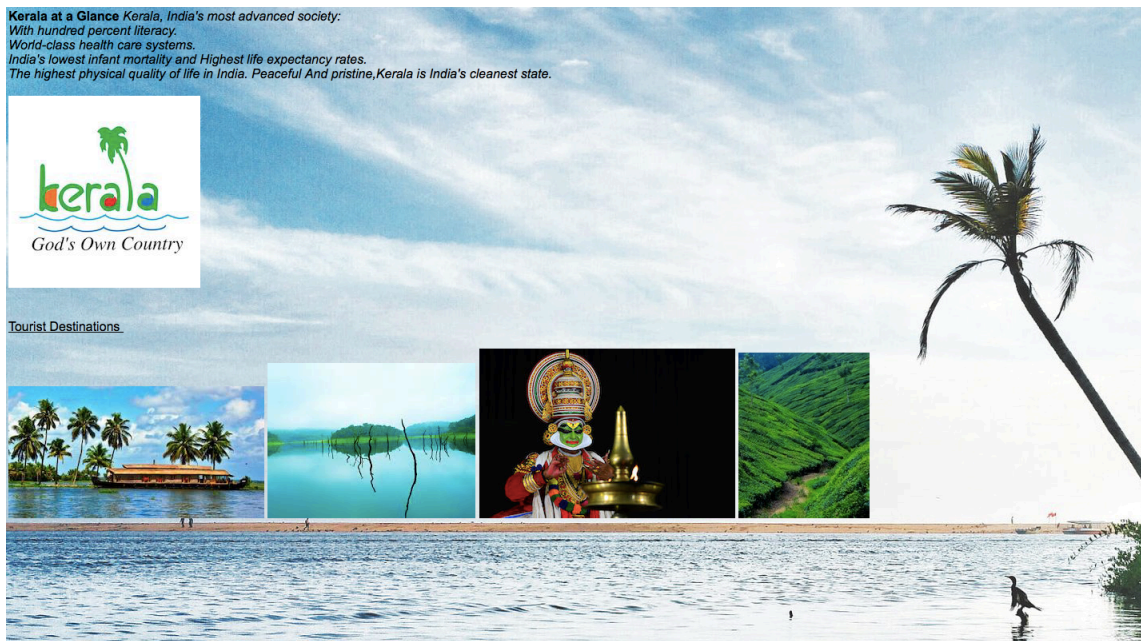

## 12. Output

### PANANGAD VHSS

My SCHOOL is Panangad Vocational Higher Secondary School,Panangad, Ernakulam. The school is celebrating its centenary in 2019

[About](#)



#### ABOUT

**PANANGAD VHSS  
PANANGAD PO  
KOCHI  
ERNAKULAM  
KERALA 682506**

### 13. Output

#### Permanent members in UN Security Council

- Russia
- China
- USA
- UK
- France

### 14. Output

#### Wild life Sanctuaries in Kerala

1. Eravikulam
2. Periyar
3. Chinnar
4. Wayanad

### 15. Output

| <b>Vehicles</b>      | <b>Near School</b><br><i>(In Km/hour)</i> | <b>Within Corporation/<br/>Municipality</b><br><i>(In Km/hour)</i> | <b>State Highway</b><br><i>(In Km/hour)</i> |
|----------------------|-------------------------------------------|--------------------------------------------------------------------|---------------------------------------------|
| Motor Cycle          | 30                                        | 50                                                                 | 50                                          |
| Motor Car            | 30                                        | 50                                                                 | 80                                          |
| Light motor vehicles | 30                                        | 50                                                                 | 80                                          |
| Heavy motor vehicles | 30                                        | 40                                                                 | 65                                          |

### 16. Output

#### Client Login

Enter User Name :

Enter Your Password

SUBMIT

CLEAR