


FLAG{ghost_login}

Location: LoginActivity.java

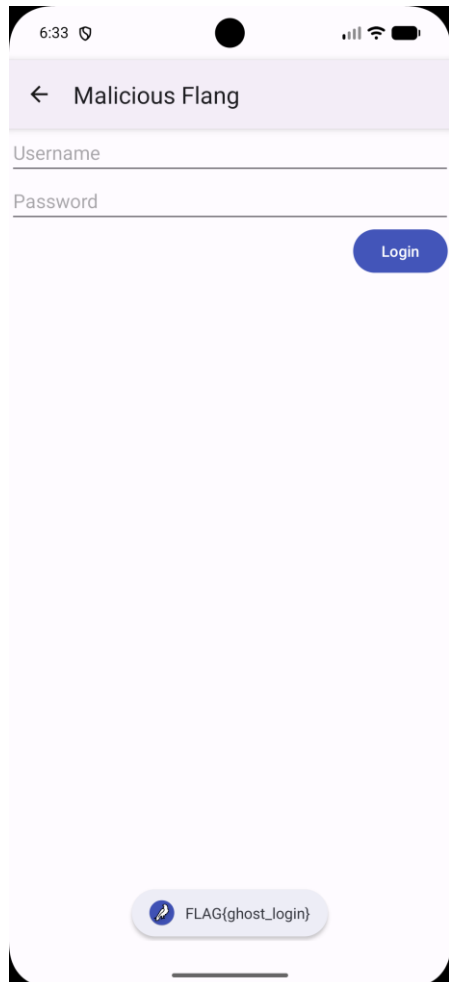

In the login submit, the code checks whether the username field is empty
Simply login without the username and you'll see the FLAG.

```
String string = activityLoginBinding.loginUsername.getText().toString();
```

```
if (string.length() != 0) {  
    // normal login flow  
    return;  
}
```

If the username is empty, instead of logging in, it builds a Toast from character codes:

```

LoginActivity
17 (supportActionBar != null) {
    supportActionBar.setDisplayHomeAsUpEnabled(true);
}
39 ActivityLoginBinding activityLoginBinding3 = this.binding;
if (activityLoginBinding3 == null) {
26 Intrinsic.throwUninitializedPropertyAccessException("binding");
    activityLoginBinding3 = null;
}
activityLoginBinding3.loginSubmit.setOnClickListener(new View.OnClickListener() { // from class: de.tadris.flang.ui.activity.LoginActivity$$ExternalSynth
@Override // android.view.View.OnClickListener
    public final void onClick(View view) {
        LoginActivity.onCreate$lambda$2(this.$f$0, view);
    }
});
60 new AlertDialog.Builder(this).setTitle(R.string.questionLoginTitle).setMessage(R.string.questionLoginMessage).setPositiveButton(R.string.actionRegister, n
@Override // android.content.DialogInterface.OnClickListener
    public final void onClick(DialogInterface dialogInterface, int i) {
        LoginActivity.onCreate$lambda$3(this.$f$0, dialogInterface, i);
    }
}).setNegativeButton(R.string.actionLogin, (DialogInterface.OnClickListener) null).setOnCancelListener(new DialogInterface.OnCancelListener() { // from cl
@Override // android.content.DialogInterface.OnCancelListener
    public final void onCancel(DialogInterface dialogInterface) {
59 this.$f$0.finish();
    }
}).show();
}

/* JADK INFO: Access modifiers changed from: private */
29 public static final WindowInsetsCompat onCreate$lambda$0(View v, WindowInsetsCompat insets) {
    Intrinsic.checkNotNullParameter(v, "v");
    Intrinsic.checkNotNullParameter(insets, "insets");
    Insets insets2 = insets.getWindowInsetsCompat.Type.systemBars();
    Intrinsic.checkNotNullExpressionValue(insets2, "getInsets(...)");
    v.setPadding(insets2.left, insets2.top, insets2.right, insets2.bottom);
    return insets;
}

/* JADK INFO: Access modifiers changed from: private */
39 public static final void onCreate$lambda$2(LoginActivity loginActivity, View view) {
    ActivityLoginBinding activityLoginBinding = loginActivity.binding;
    if (activityLoginBinding == null) {
40 Intrinsic.throwUninitializedPropertyAccessException("binding");
        activityLoginBinding = null;
    }
    String string = activityLoginBinding.loginUsername.getText().toString();
    if (string.length() != 0) {
41 BuildersKt__Builders_commonKt.launch$default(LifecycleOwnerKt.getLifecycleScope(loginActivity), null, null, new LoginActivity$onCreate$lambda$1(loginActivi
        return;
    }
44 int[] iArrPlus = ArraysKt.plus(new int[]{70, 76, 65, 71, 123}, new int[]{103, 104, 111, 115, 116, 95, 108, 111, 103, 105, 110, 125});
77 ArrayList<Integer> arrayList = new ArrayList<Integer>(iArrPlus.length);
    for (int i : iArrPlus) {
79 arrayList.add(Character.valueOf((char) i));
    }
45 Toast.makeText(loginActivity, new String(CollectionsKt.toCharArray(arrayList)), 1).show();
}

/* JADK INFO: Access modifiers changed from: private */
56 public static final void onCreate$lambda$3(LoginActivity loginActivity, DialogInterface dialogInterface, int i) {
    Toast.makeText(loginActivity, R.string.questionLoginMessage, 1).show();
}

```

```

int[] iArrPlus = ArraysKt.plus(
    new int[]{70, 76, 65, 71, 123},
    new int[]{103, 104, 111, 115, 116, 95, 108, 111, 103, 105, 110, 125}
);
Decoding (ASCII) those numbers gives: FLAG{ghost_login}

```