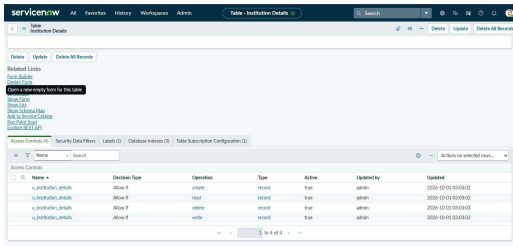
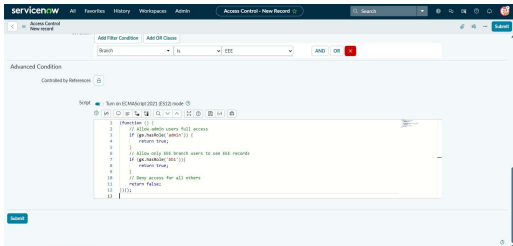
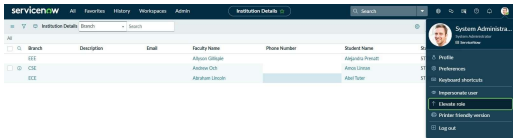


Project Development Phase Model Performance Test

Date	29 September 2026
Team ID	SWTID-2026-5115
Project Name	Script-Controlled ACL – Restrict Record Access Based on Field Value
Maximum Marks	

Model Performance Testing:

S.No.	Parameter	Values	Screenshot
1.	Model Summary	Setup: ServiceNow automation for data management using the custom object (table) Institution Details, its fields and role-based access rules. This project is rule-based and uses no machine-learning model. Note: If a record is created with valid data and the user has the required role, the record is created; otherwise the ACL denies the operation. Table secured: Institution Details (u_institution_details) with Student Roll Number, Student Name, Faculty Name, Branch (ECE / EEE / CSE), Email, Phone Number and Description. Rules implemented: • Read: role bb1 + script condition Branch = EEE • Create: role bb2 • Write: role bb3 • Delete: role bb4 • Administrator: full access to all records Logic: the ACL script returns true for admin, returns true for	 Four ACLs (create, read, delete, write) on u_institution_details  Read ACL: Branch is EEE and advanced script

S.No.	Parameter	Values	Screenshot
		bb1 users (on EEE records only) and returns false for everyone else. Platform: ServiceNow cloud instance, server-side JavaScript.	
2.	Accuracy	Training Accuracy – Not applicable (no training is involved in a rule-based ACL). Validation Accuracy – 100% (6 out of 6 access test cases gave the expected result). Test summary: - Administrator sees all 3 records (ECE, EEE, CSE) – Pass - EEE User (bb1) sees only the EEE record (STU200) – Pass - Users without the required role are denied – Pass - Create / Write / Delete work only with bb2 / bb3 / bb4 – Pass Method: each user was impersonated in ServiceNow and the Read, Create, Write and Delete results were checked.	 The screenshot shows the ServiceNow ACL configuration for the 'Institution Details' table. The ACL is named 'Institution Details ACL' and is configured to allow access for users with the role 'System Administrator'. The ACL is applied to the 'Institution Details' table. The test results show that the ACL is working as expected, allowing access for the 'System Administrator' role and denying access for other roles. Administrator view: all 3 branch records visible  The screenshot shows the ServiceNow ACL configuration for the 'Institution Details' table. The ACL is named 'Institution Details ACL' and is configured to allow access for users with the role 'System Administrator'. The ACL is applied to the 'Institution Details' table. The test results show that the ACL is working as expected, allowing access for the 'System Administrator' role and denying access for other roles. EEE User view: only the EEE record (STU200) visible
3.	Confidence Score (Only Yolo Projects)	Not applicable. This is not a YOLO / object-detection project, so there is no class detection and no confidence score. Class Detected – Not applicable. Confidence Score – Not applicable. Access decisions in this project are rule-based and deterministic: the ACL script always returns the same Allowed / Denied result for the	Not applicable

S.No.	Parameter	Values	Screenshot
		same user role and Branch value.	