

Suppose there are a number of text files in the current directory. Each file contains data about a movie. The content of each file will be according to the following format:


<Movie name>

<Storyline>

<Director name>

<Year of release>

Now your job is to organize the files according to the name of the directors. Write a shell script **director.sh** which when run in the current directory moves all such files into a directory named after the director of the movie. A sample scenario is shown in the following figure:

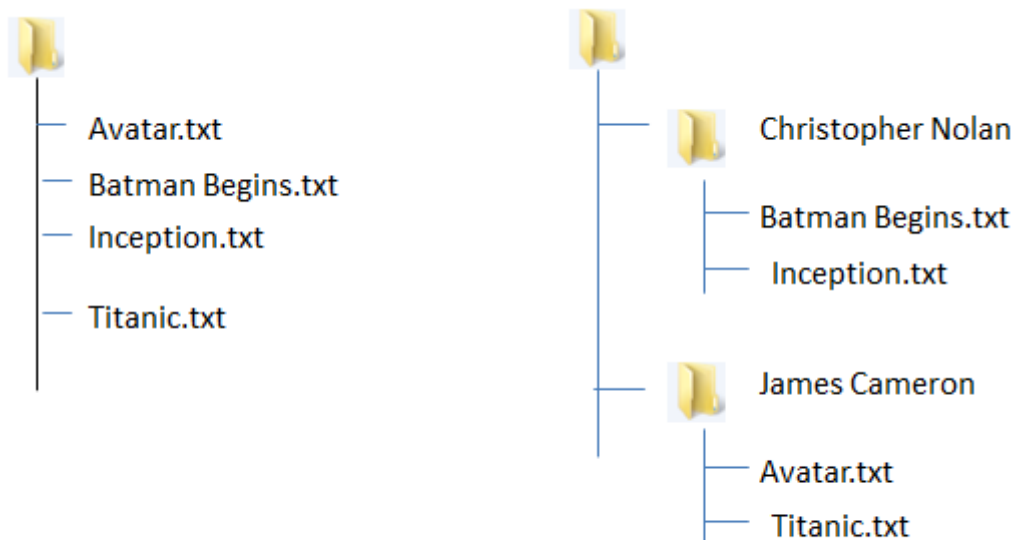

Here, the left tree is the current status of the working directory. After running director.sh, you should see a directory tree like that in the right. Remember, there can be other files or directories in the current directory as well and you have nothing to do with them.