


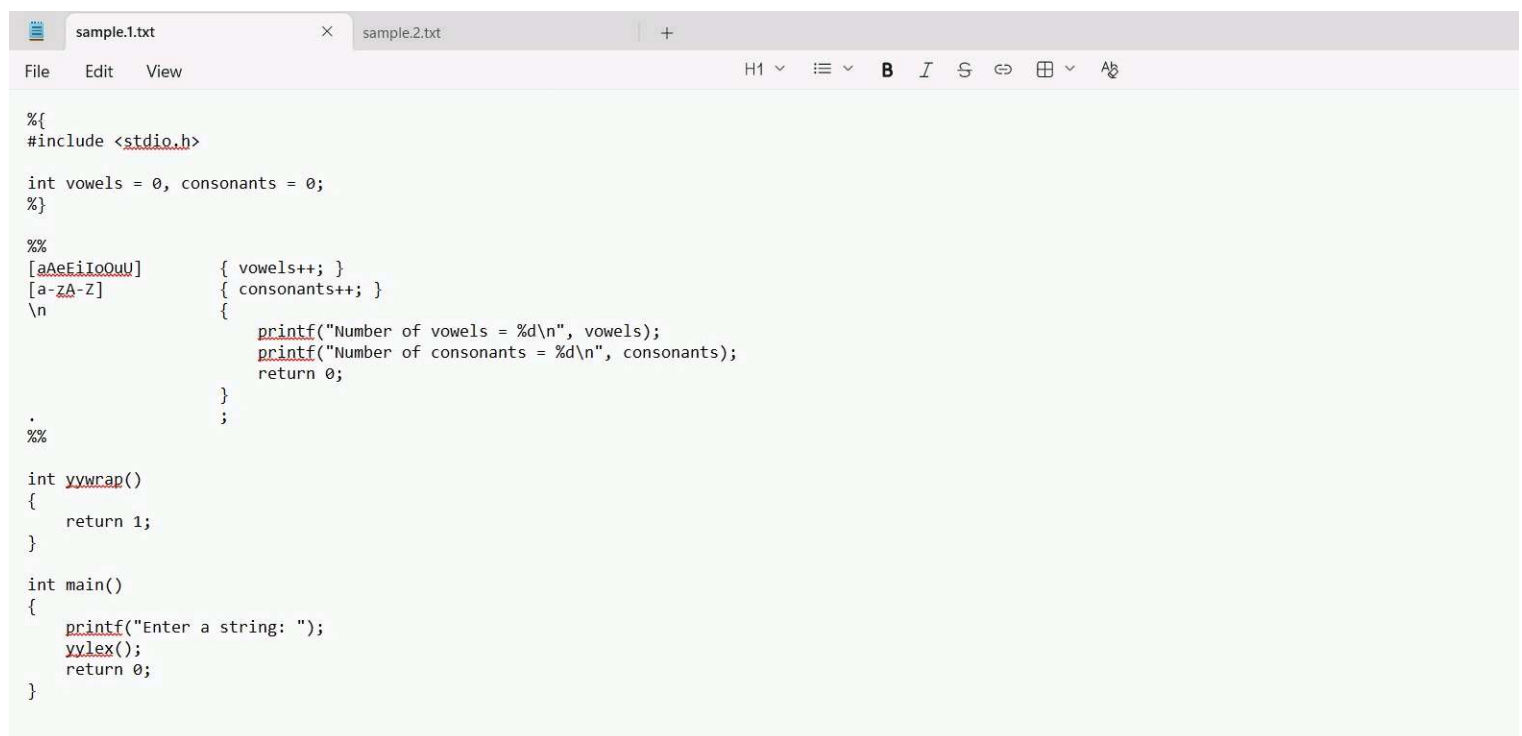

The image shows a code editor with two tabs: 'sample.1.txt' and 'sample.2.txt'. The 'sample.1.txt' tab is active, displaying a C program. The program includes `<stdio.h>` and initializes `vowels` and `consonants` to 0. It defines a function `vowlex()` that counts vowels and consonants in a string. The `main` function prompts the user to enter a string and calls `vowlex()` to process it. The code is as follows:

```
%{
#include <stdio.h>

int vowels = 0, consonants = 0;
%}

%%
[aAeEiIoOuU]    { vowels++; }
[a-zA-Z]         { consonants++; }
\n              {
    printf("Number of vowels = %d\n", vowels);
    printf("Number of consonants = %d\n", consonants);
    return 0;
}
.
%%

int vwrap()
{
    return 1;
}

int main()
{
    printf("Enter a string: ");
    vylex();
    return 0;
}
```

sample.1.txtsample.2.txt

FileEditViewH1≡BII⌂⌂⌂⌂⌂⌂

```
%{
#include <stdio.h>
%}

%%
[0-9]{10}      { printf("Valid Mobile Number\n"); }
.*             { printf("Invalid Mobile Number\n"); }
%%

int yywrap()
{
    return 1;
}

int main()
{
    printf("Enter a mobile number: ");
    yylex();
    return 0;
}
```



sample.1.txt

sample.2.txt

File Edit View

```
%{  
#include <stdio.h>  
%}  
  
%%  
[0-9]      { printf("It is a digit\n"); }  
.  
%%  
  
int yywrap()  
{  
    return 1;  
}  
  
int main()  
{  
    printf("Enter a character: ");  
    yylex();  
    return 0;  
}
```

```
C:\Windows\System32\cmd.e  X  +  v
Microsoft Windows [Version 10.0.26200.8655]
(c) Microsoft Corporation. All rights reserved.

C:\lex>set path=C:\GnuWin32\bin

C:\lex>flex sample.1.txt

C:\lex>set path=C:\MinGW\bin

C:\lex>gcc lex.yy.c

C:\lex>a
Enter a string: sheik
Number of vowels = 2
Number of consonants = 3

C:\lex>

C:\lex>a
Enter a string: lokesh
Number of vowels = 2
Number of consonants = 4

C:\lex>|
```

```
C:\Windows\System32\cmd.e  ×  +  v

Microsoft Windows [Version 10.0.26200.8655]
(c) Microsoft Corporation. All rights reserved.

C:\lex>set path=C:\GnuWin32\bin

C:\lex>flex sample.2.txt

C:\lex>set path=C:\MinGW\bin

C:\lex>gcc lex.yy.c

C:\lex>a
Enter a mobile number: 964291643684
Invalid Mobile Number

^C
C:\lex>a
Enter a mobile number: 8610649067
Valid Mobile Number
```

```
C:\Windows\System32\cmd.exe - a
(c) Microsoft Corporation. All rights reserved.

E:\temp>set path
Path=C:\Program Files\Common Files\Oracle\Java\javapath;C:\Program Files (x86)\Common Files\Oracle\Java\javapath;C:\WINDOWS\system32;C:\WINDOWS;C:\WINDOWS\System32\Wbem;C:\WINDOWS\System32\WindowsPowerShell\v1.0\;C:\WINDOWS\System32\OpenSSH\;C:\Program Files\Git\cmd;C:\Program Files\nodejs\;C:\Program Files\dotnet\;C:\Program Files\Docker\Docker\resources\bin;C:\Program Files\MySQL\MySQL Shell 8.0\bin\;C:\Users\learn\.local\bin;C:\Users\learn\AppData\Local\Microsoft\WindowsApps;C:\Users\learn\AppData\Local\Programs\Microsoft VS Code\bin;C:\Users\learn\AppData\Roaming\npm;C:\Users\learn\AppData\Local\Python\bin
PATHEXT=.COM;.EXE;.BAT;.CMD;.VBS;.VBE;.JS;.JSE;.WSF;.WSH;.MSC

E:\temp>set path=C:\GnuWin32\bin

E:\temp>flex sample.1.txt

E:\temp>set path=C:\MinGW\bin

E:\temp>gcc lex.yy.c

E:\temp>a
Enter a character: 5
It is a digit

^Z

E:\temp>a
Enter a character: g
It is not a digit
```