
DYNAMIC READING OF DATA / READING THE DATA FROM THE USER / TO READ THE DATA DYNAMICALLY / READING THE DATA DURING EXECUTION

1) We can read the data dynamically from the user with the help of Scanner class & its methods

2) Scanner is a built-in-class which is present inside util package.

Therefore, the fully Qualified name of Scanner is java.util.Scanner

DATA FLOW FROM SOURCE TO DESTINATION :-

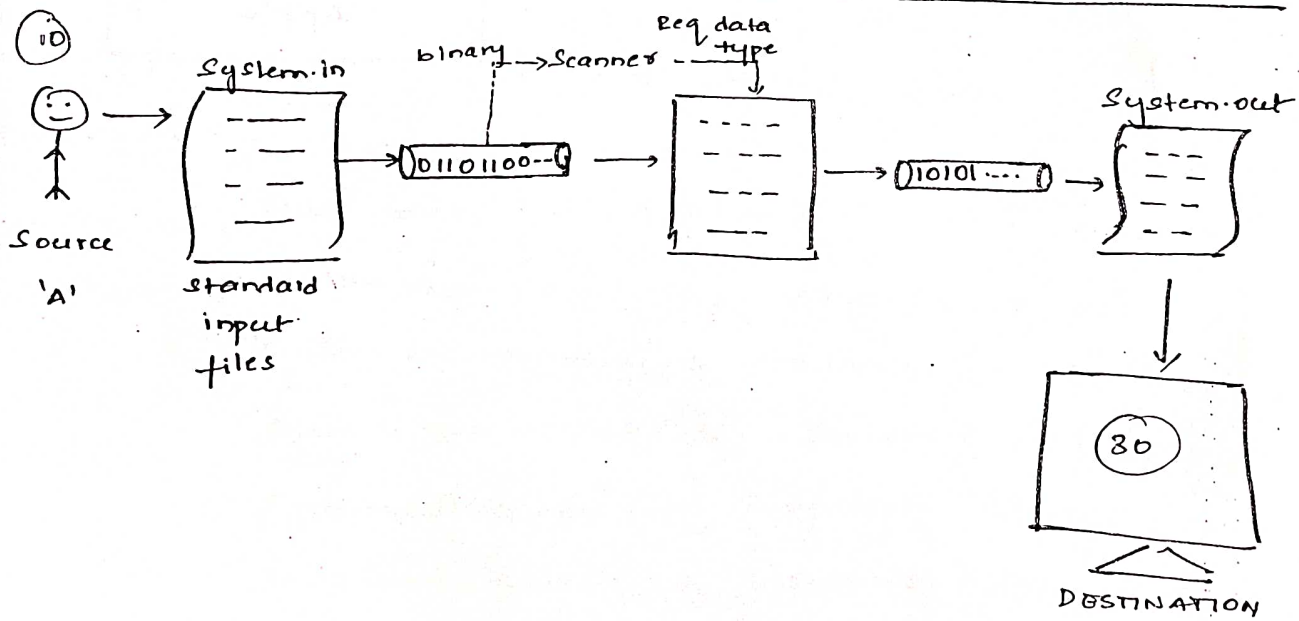

SL NO
1.
2.
3.
4.
5.
6.
7.
8.
9.

THE

ADING

the

ethods

inside

is

out

▶ STEPS TO READ THE DATA FROM THE USER :

1) Create an object of Scanner class using below Instruction:

```
Scanner s = new Scanner (System.in);
```

2) Import the Scanner class from the util package using below instruction.

```
import java.util.Scanner;
```

3) We can read the data from the user using Non-static methods present inside Scanner class.

▶ LIST OF NON-STATIC METHODS OF SCANNER :

SL NO	NON-STATIC METHOD	RETURN TYPE	PURPOSE
1.	nextByte()	byte	Used to read the data in the form of byte.
2.	nextShort()	short	Used to read the data in the form of sh
3.	nextInt()	int	Used to read the data in the form of in
4.	nextLong()	long	Used to read the data in the form of Lor
5.	nextFloat()	float	Used to read the data in the form of float
6.	nextDouble()	double	Used to read the data in the form of Double.
7.	nextBoolean()	boolean	Used to read the data in the form of Boolean.
8.	next()	String	Used to read the data in the form of String until it encounters a space
9.	nextLine()	String	Used to read the data in the form of String. until the Enter button is pressed.

Eg: import java.util.scanner;

```
class P1
{
   public static void main (String[] args)
   {
     Scanner s = new Scanner (System.in);
     System.out.println ("Enter your name:");
     String name = s.next();
     System.out.println (name);
   }
}
```

O/P:

Enter your name:

sheela sinha ↵

sheela

Eg: import java.util.Scanner;

```
class P2
{
  public static void main (String [] args)
  {
    Scanner s = new Scanner (System.in);
    System.out.println ("Enter your name:");
    String name = s.nextLine();
    System.out.println (name);
  }
}
```

O/P:

Enter your name:

Sheela Sinha ↵

Sheela Sinha

Q. WAJP to check whether the number which is read from the user is even or odd.

```
import java.util.Scanner;
class P3
{
    public static void main (String [] args)
    {
     Scanner s = new Scanner (System.in);
     System.out.println ("Enter the number");
     int a = s.nextInt();
     if (a%2 == 0)
        System.out.println ("The number entered is even
     else
        System.out.println ("The number entered is Odd"
     }
}
```