

# Chapter 3:

# Kubernetes Installation and Architecture




# What is Kubernetes?


- Kubernetes is inspired from an internal Google project called **Borg**
- Open source **container orchestration** project managed by the Linux Foundation
- Unified API for deploying web applications, batch jobs, and databases
- Decouples applications from machines through containers
- Declarative approach to deploying applications
- Automates application configuration through service discovery
- Maintains and tracks the global view of the cluster
- APIs for deployment workflows
  - Rolling updates, Autoscaling



# Kubernetes Architecture (Bird's eye view)

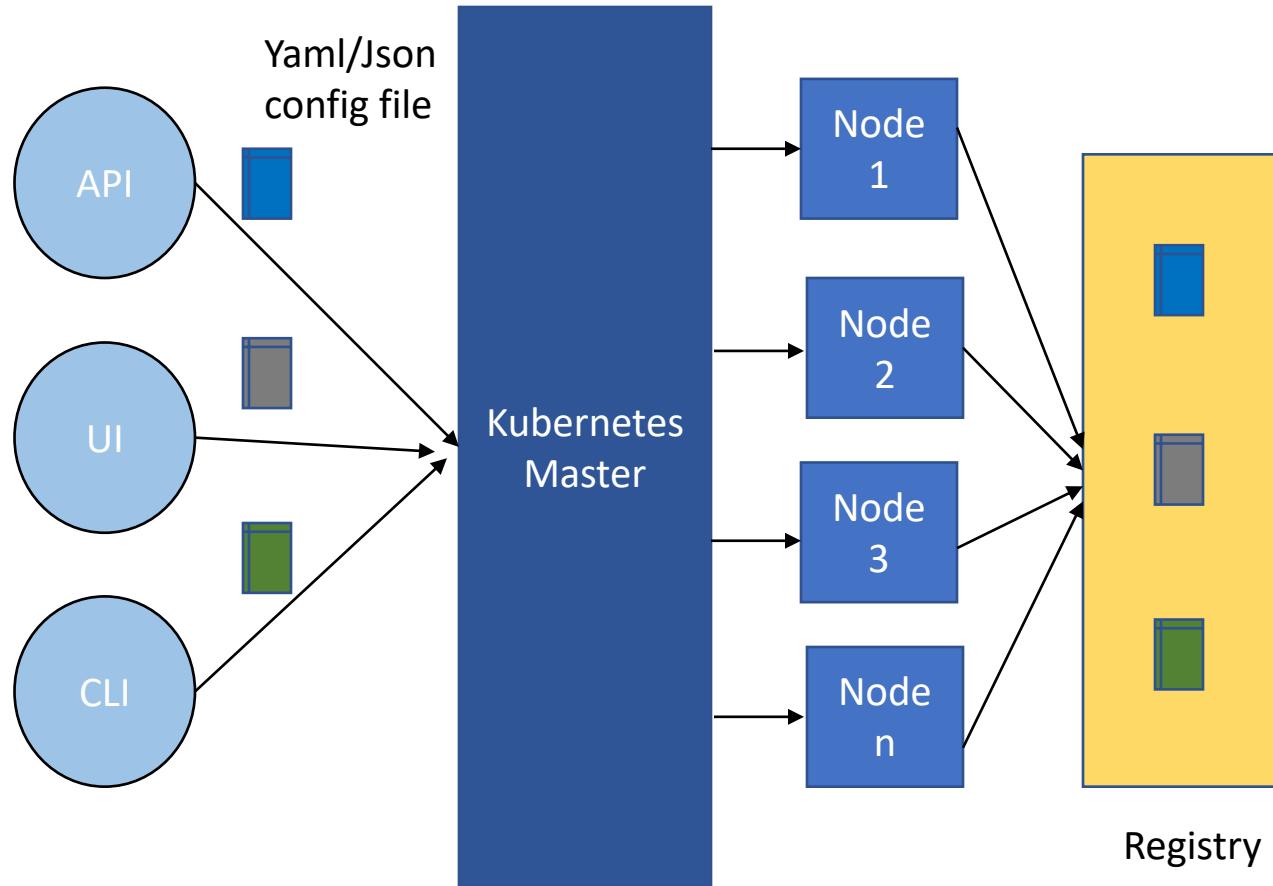

# K8s Architecture – detailed

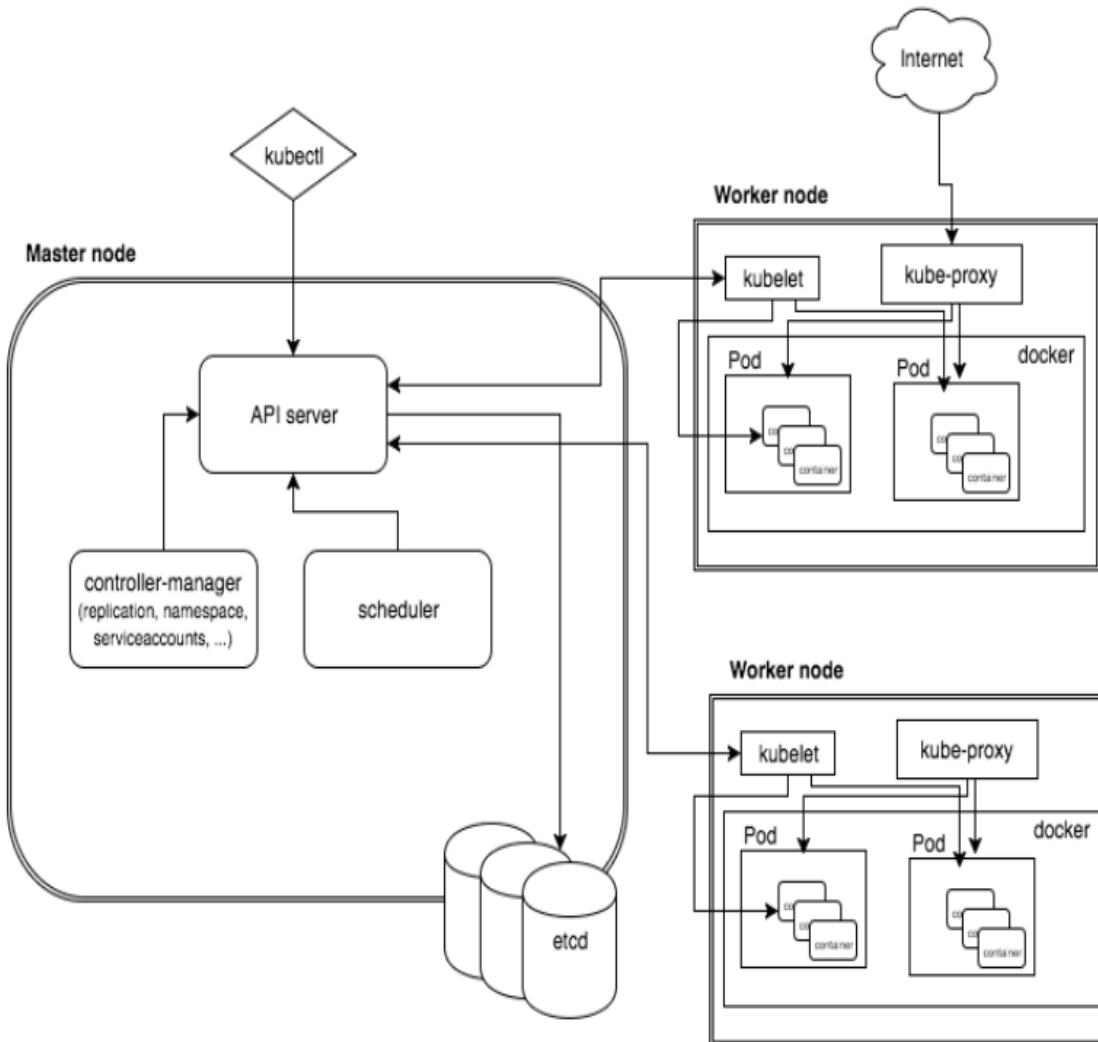

# Install Kubernetes on AWS using KubeAdm



Agile Brains Consulting

©Agile Brains Consulting Inc. All rights reserved. Not to be reproduced without prior written consent.



# Lab: Single node cluster installation using KubeAdm

-- Done in Chapter 1

*\*\* Master node need to have at least 2 CPUs*

[https://github.com/shekhar2010us/kubernetes\\_teach\\_git/blob/master/kubernetes\\_single\\_node\\_cluster\\_installation.md](https://github.com/shekhar2010us/kubernetes_teach_git/blob/master/kubernetes_single_node_cluster_installation.md)

*\*\* Do this lab the first thing – so that we all have machines with Docker which will be used to run exercises in lab 1*

*\*\* Instructions for installing multi-node k8s cluster is provided in the above link*



# Kubectl



Agile Brains Consulting

©Agile Brains Consulting Inc. All rights reserved. Not to be reproduced without prior written consent.



# Kubectl

- **kubectl** is Kubernetes command-line tool for running commands against Kubernetes clusters.
- It can be used to deploy and manage applications on Kubernetes.
- Using kubectl, you can inspect cluster resources; create, delete, and update components; look at your new cluster; and bring up example apps etc.

Kubernetes Java client

<https://github.com/kubernetes-client/java#installation>



# Kubectl – Installation

<https://kubernetes.io/docs/tasks/tools/install-kubectl/>

## On Ubuntu/Debian

```
sudo apt-get update && sudo apt-get install -y apt-transport-https  
curl -s https://packages.cloud.google.com/apt/doc/apt-key.gpg | sudo apt-key add -  
echo "deb https://apt.kubernetes.io/ kubernetes-xenial main" | sudo tee -a  
/etc/apt/sources.list.d/kubernetes.list  
sudo apt-get update  
sudo apt-get install -y kubectl
```


## To check installation (execute):

kubectl version

*\*\* Note: We have already done it while K8s installation*



# Nodes: Master and Worker

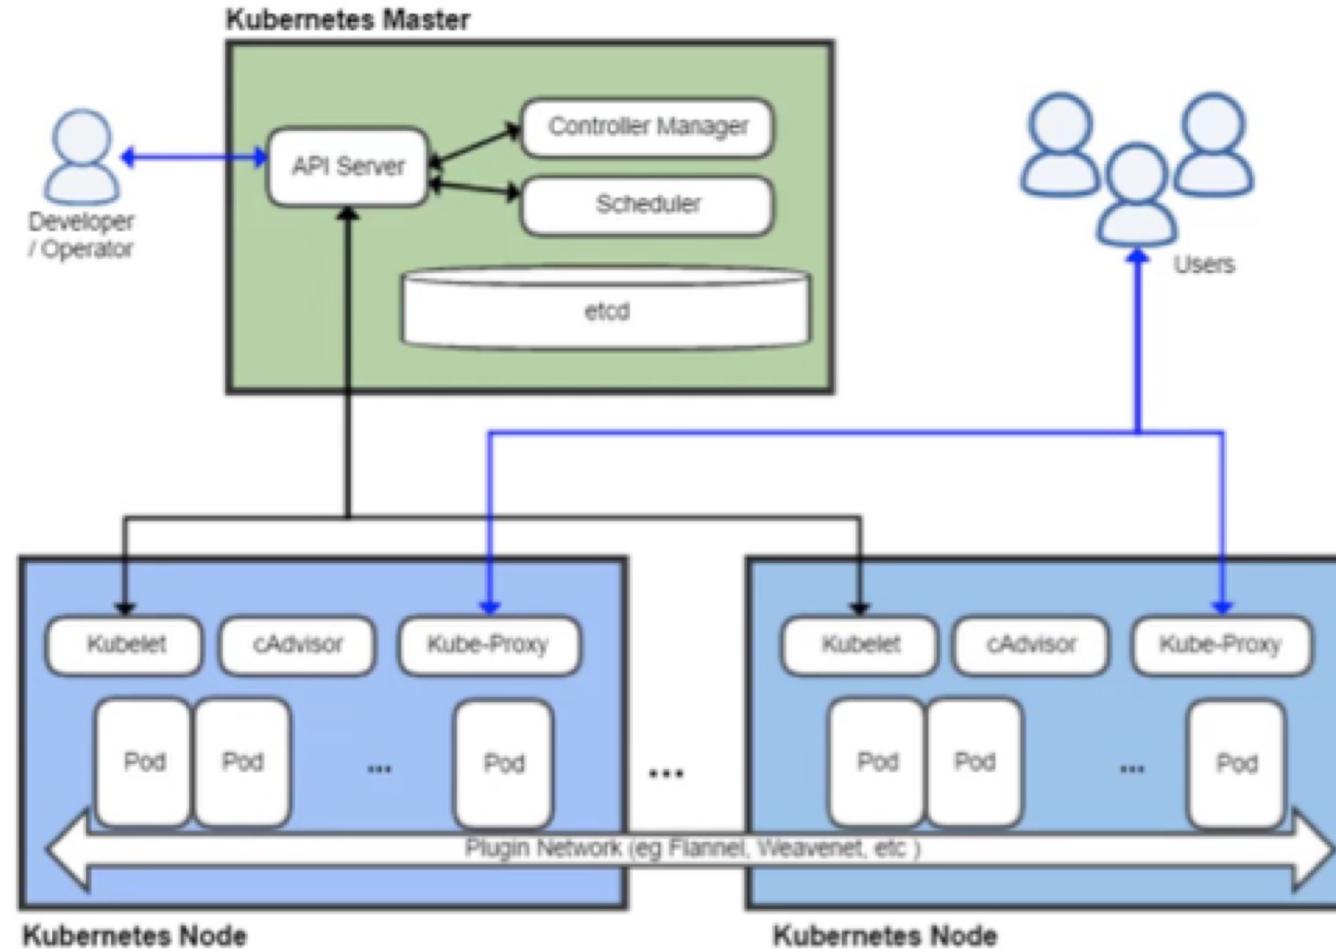

# Kubernetes: Any Node

Any kubernetes **node** contains:

- Addresses
  - Hostname
  - External IP
  - Internal IP
- Condition - describe condition of nodes – OutOfDisk, Ready, MemoryPressure, DiskPressure, NetworkUnavailable
- Capacity - describe the resources available on the nodes – CPU, memory, maximum number of pods that can be scheduled onto the node
- Info – general information about the node – kernel version, Kubernetes version, kubelet and kube-proxy version, Docker version, OS name

Command to get node details:

```
kubectl describe nodes <node_name>
```



# Master Node



Agile Brains Consulting

©Agile Brains Consulting Inc. All rights reserved. Not to be reproduced without prior written consent.



# Master Node Role


- Master components make global decisions about the cluster (for example, scheduling), and detecting and responding to cluster events (starting up a new pod when a replication controller's 'replicas' field is unsatisfied).
- Master components can be run on any machine in the cluster. However, for simplicity, set up scripts typically start all master components on the same machine, and do not run user containers on this machine.



# Master Node Components

Components of master:

- API Server
- Scheduler
- Controller
- etcd

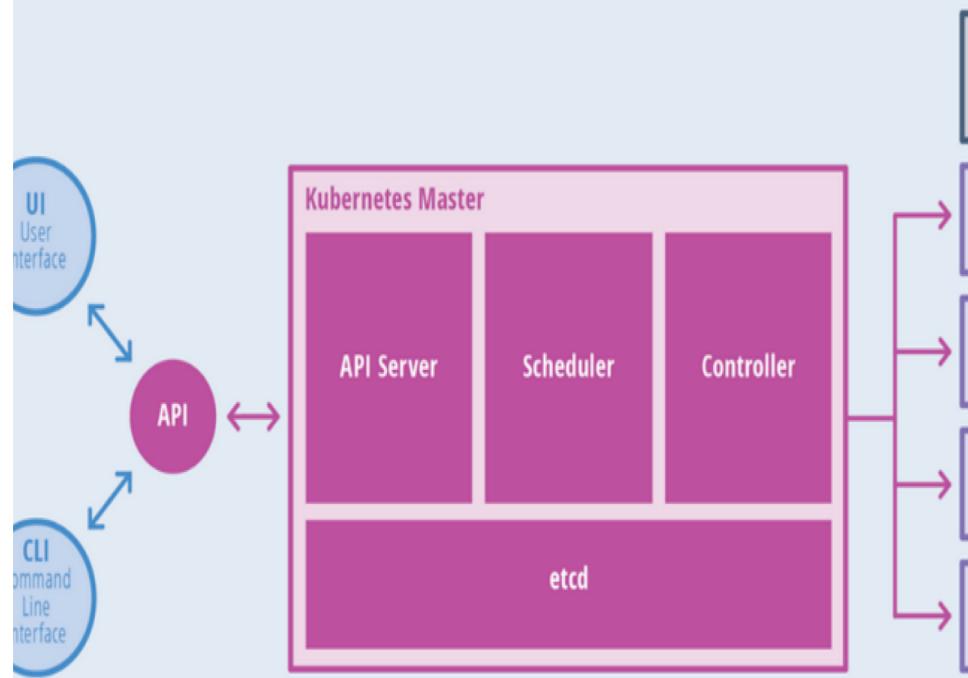

# Master Node Components

- The **API server** is the entry points for all the REST commands used to control the cluster. It processes REST requests, validates them, and executes the bound business logic. The result state has to be persisted in the “etcd” component.
- **Etcd** is an open source, distributed key-value database; it acts as a single source of truth (SSOT) for all components of the Kubernetes cluster. Masters query etcd to retrieve various parameters of the state of the nodes, pods and containers. Etcd is considered a metadata service in Kubernetes.



# Master Node Components

- **Controller Manager** is responsible for most of the collectors that regulate the state of the cluster. In general, a controller can be considered a daemon that runs in nonterminating loop and is responsible for collecting and sending information to the API server. It works toward getting the shared state of cluster and then making changes to bring the current status of the server to the desired state. The key controllers are **replication controller**, **namespace controller**, and **service account controller**. The controller manager runs different kind of controllers to handle nodes, endpoints, etc.
- **Scheduler** is one of the key components of Kubernetes master. It is responsible for distributing the workload, tracking resource utilization on cluster nodes and selecting the nodes for the workloads to run. In other words, this is the mechanism responsible for allocating pods to available nodes.



# Worker Node



Agile Brains Consulting

©Agile Brains Consulting Inc. All rights reserved. Not to be reproduced without prior written consent.




# Worker Node Roles

A node is a worker machine in Kubernetes. A node may be a VM or physical machine, depending on the cluster. Each node has the services necessary to run pods and is managed by the master components. The services on a node include **Docker**, **kubelet** and **kube-proxy**.

*Allows Pods to be scheduled. A basic worker physical or virtual machine of Kubernetes.*

- Must be managed by a master
- May host multiple pods
- Internal IP Address endpoint
- Can be tagged and filtered using labels

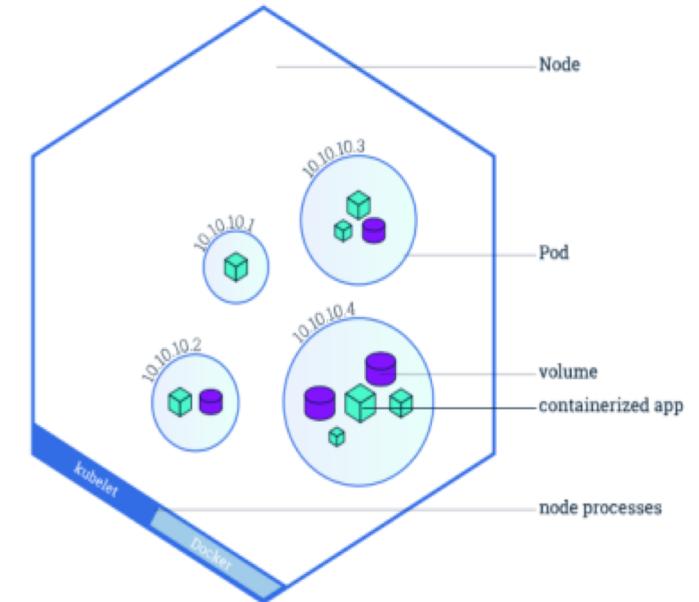

# Worker Node Components

- **kubelet** Service interacts with etcd store to read configuration details and to write values **via api-server**. It communicates with the master component to receive commands and work. The kubelet process then assumes responsibility for maintaining the state of work and the node server. It manages network rules, port forwarding, etc.
- kubelet takes a set of PodSpecs that are provided through various mechanisms and ensures that the containers described in those PodSpecs are running and healthy. The kubelet doesn't manage containers which were not created by Kubernetes.



# Worker Node Components

- **kube-proxy** enables the Kubernetes service abstraction by maintaining network rules on the host and performing connection forwarding.
- Kubernetes **Proxy** Service is a proxy service which runs on each node and helps in making services available to the external host. It helps in forwarding the request to correct containers and is capable of performing primitive load balancing. It makes sure that the networking environment is predictable and accessible and at the same time it is isolated as well. It manages pods on node, volumes, secrets, creating new containers' health checkup, etc.



# Cloud Controller Manager



Agile Brains Consulting

©Agile Brains Consulting Inc. All rights reserved. Not to be reproduced without prior written consent.




# Cloud Controller Manager (CCM)

- Initially part of kube-controller-manager
- CCM was created to allow cloud vendor code and k8s core to evolve independent of one another
- Runs along other master components
- Can also be started as a Kubernetes add-on, in which case it runs on top of Kubernetes
- Design is based on a plugin mechanism



# Cloud Controller Manager (CCM)

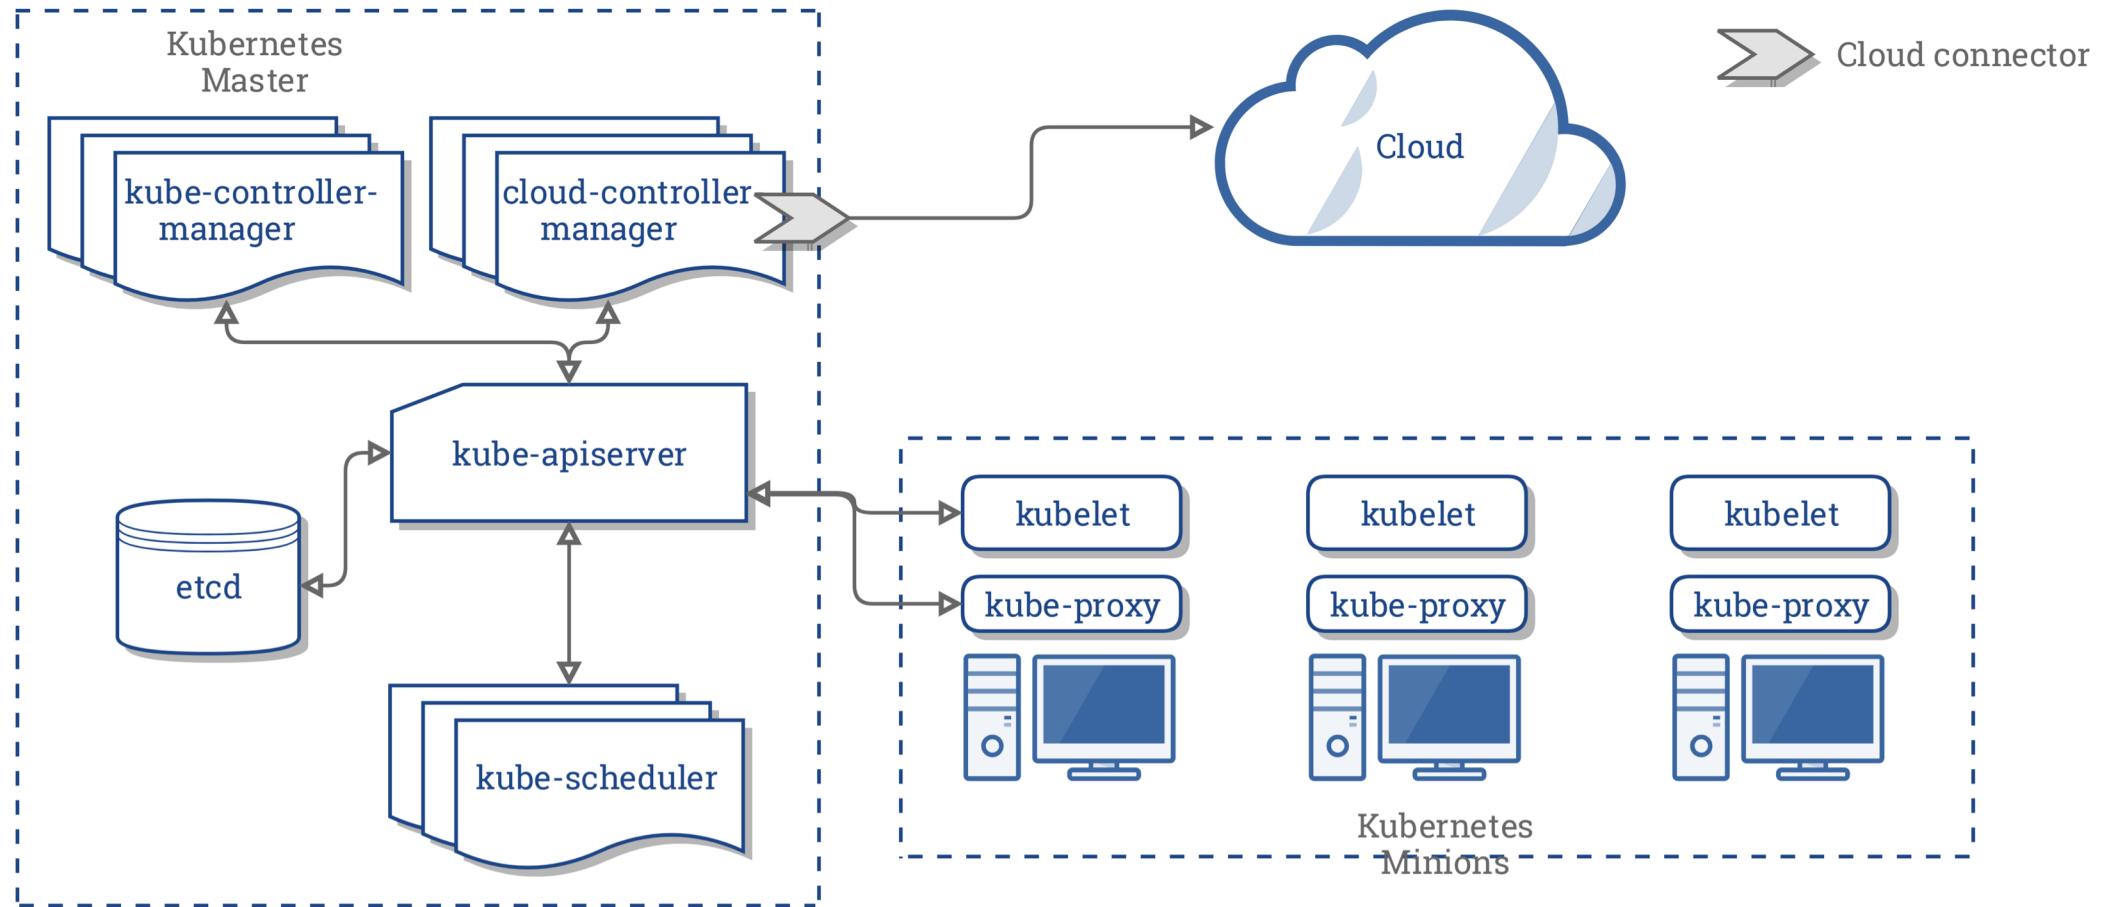

# Running Cloud Controllers

## Infrastructure requirements

- cloud authentication/authorization
- kubernetes authentication/authorization
- high availability

## Configuration changes

- kube-apiserver and kube-controller-manager MUST NOT specify the --cloud-provider flag
- kubelet must run with --cloud-provider=external

\*\* Either change the config while Master node setup OR change here - /etc/kubernetes/manifests/kube-apiserver.yaml



# Example Cloud Controllers

## *Cloud vendors*

*Digital Ocean, OCI, Rancher*

## *Examples of CCM*

- *Node Controller*: For checking the cloud provider to determine if a node has been deleted in the cloud after it stops responding
- *Route Controller*: For setting up routes in the underlying cloud infrastructure
- *Service Controller*: For creating, updating and deleting cloud provider load balancers
- *PersistentVolumeLabels controller*: It applies labels on AWS EBS/GCE PD volumes when they are created. This removes the need for users to manually set the labels on these volumes.



## Part 2

# Kubernetes Dashboard

# Lab: Dashboard Setup

[https://github.com/shekhar2010us/kubernetes\\_teach\\_git/blob/master/kubernetes\\_dashboard\\_installation.md](https://github.com/shekhar2010us/kubernetes_teach_git/blob/master/kubernetes_dashboard_installation.md)

