


Introduction to Java

How java code executes & more information about platform Independence...

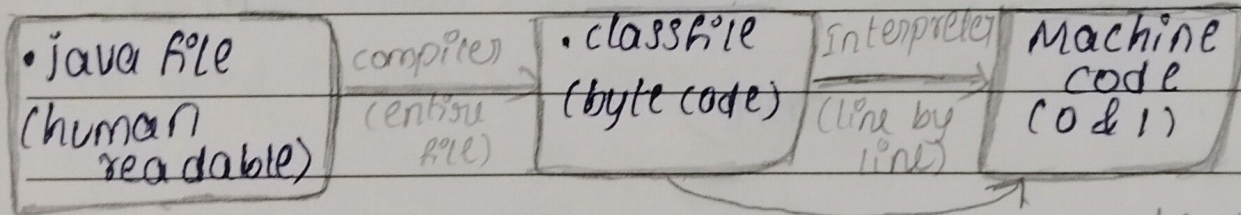

Byte Code :

- It can run on all operating systems.
 - This code doesn't run directly on a system, for this we need JVM.
 - **Therefore, Java is platform Independent.
- we can provide this byte code to any system

Date: / /



means we can compile the java code on any system.

→ But JVM is platform dependent means, for O.S the executable file that we get, it has step by step of instruction dependent on platform.

First Java program - Input/output, Debugging & Datatypes

File name: demo.java class name: Demo

↳ Its good practice to use initial

character as capital (use small also)

public → This keyword means, it is used so that we can access the class from anywhere.

functions → Collection of code, that we can use again & again. Functions are also known as methods.

Void → The void keyword specifies that a method should not have a return value.

String[] args ^{→ arrays} → means an array of sequence of characters ("strings") that are passed to the main function.

→ After compiling, .class file is always saved in current location where you are in.

→ If you want to change the location, use -d (destination) option while compiling & specify the path.

java -d <path> Demo.java


⇒ echo \$PATH → every command looks for this location before executing.

[Environment variables]

⇒ class name & file name should be same, but if we don't want to make class name as file name then it should not be public.

-for eg → class Divide

→ package com.abc OR package com.defg

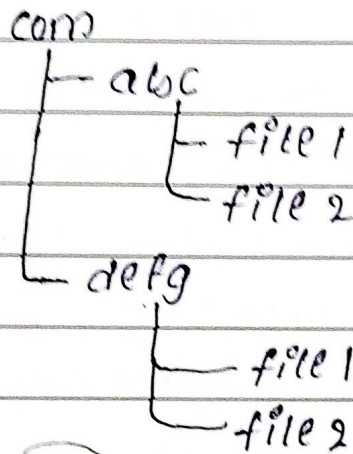

⇒ System.out.println("Hello"); → This means print the output on standard output stream (here, terminal)

println → adds new line

print → does not add new line.

Primitive → means any data type that cannot be broke further. integer, character etc. are primitive types.

⇒ All decimal values that we use are by default of double datatype, therefore if we want to store in float we have to use "f", same for int & long.

-float marks = 7.2f

double largeDecimal Number = 456789101.12345 (By default)



ASHOKA

Date: / /

`int rollNo = 64;` (by default)

`long largeInteger = 1234567891011L;`

`Integer` → wrapper class → provides additional functionalities

↳ converts primitive datatype to object

Comment → the lines that we comment are ignored by Java & will not be executed.

comment in Java → `//`

→ `int @ = 10` → literals
 ↓
 Identifier

Literals: Java literals are syntactic representations of boolean, character, numeric or string data. here, 10 is an integer literal.

Identifiers: Identifiers are the names of variables, methods, classes, packages & interfaces.

`int a = 234_000_000;`

↳ the value of `a` will be 234000000, underscore will be ignored.

`564.12345678` ^{rounds off} → `564.12345`

If we give float very big, then it rounds off the value which gives floating point error.