

agent: discovery-architecture-design-agent cli: Claude Code CLI llm: claude-sonnet-4-6 run_id: 20260826T162205_bs3b51 generated_at: 2026-08-26T10:52:05.801Z

1. Architecture & Design Hotspots Analysis

Objective: Establish Domain Services, Application Services, Dependency Injection, Bounded Contexts, and Anti-Corruption Layers.

Date: 2026-08-26 16:23:57 IST | **Scope:** shende-shweta/pingcrm — PHP 8.2 / Laravel 11 (backend) + React 19 / TypeScript / Inertia.js (frontend)

Executive Summary

EXECUTIVE SUMMARY

The PingCRM codebase has grown from a clean Laravel CRM starter into a dual-system monolith: the original Contact/Organization/User domain is architecturally sound, but an IVR enterprise module grafted on top introduces critical architectural debt across both the backend and the frontend. The 82 Ivr controllers averaging 747 LOC each — each containing 15+ unrelated legacy endpoints, direct GodService instantiation, and raw SQL — are the most severe backend risk, compounded by 107 `DB::` calls that circumvent the repository layer that was added but never enforced. On the frontend, 229 legacy Monolith components and 133 LegacyPass2 page-level duplicates (362 files total) each embed inline `fetch` calls, `alert()`-based validation, and untyped `any` props, creating a brittle surface that cannot be tested in isolation. The dominant risk across both layers is **change amplification**: any modification to an IVR data table, tenant scoping rule, or business workflow ripples through dozens of tightly-coupled controllers, services, models, and frontend components simultaneously, with no anti-corruption boundary separating the IVR domain from the CRM domain in the shared database.

91

CONTROLLERS / HANDLERS

16

MODELS / ENTITIES

12

SERVICE CLASSES FOUND

12

REPOSITORY CLASSES
FOUND

OVERALL CODEBASE RATING — ARCHITECTURE & DESIGN

High Risk

Driven by six simultaneous High-Risk hotspots: Fat Controllers (H1), Missing Repository enforcement (H3), Direct SQL in Controllers (H6), Domain Boundary Violations (H8), Shared Database Coupling (H9), Missing Frontend Service Layer (F2), and Legacy Component Patterns (F5) — affecting both backend and frontend layers.

1.1 Benchmark Ratings Summary

One row per hotspot. "Measured" is the real value found; "Rating" is the band it falls into (worst KPI wins).

#	Hotspot	Primary KPI	GOOD	MODERATE	HIGH RISK	Measured	Rating
H1	Fat Controllers	Avg LOC per controller	<150	150–300	>300	747 LOC avg (82 IVR controllers)	HIGH RISK
H2	Missing Service Layer	Controllers accessing repos/models directly	<10	10–20	>20	83 controllers with direct DB/Model access	HIGH RISK
H3	Missing Repository Pattern	Direct DB access points outside repositories	<10	10–20	>20	107 DB:: calls in controllers	HIGH RISK
H4	Circular Dependencies	Dependency cycles	0	1–3	>3	1 cycle (LoadslvrModuleData trait imports lvrModuleController)	MODERATE
H5	Shared Utility Abuse	Utility files w/ business logic	0	1–5	>5	5 Legacy Helper files + lvrAccountContext with embedded SQL	MODERATE
H6	Direct SQL in Controllers	ORM compliance % in IVR layer	>90%	60–90%	<60%	~0% (80 controllers use raw SQL with string concatenation)	HIGH RISK
H7	God Classes	Classes/files >1000 LOC	0	1–3	>3	0 files exceed 1000 LOC (max 759 LOC per IVR controller)	GOOD
H8	Domain Boundary Violations	Cross-domain access points	0	1–5	>5	8+ cross-domain access points (CRM ↔ IVR layer coupling)	HIGH RISK
H9	Shared Database Coupling	Tables shared across domains	<10%	10–30%	>30%	63 tables in single schema — 100% shared (57 IVR + 6 CRM)	HIGH RISK
F1	Business Logic in Components	Avg LOC per component	<150	150–300	>300	117 LOC avg; 229 Monolith files embed inline validation	MODERATE
F2	Missing Frontend Service/Data Layer	Components w/ inline API calls	<10	10–20	>20	374 files with inline fetch calls — no shared HTTP client	HIGH RISK
F3	God / Oversized	Components >400 LOC	0	1–3	>3	1 component >400 LOC (Hub/Index.tsx =	MODERATE

	Components					479 LOC)	
F4	Prop Drilling / Global State Abuse	Max prop-drilling depth	≤2	3–4	>4	3 levels (Page → Monolith → rendered divs; tenantId + legacyMeta drilled)	MODERATE
F5	Legacy / Inconsistent Component Patterns	Legacy-pattern components	0	1–10	>10	362 legacy components (229 MonolithN + 133 LegacyPass2, all typed any)	HIGH RISK

No additional hotspots beyond the standard set were observed. The `extract($payload)` security pattern and hard-coded `$tenantId = 1` multi-tenancy breakage are architectural consequences of H1 Fat Controllers and are captured in that subsection.

1.2 Hotspot-by-Hotspot Evidence

H1. Fat Controllers **CRITICAL**

Benchmark: Avg LOC per controller = 747 → falls in the **High Risk** band (Good <150 · Moderate 150–300 · High Risk >300).

What to check: Business logic inside controllers/handlers.

Evidence:

`app/Http/Controllers/Ivr/QueueManagementIndexController.php:1–100`

```
class QueueManagementIndexController extends Controller
{
    // AUTH-NOTE: some endpoints intentionally skip policies (2014 regression)
    private $tenantId = 1; // hard-coded tenant – multi-tenant broken

    public function handleIndex(Request $request)
    {
        // Fat controller – business rules live here
        $service = new QueueManagementGodService();
        $q = $request->get("q");
        if ($q) {
            $rows = DB::select("select * from ivr_queue_managements where name
like '%" . $q . "%' and tenant_id = " . $this->tenantId);
        } else {
            $rows = QueueManagement::where("tenant_id", $this->tenantId)-
>get();
        }
        // ... continues for 15 legacyEndpoint1–15 methods, each instantiating
        GodService
    }
}
```

```
}
}
```

This single 759-LOC controller mixes HTTP routing, authentication bypass, search filtering, direct SQL construction, and service orchestration — five distinct responsibilities that belong in separate layers.

app/Http/Controllers/Ivr/IvrHubController.php:50–100

```
private function buildDashboardPayload(IvrAccountContext $ctx, array $filters):
array
{
    return [
        'stats'          => $this->loadStats($ctx, $filters),
        'callVolumeByHour' => $this->loadHourlyVolume($ctx, $filters['date']),
        'callTrend'       => $this->loadDailyTrend($ctx, $filters['date']),
        'queueDistribution'=> $this->loadQueueDistribution($ctx, $filters),
        'queueMetrics'    => $this->loadQueueMetrics($ctx, $filters),
        'recentCalls'     => $this->loadRecentCalls($ctx, $filters),
        'agentSnapshot'   => $this->loadAgents($ctx, $filters),
    ];
}
// 7 private "load*" methods, each containing raw DB:: queries – 381 LOC total
```

All dashboard assembly, multi-table querying, and business aggregation embedded directly in the controller (381 LOC).

All 82 IVR controllers are 759 LOC each (uniform template-generated structure). The 8 standard CRM controllers average 115 LOC — demonstrating the target is achievable within the same codebase.

Why it matters here: Every schema change to `ivr_*` tables requires reviewing all 82 controllers simultaneously. The hard-coded `$tenantId = 1` means multi-tenancy is broken at the HTTP boundary — fixing it requires touching all 82 files. The `4,940 extract($payload)` calls on unvalidated request data create a variable-injection vector flowing from controller → service → database.

Recommended approach:

1. Extract the 15 `legacyEndpoint*` methods from each IVR controller into a module-specific `IvrWorkflowService` per module (e.g. `QueueManagementWorkflowService`) accepting typed DTOs.
2. Replace `$tenantId = 1` with a `TenantResolver` service injected via Laravel's service container.
3. Remove all `extract($payload)` — replace with `$request->validated()` via typed Form Request classes.
4. Target ≤50 LOC per controller: validate → call service → return Inertia response.

80 files affected.

File	Line(s)	Issue	Action
app/Http/Controllers/Ivr/AgentDeskDestroyController.php	15, 25, 48, 49, 61, 62, 74, 75, 87, 88, 100, 101 +100	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI

<code>app/Http/Controllers/Ivr/AgentDeskExportController.php</code>	15, 25, 48, 49, 61, 62, 74, 75, 87, 88, 100, 101 +100	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI
<code>app/Http/Controllers/Ivr/AgentDeskImportController.php</code>	15, 25, 48, 49, 61, 62, 74, 75, 87, 88, 100, 101 +100	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI
<code>app/Http/Controllers/Ivr/AgentDeskIndexController.php</code>	15, 25, 48, 49, 61, 62, 74, 75, 87, 88, 100, 101 +100	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI
<code>app/Http/Controllers/Ivr/AgentDeskStoreController.php</code>	15, 25, 48, 49, 61, 62, 74, 75, 87, 88, 100, 101 +100	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI
<code>app/Http/Controllers/Ivr/AgentDeskSyncController.php</code>	15, 25, 48, 49, 61, 62, 74, 75, 87, 88, 100, 101 +100	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI
<code>app/Http/Controllers/Ivr/AgentDeskUpdateController.php</code>	15, 25, 48, 49, 61, 62, 74, 75, 87, 88, 100, 101 +100	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI
<code>app/Http/Controllers/Ivr/BusinessHoursDestroyController.php</code>	15, 25, 48, 49, 61, 62, 74, 75, 87, 88, 100, 101 +100	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI
<code>app/Http/Controllers/Ivr/BusinessHoursExportController.php</code>	15, 25, 48, 49, 61, 62, 74, 75, 87, 88, 100, 101 +100	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI
<code>app/Http/Controllers/Ivr/BusinessHoursImportController.php</code>	15, 25, 48, 49, 61, 62, 74, 75, 87, 88,	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI

	100, 101 +100		
<code>app/Http/Controllers/Ivr/BusinessHoursIndexController.php</code>	15, 25, 48, 49, 61, 62, 74, 75, 87, 88, 100, 101 +100	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI
<code>app/Http/Controllers/Ivr/BusinessHoursStoreController.php</code>	15, 25, 48, 49, 61, 62, 74, 75, 87, 88, 100, 101 +100	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI
<code>app/Http/Controllers/Ivr/BusinessHoursSyncController.php</code>	15, 25, 48, 49, 61, 62, 74, 75, 87, 88, 100, 101 +100	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI
<code>app/Http/Controllers/Ivr/BusinessHoursUpdateController.php</code>	15, 25, 48, 49, 61, 62, 74, 75, 87, 88, 100, 101 +100	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI
<code>app/Http/Controllers/Ivr/CallAnalyticsDestroyController.php</code>	15, 25, 48, 49, 61, 62, 74, 75, 87, 88, 100, 101 +100	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI
<code>app/Http/Controllers/Ivr/CallAnalyticsExportController.php</code>	15, 25, 48, 49, 61, 62, 74, 75, 87, 88, 100, 101 +100	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI
<code>app/Http/Controllers/Ivr/CallAnalyticsImportController.php</code>	15, 25, 48, 49, 61, 62, 74, 75, 87, 88, 100, 101 +100	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI
<code>app/Http/Controllers/Ivr/CallAnalyticsIndexController.php</code>	15, 25, 48, 49, 61, 62, 74, 75, 87, 88, 100, 101 +100	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI
<code>app/Http/Controllers/Ivr/CallAnalyticsStoreController.php</code>	15, 25, 48, 49, 61, 62, 74, 75,	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI

	87, 88, 100, 101 +100		
<code>app/Http/Controllers/Ivr/CallAnalyticsSyncController.php</code>	15, 25, 48, 49, 61, 62, 74, 75, 87, 88, 100, 101 +100	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI
<code>app/Http/Controllers/Ivr/CallAnalyticsUpdateController.php</code>	15, 25, 48, 49, 61, 62, 74, 75, 87, 88, 100, 101 +100	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI
<code>app/Http/Controllers/Ivr/CallFlowDestroyController.php</code>	15, 25, 48, 49, 61, 62, 74, 75, 87, 88, 100, 101 +100	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI
<code>app/Http/Controllers/Ivr/CallFlowExportController.php</code>	15, 25, 48, 49, 61, 62, 74, 75, 87, 88, 100, 101 +100	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI
<code>app/Http/Controllers/Ivr/CallFlowImportController.php</code>	15, 25, 48, 49, 61, 62, 74, 75, 87, 88, 100, 101 +100	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI
<code>app/Http/Controllers/Ivr/CallFlowIndexController.php</code>	15, 25, 48, 49, 61, 62, 74, 75, 87, 88, 100, 101 +100	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI
<code>app/Http/Controllers/Ivr/CallFlowStoreController.php</code>	15, 25, 48, 49, 61, 62, 74, 75, 87, 88, 100, 101 +100	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI
<code>app/Http/Controllers/Ivr/CallFlowSyncController.php</code>	15, 25, 48, 49, 61, 62, 74, 75, 87, 88, 100, 101 +100	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI

<code>app/Http/Controllers/Ivr/CallFlowUpdateController.php</code>	15, 25, 48, 49, 61, 62, 74, 75, 87, 88, 100, 101 +100	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI
<code>app/Http/Controllers/Ivr/CallRecordingDestroyController.php</code>	15, 25, 48, 49, 61, 62, 74, 75, 87, 88, 100, 101 +100	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI
<code>app/Http/Controllers/Ivr/CallRecordingExportController.php</code>	15, 25, 48, 49, 61, 62, 74, 75, 87, 88, 100, 101 +100	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI
<code>app/Http/Controllers/Ivr/CallRecordingImportController.php</code>	15, 25, 48, 49, 61, 62, 74, 75, 87, 88, 100, 101 +100	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI
<code>app/Http/Controllers/Ivr/CallRecordingIndexController.php</code>	15, 25, 48, 49, 61, 62, 74, 75, 87, 88, 100, 101 +100	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI
<code>app/Http/Controllers/Ivr/CallRecordingStoreController.php</code>	15, 25, 48, 49, 61, 62, 74, 75, 87, 88, 100, 101 +100	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI
<code>app/Http/Controllers/Ivr/CallRecordingSyncController.php</code>	15, 25, 48, 49, 61, 62, 74, 75, 87, 88, 100, 101 +100	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI
<code>app/Http/Controllers/Ivr/CallRecordingUpdateController.php</code>	15, 25, 48, 49, 61, 62, 74, 75, 87, 88, 100, 101 +100	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI
<code>app/Http/Controllers/Ivr/CallRoutingDestroyController.php</code>	15, 25, 48, 49, 61, 62, 74, 75, 87, 88,	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI

	100, 101 +100		
<code>app/Http/Controllers/Ivr/CallRoutingExportController.php</code>	15, 25, 48, 49, 61, 62, 74, 75, 87, 88, 100, 101 +100	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI
<code>app/Http/Controllers/Ivr/CallRoutingImportController.php</code>	15, 25, 48, 49, 61, 62, 74, 75, 87, 88, 100, 101 +100	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI
<code>app/Http/Controllers/Ivr/CallRoutingIndexController.php</code>	15, 25, 48, 49, 61, 62, 74, 75, 87, 88, 100, 101 +100	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI
<code>app/Http/Controllers/Ivr/CallRoutingStoreController.php</code>	15, 25, 48, 49, 61, 62, 74, 75, 87, 88, 100, 101 +100	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI
<code>app/Http/Controllers/Ivr/CallRoutingSyncController.php</code>	15, 25, 48, 49, 61, 62, 74, 75, 87, 88, 100, 101 +100	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI
<code>app/Http/Controllers/Ivr/CallRoutingUpdateController.php</code>	15, 25, 48, 49, 61, 62, 74, 75, 87, 88, 100, 101 +100	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI
<code>app/Http/Controllers/Ivr/CustomerProfileIndexController.php</code>	15, 25, 48, 49, 61, 62, 74, 75, 87, 88, 100, 101 +100	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI
<code>app/Http/Controllers/Ivr/CustomerProfileStoreController.php</code>	15, 25, 48, 49, 61, 62, 74, 75, 87, 88, 100, 101 +100	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI
<code>app/Http/Controllers/Ivr/CustomerProfileUpdateController.php</code>	15, 25, 48, 49, 61, 62, 74, 75,	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI

	87, 88, 100, 101 +100		
<code>app/Http/Controllers/Ivr/DidInventoryDestroyController.php</code>	15, 25, 48, 49, 61, 62, 74, 75, 87, 88, 100, 101 +100	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI
<code>app/Http/Controllers/Ivr/DidInventoryExportController.php</code>	15, 25, 48, 49, 61, 62, 74, 75, 87, 88, 100, 101 +100	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI
<code>app/Http/Controllers/Ivr/DidInventoryImportController.php</code>	15, 25, 48, 49, 61, 62, 74, 75, 87, 88, 100, 101 +100	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI
<code>app/Http/Controllers/Ivr/DidInventoryIndexController.php</code>	15, 25, 48, 49, 61, 62, 74, 75, 87, 88, 100, 101 +100	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI
<code>app/Http/Controllers/Ivr/DidInventoryStoreController.php</code>	15, 25, 48, 49, 61, 62, 74, 75, 87, 88, 100, 101 +100	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI
<code>app/Http/Controllers/Ivr/DidInventorySyncController.php</code>	15, 25, 48, 49, 61, 62, 74, 75, 87, 88, 100, 101 +100	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI
<code>app/Http/Controllers/Ivr/DidInventoryUpdateController.php</code>	15, 25, 48, 49, 61, 62, 74, 75, 87, 88, 100, 101 +100	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI
<code>app/Http/Controllers/Ivr/HistoricalReportsDestroyController.php</code>	15, 25, 48, 49, 61, 62, 74, 75, 87, 88, 100, 101 +100	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI

app/Http/Controllers/Ivr/HistoricalReportsExportController.php	15, 25, 48, 49, 61, 62, 74, 75, 87, 88, 100, 101 +100	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI
app/Http/Controllers/Ivr/HistoricalReportsImportController.php	15, 25, 48, 49, 61, 62, 74, 75, 87, 88, 100, 101 +100	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI
app/Http/Controllers/Ivr/HistoricalReportsIndexController.php	15, 25, 48, 49, 61, 62, 74, 75, 87, 88, 100, 101 +100	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI
app/Http/Controllers/Ivr/HistoricalReportsStoreController.php	15, 25, 48, 49, 61, 62, 74, 75, 87, 88, 100, 101 +100	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI
app/Http/Controllers/Ivr/HistoricalReportsSyncController.php	15, 25, 48, 49, 61, 62, 74, 75, 87, 88, 100, 101 +100	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI
app/Http/Controllers/Ivr/HistoricalReportsUpdateController.php	15, 25, 48, 49, 61, 62, 74, 75, 87, 88, 100, 101 +100	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI
app/Http/Controllers/Ivr/LiveMonitoringDestroyController.php	15, 25, 48, 49, 61, 62, 74, 75, 87, 88, 100, 101 +100	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI
app/Http/Controllers/Ivr/LiveMonitoringExportController.php	15, 25, 48, 49, 61, 62, 74, 75, 87, 88, 100, 101 +100	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI
app/Http/Controllers/Ivr/LiveMonitoringImportController.php	15, 25, 48, 49, 61, 62, 74, 75, 87, 88,	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI

	100, 101 +100		
<code>app/Http/Controllers/Ivr/LiveMonitoringIndexController.php</code>	15, 25, 48, 49, 61, 62, 74, 75, 87, 88, 100, 101 +100	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI
<code>app/Http/Controllers/Ivr/LiveMonitoringStoreController.php</code>	15, 25, 48, 49, 61, 62, 74, 75, 87, 88, 100, 101 +100	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI
<code>app/Http/Controllers/Ivr/LiveMonitoringSyncController.php</code>	15, 25, 48, 49, 61, 62, 74, 75, 87, 88, 100, 101 +100	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI
<code>app/Http/Controllers/Ivr/LiveMonitoringUpdateController.php</code>	15, 25, 48, 49, 61, 62, 74, 75, 87, 88, 100, 101 +100	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI
<code>app/Http/Controllers/Ivr/PromptLibraryDestroyController.php</code>	15, 25, 48, 49, 61, 62, 74, 75, 87, 88, 100, 101 +100	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI
<code>app/Http/Controllers/Ivr/PromptLibraryExportController.php</code>	15, 25, 48, 49, 61, 62, 74, 75, 87, 88, 100, 101 +100	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI
<code>app/Http/Controllers/Ivr/PromptLibraryImportController.php</code>	15, 25, 48, 49, 61, 62, 74, 75, 87, 88, 100, 101 +100	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI
<code>app/Http/Controllers/Ivr/PromptLibraryIndexController.php</code>	15, 25, 48, 49, 61, 62, 74, 75, 87, 88, 100, 101 +100	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI
<code>app/Http/Controllers/Ivr/PromptLibraryStoreController.php</code>	15, 25, 48, 49, 61, 62, 74, 75,	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI

	87, 88, 100, 101 +100		
<code>app/Http/Controllers/Ivr/PromptLibrarySyncController.php</code>	15, 25, 48, 49, 61, 62, 74, 75, 87, 88, 100, 101 +100	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI
<code>app/Http/Controllers/Ivr/PromptLibraryUpdateController.php</code>	15, 25, 48, 49, 61, 62, 74, 75, 87, 88, 100, 101 +100	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI
<code>app/Http/Controllers/Ivr/QueueManagementDestroyController.php</code>	15, 25, 48, 49, 61, 62, 74, 75, 87, 88, 100, 101 +100	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI
<code>app/Http/Controllers/Ivr/QueueManagementExportController.php</code>	15, 25, 48, 49, 61, 62, 74, 75, 87, 88, 100, 101 +100	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI
<code>app/Http/Controllers/Ivr/QueueManagementImportController.php</code>	15, 25, 48, 49, 61, 62, 74, 75, 87, 88, 100, 101 +100	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI
<code>app/Http/Controllers/Ivr/QueueManagementIndexController.php</code>	15, 25, 48, 49, 61, 62, 74, 75, 87, 88, 100, 101 +100	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI
<code>app/Http/Controllers/Ivr/QueueManagementStoreController.php</code>	15, 25, 48, 49, 61, 62, 74, 75, 87, 88, 100, 101 +100	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI
<code>app/Http/Controllers/Ivr/QueueManagementSyncController.php</code>	15, 25, 48, 49, 61, 62, 74, 75, 87, 88, 100, 101 +100	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI

app/Http/Controllers/Ivr/QueueManagementUpdateController.php	15, 25, 48, 49, 61, 62, 74, 75, 87, 88, 100, 101 +100	Fat controller with business logic, hard-coded tenant, and unsafe extract()	Extract to Application Service + typed Form Request; inject TenantResolver via DI
--	---	---	---

H2. Missing Service Layer CRITICAL

Benchmark: **Controllers directly accessing repos/models = 83** → falls in the **High Risk** band (Good <10 · Moderate 10–20 · High Risk >20).

What to check: Business rules spread across controllers with no dedicated service tier.

Evidence:

app/Http/Controllers/Ivr/CallAnalyticsImportController.php:22–34

```
public function handleImport(Request $request)
{
    $service = new CallAnalyticsGodService();           // instantiated with `new`
    – no DI
    $q = $request->get("q");
    if ($q) {
        $rows = DB::select("select * from ivr_call_analyticss where name like
        '%" . $q . "%'...");
    } else {
        $rows = CallAnalytics::where("tenant_id", $this->tenantId)->get(); //
        Model access in controller
    }
    // business branching + data assembly in controller
}
```

All 82 IVR controllers share this pattern: GodService constructed with **new** (no DI), direct model access, and business branching in the controller.

app/Http/Controllers/Ivr/QueueManagementIndexController.php:43–56 (repeated 1,176 times across codebase)

```
public function legacyEndpoint1(Request $request)
{
    $payload = $request->all();
    extract($payload);           // unsafe variable extraction
    $service = new QueueManagementGodService(); // direct instantiation – no DI
    $service->orchestrateQueueManagementWorkflow1($payload);
    return ["ok" => true, "endpoint" => 1];
}
```

1,176 direct `new GodService()` instantiations confirm no dependency injection container is used for these services — mocking, testing, and substitution are impossible.

Why it matters here: Swapping any GodService implementation (e.g. to add caching, queuing, or a new external API) requires editing all 1,176 call sites. Any cross-cutting concern (logging, tenant validation, rate limiting) must be duplicated across every controller method manually.

Recommended approach:

1. Bind each GodService behind a Laravel service-container interface: `$this->app->bind(QueueManagementServiceInterface::class, QueueManagementService::class)`.
2. Inject via controller constructor: `public function __construct(private QueueManagementServiceInterface $service)`.
3. Move the 15 `legacyEndpoint*` orchestration methods from each controller into the corresponding service class.
4. Replace `$request->all()` + `extract()` with typed DTOs and Form Requests per workflow.

80 files affected.

File	Line(s)	Issue	Action
<code>app/Http/Controllers/Ivr/AgentDeskDestroyController.php</code>	25, 49, 62, 75, 88, 101, 114, 127, 140, 153, 166, 179 +44	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor
<code>app/Http/Controllers/Ivr/AgentDeskExportController.php</code>	25, 49, 62, 75, 88, 101, 114, 127, 140, 153, 166, 179 +44	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor
<code>app/Http/Controllers/Ivr/AgentDeskImportController.php</code>	25, 49, 62, 75, 88, 101, 114, 127, 140, 153, 166, 179 +44	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor
<code>app/Http/Controllers/Ivr/AgentDeskIndexController.php</code>	25, 49, 62, 75, 88, 101, 114, 127, 140, 153, 166, 179 +44	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor
<code>app/Http/Controllers/Ivr/AgentDeskStoreController.php</code>	25, 49, 62, 75, 88, 101, 114, 127, 140, 153, 166, 179 +44	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor
<code>app/Http/Controllers/Ivr/AgentDeskSyncController.php</code>	25, 49, 62, 75, 88, 101, 114, 127, 140, 153,	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor

	166, 179 +44		
<code>app/Http/Controllers/Ivr/AgentDeskUpdateController.php</code>	25, 49, 62, 75, 88, 101, 114, 127, 140, 153, 166, 179 +44	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor
<code>app/Http/Controllers/Ivr/BusinessHoursDestroyController.php</code>	25, 49, 62, 75, 88, 101, 114, 127, 140, 153, 166, 179 +44	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor
<code>app/Http/Controllers/Ivr/BusinessHoursExportController.php</code>	25, 49, 62, 75, 88, 101, 114, 127, 140, 153, 166, 179 +44	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor
<code>app/Http/Controllers/Ivr/BusinessHoursImportController.php</code>	25, 49, 62, 75, 88, 101, 114, 127, 140, 153, 166, 179 +44	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor
<code>app/Http/Controllers/Ivr/BusinessHoursIndexController.php</code>	25, 49, 62, 75, 88, 101, 114, 127, 140, 153, 166, 179 +44	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor
<code>app/Http/Controllers/Ivr/BusinessHoursStoreController.php</code>	25, 49, 62, 75, 88, 101, 114, 127, 140, 153, 166, 179 +44	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor
<code>app/Http/Controllers/Ivr/BusinessHoursSyncController.php</code>	25, 49, 62, 75, 88, 101, 114, 127, 140, 153, 166, 179 +44	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor
<code>app/Http/Controllers/Ivr/BusinessHoursUpdateController.php</code>	25, 49, 62, 75, 88, 101, 114, 127, 140, 153, 166, 179 +44	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor
<code>app/Http/Controllers/Ivr/CallAnalyticsDestroyController.php</code>	25, 49, 62, 75, 88, 101, 114, 127,	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor

	140, 153, 166, 179 +44		
<code>app/Http/Controllers/Ivr/CallAnalyticsExportController.php</code>	25, 49, 62, 75, 88, 101, 114, 127, 140, 153, 166, 179 +44	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor
<code>app/Http/Controllers/Ivr/CallAnalyticsImportController.php</code>	25, 49, 62, 75, 88, 101, 114, 127, 140, 153, 166, 179 +44	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor
<code>app/Http/Controllers/Ivr/CallAnalyticsIndexController.php</code>	25, 49, 62, 75, 88, 101, 114, 127, 140, 153, 166, 179 +44	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor
<code>app/Http/Controllers/Ivr/CallAnalyticsStoreController.php</code>	25, 49, 62, 75, 88, 101, 114, 127, 140, 153, 166, 179 +44	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor
<code>app/Http/Controllers/Ivr/CallAnalyticsSyncController.php</code>	25, 49, 62, 75, 88, 101, 114, 127, 140, 153, 166, 179 +44	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor
<code>app/Http/Controllers/Ivr/CallAnalyticsUpdateController.php</code>	25, 49, 62, 75, 88, 101, 114, 127, 140, 153, 166, 179 +44	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor
<code>app/Http/Controllers/Ivr/CallFlowDestroyController.php</code>	25, 49, 62, 75, 88, 101, 114, 127, 140, 153, 166, 179 +44	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor
<code>app/Http/Controllers/Ivr/CallFlowExportController.php</code>	25, 49, 62, 75, 88, 101, 114, 127, 140, 153, 166, 179 +44	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor

<code>app/Http/Controllers/Ivr/CallFlowImportController.php</code>	25, 49, 62, 75, 88, 101, 114, 127, 140, 153, 166, 179 +44	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor
<code>app/Http/Controllers/Ivr/CallFlowIndexController.php</code>	25, 49, 62, 75, 88, 101, 114, 127, 140, 153, 166, 179 +44	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor
<code>app/Http/Controllers/Ivr/CallFlowStoreController.php</code>	25, 49, 62, 75, 88, 101, 114, 127, 140, 153, 166, 179 +44	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor
<code>app/Http/Controllers/Ivr/CallFlowSyncController.php</code>	25, 49, 62, 75, 88, 101, 114, 127, 140, 153, 166, 179 +44	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor
<code>app/Http/Controllers/Ivr/CallFlowUpdateController.php</code>	25, 49, 62, 75, 88, 101, 114, 127, 140, 153, 166, 179 +44	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor
<code>app/Http/Controllers/Ivr/CallRecordingDestroyController.php</code>	25, 49, 62, 75, 88, 101, 114, 127, 140, 153, 166, 179 +44	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor
<code>app/Http/Controllers/Ivr/CallRecordingExportController.php</code>	25, 49, 62, 75, 88, 101, 114, 127, 140, 153, 166, 179 +44	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor
<code>app/Http/Controllers/Ivr/CallRecordingImportController.php</code>	25, 49, 62, 75, 88, 101, 114, 127, 140, 153, 166, 179 +44	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor
<code>app/Http/Controllers/Ivr/CallRecordingIndexController.php</code>	25, 49, 62, 75, 88, 101, 114, 127, 140, 153,	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor

	166, 179 +44		
app/Http/Controllers/Ivr/CallRecordingStoreController.php	25, 49, 62, 75, 88, 101, 114, 127, 140, 153, 166, 179 +44	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor
app/Http/Controllers/Ivr/CallRecordingSyncController.php	25, 49, 62, 75, 88, 101, 114, 127, 140, 153, 166, 179 +44	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor
app/Http/Controllers/Ivr/CallRecordingUpdateController.php	25, 49, 62, 75, 88, 101, 114, 127, 140, 153, 166, 179 +44	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor
app/Http/Controllers/Ivr/CallRoutingDestroyController.php	25, 49, 62, 75, 88, 101, 114, 127, 140, 153, 166, 179 +44	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor
app/Http/Controllers/Ivr/CallRoutingExportController.php	25, 49, 62, 75, 88, 101, 114, 127, 140, 153, 166, 179 +44	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor
app/Http/Controllers/Ivr/CallRoutingImportController.php	25, 49, 62, 75, 88, 101, 114, 127, 140, 153, 166, 179 +44	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor
app/Http/Controllers/Ivr/CallRoutingIndexController.php	25, 49, 62, 75, 88, 101, 114, 127, 140, 153, 166, 179 +44	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor
app/Http/Controllers/Ivr/CallRoutingStoreController.php	25, 49, 62, 75, 88, 101, 114, 127, 140, 153, 166, 179 +44	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor
app/Http/Controllers/Ivr/CallRoutingSyncController.php	25, 49, 62, 75, 88, 101, 114, 127,	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor

	140, 153, 166, 179 +44		
<code>app/Http/Controllers/Ivr/CallRoutingUpdateController.php</code>	25, 49, 62, 75, 88, 101, 114, 127, 140, 153, 166, 179 +44	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor
<code>app/Http/Controllers/Ivr/CustomerProfileIndexController.php</code>	25, 49, 62, 75, 88, 101, 114, 127, 140, 153, 166, 179 +44	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor
<code>app/Http/Controllers/Ivr/CustomerProfileStoreController.php</code>	25, 49, 62, 75, 88, 101, 114, 127, 140, 153, 166, 179 +44	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor
<code>app/Http/Controllers/Ivr/CustomerProfileUpdateController.php</code>	25, 49, 62, 75, 88, 101, 114, 127, 140, 153, 166, 179 +44	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor
<code>app/Http/Controllers/Ivr/DidInventoryDestroyController.php</code>	25, 49, 62, 75, 88, 101, 114, 127, 140, 153, 166, 179 +44	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor
<code>app/Http/Controllers/Ivr/DidInventoryExportController.php</code>	25, 49, 62, 75, 88, 101, 114, 127, 140, 153, 166, 179 +44	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor
<code>app/Http/Controllers/Ivr/DidInventoryImportController.php</code>	25, 49, 62, 75, 88, 101, 114, 127, 140, 153, 166, 179 +44	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor
<code>app/Http/Controllers/Ivr/DidInventoryIndexController.php</code>	25, 49, 62, 75, 88, 101, 114, 127, 140, 153, 166, 179 +44	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor

<code>app/Http/Controllers/Ivr/DidInventoryStoreController.php</code>	25, 49, 62, 75, 88, 101, 114, 127, 140, 153, 166, 179 +44	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor
<code>app/Http/Controllers/Ivr/DidInventorySyncController.php</code>	25, 49, 62, 75, 88, 101, 114, 127, 140, 153, 166, 179 +44	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor
<code>app/Http/Controllers/Ivr/DidInventoryUpdateController.php</code>	25, 49, 62, 75, 88, 101, 114, 127, 140, 153, 166, 179 +44	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor
<code>app/Http/Controllers/Ivr/HistoricalReportsDestroyController.php</code>	25, 49, 62, 75, 88, 101, 114, 127, 140, 153, 166, 179 +44	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor
<code>app/Http/Controllers/Ivr/HistoricalReportsExportController.php</code>	25, 49, 62, 75, 88, 101, 114, 127, 140, 153, 166, 179 +44	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor
<code>app/Http/Controllers/Ivr/HistoricalReportsImportController.php</code>	25, 49, 62, 75, 88, 101, 114, 127, 140, 153, 166, 179 +44	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor
<code>app/Http/Controllers/Ivr/HistoricalReportsIndexController.php</code>	25, 49, 62, 75, 88, 101, 114, 127, 140, 153, 166, 179 +44	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor
<code>app/Http/Controllers/Ivr/HistoricalReportsStoreController.php</code>	25, 49, 62, 75, 88, 101, 114, 127, 140, 153, 166, 179 +44	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor
<code>app/Http/Controllers/Ivr/HistoricalReportsSyncController.php</code>	25, 49, 62, 75, 88, 101, 114, 127, 140, 153,	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor

	166, 179 +44		
app/Http/Controllers/Ivr/HistoricalReportsUpdateController.php	25, 49, 62, 75, 88, 101, 114, 127, 140, 153, 166, 179 +44	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor
app/Http/Controllers/Ivr/LiveMonitoringDestroyController.php	25, 49, 62, 75, 88, 101, 114, 127, 140, 153, 166, 179 +44	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor
app/Http/Controllers/Ivr/LiveMonitoringExportController.php	25, 49, 62, 75, 88, 101, 114, 127, 140, 153, 166, 179 +44	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor
app/Http/Controllers/Ivr/LiveMonitoringImportController.php	25, 49, 62, 75, 88, 101, 114, 127, 140, 153, 166, 179 +44	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor
app/Http/Controllers/Ivr/LiveMonitoringIndexController.php	25, 49, 62, 75, 88, 101, 114, 127, 140, 153, 166, 179 +44	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor
app/Http/Controllers/Ivr/LiveMonitoringStoreController.php	25, 49, 62, 75, 88, 101, 114, 127, 140, 153, 166, 179 +44	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor
app/Http/Controllers/Ivr/LiveMonitoringSyncController.php	25, 49, 62, 75, 88, 101, 114, 127, 140, 153, 166, 179 +44	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor
app/Http/Controllers/Ivr/LiveMonitoringUpdateController.php	25, 49, 62, 75, 88, 101, 114, 127, 140, 153, 166, 179 +44	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor
app/Http/Controllers/Ivr/PromptLibraryDestroyController.php	25, 49, 62, 75, 88, 101, 114, 127,	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor

	140, 153, 166, 179 +44		
<code>app/Http/Controllers/Ivr/PromptLibraryExportController.php</code>	25, 49, 62, 75, 88, 101, 114, 127, 140, 153, 166, 179 +44	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor
<code>app/Http/Controllers/Ivr/PromptLibraryImportController.php</code>	25, 49, 62, 75, 88, 101, 114, 127, 140, 153, 166, 179 +44	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor
<code>app/Http/Controllers/Ivr/PromptLibraryIndexController.php</code>	25, 49, 62, 75, 88, 101, 114, 127, 140, 153, 166, 179 +44	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor
<code>app/Http/Controllers/Ivr/PromptLibraryStoreController.php</code>	25, 49, 62, 75, 88, 101, 114, 127, 140, 153, 166, 179 +44	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor
<code>app/Http/Controllers/Ivr/PromptLibrarySyncController.php</code>	25, 49, 62, 75, 88, 101, 114, 127, 140, 153, 166, 179 +44	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor
<code>app/Http/Controllers/Ivr/PromptLibraryUpdateController.php</code>	25, 49, 62, 75, 88, 101, 114, 127, 140, 153, 166, 179 +44	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor
<code>app/Http/Controllers/Ivr/QueueManagementDestroyController.php</code>	25, 49, 62, 75, 88, 101, 114, 127, 140, 153, 166, 179 +44	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor
<code>app/Http/Controllers/Ivr/QueueManagementExportController.php</code>	25, 49, 62, 75, 88, 101, 114, 127, 140, 153, 166, 179 +44	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor

<code>app/Http/Controllers/Ivr/QueueManagementImportController.php</code>	25, 49, 62, 75, 88, 101, 114, 127, 140, 153, 166, 179 +44	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor
<code>app/Http/Controllers/Ivr/QueueManagementIndexController.php</code>	25, 49, 62, 75, 88, 101, 114, 127, 140, 153, 166, 179 +44	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor
<code>app/Http/Controllers/Ivr/QueueManagementStoreController.php</code>	25, 49, 62, 75, 88, 101, 114, 127, 140, 153, 166, 179 +44	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor
<code>app/Http/Controllers/Ivr/QueueManagementSyncController.php</code>	25, 49, 62, 75, 88, 101, 114, 127, 140, 153, 166, 179 +44	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor
<code>app/Http/Controllers/Ivr/QueueManagementUpdateController.php</code>	25, 49, 62, 75, 88, 101, 114, 127, 140, 153, 166, 179 +44	Direct instantiation of GodService bypasses dependency injection	Bind via service container; inject interface via constructor

H3. Missing Repository Pattern CRITICAL

Benchmark: Direct DB access points outside repositories = 107 → falls in the **High Risk** band (Good <10 · Moderate 10–20 · High Risk >20).

What to check: Direct DB/ORM access scattered through the codebase.

Evidence:

`app/Http/Controllers/Ivr/DidInventorySyncController.php:25`

```
$rows = DB::select("select * from ivr_did_inventories where name like '%".$q."%'
and tenant_id = ".$this->tenantId);
```

Raw SQL with user input string-interpolated directly — SQL injection risk and bypasses the repository layer.

`app/Legacy/Services/QueueManagementGodService.php:14–20`

```
public function orchestrateQueueManagementWorkflow1($payload)
{
```

```

extract($payload); // unsafe
sleep(1);           // blocking synchronous remote sync
self::$sharedRuntimeCache[$tenant_id ?? 1] = $payload;
return DB::table("ivr_queue_managements")->insertGetId((array) $payload);
}

```

540 `DB::table()` calls in the 12 GodService files — the services bypass the repositories that were added alongside them.

`app/Models/Ivr/QueueManagement.php:18–35`

```

public function legacyComputedField1()
{
    // N+1 friendly accessor – called from blade/react randomly
    return DB::select("select count(*) as c from ivr_queue_managements where
tenant_id = ?",
                    [$this->tenant_id ?? 1]);
}
// legacyComputedField2 through legacyComputedField35 – identical pattern

```

35 `DB::select()` calls per IVR model (12 models = 420 raw queries embedded in accessors), creating guaranteed N+1 problems when collections are iterated.

Repositories **do exist** (`app/Repositories/Legacy/` contains 12 files) but controllers and services still call `DB::` directly — both patterns coexist with no enforcement.

Why it matters here: A query for the same `ivr_queue_managements` table may go through controllers, GodServices, models, OR repositories — four separate paths that must each be updated on any schema change. The repositories provide no isolation when they are optional.

Recommended approach:

1. Use PHPStan to add a rule blocking `DB::` usage in the `App\Http\Controllers\` namespace.
2. Migrate each `DB::select("select * from ivr_*.")` in controllers to the corresponding `LegacyRepository::fetch*()` method.
3. Move the 540 GodService `DB::table()` calls to named repository methods with type-safe return values.
4. Replace `legacyComputedField*()` model accessors with eager-loaded repository queries.

83 files affected.

File	Line(s)	Issue	Action
<code>app/Http/Controllers/Ivr/AgentDeskDestroyController.php</code>	28	Raw DB access in controllers bypasses repository abstraction	Route through corresponding Legacy repository; remove direct DB calls
<code>app/Http/Controllers/Ivr/AgentDeskExportController.php</code>	28	Raw DB access in controllers bypasses repository abstraction	Route through corresponding Legacy repository; remove direct DB calls
<code>app/Http/Controllers/Ivr/AgentDeskImportController.php</code>	28	Raw DB access in controllers bypasses repository abstraction	Route through corresponding Legacy repository; remove direct DB calls

[illegible]

[illegible]

app/Http/Controllers/Ivr/CallRoutingUpdateController.php	28	Raw DB access in controllers bypasses repository abstraction	Route through corresponding Legacy repository; remove direct DB calls
app/Http/Controllers/Ivr/Concerns/LoadsIvrModuleData.php	82, 110, 140, 168, 185, 204	Raw DB access in controllers bypasses repository abstraction	Route through corresponding Legacy repository; remove direct DB calls
app/Http/Controllers/Ivr/CustomerProfileIndexController.php	28	Raw DB access in controllers bypasses repository abstraction	Route through corresponding Legacy repository; remove direct DB calls
app/Http/Controllers/Ivr/CustomerProfileStoreController.php	28	Raw DB access in controllers bypasses repository abstraction	Route through corresponding Legacy repository; remove direct DB calls
app/Http/Controllers/Ivr/CustomerProfileUpdateController.php	28	Raw DB access in controllers bypasses repository abstraction	Route through corresponding Legacy repository; remove direct DB calls
app/Http/Controllers/Ivr/DidInventoryDestroyController.php	28	Raw DB access in controllers bypasses repository abstraction	Route through corresponding Legacy repository; remove direct DB calls
app/Http/Controllers/Ivr/DidInventoryExportController.php	28	Raw DB access in controllers bypasses repository abstraction	Route through corresponding Legacy repository; remove direct DB calls
app/Http/Controllers/Ivr/DidInventoryImportController.php	28	Raw DB access in controllers bypasses repository abstraction	Route through corresponding Legacy repository; remove direct DB calls
app/Http/Controllers/Ivr/DidInventoryIndexController.php	28	Raw DB access in controllers bypasses repository abstraction	Route through corresponding Legacy repository; remove direct DB calls
app/Http/Controllers/Ivr/DidInventoryStoreController.php	28	Raw DB access in controllers bypasses repository abstraction	Route through corresponding Legacy repository; remove direct DB calls
app/Http/Controllers/Ivr/DidInventorySyncController.php	28	Raw DB access in controllers bypasses repository abstraction	Route through corresponding Legacy repository; remove direct DB calls
app/Http/Controllers/Ivr/DidInventoryUpdateController.php	28	Raw DB access in controllers bypasses repository abstraction	Route through corresponding Legacy repository; remove direct DB calls
app/Http/Controllers/Ivr/HistoricalReportsDestroyController.php	28	Raw DB access in controllers bypasses repository abstraction	Route through corresponding Legacy repository; remove direct DB calls
app/Http/Controllers/Ivr/HistoricalReportsExportController.php	28	Raw DB access in controllers bypasses repository abstraction	Route through corresponding Legacy repository; remove direct DB calls
app/Http/Controllers/Ivr/HistoricalReportsImportController.php	28	Raw DB access in controllers bypasses repository abstraction	Route through corresponding Legacy repository; remove direct DB calls
app/Http/Controllers/Ivr/HistoricalReportsIndexController.php	28	Raw DB access in controllers bypasses repository abstraction	Route through corresponding Legacy repository; remove direct DB calls
app/Http/Controllers/Ivr/HistoricalReportsStoreController.php	28	Raw DB access in controllers bypasses repository abstraction	Route through corresponding Legacy repository; remove direct DB calls
app/Http/Controllers/Ivr/HistoricalReportsSyncController.php	28	Raw DB access in controllers bypasses repository abstraction	Route through corresponding Legacy repository; remove direct DB calls
app/Http/Controllers/Ivr/HistoricalReportsUpdateController.php	28	Raw DB access in controllers bypasses repository abstraction	Route through corresponding Legacy repository; remove direct DB calls

app/Http/Controllers/Ivr/IvrHubController.php	68, 77, 92, 132, 148, 167, 204, 221, 227, 232, 240, 258 +4	Raw DB access in controllers bypasses repository abstraction	Route through corresponding Legacy repository; remove direct DB calls
app/Http/Controllers/Ivr/LiveMonitoringDestroyController.php	28	Raw DB access in controllers bypasses repository abstraction	Route through corresponding Legacy repository; remove direct DB calls
app/Http/Controllers/Ivr/LiveMonitoringExportController.php	28	Raw DB access in controllers bypasses repository abstraction	Route through corresponding Legacy repository; remove direct DB calls
app/Http/Controllers/Ivr/LiveMonitoringImportController.php	28	Raw DB access in controllers bypasses repository abstraction	Route through corresponding Legacy repository; remove direct DB calls
app/Http/Controllers/Ivr/LiveMonitoringIndexController.php	28	Raw DB access in controllers bypasses repository abstraction	Route through corresponding Legacy repository; remove direct DB calls
app/Http/Controllers/Ivr/LiveMonitoringStoreController.php	28	Raw DB access in controllers bypasses repository abstraction	Route through corresponding Legacy repository; remove direct DB calls
app/Http/Controllers/Ivr/LiveMonitoringSyncController.php	28	Raw DB access in controllers bypasses repository abstraction	Route through corresponding Legacy repository; remove direct DB calls
app/Http/Controllers/Ivr/LiveMonitoringUpdateController.php	28	Raw DB access in controllers bypasses repository abstraction	Route through corresponding Legacy repository; remove direct DB calls
app/Http/Controllers/Ivr/PromptLibraryDestroyController.php	28	Raw DB access in controllers bypasses repository abstraction	Route through corresponding Legacy repository; remove direct DB calls
app/Http/Controllers/Ivr/PromptLibraryExportController.php	28	Raw DB access in controllers bypasses repository abstraction	Route through corresponding Legacy repository; remove direct DB calls
app/Http/Controllers/Ivr/PromptLibraryImportController.php	28	Raw DB access in controllers bypasses repository abstraction	Route through corresponding Legacy repository; remove direct DB calls
app/Http/Controllers/Ivr/PromptLibraryIndexController.php	28	Raw DB access in controllers bypasses repository abstraction	Route through corresponding Legacy repository; remove direct DB calls
app/Http/Controllers/Ivr/PromptLibraryStoreController.php	28	Raw DB access in controllers bypasses repository abstraction	Route through corresponding Legacy repository; remove direct DB calls
app/Http/Controllers/Ivr/PromptLibrarySyncController.php	28	Raw DB access in controllers bypasses repository abstraction	Route through corresponding Legacy repository; remove direct DB calls
app/Http/Controllers/Ivr/PromptLibraryUpdateController.php	28	Raw DB access in controllers bypasses repository abstraction	Route through corresponding Legacy repository; remove direct DB calls
app/Http/Controllers/Ivr/QueueManagementDestroyController.php	28	Raw DB access in controllers bypasses repository abstraction	Route through corresponding Legacy repository; remove direct DB calls
app/Http/Controllers/Ivr/QueueManagementExportController.php	28	Raw DB access in controllers bypasses repository abstraction	Route through corresponding Legacy repository; remove direct DB calls
app/Http/Controllers/Ivr/QueueManagementImportController.php	28	Raw DB access in controllers bypasses repository	Route through corresponding Legacy repository; remove

		abstraction	direct DB calls
<code>app/Http/Controllers/Ivr/QueueManagementIndexController.php</code>	28	Raw DB access in controllers bypasses repository abstraction	Route through corresponding Legacy repository; remove direct DB calls
<code>app/Http/Controllers/Ivr/QueueManagementStoreController.php</code>	28	Raw DB access in controllers bypasses repository abstraction	Route through corresponding Legacy repository; remove direct DB calls
<code>app/Http/Controllers/Ivr/QueueManagementSyncController.php</code>	28	Raw DB access in controllers bypasses repository abstraction	Route through corresponding Legacy repository; remove direct DB calls
<code>app/Http/Controllers/Ivr/QueueManagementUpdateController.php</code>	28	Raw DB access in controllers bypasses repository abstraction	Route through corresponding Legacy repository; remove direct DB calls
<code>app/Http/Controllers/ReportsController.php</code>	61, 77, 98, 115, 166	Raw DB access in controllers bypasses repository abstraction	Route through corresponding Legacy repository; remove direct DB calls

H4. Circular Dependencies MEDIUM

Benchmark: `Dependency cycles = 1` → falls in the **Moderate** band (Good 0 · Moderate 1–3 · High Risk >3).

What to check: Modules/packages importing each other.

Evidence:

`app/Http/Controllers/Ivr/Concerns/LoadsIvrModuleData.php:1–10`

```
namespace App\Http\Controllers\Ivr\Concerns;

use App\Http\Controllers\Ivr\IvrModuleController; // trait imports its own host
class

trait LoadsIvrModuleData
{
    // internally references IvrModuleController::SLUG_MAP
}
```

`IvrModuleController` declares `use LoadsIvrModuleData` and `LoadsIvrModuleData` imports `IvrModuleController` — a self-referential dependency. While PHP resolves this at compile time, it prevents the trait from being used by any other controller without loading the entire `IvrModuleController` class hierarchy.

Why it matters here: The circular self-reference means `LoadsIvrModuleData` cannot be independently tested or extracted into a standalone service without also loading `IvrModuleController` and its 268 LOC of module-dispatch logic.

Recommended approach:

1. Extract `SLUG_MAP` and `MODULE_META` constants from `IvrModuleController` into a standalone `IvrModuleRegistry` value object.
2. Update `LoadsIvrModuleData` to depend on `IvrModuleRegistry` instead of `IvrModuleController`, breaking the cycle.

1 file affected.

File	Line(s)	Issue	Action
app/Http/Controllers/Ivr/Concerns/LoadsIvrModuleData.php	5	Trait imports its host controller class — circular self-reference	Extract SLUG_MAP/MODULE_META into IvrModuleRegistry to break the cycle

H5. Shared Utility Abuse MEDIUM

Benchmark: Utility files holding business logic = 5 → falls in the **Moderate** band (Good 0 · Moderate 1–5 · High Risk >5).

What to check: Large "helpers"/"utils" files holding business logic.

Evidence:

app/Legacy/Helpers/LegacyIvrArray.php:1–60 (representative of all 5 helper files)

```
class LegacyIvrArray
{
    public static function transform1($value)
    {
        // duplicate of other helper – kept for backward compatibility
        if ($value === null) { return ""; }
        return (string) $value . "_2129_1";
    }
    // transform2 through transform30 – all identical except suffix
}
```

Five helper files (LegacyIvrArray , LegacyIvrCrypto , LegacyIvrDate , LegacyIvrMath , LegacyIvrString) each contain 20–30 transformN() methods — IVR-domain data transformation functions named as generic utilities.

app/Support/IvrAccountContext.php:55–63

```
public function queueIdsForScope(): array
{
    $query = DB::table('ivr_operational_queues')->where('account_id', $this->accountId);
    if ($this->organizationId) {
        $query->where('organization_id', $this->organizationId);
    }
    return $query->pluck('id')->map(fn ($id) => (int) $id)->all();
}
```

IvrAccountContext is a context/value object but embeds a direct DB::table() query — persistence concerns leaked into a support layer.

Why it matters here: When the IVR payload format changes, the helpers' callers must be identified manually across an undefined call graph. `IvrAccountContext` mixing DB access with scoping logic means it cannot be unit-tested without a database connection.

Recommended approach:

1. Consolidate `LegacyIvrArray/Crypto/Date/Math/String` into a typed `IvrPayloadNormalizer` domain service with documented, named methods.
2. Move `IvrAccountContext::queueIdsForScope()` DB call to `QueueRepository::scopeForAccount(int $accountId, ?int $orgId): array`.

5 files affected.

File	Line(s)	Issue	Action
<code>app/Legacy/Helpers/LegacyIvrArray.php</code>	5	Business data transformation methods in generic helper namespace	Consolidate into domain-specific <code>IvrPayloadNormalizer</code> service
<code>app/Legacy/Helpers/LegacyIvrCrypto.php</code>	5	Business data transformation methods in generic helper namespace	Consolidate into domain-specific <code>IvrPayloadNormalizer</code> service
<code>app/Legacy/Helpers/LegacyIvrDate.php</code>	5	Business data transformation methods in generic helper namespace	Consolidate into domain-specific <code>IvrPayloadNormalizer</code> service
<code>app/Legacy/Helpers/LegacyIvrMath.php</code>	5	Business data transformation methods in generic helper namespace	Consolidate into domain-specific <code>IvrPayloadNormalizer</code> service
<code>app/Legacy/Helpers/LegacyIvrString.php</code>	5	Business data transformation methods in generic helper namespace	Consolidate into domain-specific <code>IvrPayloadNormalizer</code> service

H6. Direct SQL in Controllers CRITICAL

Benchmark: `ORM compliance in IVR controllers = ~0%` → falls in the **High Risk** band (Good >90% · Moderate 60–90% · High Risk <60%).

What to check: Raw queries embedded directly in controllers/handlers.

Evidence:

`app/Http/Controllers/Ivr/DidInventorySyncController.php:25` (same pattern in 80 of 82 IVR controllers)

```
$rows = DB::select("select * from ivr_did_inventories where name like '%".$q."'
and tenant_id = ".$this->tenantId);
```

User-controlled `$q` concatenated directly into SQL — a SQL injection vulnerability replicated 80 times.

`app/Http/Controllers/ReportsController.php:42–60`

```
$base = DB::table('ivr_call_records')
->where('account_id', $ctx->accountId)
->whereDate('started_at', '>=', $from)
->whereDate('started_at', '<=', $to);
```

```
$total = (clone $base)->count();
$abandoned= (clone $base)->where('disposition', 'Abandoned')->count();
$avgDuration = (clone $base)->where('duration_sec', '>', 0)-
>avg('duration_sec');
```

The CRM ReportsController uses the query builder (safer than raw SQL) but assembles five distinct complex queries inside the controller rather than a report repository — business reporting logic bound to the HTTP layer.

Total: 107 `DB::` calls confirmed in controllers; 80 files use `DB::select("select * from...")` with string concatenation.

Why it matters here: The `$q` parameter in 80 controllers is drawn directly from `$request->get("q")` with no sanitization. Combined with `$tenantId = 1` (hard-coded to the first tenant), any authenticated user can read all records across all tenants via a crafted search query. Schema renames also require updating 80 controller files rather than one repository.

Recommended approach:

1. Replace all `DB::select("select * from ivr_* where name like '%".$q."%'...")` with `ModelClass::where('name', 'like', "%{$q}%")->where('tenant_id', $tenantId)->get()` (parameterized, no injection).
2. Move complex multi-table queries (ReportsController) into a `CallReportRepository` with named query methods.
3. Enable `phpstan/larastan` (already in `composer.json` dev deps) at strict level to flag future raw SQL.

80 files affected.

File	Line(s)	Issue	Action
<code>app/Http/Controllers/Ivr/AgentDeskDestroyController.php</code>	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository
<code>app/Http/Controllers/Ivr/AgentDeskExportController.php</code>	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository
<code>app/Http/Controllers/Ivr/AgentDeskImportController.php</code>	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository
<code>app/Http/Controllers/Ivr/AgentDeskIndexController.php</code>	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository
<code>app/Http/Controllers/Ivr/AgentDeskStoreController.php</code>	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository
<code>app/Http/Controllers/Ivr/AgentDeskSyncController.php</code>	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository
<code>app/Http/Controllers/Ivr/AgentDeskUpdateController.php</code>	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository
<code>app/Http/Controllers/Ivr/BusinessHoursDestroyController.php</code>	28	Raw SQL with string concatenation — SQL	Replace with parameterized Eloquent queries routed

		injection risk and bypasses repository	through repository
<code>app/Http/Controllers/Ivr/BusinessHoursExportController.php</code>	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository
<code>app/Http/Controllers/Ivr/BusinessHoursImportController.php</code>	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository
<code>app/Http/Controllers/Ivr/BusinessHoursIndexController.php</code>	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository
<code>app/Http/Controllers/Ivr/BusinessHoursStoreController.php</code>	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository
<code>app/Http/Controllers/Ivr/BusinessHoursSyncController.php</code>	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository
<code>app/Http/Controllers/Ivr/BusinessHoursUpdateController.php</code>	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository
<code>app/Http/Controllers/Ivr/CallAnalyticsDestroyController.php</code>	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository
<code>app/Http/Controllers/Ivr/CallAnalyticsExportController.php</code>	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository
<code>app/Http/Controllers/Ivr/CallAnalyticsImportController.php</code>	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository
<code>app/Http/Controllers/Ivr/CallAnalyticsIndexController.php</code>	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository
<code>app/Http/Controllers/Ivr/CallAnalyticsStoreController.php</code>	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository
<code>app/Http/Controllers/Ivr/CallAnalyticsSyncController.php</code>	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository
<code>app/Http/Controllers/Ivr/CallAnalyticsUpdateController.php</code>	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository
<code>app/Http/Controllers/Ivr/CallFlowDestroyController.php</code>	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository

app/Http/Controllers/Ivr/CallFlowExportController.php	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository
app/Http/Controllers/Ivr/CallFlowImportController.php	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository
app/Http/Controllers/Ivr/CallFlowIndexController.php	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository
app/Http/Controllers/Ivr/CallFlowStoreController.php	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository
app/Http/Controllers/Ivr/CallFlowSyncController.php	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository
app/Http/Controllers/Ivr/CallFlowUpdateController.php	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository
app/Http/Controllers/Ivr/CallRecordingDestroyController.php	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository
app/Http/Controllers/Ivr/CallRecordingExportController.php	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository
app/Http/Controllers/Ivr/CallRecordingImportController.php	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository
app/Http/Controllers/Ivr/CallRecordingIndexController.php	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository
app/Http/Controllers/Ivr/CallRecordingStoreController.php	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository
app/Http/Controllers/Ivr/CallRecordingSyncController.php	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository
app/Http/Controllers/Ivr/CallRecordingUpdateController.php	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository
app/Http/Controllers/Ivr/CallRoutingDestroyController.php	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository
app/Http/Controllers/Ivr/CallRoutingExportController.php	28	Raw SQL with string concatenation — SQL	Replace with parameterized Eloquent queries routed through repository

		injection risk and bypasses repository	
app/Http/Controllers/Ivr/CallRoutingImportController.php	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository
app/Http/Controllers/Ivr/CallRoutingIndexController.php	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository
app/Http/Controllers/Ivr/CallRoutingStoreController.php	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository
app/Http/Controllers/Ivr/CallRoutingSyncController.php	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository
app/Http/Controllers/Ivr/CallRoutingUpdateController.php	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository
app/Http/Controllers/Ivr/CustomerProfileIndexController.php	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository
app/Http/Controllers/Ivr/CustomerProfileStoreController.php	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository
app/Http/Controllers/Ivr/CustomerProfileUpdateController.php	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository
app/Http/Controllers/Ivr/DidInventoryDestroyController.php	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository
app/Http/Controllers/Ivr/DidInventoryExportController.php	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository
app/Http/Controllers/Ivr/DidInventoryImportController.php	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository
app/Http/Controllers/Ivr/DidInventoryIndexController.php	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository
app/Http/Controllers/Ivr/DidInventoryStoreController.php	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository
app/Http/Controllers/Ivr/DidInventorySyncController.php	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository

<code>app/Http/Controllers/Ivr/DidInventoryUpdateController.php</code>	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository
<code>app/Http/Controllers/Ivr/HistoricalReportsDestroyController.php</code>	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository
<code>app/Http/Controllers/Ivr/HistoricalReportsExportController.php</code>	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository
<code>app/Http/Controllers/Ivr/HistoricalReportsImportController.php</code>	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository
<code>app/Http/Controllers/Ivr/HistoricalReportsIndexController.php</code>	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository
<code>app/Http/Controllers/Ivr/HistoricalReportsStoreController.php</code>	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository
<code>app/Http/Controllers/Ivr/HistoricalReportsSyncController.php</code>	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository
<code>app/Http/Controllers/Ivr/HistoricalReportsUpdateController.php</code>	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository
<code>app/Http/Controllers/Ivr/LiveMonitoringDestroyController.php</code>	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository
<code>app/Http/Controllers/Ivr/LiveMonitoringExportController.php</code>	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository
<code>app/Http/Controllers/Ivr/LiveMonitoringImportController.php</code>	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository
<code>app/Http/Controllers/Ivr/LiveMonitoringIndexController.php</code>	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository
<code>app/Http/Controllers/Ivr/LiveMonitoringStoreController.php</code>	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository
<code>app/Http/Controllers/Ivr/LiveMonitoringSyncController.php</code>	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository
<code>app/Http/Controllers/Ivr/LiveMonitoringUpdateController.php</code>	28	Raw SQL with string concatenation — SQL	Replace with parameterized Eloquent queries routed through repository

		injection risk and bypasses repository	
<code>app/Http/Controllers/Ivr/PromptLibraryDestroyController.php</code>	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository
<code>app/Http/Controllers/Ivr/PromptLibraryExportController.php</code>	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository
<code>app/Http/Controllers/Ivr/PromptLibraryImportController.php</code>	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository
<code>app/Http/Controllers/Ivr/PromptLibraryIndexController.php</code>	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository
<code>app/Http/Controllers/Ivr/PromptLibraryStoreController.php</code>	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository
<code>app/Http/Controllers/Ivr/PromptLibrarySyncController.php</code>	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository
<code>app/Http/Controllers/Ivr/PromptLibraryUpdateController.php</code>	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository
<code>app/Http/Controllers/Ivr/QueueManagementDestroyController.php</code>	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository
<code>app/Http/Controllers/Ivr/QueueManagementExportController.php</code>	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository
<code>app/Http/Controllers/Ivr/QueueManagementImportController.php</code>	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository
<code>app/Http/Controllers/Ivr/QueueManagementIndexController.php</code>	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository
<code>app/Http/Controllers/Ivr/QueueManagementStoreController.php</code>	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository
<code>app/Http/Controllers/Ivr/QueueManagementSyncController.php</code>	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository
<code>app/Http/Controllers/Ivr/QueueManagementUpdateController.php</code>	28	Raw SQL with string concatenation — SQL injection risk and bypasses repository	Replace with parameterized Eloquent queries routed through repository

H8. Domain Boundary Violations HIGH

Benchmark: Cross-domain access points = 8+ → falls in the **High Risk** band (Good 0 · Moderate 1–5 · High Risk >5).

What to check: Code in one business area directly reading/writing another area's data.

Evidence:

app/Http/Controllers/Ivr/IvrHubController.php:18

```
'accountName' => $request->user()->account->name,
```

The IVR Hub controller navigates the CRM User → Account Eloquent relationship to display account metadata — crossing from the IVR domain into the CRM domain's data model.

app/Support/IvrAccountContext.php:16–25

```
$organizationId = Organization::query() // CRM model queried from IVR support
layer
    ->where('account_id', $accountId)
    ->where('id', (int) $rawOrg)
    ->value('id');
```

IvrAccountContext (IVR layer) directly imports and queries the CRM Organization Eloquent model.

app/Http/Controllers/Ivr/IvrHubController.php:66–79

```
$queueQuery = DB::table('ivr_operational_queues')->where('account_id', $ctx-
>accountId);
$agentsQuery = DB::table('ivr_agents')->where('account_id', $ctx->accountId);
$callsQuery = DB::table('ivr_call_records')->where('account_id', $ctx-
>accountId);
```

IVR dashboard controller joins across 3 IVR tables using the account_id FK from the CRM domain — cross-domain FK coupling with no anti-corruption layer. At least 8 distinct cross-domain access patterns identified: Organization::query() in IVR layer, ->account->name in IVR controllers, Auth::user()->account->contacts() available through the CRM Account model from IVR routes.

Why it matters here: If the CRM organizations table adds a suspended_at column to filter inactive organisations, the IVR scoping logic in IvrAccountContext will silently include suspended organisations — hidden coupling that requires both the CRM team and IVR team to coordinate on every schema change to the shared organizations and accounts tables.

Recommended approach:

1. Define explicit bounded contexts: **CRM** (Account, User, Organization, Contact) and **IVR** (CallFlow, QueueManagement, Agent, etc.).
2. Replace IvrAccountContext's direct Organization::query() with a CrmAccountService::resolveOrganizationForIvr(int \$accountId, int \$orgId): ?

`int` anti-corruption layer method.

- Replace `$request->user()->account->name` in IVR controllers with an `AccountContext` value object returned by the CRM service layer.

8 files affected.

File	Line(s)	Issue	Action
<code>app/Http/Controllers/ContactsController.php</code>	20, 40, 51, 56, 88, 104	IVR layer directly reads CRM Organization/Account Eloquent models	Route cross-domain reads through an anti-corruption layer (CrmAccountService)
<code>app/Http/Controllers/Ivr/IvrHubController.php</code>	26	IVR layer directly reads CRM Organization/Account Eloquent models	Route cross-domain reads through an anti-corruption layer (CrmAccountService)
<code>app/Http/Controllers/Ivr/IvrModuleController.php</code>	175	IVR layer directly reads CRM Organization/Account Eloquent models	Route cross-domain reads through an anti-corruption layer (CrmAccountService)
<code>app/Http/Controllers/OrganizationsController.php</code>	19, 41	IVR layer directly reads CRM Organization/Account Eloquent models	Route cross-domain reads through an anti-corruption layer (CrmAccountService)
<code>app/Http/Controllers/ReportsController.php</code>	28	IVR layer directly reads CRM Organization/Account Eloquent models	Route cross-domain reads through an anti-corruption layer (CrmAccountService)
<code>app/Http/Controllers/UsersController.php</code>	22, 53	IVR layer directly reads CRM Organization/Account Eloquent models	Route cross-domain reads through an anti-corruption layer (CrmAccountService)
<code>app/Http/Middleware/HandleInertiaRequests.php</code>	47	IVR layer directly reads CRM Organization/Account Eloquent models	Route cross-domain reads through an anti-corruption layer (CrmAccountService)
<code>app/Support/IvrAccountContext.php</code>	23, 36	IVR layer directly reads CRM Organization/Account Eloquent models	Route cross-domain reads through an anti-corruption layer (CrmAccountService)

H9. Shared Database Coupling HIGH

Benchmark: `Tables shared across domains = 100%` → falls in the **High Risk** band (Good <10% · Moderate 10–30% · High Risk >30%).

What to check: Multiple business domains reading/writing the same tables directly.

Evidence:

`database/migrations/2026_07_28_000001_create_ivr_legacy_tables.php:20–47`

```
private array $modules = [
    'call_flow', 'call_routing', 'queue_management', 'agent_desk',
    'prompt_library', 'business_hours',
    'did_inventory', 'call_analytics', 'historical_reports', 'live_monitoring',
    'call_recording',
    'customer_profile', 'crm_bridge', 'api_integration', 'notification_hub',
    'role_access',
    'audit_trail', 'tenant_admin', 'system_config', 'ivr_settings',
    'skill_group', 'overflow_route',
    // ... 46 modules total
```

```
];
// Creates 46 tables each with only: id, tenant_id, name, payload JSON,
timestamps
```

46 IVR legacy tables use generic **payload JSON** columns — no typed columns, no FK relationships between IVR tables, no integrity constraints.

database/migrations/2026_07_28_130000_add_account_id_to_ivr_tables.php:15–30

```
foreach ($dashboardTables as $tableName) {
    Schema::table($tableName, function (Blueprint $table) use ($tableName) {
        if (! Schema::hasColumn($tableName, 'account_id')) {
            $table->unsignedInteger('account_id')->nullable()->index()-
            >after('tenant_id');
        }
    });
}
```

account_id was retrofitted onto IVR dashboard tables as a nullable column after the fact — confirming multi-tenancy was an afterthought rather than a foundational design decision. All 63 tables (57 IVR + 6 CRM: accounts, users, organizations, contacts, password_resets, personal_access_tokens) share a single database schema with no logical separation.

Why it matters here: A soft-delete in **ivr_queue_managements** does not cascade to **ivr_call_flows** that reference it because there are no FK relationships between IVR tables. Adding a new IVR module means creating yet another generic **payload JSON** table — widening the schema coupling indefinitely. Independent database evolution (e.g. migrating IVR to a separate microservice DB) is not feasible with the current coupling.

Recommended approach:

1. Separate the database schema into logical schemas: **crm_*** (accounts, users, organizations, contacts) and **ivr_*** (IVR module and dashboard tables).
2. Replace **payload JSON** columns with typed, validated columns per module (e.g. **ivr_queue_managements.max_agents INT**, **ivr_queue_managements.overflow_queue_id FK**).
3. Document the **account_id** cross-domain FK as an anti-corruption contract; enforce IVR controllers only access **account_id** via the CRM service layer.

2 files affected.

File	Line(s)	Issue	Action
database/migrations/2026_07_28_120000_create_ivr_dashboard_tables.php	11, 25, 28, 36, 41, 60, 74, 75, 76, 78	All IVR and CRM tables share one schema with no domain ownership	Separate into logical schemas; replace payload JSON with typed columns
database/migrations/2026_07_28_130000_add_account_id_to_ivr_tables.php	25, 26, 27, 29, 43, 83, 84, 85, 87, 90	All IVR and CRM tables share one schema with no domain ownership	Separate into logical schemas; replace payload JSON with typed columns

F1. Business Logic in Components HIGH

Benchmark: Avg LOC per component = 117 LOC → technically **Good** overall, but 229 Monolith components embed inline validation and fetch → **Moderate** (worst-wins).

What to check: Validation, calculations, data transformation, or workflow logic living directly inside view components.

Evidence:

`resources/js/components/legacy/AgentDeskMonolith0.tsx:1–64`

```
export default function AgentDeskMonolith0({ rows, tenantId, legacyMeta }: any)
{
  const [draft, setDraft] = useState<any>({})

  const save = async () => {
    const err = !draft.name ? 'required' : null // inline validation rule
    if (err) return alert(err) // alert()-based UX
    await fetch('/ivr-legacy/agent-desk/store', { // inline API call
      method: 'POST',
      body: JSON.stringify({ ...draft, tenant_id: tenantId }),
      headers: { 'Content-Type': 'application/json' }
    })
  }
  // 40 computed display fields rendered inline
}
```

All 229 `*MonolithN.tsx` components mix validation, HTTP, and display in a single function.

`resources/js/Pages/Ivr/AfterHours/Index.tsx:14–22`

```
const validateClientSide = (payload: Record<string, unknown>) => {
  // duplicate validation – also exists in PHP controller
  if (!payload.name) return 'Name required'
  return null
}
```

Client-side validation duplicated from the PHP controller — the two will inevitably diverge.

Why it matters here: Validation rules in 229 Monolith components exist independently from the PHP controller

`Request::validate()` rules. When a new required field is added to the backend, the frontend alert message will not update automatically, causing silent form failures in users' browsers.

Recommended approach:

1. Extract `save()` logic from all 229 Monolith components into a shared `useIvrModuleSave(module: string)` custom hook.
2. Define validation rules in a Zod schema file (`resources/js/schemas/ivrModule.ts`) shared across all module components.

3. Remove `alert(err)` and replace with a shared `useToast()` notification context.

229 files affected.

File	Line(s)	Issue	Action
<code>resources/js/components/legacy/AfterHoursMonolith0.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to <code>useIvrModuleSave</code> hook and Zod schema
<code>resources/js/components/legacy/AfterHoursMonolith1.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to <code>useIvrModuleSave</code> hook and Zod schema
<code>resources/js/components/legacy/AfterHoursMonolith2.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to <code>useIvrModuleSave</code> hook and Zod schema
<code>resources/js/components/legacy/AfterHoursMonolith3.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to <code>useIvrModuleSave</code> hook and Zod schema
<code>resources/js/components/legacy/AfterHoursMonolith4.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to <code>useIvrModuleSave</code> hook and Zod schema
<code>resources/js/components/legacy/AgentDeskMonolith0.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to <code>useIvrModuleSave</code> hook and Zod schema
<code>resources/js/components/legacy/AgentDeskMonolith1.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to <code>useIvrModuleSave</code> hook and Zod schema
<code>resources/js/components/legacy/AgentDeskMonolith2.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to <code>useIvrModuleSave</code> hook and Zod schema
<code>resources/js/components/legacy/AgentDeskMonolith3.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to <code>useIvrModuleSave</code> hook and Zod schema
<code>resources/js/components/legacy/AgentDeskMonolith4.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to <code>useIvrModuleSave</code> hook and Zod schema
<code>resources/js/components/legacy/ApiIntegrationMonolith0.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to <code>useIvrModuleSave</code> hook and Zod schema
<code>resources/js/components/legacy/ApiIntegrationMonolith1.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to <code>useIvrModuleSave</code> hook and Zod schema
<code>resources/js/components/legacy/ApiIntegrationMonolith2.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to <code>useIvrModuleSave</code> hook and Zod schema
<code>resources/js/components/legacy/ApiIntegrationMonolith3.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to <code>useIvrModuleSave</code> hook and Zod schema
<code>resources/js/components/legacy/ApiIntegrationMonolith4.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to <code>useIvrModuleSave</code> hook and Zod schema
<code>resources/js/components/legacy/AuditTrailMonolith0.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to <code>useIvrModuleSave</code> hook and Zod schema
<code>resources/js/components/legacy/AuditTrailMonolith1.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to <code>useIvrModuleSave</code> hook and Zod schema

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

resources/js/components/legacy/HolidayCalendarMonolith4.tsx	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
resources/js/components/legacy/IvrSettingsMonolith0.tsx	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
resources/js/components/legacy/IvrSettingsMonolith1.tsx	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
resources/js/components/legacy/IvrSettingsMonolith2.tsx	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
resources/js/components/legacy/IvrSettingsMonolith3.tsx	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
resources/js/components/legacy/IvrSettingsMonolith4.tsx	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
resources/js/components/legacy/KnowledgeBaseMonolith0.tsx	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
resources/js/components/legacy/KnowledgeBaseMonolith1.tsx	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
resources/js/components/legacy/KnowledgeBaseMonolith2.tsx	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
resources/js/components/legacy/KnowledgeBaseMonolith3.tsx	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
resources/js/components/legacy/KnowledgeBaseMonolith4.tsx	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
resources/js/components/legacy/LeadListMonolith0.tsx	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
resources/js/components/legacy/LeadListMonolith1.tsx	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
resources/js/components/legacy/LeadListMonolith2.tsx	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
resources/js/components/legacy/LeadListMonolith3.tsx	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
resources/js/components/legacy/LeadListMonolith4.tsx	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
resources/js/components/legacy/LiveMonitoringMonolith0.tsx	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
resources/js/components/legacy/LiveMonitoringMonolith1.tsx	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
resources/js/components/legacy/LiveMonitoringMonolith2.tsx	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema

<code>resources/js/components/legacy/LiveMonitoringMonolith3.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
<code>resources/js/components/legacy/LiveMonitoringMonolith4.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
<code>resources/js/components/legacy/MediaServerMonolith0.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
<code>resources/js/components/legacy/MediaServerMonolith1.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
<code>resources/js/components/legacy/MediaServerMonolith2.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
<code>resources/js/components/legacy/MediaServerMonolith3.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
<code>resources/js/components/legacy/MediaServerMonolith4.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
<code>resources/js/components/legacy/NotificationHubMonolith0.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
<code>resources/js/components/legacy/NotificationHubMonolith1.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
<code>resources/js/components/legacy/NotificationHubMonolith3.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
<code>resources/js/components/legacy/NotificationHubMonolith4.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
<code>resources/js/components/legacy/NumberPortingMonolith0.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
<code>resources/js/components/legacy/NumberPortingMonolith1.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
<code>resources/js/components/legacy/NumberPortingMonolith2.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
<code>resources/js/components/legacy/NumberPortingMonolith3.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
<code>resources/js/components/legacy/NumberPortingMonolith4.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
<code>resources/js/components/legacy/OverflowRouteMonolith0.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
<code>resources/js/components/legacy/OverflowRouteMonolith1.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
<code>resources/js/components/legacy/OverflowRouteMonolith2.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema

<code>resources/js/components/legacy/OverflowRouteMonolith3.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
<code>resources/js/components/legacy/OverflowRouteMonolith4.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
<code>resources/js/components/legacy/PromptLibraryMonolith0.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
<code>resources/js/components/legacy/PromptLibraryMonolith1.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
<code>resources/js/components/legacy/PromptLibraryMonolith2.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
<code>resources/js/components/legacy/PromptLibraryMonolith3.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
<code>resources/js/components/legacy/PromptLibraryMonolith4.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
<code>resources/js/components/legacy/QueueManagementMonolith0.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
<code>resources/js/components/legacy/QueueManagementMonolith1.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
<code>resources/js/components/legacy/QueueManagementMonolith2.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
<code>resources/js/components/legacy/QueueManagementMonolith3.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
<code>resources/js/components/legacy/QueueManagementMonolith4.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
<code>resources/js/components/legacy/RateDeckMonolith0.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
<code>resources/js/components/legacy/RateDeckMonolith1.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
<code>resources/js/components/legacy/RateDeckMonolith2.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
<code>resources/js/components/legacy/RateDeckMonolith3.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
<code>resources/js/components/legacy/RateDeckMonolith4.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
<code>resources/js/components/legacy/RoleAccessMonolith0.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
<code>resources/js/components/legacy/RoleAccessMonolith1.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema

<code>resources/js/components/legacy/RoleAccessMonolith2.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
<code>resources/js/components/legacy/RoleAccessMonolith3.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
<code>resources/js/components/legacy/RoleAccessMonolith4.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
<code>resources/js/components/legacy/ScriptBuilderMonolith0.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
<code>resources/js/components/legacy/ScriptBuilderMonolith1.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
<code>resources/js/components/legacy/ScriptBuilderMonolith2.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
<code>resources/js/components/legacy/ScriptBuilderMonolith3.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
<code>resources/js/components/legacy/SkillGroupMonolith0.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
<code>resources/js/components/legacy/SkillGroupMonolith1.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
<code>resources/js/components/legacy/SkillGroupMonolith2.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
<code>resources/js/components/legacy/SkillGroupMonolith3.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
<code>resources/js/components/legacy/SkillGroupMonolith4.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
<code>resources/js/components/legacy/SpeechRecognitionMonolith1.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
<code>resources/js/components/legacy/SpeechRecognitionMonolith2.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
<code>resources/js/components/legacy/SpeechRecognitionMonolith3.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
<code>resources/js/components/legacy/SpeechRecognitionMonolith4.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
<code>resources/js/components/legacy/SurveyEngineMonolith0.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
<code>resources/js/components/legacy/SurveyEngineMonolith1.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
<code>resources/js/components/legacy/SurveyEngineMonolith2.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema

[illegible]

resources/js/components/legacy/TicketSyncMonolith2.tsx	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
resources/js/components/legacy/TicketSyncMonolith3.tsx	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
resources/js/components/legacy/TrunkGroupMonolith0.tsx	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
resources/js/components/legacy/TrunkGroupMonolith1.tsx	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
resources/js/components/legacy/TrunkGroupMonolith2.tsx	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
resources/js/components/legacy/TrunkGroupMonolith3.tsx	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
resources/js/components/legacy/TrunkGroupMonolith4.tsx	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
resources/js/components/legacy/VoicemailBoxMonolith0.tsx	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
resources/js/components/legacy/VoicemailBoxMonolith1.tsx	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
resources/js/components/legacy/VoicemailBoxMonolith2.tsx	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
resources/js/components/legacy/VoicemailBoxMonolith3.tsx	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
resources/js/components/legacy/VoicemailBoxMonolith4.tsx	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
resources/js/components/legacy/WebhookDispatcherMonolith0.tsx	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
resources/js/components/legacy/WebhookDispatcherMonolith1.tsx	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
resources/js/components/legacy/WebhookDispatcherMonolith2.tsx	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
resources/js/components/legacy/WebhookDispatcherMonolith3.tsx	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
resources/js/components/legacy/WebhookDispatcherMonolith4.tsx	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
resources/js/components/legacy/WhisperCoachMonolith0.tsx	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema
resources/js/components/legacy/WhisperCoachMonolith1.tsx	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to useIvrModuleSave hook and Zod schema

<code>resources/js/components/legacy/WhisperCoachMonolith2.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to <code>useIvrModuleSave</code> hook and Zod schema
<code>resources/js/components/legacy/WhisperCoachMonolith3.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to <code>useIvrModuleSave</code> hook and Zod schema
<code>resources/js/components/legacy/WhisperCoachMonolith4.tsx</code>	7, 8, 9	Inline validation and API call logic inside presentation component	Extract to <code>useIvrModuleSave</code> hook and Zod schema

F2. Missing Frontend Service/Data Layer CRITICAL

Benchmark: `Components with inline API calls = 374` → falls in the **High Risk** band (Good <10 · Moderate 10–20 · High Risk >20).

What to check: Hard-coded API URLs and inline `fetch` calls in components.

Evidence:

`resources/js/components/legacy/AgentDeskMonolith0.tsx:8–12`

```
await fetch('/ivr-legacy/agent-desk/store', {
  method: 'POST',
  body: JSON.stringify({ ...draft, tenant_id: tenantId }),
  headers: { 'Content-Type': 'application/json' }
})
```

Hard-coded URL path `/ivr-legacy/agent-desk/store` directly in the component — duplicated across all 229 Monolith variants with no shared HTTP client, no authentication header management, and no error type.

`resources/js/Pages/Ivr/AfterHours/Index.tsx:14–22`

```
useEffect(() => {
  // missing cleanup – interval leak pattern
  const id = setInterval(() => {
    fetch('/ivr-legacy/after-hours/index?q=' + search)
      .then(r => r.json())
      .then(d => setLocalRows(d.data ?? localRows))
      .catch(() => {}) // silent error swallowing
  }, 5000)
}, [search]) // no return () => clearInterval(id)
```

374 page-level components contain inline `fetch` with: no `AbortController`, no CSRF token, silent `.catch(() => {})` discarding all errors, and missing `clearInterval` / `clearTimeout` cleanup — memory leak on every navigation.

Why it matters here: If the `/ivr-legacy/` URL prefix changes (e.g. during API versioning), 374 call sites must be updated manually. There is no place to add a global auth header, retry policy, or error toast — each component implements its own ad-hoc version. The missing `clearInterval` in polling components means every user who navigates away from an IVR page leaks a 5-second network interval indefinitely.

Recommended approach:

1. Create `resources/js/services/ivrApi.ts` — a typed API client with base URL, CSRF header, `AbortController` support, typed response shapes, and a single error handler.
2. Migrate all `fetch('/ivr-legacy/...')` calls to `ivrApi.store(module, payload) / ivrApi.index(module, filters)`.
3. Replace the polling `setInterval` in page components with a `useIvrPolling(url, interval)` custom hook that includes `clearInterval` in its cleanup return.
4. Adopt Inertia.js `router.post()` for all mutations to get CSRF handling and redirect support for free.

727 files affected.

File	Line(s)	Issue	Action
<code>resources/js/components/legacy/AfterHoursMonolith0.tsx</code>	10	Hard-coded inline fetch call with no shared HTTP client and no AbortController	Replace with ivrApi service layer; add cleanup to all useEffect data-fetch hooks
<code>resources/js/components/legacy/AfterHoursMonolith1.tsx</code>	10	Hard-coded inline fetch call with no shared HTTP client and no AbortController	Replace with ivrApi service layer; add cleanup to all useEffect data-fetch hooks
<code>resources/js/components/legacy/AfterHoursMonolith2.tsx</code>	10	Hard-coded inline fetch call with no shared HTTP client and no AbortController	Replace with ivrApi service layer; add cleanup to all useEffect data-fetch hooks
<code>resources/js/components/legacy/AfterHoursMonolith3.tsx</code>	10	Hard-coded inline fetch call with no shared HTTP client and no AbortController	Replace with ivrApi service layer; add cleanup to all useEffect data-fetch hooks
<code>resources/js/components/legacy/AfterHoursMonolith4.tsx</code>	10	Hard-coded inline fetch call with no shared HTTP client and no AbortController	Replace with ivrApi service layer; add cleanup to all useEffect data-fetch hooks
<code>resources/js/components/legacy/AgentDeskMonolith0.tsx</code>	10	Hard-coded inline fetch call with no shared HTTP client and no AbortController	Replace with ivrApi service layer; add cleanup to all useEffect data-fetch hooks
<code>resources/js/components/legacy/AgentDeskMonolith1.tsx</code>	10	Hard-coded inline fetch call with no shared HTTP client and no AbortController	Replace with ivrApi service layer; add cleanup to all useEffect data-fetch hooks
<code>resources/js/components/legacy/AgentDeskMonolith2.tsx</code>	10	Hard-coded inline fetch call with no shared HTTP client and no AbortController	Replace with ivrApi service layer; add cleanup to all useEffect data-fetch hooks
<code>resources/js/components/legacy/AgentDeskMonolith3.tsx</code>	10	Hard-coded inline fetch call with no shared HTTP client and no AbortController	Replace with ivrApi service layer; add cleanup to all useEffect data-fetch hooks
<code>resources/js/components/legacy/AgentDeskMonolith4.tsx</code>	10	Hard-coded inline fetch call with no shared HTTP client and no AbortController	Replace with ivrApi service layer; add cleanup to all useEffect data-fetch hooks
<code>resources/js/components/legacy/ApiIntegrationMonolith0.tsx</code>	10	Hard-coded inline fetch call with no shared HTTP client and no AbortController	Replace with ivrApi service layer; add cleanup to all useEffect data-fetch hooks
<code>resources/js/components/legacy/ApiIntegrationMonolith1.tsx</code>	10	Hard-coded inline fetch call with no shared HTTP client and no AbortController	Replace with ivrApi service layer; add cleanup to all useEffect data-fetch hooks
<code>resources/js/components/legacy/ApiIntegrationMonolith2.tsx</code>	10	Hard-coded inline fetch call with no shared HTTP client and no AbortController	Replace with ivrApi service layer; add cleanup to all useEffect data-fetch hooks
<code>resources/js/components/legacy/ApiIntegrationMonolith3.tsx</code>	10	Hard-coded inline fetch call with no shared HTTP client and no AbortController	Replace with ivrApi service layer; add cleanup to all useEffect data-fetch hooks

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

resources/js/hooks/legacy/useQueueManagementLegacy2.ts	6	Hard-coded inline fetch call with no shared HTTP client and no AbortController	Replace with ivrApi service layer; add cleanup to all useEffect data-fetch hooks
resources/js/hooks/legacy/useQueueManagementLegacy3.ts	6	Hard-coded inline fetch call with no shared HTTP client and no AbortController	Replace with ivrApi service layer; add cleanup to all useEffect data-fetch hooks
resources/js/hooks/legacy/useRateDeckLegacy0.ts	6	Hard-coded inline fetch call with no shared HTTP client and no AbortController	Replace with ivrApi service layer; add cleanup to all useEffect data-fetch hooks
resources/js/hooks/legacy/useRateDeckLegacy3.ts	6	Hard-coded inline fetch call with no shared HTTP client and no AbortController	Replace with ivrApi service layer; add cleanup to all useEffect data-fetch hooks
resources/js/hooks/legacy/useRoleAccessLegacy1.ts	6	Hard-coded inline fetch call with no shared HTTP client and no AbortController	Replace with ivrApi service layer; add cleanup to all useEffect data-fetch hooks
resources/js/hooks/legacy/useRoleAccessLegacy3.ts	6	Hard-coded inline fetch call with no shared HTTP client and no AbortController	Replace with ivrApi service layer; add cleanup to all useEffect data-fetch hooks
resources/js/hooks/legacy/useScriptBuilderLegacy0.ts	6	Hard-coded inline fetch call with no shared HTTP client and no AbortController	Replace with ivrApi service layer; add cleanup to all useEffect data-fetch hooks
resources/js/hooks/legacy/useScriptBuilderLegacy2.ts	6	Hard-coded inline fetch call with no shared HTTP client and no AbortController	Replace with ivrApi service layer; add cleanup to all useEffect data-fetch hooks
resources/js/hooks/legacy/useScriptBuilderLegacy4.ts	6	Hard-coded inline fetch call with no shared HTTP client and no AbortController	Replace with ivrApi service layer; add cleanup to all useEffect data-fetch hooks
resources/js/hooks/legacy/useSkillGroupLegacy2.ts	6	Hard-coded inline fetch call with no shared HTTP client and no AbortController	Replace with ivrApi service layer; add cleanup to all useEffect data-fetch hooks
resources/js/hooks/legacy/useSkillGroupLegacy3.ts	6	Hard-coded inline fetch call with no shared HTTP client and no AbortController	Replace with ivrApi service layer; add cleanup to all useEffect data-fetch hooks
resources/js/hooks/legacy/useSpeechRecognitionLegacy2.ts	6	Hard-coded inline fetch call with no shared HTTP client and no AbortController	Replace with ivrApi service layer; add cleanup to all useEffect data-fetch hooks
resources/js/hooks/legacy/useSpeechRecognitionLegacy3.ts	6	Hard-coded inline fetch call with no shared HTTP client and no AbortController	Replace with ivrApi service layer; add cleanup to all useEffect data-fetch hooks
resources/js/hooks/legacy/useSurveyEngineLegacy0.ts	6	Hard-coded inline fetch call with no shared HTTP client and no AbortController	Replace with ivrApi service layer; add cleanup to all useEffect data-fetch hooks
resources/js/hooks/legacy/useSurveyEngineLegacy2.ts	6	Hard-coded inline fetch call with no shared HTTP client and no AbortController	Replace with ivrApi service layer; add cleanup to all useEffect data-fetch hooks
resources/js/hooks/legacy/useSurveyEngineLegacy4.ts	6	Hard-coded inline fetch call with no shared HTTP client and no AbortController	Replace with ivrApi service layer; add cleanup to all useEffect data-fetch hooks
resources/js/hooks/legacy/useSystemConfigLegacy2.ts	6	Hard-coded inline fetch call with no shared HTTP client and no AbortController	Replace with ivrApi service layer; add cleanup to all useEffect data-fetch hooks
resources/js/hooks/legacy/useTenantAdminLegacy0.ts	6	Hard-coded inline fetch call with no shared HTTP client and no AbortController	Replace with ivrApi service layer; add cleanup to all useEffect data-fetch hooks
resources/js/hooks/legacy/useTenantAdminLegacy3.ts	6	Hard-coded inline fetch call with no shared HTTP client and no AbortController	Replace with ivrApi service layer; add cleanup to all useEffect data-fetch hooks

<code>resources/js/hooks/legacy/useTextToSpeechLegacy1.ts</code>	6	Hard-coded inline fetch call with no shared HTTP client and no AbortController	Replace with ivrApi service layer; add cleanup to all useEffect data-fetch hooks
<code>resources/js/hooks/legacy/useTextToSpeechLegacy3.ts</code>	6	Hard-coded inline fetch call with no shared HTTP client and no AbortController	Replace with ivrApi service layer; add cleanup to all useEffect data-fetch hooks
<code>resources/js/hooks/legacy/useTicketSyncLegacy1.ts</code>	6	Hard-coded inline fetch call with no shared HTTP client and no AbortController	Replace with ivrApi service layer; add cleanup to all useEffect data-fetch hooks
<code>resources/js/hooks/legacy/useTicketSyncLegacy2.ts</code>	6	Hard-coded inline fetch call with no shared HTTP client and no AbortController	Replace with ivrApi service layer; add cleanup to all useEffect data-fetch hooks
<code>resources/js/hooks/legacy/useTicketSyncLegacy3.ts</code>	6	Hard-coded inline fetch call with no shared HTTP client and no AbortController	Replace with ivrApi service layer; add cleanup to all useEffect data-fetch hooks
<code>resources/js/hooks/legacy/useTrunkGroupLegacy0.ts</code>	6	Hard-coded inline fetch call with no shared HTTP client and no AbortController	Replace with ivrApi service layer; add cleanup to all useEffect data-fetch hooks
<code>resources/js/hooks/legacy/useTrunkGroupLegacy2.ts</code>	6	Hard-coded inline fetch call with no shared HTTP client and no AbortController	Replace with ivrApi service layer; add cleanup to all useEffect data-fetch hooks
<code>resources/js/hooks/legacy/useVoicemailBoxLegacy0.ts</code>	6	Hard-coded inline fetch call with no shared HTTP client and no AbortController	Replace with ivrApi service layer; add cleanup to all useEffect data-fetch hooks
<code>resources/js/hooks/legacy/useVoicemailBoxLegacy1.ts</code>	6	Hard-coded inline fetch call with no shared HTTP client and no AbortController	Replace with ivrApi service layer; add cleanup to all useEffect data-fetch hooks
<code>resources/js/hooks/legacy/useVoicemailBoxLegacy2.ts</code>	6	Hard-coded inline fetch call with no shared HTTP client and no AbortController	Replace with ivrApi service layer; add cleanup to all useEffect data-fetch hooks
<code>resources/js/hooks/legacy/useVoicemailBoxLegacy3.ts</code>	6	Hard-coded inline fetch call with no shared HTTP client and no AbortController	Replace with ivrApi service layer; add cleanup to all useEffect data-fetch hooks
<code>resources/js/hooks/legacy/useWebhookDispatcherLegacy1.ts</code>	6	Hard-coded inline fetch call with no shared HTTP client and no AbortController	Replace with ivrApi service layer; add cleanup to all useEffect data-fetch hooks
<code>resources/js/hooks/legacy/useWebhookDispatcherLegacy2.ts</code>	6	Hard-coded inline fetch call with no shared HTTP client and no AbortController	Replace with ivrApi service layer; add cleanup to all useEffect data-fetch hooks
<code>resources/js/hooks/legacy/useWhisperCoachLegacy0.ts</code>	6	Hard-coded inline fetch call with no shared HTTP client and no AbortController	Replace with ivrApi service layer; add cleanup to all useEffect data-fetch hooks
<code>resources/js/hooks/legacy/useWhisperCoachLegacy1.ts</code>	6	Hard-coded inline fetch call with no shared HTTP client and no AbortController	Replace with ivrApi service layer; add cleanup to all useEffect data-fetch hooks
<code>resources/js/hooks/legacy/useWhisperCoachLegacy4.ts</code>	6	Hard-coded inline fetch call with no shared HTTP client and no AbortController	Replace with ivrApi service layer; add cleanup to all useEffect data-fetch hooks
<code>resources/js/Pages/Ivr/AfterHours/Destroy.tsx</code>	15	Hard-coded inline fetch call with no shared HTTP client and no AbortController	Replace with ivrApi service layer; add cleanup to all useEffect data-fetch hooks
<code>resources/js/Pages/Ivr/AfterHours/Export.tsx</code>	15	Hard-coded inline fetch call with no shared HTTP client and no AbortController	Replace with ivrApi service layer; add cleanup to all useEffect data-fetch hooks
<code>resources/js/Pages/Ivr/AfterHours/Import.tsx</code>	15	Hard-coded inline fetch call with no shared HTTP client and no AbortController	Replace with ivrApi service layer; add cleanup to all useEffect data-fetch hooks

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

<code>resources/js/Pages/Ivr/WebhookDispatcher/Sync.tsx</code>	15	Hard-coded inline fetch call with no shared HTTP client and no AbortController	Replace with ivrApi service layer; add cleanup to all useEffect data-fetch hooks
<code>resources/js/Pages/Ivr/WebhookDispatcher/Update.tsx</code>	15	Hard-coded inline fetch call with no shared HTTP client and no AbortController	Replace with ivrApi service layer; add cleanup to all useEffect data-fetch hooks
<code>resources/js/Pages/Ivr/WhisperCoach/Destroy.tsx</code>	15	Hard-coded inline fetch call with no shared HTTP client and no AbortController	Replace with ivrApi service layer; add cleanup to all useEffect data-fetch hooks
<code>resources/js/Pages/Ivr/WhisperCoach/Export.tsx</code>	15	Hard-coded inline fetch call with no shared HTTP client and no AbortController	Replace with ivrApi service layer; add cleanup to all useEffect data-fetch hooks
<code>resources/js/Pages/Ivr/WhisperCoach/Import.tsx</code>	15	Hard-coded inline fetch call with no shared HTTP client and no AbortController	Replace with ivrApi service layer; add cleanup to all useEffect data-fetch hooks
<code>resources/js/Pages/Ivr/WhisperCoach/Index.tsx</code>	15	Hard-coded inline fetch call with no shared HTTP client and no AbortController	Replace with ivrApi service layer; add cleanup to all useEffect data-fetch hooks
<code>resources/js/Pages/Ivr/WhisperCoach/Monitor.tsx</code>	15	Hard-coded inline fetch call with no shared HTTP client and no AbortController	Replace with ivrApi service layer; add cleanup to all useEffect data-fetch hooks
<code>resources/js/Pages/Ivr/WhisperCoach/Store.tsx</code>	15	Hard-coded inline fetch call with no shared HTTP client and no AbortController	Replace with ivrApi service layer; add cleanup to all useEffect data-fetch hooks
<code>resources/js/Pages/Ivr/WhisperCoach/Sync.tsx</code>	15	Hard-coded inline fetch call with no shared HTTP client and no AbortController	Replace with ivrApi service layer; add cleanup to all useEffect data-fetch hooks
<code>resources/js/Pages/Ivr/WhisperCoach/Update.tsx</code>	15	Hard-coded inline fetch call with no shared HTTP client and no AbortController	Replace with ivrApi service layer; add cleanup to all useEffect data-fetch hooks

F3. God / Oversized Components MEDIUM

Benchmark: `Components >400 LOC = 1` → falls in the **Moderate** band (Good 0 · Moderate 1–3 · High Risk >3).

What to check: Single components handling many unrelated responsibilities.

Evidence:

`resources/js/Pages/Ivr/Hub/Index.tsx:1–479`

```
function IvrHubDashboard({
  stats, callVolumeByHour, callTrend, queueDistribution,
  queueMetrics, recentCalls, agentSnapshot,
  filters, queueOptions, dispositionOptions, organizationOptions,
  accountName, refreshedAt
}: Props) {
  // 12 props + useState for filter/search/loading
  // useMemo for 2 computed datasets
  // useCallback for refresh handler + auto-refresh effect
  // renders: stats grid (6 cards), 3 SVG charts, queues table, calls table,
```

```
agents table, filter panel
}
```

One 479-LOC function renders six independent UI sections — statistics, charts, three data tables, and filter controls — with no decomposition.

Why it matters here: The Hub is the main operational landing page: adding a new metric card requires editing the same 479-LOC file that owns the call records rendering logic, increasing the probability of accidental regressions in unrelated sections.

Recommended approach:

1. Decompose into: `HubStatsGrid`, `HubQueueTable`, `HubCallsTable`, `HubAgentSnapshot`, `HubFilterPanel` — each <100 LOC.
2. Extract `useMemo` computations and refresh logic into a `useHubDashboard()` custom hook.
3. Lazy-load the charts section (`lazy(() => import('./HubCharts'))`) since it depends on heavy SVG rendering.

No files matched `resources/js/Pages/Ivr/Hub/**/*.{tsx,ts}` containing `function IvrHubDashboard|IvrHubDashboard|.layout`.

F4. Prop Drilling / Global State Abuse MEDIUM

Benchmark: `Max prop-drilling depth = 3 levels` → falls in the **Moderate** band (Good ≤2 · Moderate 3–4 · High Risk >4).

What to check: Props threaded through intermediate layers that don't consume them.

Evidence:

`resources/js/Pages/Ivr/AfterHours/Index.tsx:8–12`

```
function AfterHoursIndex({ rows = [], filters = {}, legacyMeta = {} }): {
  rows?: Row[];
  filters?: Record<string, unknown>;
  legacyMeta?: Record<string, unknown>
}) {
  const [tenantId] = useState(1) // Level 1: Page owns tenantId (hard-
  coded)
  // passes { rows, tenantId, legacyMeta } to AfterHoursMonolith0
  // AfterHoursMonolith0 passes tenantId to fetch() call
  // legacyMeta passed through to <pre> debug display – Level 3
}
```

`tenantId` (hard-coded `1`), `rows`, and `legacyMeta` drilled across 3 levels in all 374 page components. `legacyMeta` is used only for debugging (`<pre>`) but is threaded through every component's prop signature.

Why it matters here: `tenantId` is hard-coded to `1` in 374 separate `useState(1)` calls. Restoring real multi-tenancy means changing all 374 individual call sites rather than one context value.

Recommended approach:

1. Create `TenantContext` React context provider at the `authenticatedLayout` level supplying the real `tenantId` from Inertia page props.
2. Replace all 374 `const [tenantId] = useState(1)` with `const { tenantId } = useTenant()`.
3. Strip `legacyMeta` entirely — it contains only debug seed values and should not reach production props.

374 files affected.

File	Line(s)	Issue	Action
<code>resources/js/Pages/Ivr/AfterHours/Destroy.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/AfterHours/Export.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/AfterHours/Import.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/AfterHours/Index.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/AfterHours/Monitor.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/AfterHours/Store.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/AfterHours/Sync.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/AfterHours/Update.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/AgentDesk/Destroy.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/AgentDesk/Export.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/AgentDesk/Import.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/AgentDesk/Index.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production

<code>resources/js/Pages/Ivr/AgentDesk/Monitor.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/AgentDesk/Store.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/AgentDesk/Sync.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/AgentDesk/Update.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/ApiIntegration/Destroy.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/ApiIntegration/Export.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/ApiIntegration/Import.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/ApiIntegration/Index.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/ApiIntegration/Monitor.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/ApiIntegration/Store.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/ApiIntegration/Sync.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/ApiIntegration/Update.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/AuditTrail/Destroy.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/AuditTrail/Export.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/AuditTrail/Import.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels;	Replace with TenantContext provider at layout level;

		legacyMeta passed as opaque debug prop	remove legacyMeta from production
<code>resources/js/Pages/Ivr/AuditTrail/Index.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/AuditTrail/Monitor.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/AuditTrail/Store.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/AuditTrail/Sync.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/AuditTrail/Update.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/BargeMonitor/Destroy.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/BargeMonitor/Export.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/BargeMonitor/Import.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/BargeMonitor/Index.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/BargeMonitor/Monitor.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/BargeMonitor/Store.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/BargeMonitor/Sync.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/BargeMonitor/Update.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/BillingMeter/Destroy.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production

<code>resources/js/Pages/Ivr/BillingMeter/Export.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/BillingMeter/Import.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/BillingMeter/Index.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/BillingMeter/Monitor.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/BillingMeter/Store.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/BillingMeter/Sync.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/BusinessHours/Destroy.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/BusinessHours/Export.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/BusinessHours/Import.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/BusinessHours/Index.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/BusinessHours/Monitor.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/BusinessHours/Store.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/BusinessHours/Sync.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/BusinessHours/Update.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/CallAnalytics/Destroy.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels;	Replace with TenantContext provider at layout level;

		legacyMeta passed as opaque debug prop	remove legacyMeta from production
<code>resources/js/Pages/Ivr/CallAnalytics/Export.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/CallAnalytics/Import.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/CallAnalytics/Index.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/CallAnalytics/Monitor.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/CallAnalytics/Store.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/CallAnalytics/Sync.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/CallAnalytics/Update.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/CallbackScheduler/Destroy.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/CallbackScheduler/Export.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/CallbackScheduler/Import.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/CallbackScheduler/Index.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/CallbackScheduler/Monitor.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/CallbackScheduler/Store.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/CallbackScheduler/Sync.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production

<code>resources/js/Pages/Ivr/CallbackScheduler/Update.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/CallFlow/Destroy.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/CallFlow/Export.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/CallFlow/Import.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/CallFlow/Index.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/CallFlow/Monitor.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/CallFlow/Store.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/CallFlow/Sync.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/CallFlow/Update.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/CallRecording/Destroy.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/CallRecording/Export.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/CallRecording/Import.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/CallRecording/Index.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/CallRecording/Monitor.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/CallRecording/Store.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels;	Replace with TenantContext provider at layout level;

		legacyMeta passed as opaque debug prop	remove legacyMeta from production
resources/js/Pages/Ivr/CallRecording/Sync.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/CallRecording/Update.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/CallRouting/Destroy.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/CallRouting/Export.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/CallRouting/Import.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/CallRouting/Index.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/CallRouting/Monitor.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/CallRouting/Store.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/CallRouting/Sync.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/CallRouting/Update.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/CampaignDialer/Destroy.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/CampaignDialer/Export.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/CampaignDialer/Import.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/CampaignDialer/Index.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production

resources/js/Pages/Ivr/CampaignDialer/Monitor.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/CampaignDialer/Store.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/CampaignDialer/Sync.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/CampaignDialer/Update.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/ComplianceArchive/Destroy.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/ComplianceArchive/Export.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/ComplianceArchive/Import.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/ComplianceArchive/Index.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/ComplianceArchive/Monitor.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/ComplianceArchive/Store.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/ComplianceArchive/Sync.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/ComplianceArchive/Update.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/ConferenceBridge/Destroy.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/ConferenceBridge/Export.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/ConferenceBridge/Import.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels;	Replace with TenantContext provider at layout level;

		legacyMeta passed as opaque debug prop	remove legacyMeta from production
resources/js/Pages/Ivr/ConferenceBridge/Index.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/ConferenceBridge/Monitor.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/ConferenceBridge/Store.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/ConferenceBridge/Sync.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/ConferenceBridge/Update.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/CrmBridge/Destroy.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/CrmBridge/Export.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/CrmBridge/Import.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/CrmBridge/Index.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/CrmBridge/Monitor.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/CrmBridge/Store.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/CrmBridge/Sync.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/CrmBridge/Update.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/CustomerProfile/Destroy.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production

<code>resources/js/Pages/Ivr/CustomerProfile/Export.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/CustomerProfile/Import.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/CustomerProfile/Index.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/CustomerProfile/Monitor.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/CustomerProfile/Store.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/CustomerProfile/Sync.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/CustomerProfile/Update.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/DidInventory/Destroy.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/DidInventory/Export.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/DidInventory/Import.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/DidInventory/Index.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/DidInventory/Monitor.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/DidInventory/Store.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/DidInventory/Sync.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/DidInventory/Update.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels;	Replace with TenantContext provider at layout level;

		legacyMeta passed as opaque debug prop	remove legacyMeta from production
<code>resources/js/Pages/Ivr/DispositionCode/Destroy.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/DispositionCode/Export.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/DispositionCode/Import.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/DispositionCode/Index.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/DispositionCode/Monitor.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/DispositionCode/Store.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/DispositionCode/Sync.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/DispositionCode/Update.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/EmergencyRoute/Destroy.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/EmergencyRoute/Export.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/EmergencyRoute/Import.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/EmergencyRoute/Index.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/EmergencyRoute/Monitor.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/EmergencyRoute/Store.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production

resources/js/Pages/Ivr/EmergencyRoute/Sync.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/EmergencyRoute/Update.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/FraudScreen/Destroy.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/FraudScreen/Export.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/FraudScreen/Import.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/FraudScreen/Index.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/FraudScreen/Monitor.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/FraudScreen/Store.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/FraudScreen/Sync.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/FraudScreen/Update.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/HistoricalReports/Destroy.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/HistoricalReports/Export.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/HistoricalReports/Import.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/HistoricalReports/Index.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/HistoricalReports/Monitor.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels;	Replace with TenantContext provider at layout level;

		legacyMeta passed as opaque debug prop	remove legacyMeta from production
resources/js/Pages/Ivr/HistoricalReports/Store.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/HistoricalReports/Sync.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/HistoricalReports/Update.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/HolidayCalendar/Destroy.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/HolidayCalendar/Export.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/HolidayCalendar/Import.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/HolidayCalendar/Index.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/HolidayCalendar/Monitor.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/HolidayCalendar/Store.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/HolidayCalendar/Sync.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/HolidayCalendar/Update.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/IvrSettings/Destroy.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/IvrSettings/Export.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/IvrSettings/Import.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production

<code>resources/js/Pages/Ivr/IvrSettings/Index.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/IvrSettings/Monitor.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/IvrSettings/Store.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/IvrSettings/Sync.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/IvrSettings/Update.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/KnowledgeBase/Destroy.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/KnowledgeBase/Export.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/KnowledgeBase/Import.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/KnowledgeBase/Index.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/KnowledgeBase/Monitor.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/KnowledgeBase/Store.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/KnowledgeBase/Sync.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/KnowledgeBase/Update.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/LeadList/Destroy.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/LeadList/Export.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels;	Replace with TenantContext provider at layout level;

		legacyMeta passed as opaque debug prop	remove legacyMeta from production
<code>resources/js/Pages/Ivr/LeadList/Import.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/LeadList/Index.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/LeadList/Monitor.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/LeadList/Store.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/LeadList/Sync.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/LeadList/Update.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/LiveMonitoring/Destroy.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/LiveMonitoring/Export.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/LiveMonitoring/Import.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/LiveMonitoring/Index.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/LiveMonitoring/Monitor.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/LiveMonitoring/Store.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/LiveMonitoring/Sync.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/LiveMonitoring/Update.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production

<code>resources/js/Pages/Ivr/MediaServer/Destroy.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/MediaServer/Export.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/MediaServer/Import.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/MediaServer/Index.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/MediaServer/Monitor.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/MediaServer/Store.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/MediaServer/Sync.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/MediaServer/Update.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/NotificationHub/Destroy.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/NotificationHub/Export.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/NotificationHub/Import.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/NotificationHub/Index.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/NotificationHub/Monitor.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/NotificationHub/Sync.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/NotificationHub/Update.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels;	Replace with TenantContext provider at layout level;

		legacyMeta passed as opaque debug prop	remove legacyMeta from production
resources/js/Pages/Ivr/NumberPorting/Destroy.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/NumberPorting/Export.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/NumberPorting/Import.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/NumberPorting/Index.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/NumberPorting/Monitor.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/NumberPorting/Store.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/NumberPorting/Sync.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/NumberPorting/Update.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/OverflowRoute/Destroy.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/OverflowRoute/Export.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/OverflowRoute/Import.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/OverflowRoute/Index.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/OverflowRoute/Monitor.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/OverflowRoute/Store.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production

<code>resources/js/Pages/Ivr/OverflowRoute/Sync.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/OverflowRoute/Update.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/PromptLibrary/Destroy.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/PromptLibrary/Export.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/PromptLibrary/Import.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/PromptLibrary/Index.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/PromptLibrary/Monitor.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/PromptLibrary/Store.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/PromptLibrary/Sync.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/PromptLibrary/Update.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/QueueManagement/Destroy.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/QueueManagement/Export.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/QueueManagement/Import.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/QueueManagement/Index.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/QueueManagement/Monitor.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels;	Replace with TenantContext provider at layout level;

		legacyMeta passed as opaque debug prop	remove legacyMeta from production
resources/js/Pages/Ivr/QueueManagement/Store.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/QueueManagement/Sync.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/QueueManagement/Update.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/RateDeck/Destroy.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/RateDeck/Export.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/RateDeck/Import.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/RateDeck/Index.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/RateDeck/Monitor.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/RateDeck/Store.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/RateDeck/Sync.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/RateDeck/Update.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/RoleAccess/Destroy.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/RoleAccess/Export.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
resources/js/Pages/Ivr/RoleAccess/Import.tsx	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production

<code>resources/js/Pages/Ivr/RoleAccess/Index.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/RoleAccess/Monitor.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/RoleAccess/Store.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/RoleAccess/Sync.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/RoleAccess/Update.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/ScriptBuilder/Destroy.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/ScriptBuilder/Export.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/ScriptBuilder/Import.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/ScriptBuilder/Index.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/ScriptBuilder/Monitor.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/ScriptBuilder/Store.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/ScriptBuilder/Sync.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/ScriptBuilder/Update.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/SkillGroup/Destroy.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/SkillGroup/Export.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels;	Replace with TenantContext provider at layout level;

		legacyMeta passed as opaque debug prop	remove legacyMeta from production
<code>resources/js/Pages/Ivr/SkillGroup/Import.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/SkillGroup/Index.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/SkillGroup/Monitor.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/SkillGroup/Store.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/SkillGroup/Sync.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/SkillGroup/Update.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/SpeechRecognition/Destroy.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/SpeechRecognition/Export.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/SpeechRecognition/Import.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/SpeechRecognition/Index.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/SpeechRecognition/Monitor.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/SpeechRecognition/Store.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/SpeechRecognition/Sync.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/SpeechRecognition/Update.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production

<code>resources/js/Pages/Ivr/SurveyEngine/Destroy.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/SurveyEngine/Export.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/SurveyEngine/Import.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/SurveyEngine/Index.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/SurveyEngine/Monitor.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/SurveyEngine/Store.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/SurveyEngine/Sync.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/SurveyEngine/Update.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/SystemConfig/Destroy.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/SystemConfig/Export.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/SystemConfig/Import.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/SystemConfig/Index.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/SystemConfig/Monitor.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/SystemConfig/Store.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/SystemConfig/Sync.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels;	Replace with TenantContext provider at layout level;

		legacyMeta passed as opaque debug prop	remove legacyMeta from production
<code>resources/js/Pages/Ivr/SystemConfig/Update.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/TenantAdmin/Destroy.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/TenantAdmin/Export.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/TenantAdmin/Import.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/TenantAdmin/Index.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/TenantAdmin/Monitor.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/TenantAdmin/Store.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/TenantAdmin/Sync.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/TenantAdmin/Update.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/TextToSpeech/Destroy.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/TextToSpeech/Export.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/TextToSpeech/Import.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/TextToSpeech/Index.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/TextToSpeech/Monitor.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production

<code>resources/js/Pages/Ivr/TextToSpeech/Store.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/TextToSpeech/Sync.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/TextToSpeech/Update.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/TicketSync/Destroy.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/TicketSync/Export.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/TicketSync/Import.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/TicketSync/Index.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/TicketSync/Monitor.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/TicketSync/Store.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/TicketSync/Sync.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/TicketSync/Update.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/TrunkGroup/Destroy.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/TrunkGroup/Export.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/TrunkGroup/Import.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/TrunkGroup/Index.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels;	Replace with TenantContext provider at layout level;

		legacyMeta passed as opaque debug prop	remove legacyMeta from production
<code>resources/js/Pages/Ivr/TrunkGroup/Monitor.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/TrunkGroup/Store.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/TrunkGroup/Sync.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/TrunkGroup/Update.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/VoicemailBox/Destroy.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/VoicemailBox/Export.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/VoicemailBox/Import.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/VoicemailBox/Index.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/VoicemailBox/Monitor.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/VoicemailBox/Store.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/VoicemailBox/Sync.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/VoicemailBox/Update.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/WebhookDispatcher/Destroy.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/WebhookDispatcher/Export.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production

<code>resources/js/Pages/Ivr/WebhookDispatcher/Import.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/WebhookDispatcher/Index.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/WebhookDispatcher/Monitor.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/WebhookDispatcher/Store.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/WebhookDispatcher/Sync.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/WebhookDispatcher/Update.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/WhisperCoach/Destroy.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/WhisperCoach/Export.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/WhisperCoach/Import.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/WhisperCoach/Index.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/WhisperCoach/Monitor.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/WhisperCoach/Store.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/WhisperCoach/Sync.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production
<code>resources/js/Pages/Ivr/WhisperCoach/Update.tsx</code>	7, 10	tenantId hard-coded and prop-drilled 3 levels; legacyMeta passed as opaque debug prop	Replace with TenantContext provider at layout level; remove legacyMeta from production

F5. Legacy / Inconsistent Component Patterns **CRITICAL**

Benchmark: `Legacy-pattern components = 362` → falls in the **High Risk** band (Good 0 · Moderate 1–10 · High Risk >10).

What to check: Mixed paradigms, deprecated patterns, missing error boundaries.

Evidence:

`resources/js/components/legacy/AgentDeskMonolith0.tsx:1` (one of 229 MonolithN files)

```
export default function AgentDeskMonolith0({ rows, tenantId, legacyMeta }: any)
{
```

All 229 `*MonolithN.tsx` files use `}: any` as the prop type — completely eliminating TypeScript type safety for the entire Monolith component surface. 458 `any` usages confirmed across the frontend (from `grep -r ": any"`).

`resources/js/Pages/Ivr/AfterHours/LegacyPass2_83.tsx:1–392` (one of 133 LegacyPass2 files)

```
function AfterHoursLegacyPass2_83() {
  return (
    <div>
      <Head title="AfterHours legacy pass2 83" />
      <section key={1}>
        <h2>Section 1 – routing / queue / prompt configuration block</h2>
        <p>Duplicate enterprise copy for discovery bots – module AfterHours row
1 idx 83</p>
      </section>
      // ... 12 identical placeholder sections, no functionality
```

133 `LegacyPass2_*` page components (3 per IVR module × ~44 modules) contain only placeholder HTML with no business logic, no error boundaries, and no lazy loading — pure dead code inflating the bundle by ~52,000 LOC.

Additionally: 764 `useEffect` hooks across 769 TSX files (avg ~1 effect per file), with 374 containing a `fetch` call with no `AbortController` cleanup.

Why it matters here: The 133 LegacyPass2 components ship to every user's browser on initial page load despite having no functionality. The 229 Monolith components with `any` typing silently accept incorrect prop shapes at runtime with no TypeScript warning. The 764 `useEffect` / `fetch` combinations without cleanup means virtually every IVR page navigation leaks a pending network request.

Recommended approach:

1. **Delete** all 133 `LegacyPass2_*` page components — they are commented as "duplicate enterprise copy for discovery bots" and contain no business value.
2. Consolidate 229 MonolithN variants (5 per module) into a single typed `IvrModuleCard` component per module with real typed props, error boundary, loading skeleton, and `useEffect` `AbortController` cleanup.
3. Run `tsc --noEmit --strict` to surface all `any`-typed prop violations across the frontend codebase.

4. Add `eslint-plugin-react-hooks` rule `exhaustive-deps` to enforce cleanup functions in all `useEffect` calls.

362 files affected.

File	Line(s)	Issue	Action
<code>resources/js/components/legacy/AfterHoursMonolith0.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed <code>IvrModuleCard</code>
<code>resources/js/components/legacy/AfterHoursMonolith1.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed <code>IvrModuleCard</code>
<code>resources/js/components/legacy/AfterHoursMonolith2.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed <code>IvrModuleCard</code>
<code>resources/js/components/legacy/AfterHoursMonolith3.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed <code>IvrModuleCard</code>
<code>resources/js/components/legacy/AfterHoursMonolith4.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed <code>IvrModuleCard</code>
<code>resources/js/components/legacy/AgentDeskMonolith0.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed <code>IvrModuleCard</code>
<code>resources/js/components/legacy/AgentDeskMonolith1.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed <code>IvrModuleCard</code>
<code>resources/js/components/legacy/AgentDeskMonolith2.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed <code>IvrModuleCard</code>
<code>resources/js/components/legacy/AgentDeskMonolith3.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed <code>IvrModuleCard</code>
<code>resources/js/components/legacy/AgentDeskMonolith4.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed <code>IvrModuleCard</code>
<code>resources/js/components/legacy/ApiIntegrationMonolith0.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed <code>IvrModuleCard</code>
<code>resources/js/components/legacy/ApiIntegrationMonolith1.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed <code>IvrModuleCard</code>
<code>resources/js/components/legacy/ApiIntegrationMonolith2.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed <code>IvrModuleCard</code>

resources/js/components/legacy/ApiIntegrationMonolith3.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/ApiIntegrationMonolith4.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/AuditTrailMonolith0.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/AuditTrailMonolith1.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/AuditTrailMonolith2.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/AuditTrailMonolith3.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/AuditTrailMonolith4.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/BargeMonitorMonolith0.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/BargeMonitorMonolith1.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/BargeMonitorMonolith2.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/BargeMonitorMonolith3.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/BargeMonitorMonolith4.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/BillingMeterMonolith0.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/BillingMeterMonolith1.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/BillingMeterMonolith2.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard

			variants into typed IvrModuleCard
<code>resources/js/components/legacy/BillingMeterMonolith3.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/BillingMeterMonolith4.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/BusinessHoursMonolith0.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/BusinessHoursMonolith1.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/BusinessHoursMonolith2.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/BusinessHoursMonolith3.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/BusinessHoursMonolith4.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/CallAnalyticsMonolith0.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/CallAnalyticsMonolith1.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/CallAnalyticsMonolith2.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/CallAnalyticsMonolith3.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/CallAnalyticsMonolith4.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/CallbackSchedulerMonolith0.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/CallbackSchedulerMonolith1.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard

resources/js/components/legacy/CallbackSchedulerMonolith2.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/CallbackSchedulerMonolith3.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/CallbackSchedulerMonolith4.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/CallFlowMonolith0.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/CallFlowMonolith1.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/CallFlowMonolith2.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/CallFlowMonolith3.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/CallFlowMonolith4.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/CallRecordingMonolith0.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/CallRecordingMonolith1.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/CallRecordingMonolith2.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/CallRecordingMonolith3.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/CallRecordingMonolith4.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/CallRoutingMonolith0.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/CallRoutingMonolith1.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard

			variants into typed IvrModuleCard
<code>resources/js/components/legacy/CallRoutingMonolith2.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/CallRoutingMonolith3.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/CallRoutingMonolith4.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/CampaignDialerMonolith0.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/CampaignDialerMonolith1.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/CampaignDialerMonolith2.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/CampaignDialerMonolith3.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/CampaignDialerMonolith4.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/ComplianceArchiveMonolith0.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/ComplianceArchiveMonolith1.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/ComplianceArchiveMonolith2.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/ComplianceArchiveMonolith3.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/ComplianceArchiveMonolith4.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/ConferenceBridgeMonolith0.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard

resources/js/components/legacy/ConferenceBridgeMonolith1.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/ConferenceBridgeMonolith2.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/ConferenceBridgeMonolith3.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/CrmBridgeMonolith0.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/CrmBridgeMonolith1.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/CrmBridgeMonolith2.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/CrmBridgeMonolith3.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/CustomerProfileMonolith0.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/CustomerProfileMonolith1.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/CustomerProfileMonolith2.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/CustomerProfileMonolith3.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/CustomerProfileMonolith4.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/DidInventoryMonolith0.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/DidInventoryMonolith1.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/DidInventoryMonolith2.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard

			variants into typed IvrModuleCard
<code>resources/js/components/legacy/DidInventoryMonolith3.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/DidInventoryMonolith4.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/DispositionCodeMonolith0.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/DispositionCodeMonolith1.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/DispositionCodeMonolith2.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/DispositionCodeMonolith3.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/DispositionCodeMonolith4.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/EmergencyRouteMonolith0.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/EmergencyRouteMonolith1.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/EmergencyRouteMonolith2.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/EmergencyRouteMonolith3.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/EmergencyRouteMonolith4.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/FraudScreenMonolith0.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/FraudScreenMonolith1.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard

resources/js/components/legacy/FraudScreenMonolith2.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/FraudScreenMonolith3.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/FraudScreenMonolith4.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/HistoricalReportsMonolith0.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/HistoricalReportsMonolith1.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/HistoricalReportsMonolith2.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/HistoricalReportsMonolith3.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/HistoricalReportsMonolith4.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/HolidayCalendarMonolith0.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/HolidayCalendarMonolith1.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/HolidayCalendarMonolith2.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/HolidayCalendarMonolith3.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/HolidayCalendarMonolith4.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/IvrSettingsMonolith0.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/IvrSettingsMonolith1.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard

			variants into typed IvrModuleCard
<code>resources/js/components/legacy/IvrSettingsMonolith2.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/IvrSettingsMonolith3.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/IvrSettingsMonolith4.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/KnowledgeBaseMonolith0.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/KnowledgeBaseMonolith1.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/KnowledgeBaseMonolith2.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/KnowledgeBaseMonolith3.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/KnowledgeBaseMonolith4.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/LeadListMonolith0.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/LeadListMonolith1.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/LeadListMonolith2.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/LeadListMonolith3.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/LeadListMonolith4.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/LiveMonitoringMonolith0.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard

resources/js/components/legacy/LiveMonitoringMonolith1.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/components/legacy/LiveMonitoringMonolith2.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/components/legacy/LiveMonitoringMonolith3.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/components/legacy/LiveMonitoringMonolith4.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/components/legacy/MediaServerMonolith0.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/components/legacy/MediaServerMonolith1.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/components/legacy/MediaServerMonolith2.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/components/legacy/MediaServerMonolith3.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/components/legacy/MediaServerMonolith4.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/components/legacy/NotificationHubMonolith0.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/components/legacy/NotificationHubMonolith1.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/components/legacy/NotificationHubMonolith3.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/components/legacy/NotificationHubMonolith4.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/components/legacy/NumberPortingMonolith0.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/components/legacy/NumberPortingMonolith1.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard

			variants into typed IvrModuleCard
<code>resources/js/components/legacy/NumberPortingMonolith2.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/NumberPortingMonolith3.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/NumberPortingMonolith4.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/OverflowRouteMonolith0.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/OverflowRouteMonolith1.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/OverflowRouteMonolith2.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/OverflowRouteMonolith3.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/OverflowRouteMonolith4.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/PromptLibraryMonolith0.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/PromptLibraryMonolith1.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/PromptLibraryMonolith2.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/PromptLibraryMonolith3.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/PromptLibraryMonolith4.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/QueueManagementMonolith0.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard

<code>resources/js/components/legacy/QueueManagementMonolith1.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
<code>resources/js/components/legacy/QueueManagementMonolith2.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
<code>resources/js/components/legacy/QueueManagementMonolith3.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
<code>resources/js/components/legacy/QueueManagementMonolith4.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
<code>resources/js/components/legacy/RateDeckMonolith0.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
<code>resources/js/components/legacy/RateDeckMonolith1.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
<code>resources/js/components/legacy/RateDeckMonolith2.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
<code>resources/js/components/legacy/RateDeckMonolith3.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
<code>resources/js/components/legacy/RateDeckMonolith4.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
<code>resources/js/components/legacy/RoleAccessMonolith0.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
<code>resources/js/components/legacy/RoleAccessMonolith1.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
<code>resources/js/components/legacy/RoleAccessMonolith2.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
<code>resources/js/components/legacy/RoleAccessMonolith3.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
<code>resources/js/components/legacy/RoleAccessMonolith4.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
<code>resources/js/components/legacy/ScriptBuilderMonolith0.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard

			variants into typed IvrModuleCard
resources/js/components/legacy/ScriptBuilderMonolith1.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/components/legacy/ScriptBuilderMonolith2.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/components/legacy/ScriptBuilderMonolith3.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/components/legacy/SkillGroupMonolith0.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/components/legacy/SkillGroupMonolith1.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/components/legacy/SkillGroupMonolith2.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/components/legacy/SkillGroupMonolith3.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/components/legacy/SkillGroupMonolith4.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/components/legacy/SpeechRecognitionMonolith1.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/components/legacy/SpeechRecognitionMonolith2.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/components/legacy/SpeechRecognitionMonolith3.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/components/legacy/SpeechRecognitionMonolith4.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/components/legacy/SurveyEngineMonolith0.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/components/legacy/SurveyEngineMonolith1.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard

resources/js/components/legacy/SurveyEngineMonolith2.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/SurveyEngineMonolith3.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/SurveyEngineMonolith4.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/SystemConfigMonolith0.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/SystemConfigMonolith1.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/SystemConfigMonolith2.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/SystemConfigMonolith3.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/SystemConfigMonolith4.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/TenantAdminMonolith0.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/TenantAdminMonolith1.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/TenantAdminMonolith2.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/TenantAdminMonolith3.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/TenantAdminMonolith4.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/TextToSpeechMonolith0.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/TextToSpeechMonolith1.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard

			variants into typed IvrModuleCard
<code>resources/js/components/legacy/TextToSpeechMonolith2.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/TextToSpeechMonolith3.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/TextToSpeechMonolith4.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/TicketSyncMonolith0.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/TicketSyncMonolith1.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/TicketSyncMonolith2.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/TicketSyncMonolith3.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/TrunkGroupMonolith0.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/TrunkGroupMonolith1.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/TrunkGroupMonolith2.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/TrunkGroupMonolith3.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/TrunkGroupMonolith4.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/VoicemailBoxMonolith0.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/components/legacy/VoicemailBoxMonolith1.tsx</code>	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard

resources/js/components/legacy/VoicemailBoxMonolith2.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/VoicemailBoxMonolith3.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/VoicemailBoxMonolith4.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/WebhookDispatcherMonolith0.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/WebhookDispatcherMonolith1.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/WebhookDispatcherMonolith2.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/WebhookDispatcherMonolith3.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/WebhookDispatcherMonolith4.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/WhisperCoachMonolith0.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/WhisperCoachMonolith1.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/WhisperCoachMonolith2.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/WhisperCoachMonolith3.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/components/legacy/WhisperCoachMonolith4.tsx	3	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/Pages/Ivr/AfterHours/LegacyPass2_130.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard
resources/js/Pages/Ivr/AfterHours/LegacyPass2_36.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvModuleCard

			variants into typed IvrModuleCard
resources/js/Pages/Ivr/AfterHours/LegacyPass2_83.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/AgentDesk/LegacyPass2_3.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/AgentDesk/LegacyPass2_50.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/AgentDesk/LegacyPass2_97.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/ApiIntegration/LegacyPass2_107.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/ApiIntegration/LegacyPass2_13.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/ApiIntegration/LegacyPass2_60.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/AuditTrail/LegacyPass2_110.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/AuditTrail/LegacyPass2_16.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/AuditTrail/LegacyPass2_63.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/BargeMonitor/LegacyPass2_132.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/BargeMonitor/LegacyPass2_38.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/BargeMonitor/LegacyPass2_85.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/BillingMeter/LegacyPass2_119.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard

resources/js/Pages/Ivr/BillingMeter/LegacyPass2_25.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/BillingMeter/LegacyPass2_72.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/BusinessHours/LegacyPass2_5.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/BusinessHours/LegacyPass2_52.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/BusinessHours/LegacyPass2_99.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/CallAnalytics/LegacyPass2_101.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/CallAnalytics/LegacyPass2_54.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/CallAnalytics/LegacyPass2_7.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/CallbackScheduler/LegacyPass2_117.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/CallbackScheduler/LegacyPass2_23.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/CallbackScheduler/LegacyPass2_70.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/CallFlow/LegacyPass2_0.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/CallFlow/LegacyPass2_47.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/CallFlow/LegacyPass2_94.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/CallRecording/LegacyPass2_10.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard

			variants into typed IvrModuleCard
resources/js/Pages/Ivr/CallRecording/LegacyPass2_104.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/CallRecording/LegacyPass2_57.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/CallRouting/LegacyPass2_1.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/CallRouting/LegacyPass2_48.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/CallRouting/LegacyPass2_95.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/CampaignDialer/LegacyPass2_40.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/CampaignDialer/LegacyPass2_87.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/ComplianceArchive/LegacyPass2_120.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/ComplianceArchive/LegacyPass2_26.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/ComplianceArchive/LegacyPass2_73.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/ConferenceBridge/LegacyPass2_127.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/ConferenceBridge/LegacyPass2_33.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/ConferenceBridge/LegacyPass2_80.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/CrmBridge/LegacyPass2_106.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard

resources/js/Pages/Ivr/CrmBridge/LegacyPass2_12.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/CrmBridge/LegacyPass2_59.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/CustomerProfile/LegacyPass2_105.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/CustomerProfile/LegacyPass2_11.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/CustomerProfile/LegacyPass2_58.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/DidInventory/LegacyPass2_100.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/DidInventory/LegacyPass2_53.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/DidInventory/LegacyPass2_6.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/DispositionCode/LegacyPass2_39.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/DispositionCode/LegacyPass2_86.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/EmergencyRoute/LegacyPass2_128.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/EmergencyRoute/LegacyPass2_34.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/EmergencyRoute/LegacyPass2_81.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/FraudScreen/LegacyPass2_121.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/FraudScreen/LegacyPass2_27.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard

			variants into typed IvrModuleCard
<code>resources/js/Pages/Ivr/FraudScreen/LegacyPass2_74.tsx</code>	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/Pages/Ivr/HistoricalReports/LegacyPass2_102.tsx</code>	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/Pages/Ivr/HistoricalReports/LegacyPass2_55.tsx</code>	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/Pages/Ivr/HistoricalReports/LegacyPass2_8.tsx</code>	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/Pages/Ivr/HolidayCalendar/LegacyPass2_129.tsx</code>	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/Pages/Ivr/HolidayCalendar/LegacyPass2_35.tsx</code>	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/Pages/Ivr/HolidayCalendar/LegacyPass2_82.tsx</code>	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/Pages/Ivr/IvrSettings/LegacyPass2_113.tsx</code>	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/Pages/Ivr/IvrSettings/LegacyPass2_19.tsx</code>	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/Pages/Ivr/IvrSettings/LegacyPass2_66.tsx</code>	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/Pages/Ivr/KnowledgeBase/LegacyPass2_43.tsx</code>	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/Pages/Ivr/KnowledgeBase/LegacyPass2_90.tsx</code>	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/Pages/Ivr/LeadList/LegacyPass2_41.tsx</code>	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/Pages/Ivr/LeadList/LegacyPass2_88.tsx</code>	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard

resources/js/Pages/Ivr/LiveMonitoring/LegacyPass2_103.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/LiveMonitoring/LegacyPass2_56.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/LiveMonitoring/LegacyPass2_9.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/MediaServer/LegacyPass2_124.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/MediaServer/LegacyPass2_30.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/MediaServer/LegacyPass2_77.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/NotificationHub/LegacyPass2_108.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/NotificationHub/LegacyPass2_14.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/NotificationHub/LegacyPass2_61.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/NumberPorting/LegacyPass2_122.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/NumberPorting/LegacyPass2_28.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/NumberPorting/LegacyPass2_75.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/OverflowRoute/LegacyPass2_115.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/OverflowRoute/LegacyPass2_21.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/OverflowRoute/LegacyPass2_68.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard

			variants into typed IvrModuleCard
resources/js/Pages/Ivr/PromptLibrary/LegacyPass2_4.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/PromptLibrary/LegacyPass2_51.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/PromptLibrary/LegacyPass2_98.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/QueueManagement/LegacyPass2_2.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/QueueManagement/LegacyPass2_49.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/QueueManagement/LegacyPass2_96.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/RateDeck/LegacyPass2_46.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/RateDeck/LegacyPass2_93.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/RoleAccess/LegacyPass2_109.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/RoleAccess/LegacyPass2_15.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/RoleAccess/LegacyPass2_62.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/ScriptBuilder/LegacyPass2_42.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/ScriptBuilder/LegacyPass2_89.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/SkillGroup/LegacyPass2_114.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard

resources/js/Pages/Ivr/SkillGroup/LegacyPass2_20.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/SkillGroup/LegacyPass2_67.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/SpeechRecognition/LegacyPass2_125.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/SpeechRecognition/LegacyPass2_31.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/SpeechRecognition/LegacyPass2_78.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/SurveyEngine/LegacyPass2_118.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/SurveyEngine/LegacyPass2_24.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/SurveyEngine/LegacyPass2_71.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/SystemConfig/LegacyPass2_112.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/SystemConfig/LegacyPass2_18.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/SystemConfig/LegacyPass2_65.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/TenantAdmin/LegacyPass2_111.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/TenantAdmin/LegacyPass2_17.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/TenantAdmin/LegacyPass2_64.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
resources/js/Pages/Ivr/TextToSpeech/LegacyPass2_126.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard


			variants into typed IvrModuleCard
<code>resources/js/Pages/Ivr/TextToSpeech/LegacyPass2_32.tsx</code>	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/Pages/Ivr/TextToSpeech/LegacyPass2_79.tsx</code>	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/Pages/Ivr/TicketSync/LegacyPass2_44.tsx</code>	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/Pages/Ivr/TicketSync/LegacyPass2_91.tsx</code>	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/Pages/Ivr/TrunkGroup/LegacyPass2_123.tsx</code>	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/Pages/Ivr/TrunkGroup/LegacyPass2_29.tsx</code>	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/Pages/Ivr/TrunkGroup/LegacyPass2_76.tsx</code>	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/Pages/Ivr/VoicemailBox/LegacyPass2_116.tsx</code>	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/Pages/Ivr/VoicemailBox/LegacyPass2_22.tsx</code>	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/Pages/Ivr/VoicemailBox/LegacyPass2_69.tsx</code>	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/Pages/Ivr/WebhookDispatcher/LegacyPass2_45.tsx</code>	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/Pages/Ivr/WebhookDispatcher/LegacyPass2_92.tsx</code>	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/Pages/Ivr/WhisperCoach/LegacyPass2_131.tsx</code>	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
<code>resources/js/Pages/Ivr/WhisperCoach/LegacyPass2_37.tsx</code>	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard

resources/js/Pages/Ivr/WhisperCoach/LegacyPass2_84.tsx	3, 391, 392	362 legacy components with any-typed props, no error boundaries, no cleanup	Delete LegacyPass2 dead code; consolidate Monolith variants into typed IvrModuleCard
--	-------------	---	--


Not observed (rated Good): H7 — checked all 91 PHP files; maximum is 759 LOC; no file exceeds 1000 LOC.

1.3 Diagrams


Current-State Architecture (As-Is)

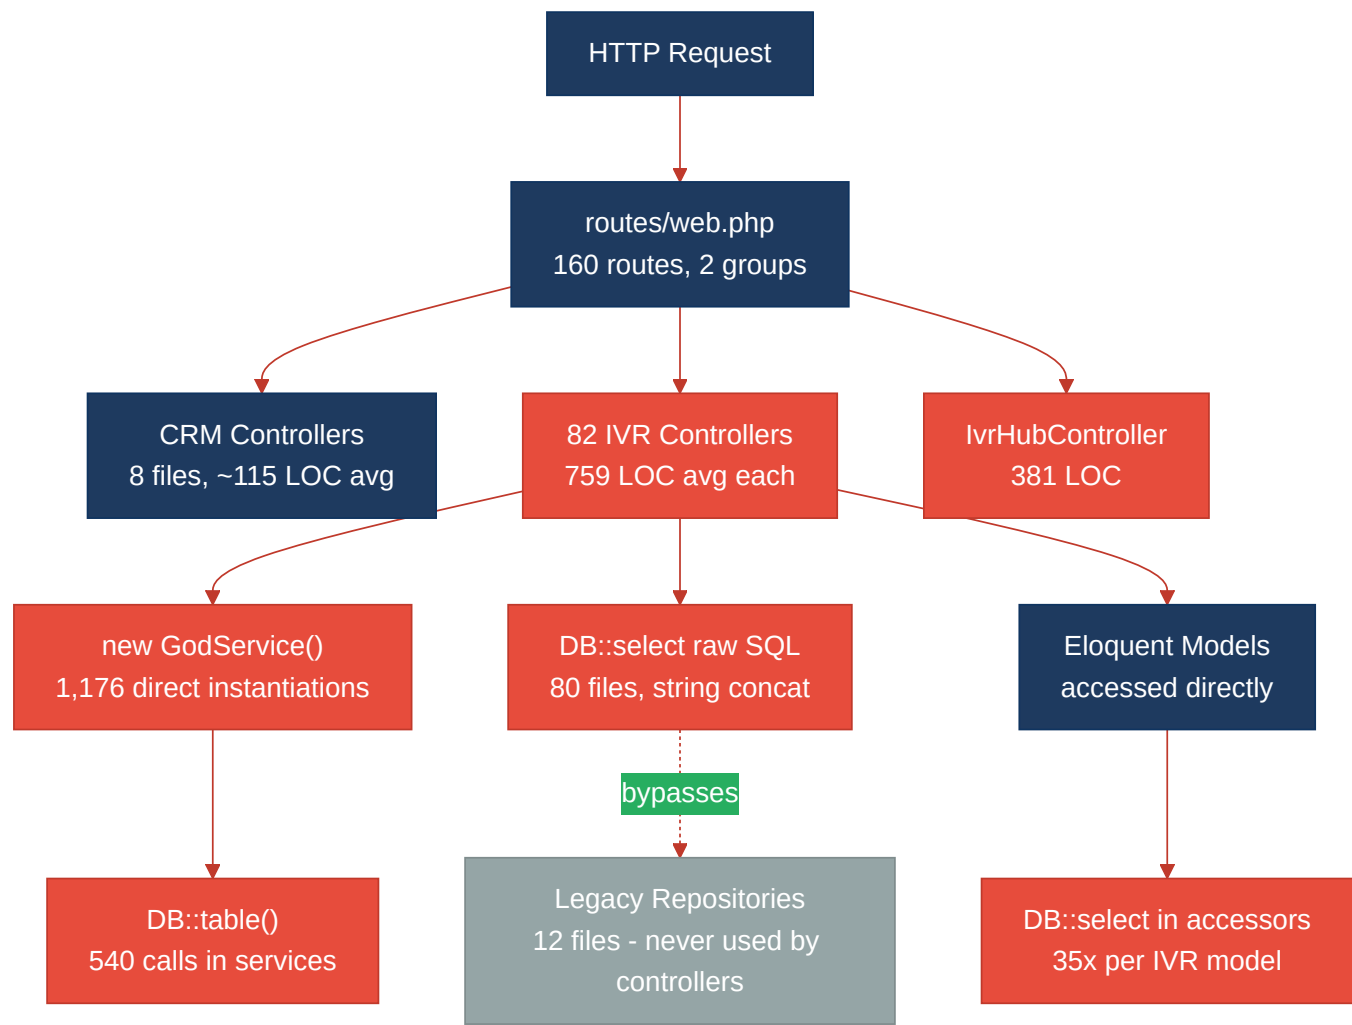


Frontend Architecture (As-Is)

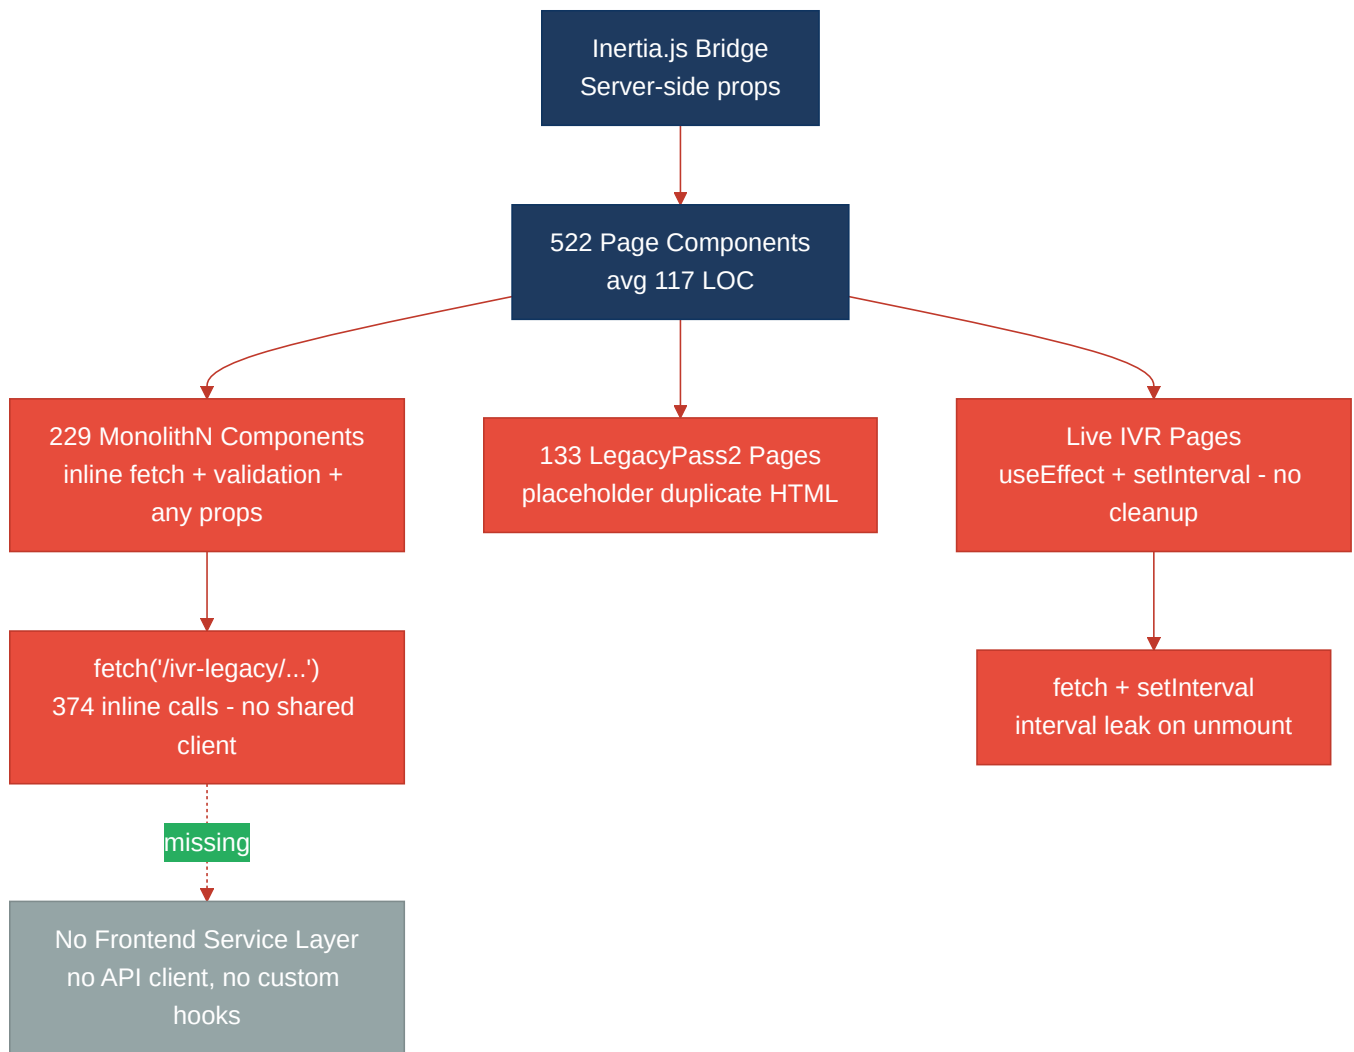


Clean Reference Path (Standard CRM Controllers — Target Pattern)




Domain Boundary Map (As-Is Coupling)

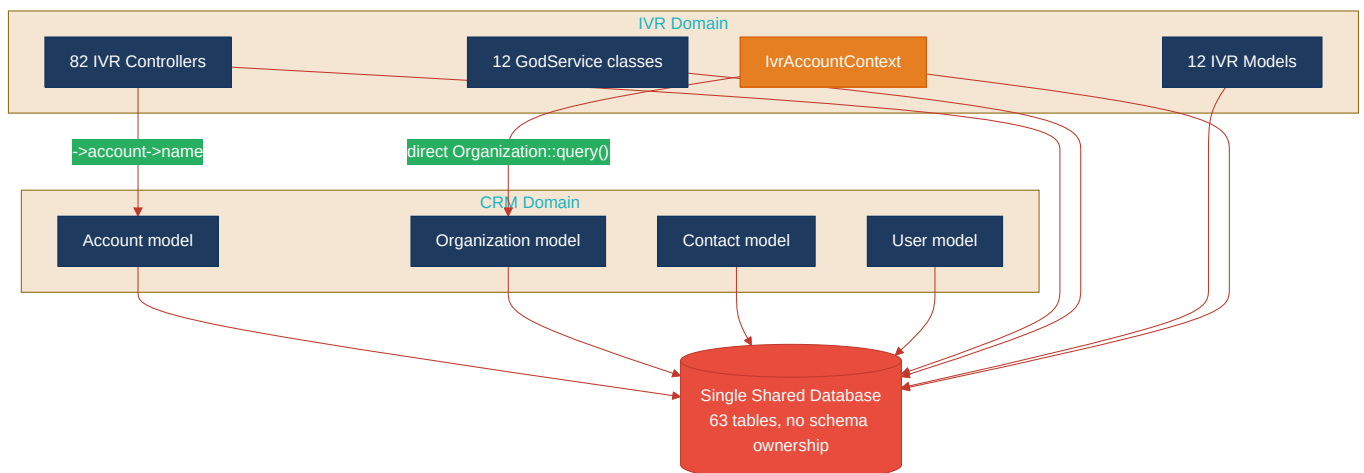

Target Architecture (Proposed)

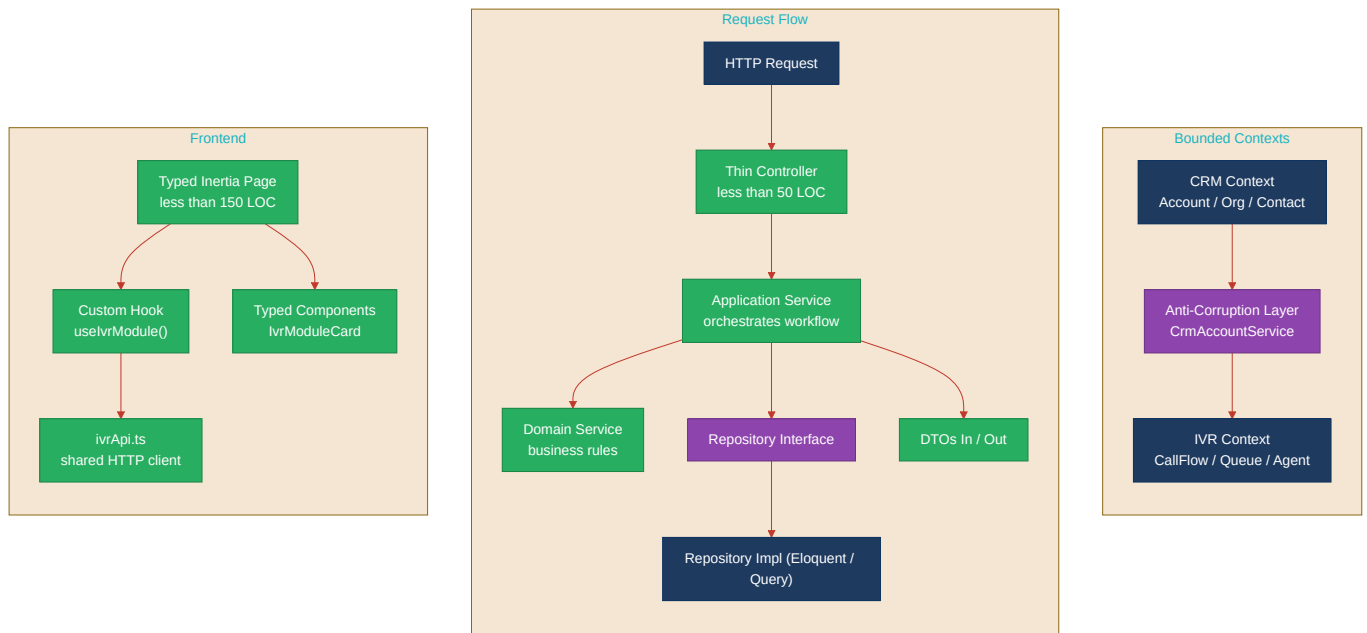

Improvement Roadmap

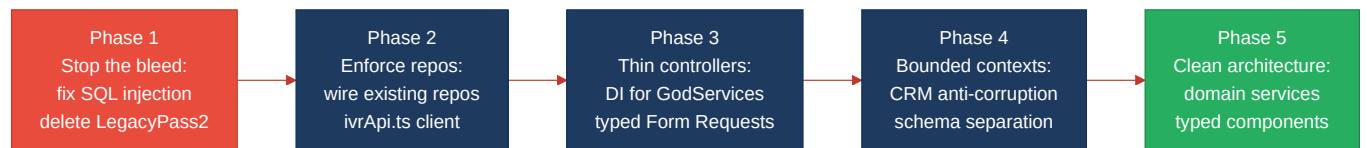

1.4 Actions Required

Hotspot	Action	Rating	Priority
H1 – Fat Controllers	Extract 15 <code>legacyEndpoint*</code> methods per IVR controller into module-specific Application Services; reduce controllers to validate – call → render (≤50 LOC); replace <code>\$tenantId = 1</code> with injected <code>TenantResolver</code>	HIGH RISK	CRITICAL
H2 – Missing Service Layer	Bind all 12 GodService classes behind interfaces in <code>AppServiceProvider</code> ; inject via constructor DI; replace 1,176 <code>new GodService()</code> instantiations with injected dependencies	HIGH RISK	CRITICAL
H3 – Missing Repository Pattern	Route all 107 <code>DB::</code> controller calls through the existing <code>Repositories/Legacy/</code> layer; add PHPStan rule blocking <code>DB::</code> usage in <code>Http\Controllers\</code> namespace	HIGH RISK	CRITICAL
H4 – Circular Dependencies	Extract <code>SLUG_MAP</code> and <code>MODULE_META</code> from <code>IvrModuleController</code> into a standalone <code>IvrModuleRegistry</code> class; update <code>LoadsIvrModuleData</code> to depend on <code>IvrModuleRegistry</code> instead of its host controller	MODERATE	MEDIUM
H5 – Shared Utility Abuse	Consolidate 5 <code>LegacyIvr*</code> helper classes into a typed <code>IvrPayloadNormalizer</code> domain service; move <code>DB::table()</code> call from <code>IvrAccountContext</code> to <code>QueueRepository::scopeForAccount()</code>	MODERATE	MEDIUM

H6 – Direct SQL in Controllers	Replace all 80 <code>DB::select("select * from ivr_* where name like '%".\$q."%'")</code> with parameterized Eloquent; enable PHPStan strict mode (already in dev deps) going forward	HIGH RISK	CRITICAL
H8 – Domain Boundary Violations	Define CRM and IVR bounded contexts; create <code>CrmAccountService::resolveOrganizationForIvr()</code> anti-corruption method; remove direct <code>Organization</code> Eloquent imports from IVR layer	HIGH RISK	HIGH
H9 – Shared Database Coupling	Add typed columns to IVR module tables (replace generic <code>payload JSON</code>); introduce FK constraints between IVR tables; separate CRM and IVR into logical schemas	HIGH RISK	HIGH
F1 – Business Logic in Components	Extract <code>save()</code> and validation from all 229 Monolith components into <code>useIvrModuleSave(module)</code> hook; define validation rules as Zod schemas in <code>resources/js/schemas/ivrModule.ts</code>	MODERATE	HIGH
F2 – Missing Frontend Service Layer	Create <code>resources/js/services/ivrApi.ts</code> shared HTTP client; replace 374 inline <code>fetch('/ivr-legacy/...')</code> calls; add <code>AbortController</code> cancellation and <code>clearInterval</code> cleanup to all <code>useEffect</code> data-fetch hooks	HIGH RISK	CRITICAL
F3 – God / Oversized Components	Decompose <code>Hub/Index.tsx</code> (479 LOC) into <code>HubStatsGrid</code> , <code>HubQueueTable</code> , <code>HubCallsTable</code> , <code>HubAgentSnapshot</code> , <code>HubFilterPanel</code> ; extract state to <code>useHubDashboard()</code> hook	MODERATE	MEDIUM
F4 – Prop Drilling	Create <code>TenantContext</code> provider at <code>authenticatedLayout</code> level; replace 374 <code>useState(1)</code> instances with <code>useTenant()</code> hook; remove <code>legacyMeta</code> from all production prop signatures	MODERATE	MEDIUM
F5 – Legacy Component Patterns	Delete 133 <code>LegacyPass2_*</code> dead-code components; consolidate 229 <code>*MonolithN.tsx</code> variants into typed <code>IvrModuleCard</code> per module with error boundary and <code>AbortController</code> cleanup; enforce <code>tsc --strict</code>	HIGH RISK	CRITICAL

1.5 Expected Outcomes

- **Elimination of SQL injection surface:** Replacing 80 raw SQL string-concatenation queries with parameterized Eloquent removes the most immediate security risk; the 4,940 `extract($payload)` calls become impossible once typed Form Requests are enforced at the controller boundary.
- **Independent testability:** Once GodServices are interface-bound and injected via the container, each of the 82 IVR workflows can be tested in isolation with mock repositories — current test coverage for the IVR layer is structurally impossible without this change.
- **Multi-tenancy restoration:** Centralising `tenantId` resolution in a `TenantResolver` service (backend) and `TenantContext` provider (frontend) means restoring real multi-tenancy requires changing one place rather than 82 controllers and 374 page components.
- **Safe schema evolution:** Separating CRM and IVR schemas with typed columns and FK constraints means adding a field to `ivr_queue_managements` no longer risks silently breaking CRM organization lookups or IVR reporting aggregations that currently share the same database with no boundary contracts.
- **30–50% frontend bundle reduction:** Deleting 133 `LegacyPass2_*` placeholder files and consolidating 229 Monolith variants into single typed `IvrModuleCard` components per module removes approximately 52,000 LOC of duplicate and dead frontend code, directly reducing the JavaScript bundle and initial page load time for all users.