

Experiment 2

1. Aim

Use `var`, `let`, `const`, and demonstrate basic features like template literals and destructuring; build a billing calculator with user input.

2. Software/Tools Required

- Visual Studio Code (VS Code) or Notepad++
- Google Chrome / Mozilla Firefox / Microsoft Edge
- HTML
- JavaScript

3. Theory

JavaScript provides different ways to declare variables:


- **var** is function-scoped and can be redeclared and updated.
- **let** is block-scoped and can be updated but not redeclared within the same block.
- **const** is block-scoped and cannot be reassigned after initialization.

Template literals use backticks (```) to create strings and allow embedding variables using ``${}``.

Destructuring is a JavaScript feature that extracts values from arrays or objects into separate variables.

In this experiment, a billing calculator accepts user input such as item name, quantity, and price. It calculates the total bill and displays the result using template literals while demonstrating the use of `var`, `let`, `const`, and destructuring.

4. Output

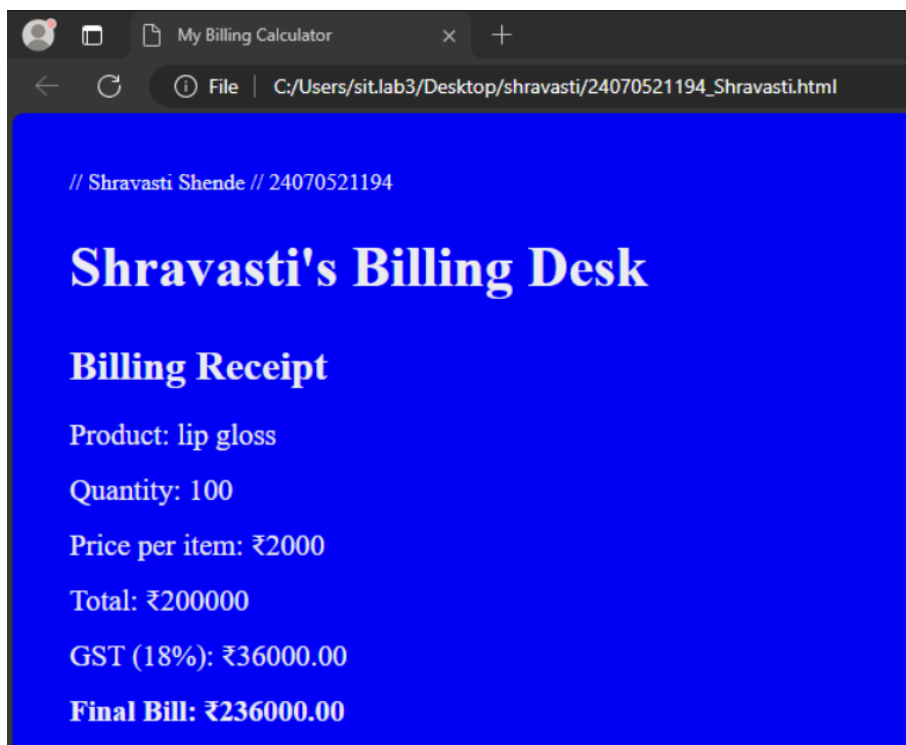

5. Result/Conclusion

The experiment was executed successfully. The concepts of `var`, `let`, `const`, template literals, and destructuring were demonstrated, and the billing calculator correctly accepted user input and displayed the total bill.