```html
<html data-n-head-ssr data-n-head="">
```

```html
<meta data-n-head="true" charset="utf-8"/>
```

```html
<meta data-n-head="true" name="viewport" content="width=device-width, initial-
```

```html
<meta data-n-head="true" data-hid="description" name="description"
```

scale=1"/>

content="Meet.js project"/>

```html
<link data-n-head="true" rel="icon" type="image/x-icon" href="/favicon.ico"/>
```

```html
<title data-n-head="true">meetjs</title>
```

```html
<link rel="preload" href="/_nuxt/manifest.01e3104cb38517568746.js" as="script">
```

```html
<link rel="preload" href="/_nuxt/app.af1b897b7e75c128f1f5.js" as="script">
```

```html
<link rel="preload" href="/_nuxt/common.e91d94cf917f06793e56.js" as="script">
```

```html
<link rel="prefetch" href="/_nuxt/pages/index.11857ae043280f040cf7.js">
```

```html
<style data-vue-ssr-id="0b2440a2:0">.container{background:white};</style>
```

`</head>`

```html
<div id="__nuxt" data-server-rendered="true">
```

```html
<body data-n-head="">
```

frameworkData from state: 0.2624791076133157

```html
<link rel="prefetch" href="/_nuxt/layouts/default.cadb7e5c1b50ffe4e97a.js">
```

```
"layout": "default",
```

```
// Asynchrounously resolved compoennt data
```

```
<script type="text/javascript">
```

```
window.__NUXT__ = {
```

```
"error": null,
```

```
"state": { "frameworkData": 0.2624791076133157 },
```

```
"data": [],
```

```
// Asynchrounously resolved Vuex store data
```

```
"serverRendered": true
```

`</script>`

```html
<script src="/_nuxt/common.e91d94cf917f06793e56.js" defer></script>
```

```html
<script src="/_nuvt/app.af1b897b7e75c128f1f5.js" defer></script>
```

`</body>`

```html
<script src="/_nuxt/manifest.01e3104cb38517568746.js" defer></script>
```
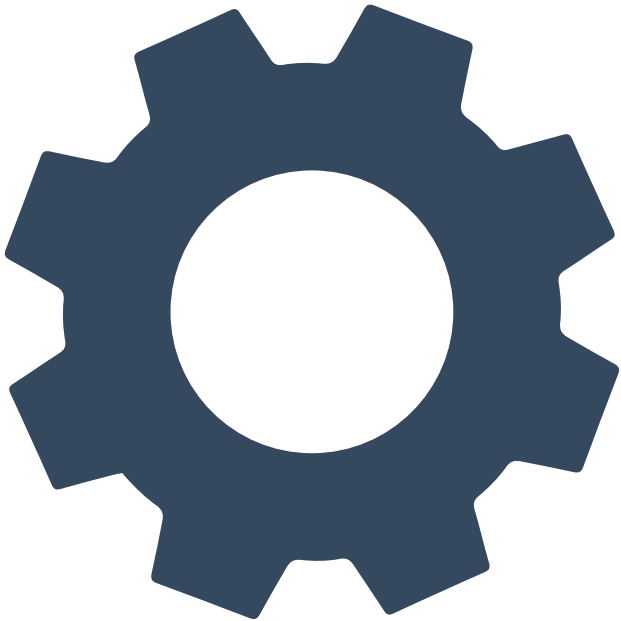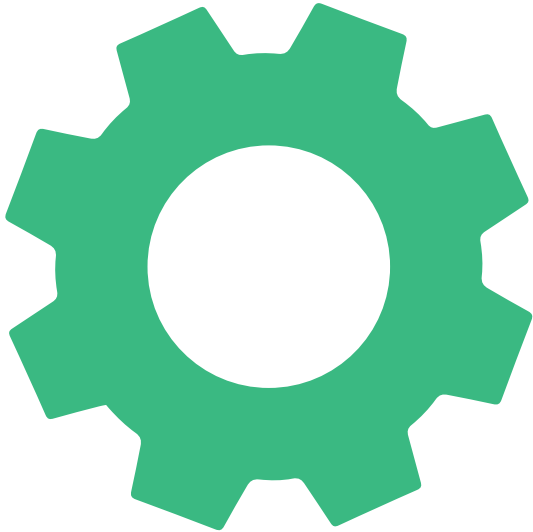
Browser

What we got is a

snapshot of our app.