




To enable local judge, create a new “Directory” at the same level as “src”.

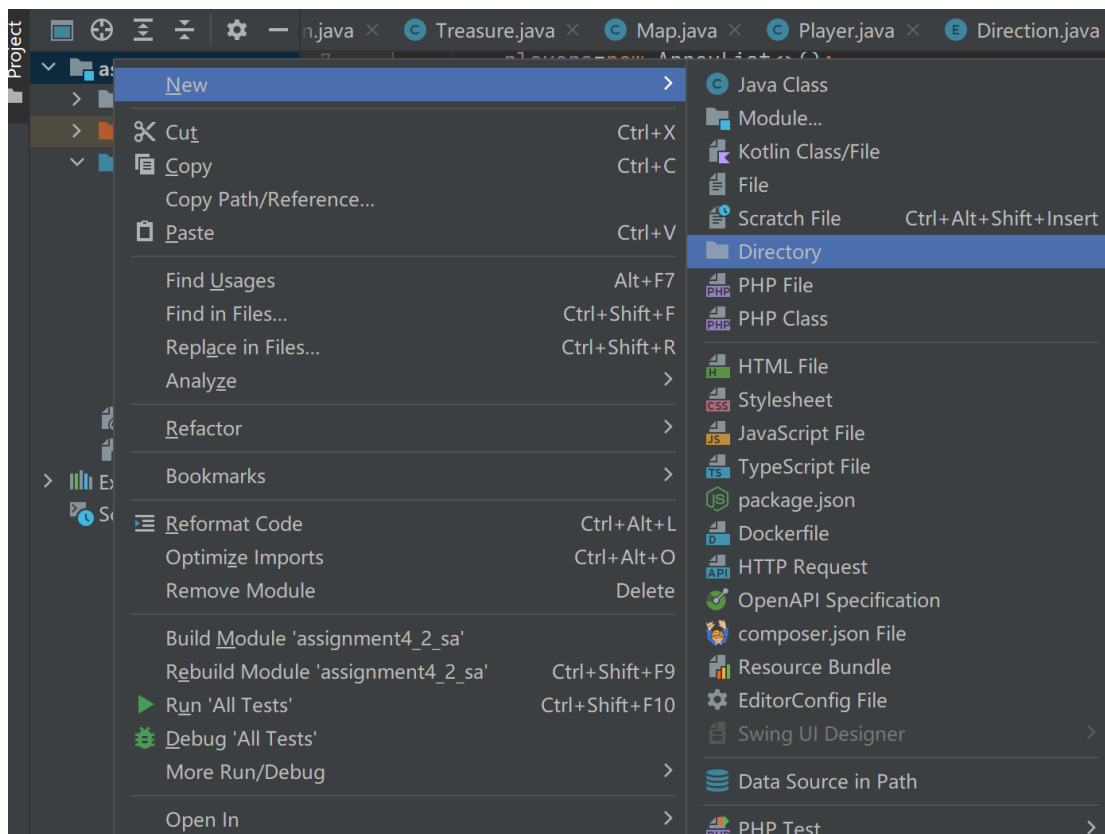


Then you will get a gray Directory named “Test”.

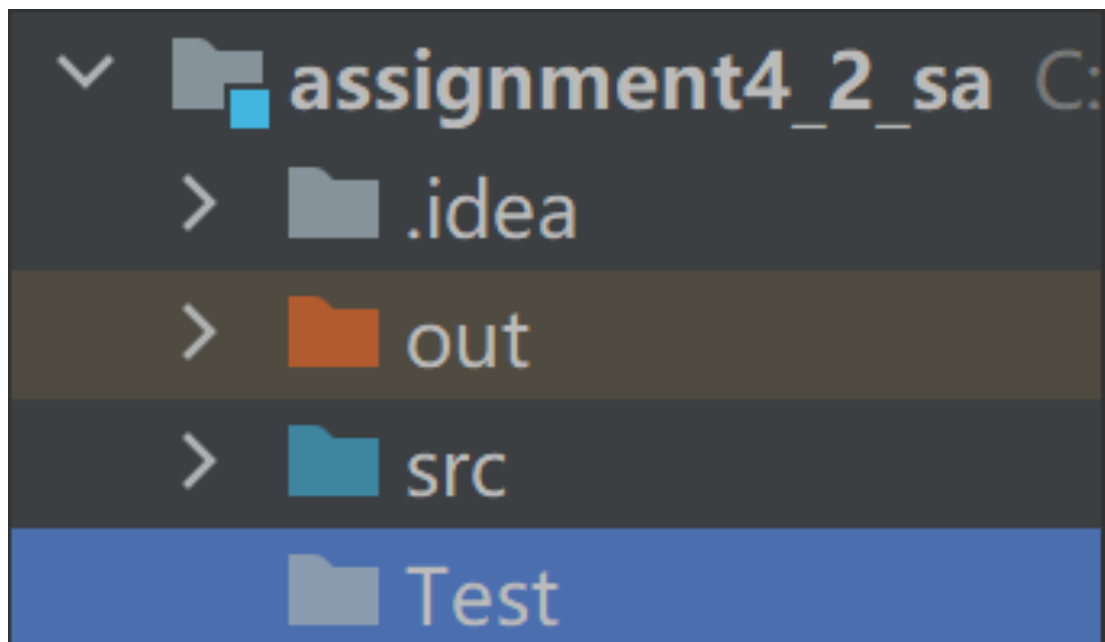

Next, you need to move local judge file into the “Test” directory. And set “Test” directory by “Mark Directory as” to “Test Sources Root”.

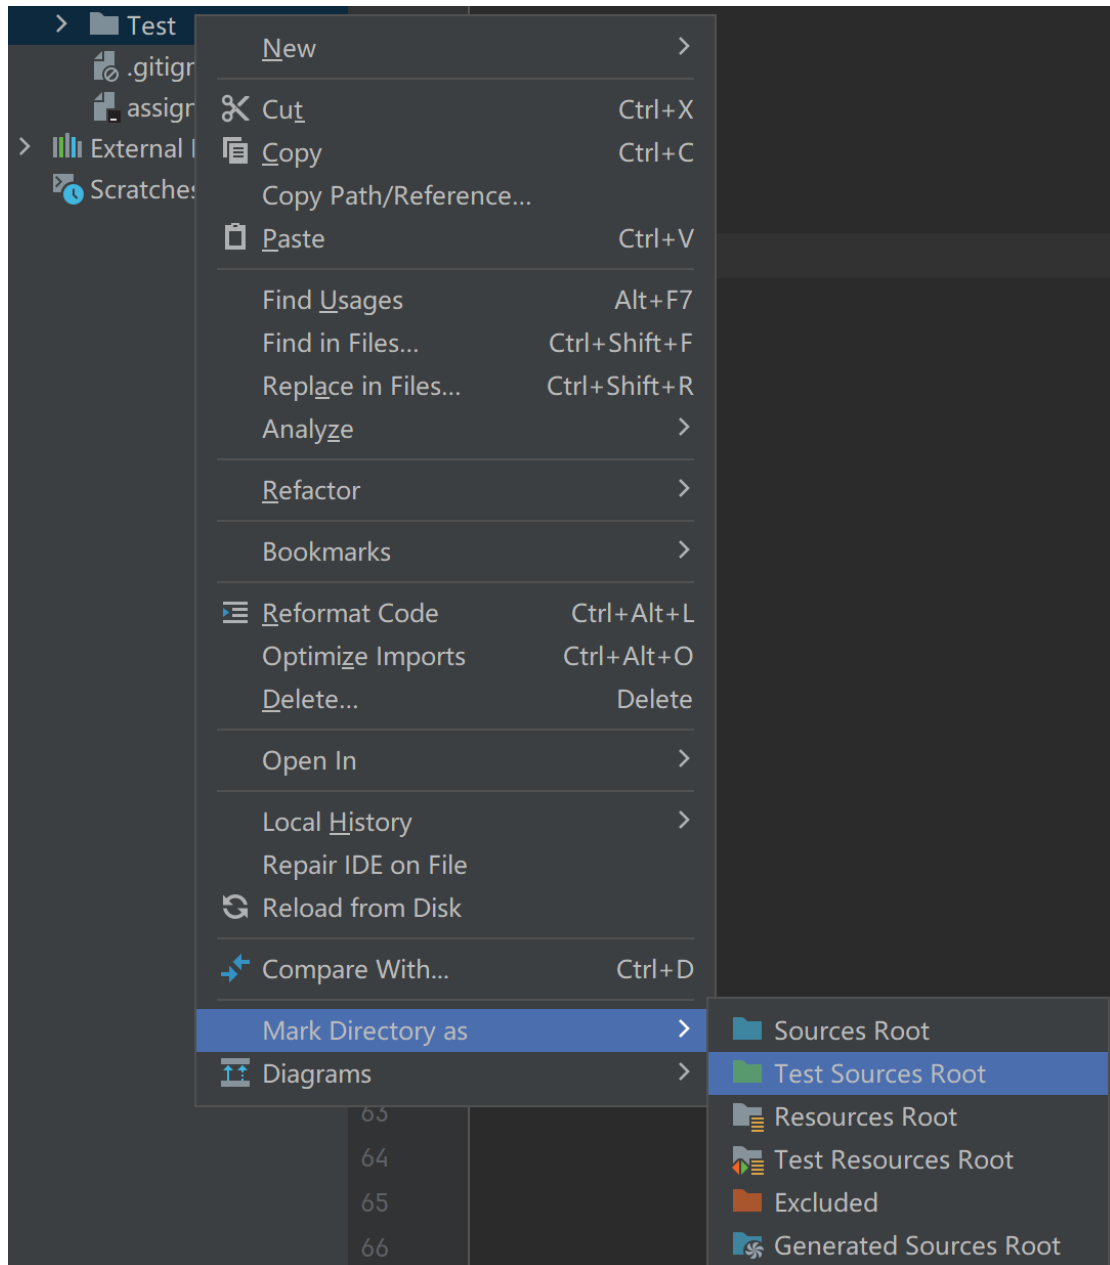

Probably, “junit” will be marked in red. “Show Context Actions” is a handy button to set up junit.

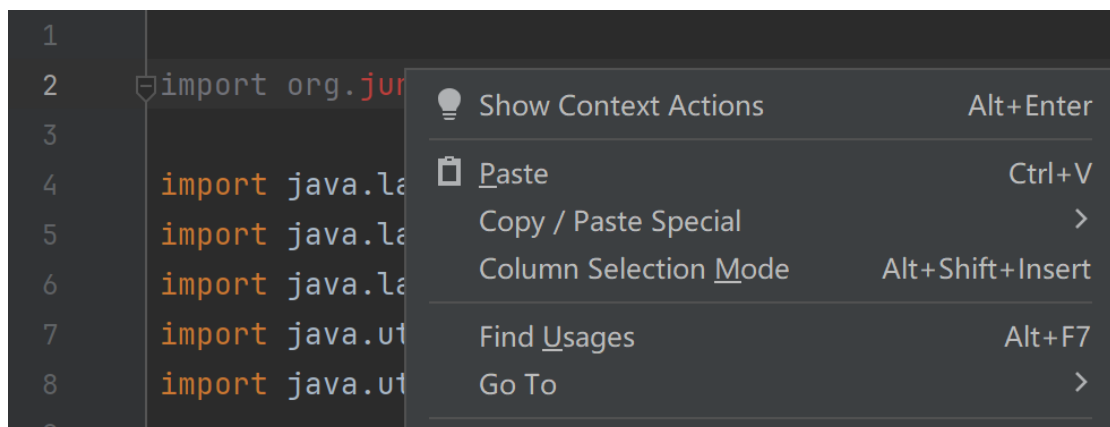

Add **JUnit5.8.1** to classpath, and you can enjoy your local judge now. (A kind reminder: It is not recommended to Add JUnit4 and Junit5 in a same Test code.)

