


User Manual

Detailed setup and step-by-step guide for storing, finding, sorting, and managing passwords, API keys, tokens, and secure notes.

Important security notice

This version stores data in your browser's local storage without encryption. Use sample or non-sensitive data only. Do not store real production passwords, recovery codes, private keys, or live API tokens until encryption and a master-password lock are implemented.

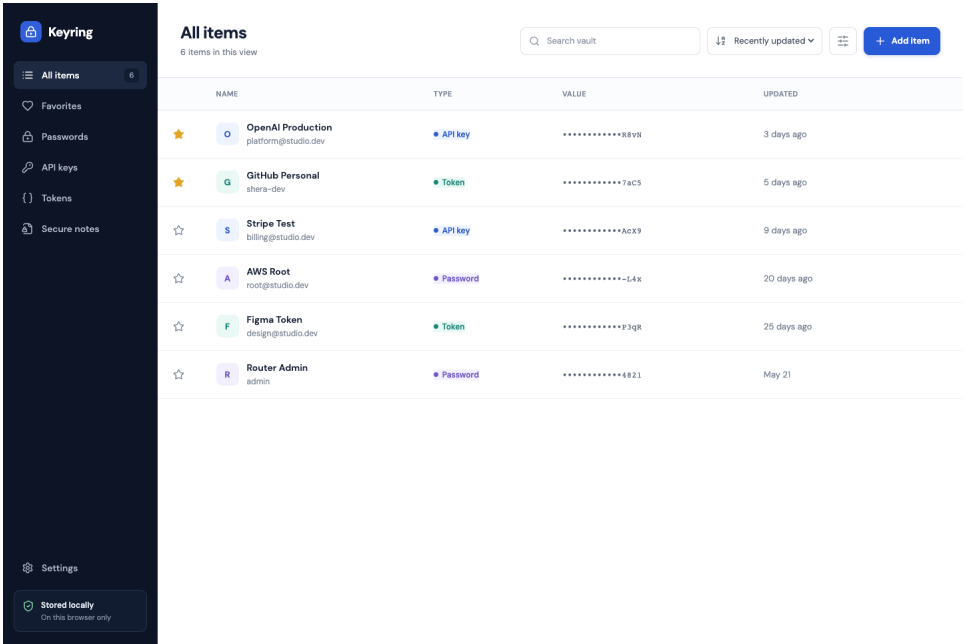

Keyring desktop vault: categories, search, sorting, and credential list.

Manual version	1.0
Application	Keyring 0.1 local prototype
Prepared	June 22, 2026
Project folder	/Users/shera184/dev/cx/STR

Contents

- 1. Before you begin 3
- 2. Install and start Keyring 4
- 3. Understand the main screen 5
- 4. Add your first item 7
- 5. Find, sort, and organize items 9
- 6. View, copy, reveal, edit, and delete 11
- 7. Use Keyring on a small screen 13
- 8. Storage, privacy, and safe usage 14
- 9. Troubleshooting 15
- 10. Quick reference checklist 16

What Keyring does

Keyring is a local credential organizer. It gives you one searchable place to record passwords, API keys, access tokens, and secure notes. You can group items by type, mark important items as favorites, sort the list, and open a detail panel for each record.

What the current version does not do

No encryption	Saved values are readable by scripts or people who can access this browser profile.
No master password	The app opens without asking you to unlock the vault.
No cloud sync	Items do not automatically move to another computer or browser.
No export or backup	There is currently no built-in backup, import, or recovery workflow.
No accounts	There is no login, team sharing, or permission system.

Recommended use

Use this build to learn the workflow, organize sample credentials, and validate the interface. Add encryption before using it as a real password manager.

1. Before you begin

What you need

Computer	macOS, Windows, or Linux.
Node.js and npm	Required to install dependencies and run the local web app.
Web browser	Chrome, Edge, Safari, or Firefox. Chrome or Edge is recommended for development testing.
Project files	The Keyring project folder supplied with this manual.
Terminal	The command-line application used to enter the setup commands.

Check whether Node.js is installed

1 Open Terminal

On macOS, press Command + Space, type **Terminal**, and press Return.

2 Check Node.js

Enter the following command and press Return:

```
node --version
```

3 Check npm

Enter the following command and press Return:

```
npm --version
```

Expected result

Each command should print a version number. If Terminal says command not found, install the current LTS release from <https://nodejs.org> and then repeat the checks.

Locate the project folder

For this delivered copy, the project is located at `/Users/shera184/dev/cx/STR`. If you move the project, replace that path in later commands with the new location.

Understand Terminal prompts

You only type the command shown in the dark command boxes. Do not type the surrounding explanation. Press Return after each command and wait for it to finish before entering the next one.

2. Install and start Keyring

1 Open the project folder in Terminal

Enter:

```
cd /Users/shera184/dev/cx/STR
```

2 Install the project dependencies

Enter the command below. This may take a minute the first time:

```
npm install
```

3 Start the development server

Enter:

```
npm run dev
```

4 Read the local address

Terminal will display a local address, normally **http://127.0.0.1:5173/**. Keep this Terminal window open while you use Keyring.

5 Open Keyring

Open your browser and enter **http://127.0.0.1:5173/** in the address bar.

6 Confirm the app loaded

You should see the dark Keyring sidebar, the **All items** heading, a search field, an **Add item** button, and sample rows.

How to stop Keyring

Return to the Terminal window where the server is running and press Control + C. Closing the browser tab alone does not stop the server.

Start it again later

Each time you want to run the app, use these commands:

```
cd /Users/shera184/dev/cx/STR  
npm run dev
```

Production build check

To verify that the optimized application can be built, run:

```
npm run build
```

A successful build creates or updates the **dist** folder.

3. Understand the main screen

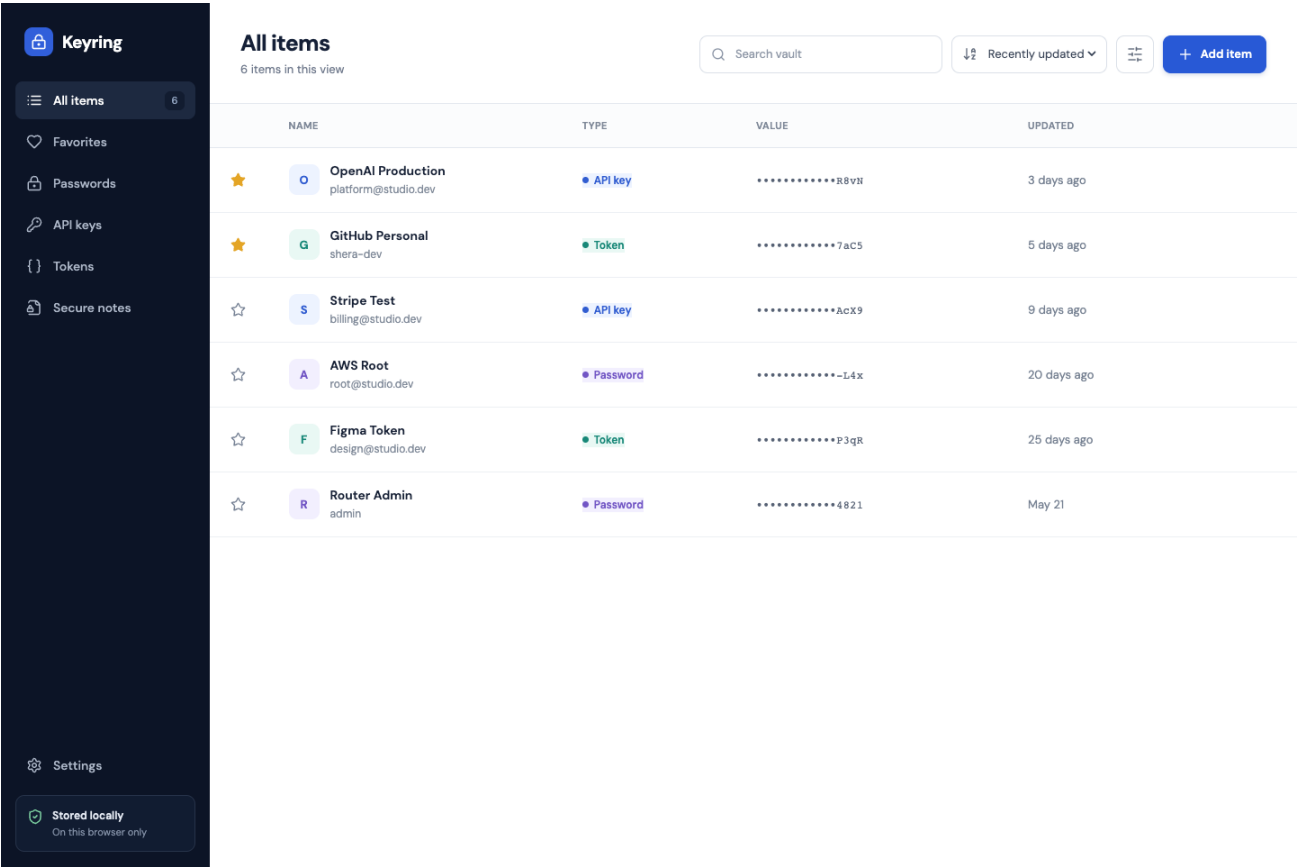


Figure 1. The complete desktop vault.

Sidebar	Switch between All items, Favorites, Passwords, API keys, Tokens, and Secure notes.
Page heading	Shows the active category and how many matching items are visible.
Search vault	Filters items using names, types, usernames, websites, notes, and tags.
Sort menu	Orders items by most recently updated, name, or type.
Add item	Opens the form for creating a new credential.
Favorite star	Adds or removes an item from the Favorites view.
Credential row	Shows the name, type, masked value, and update date. Select it to open details.
Row actions	On desktop, hover over a row to display copy and edit controls.

Credential types

Password	A login password, router password, database password, or similar secret.
API key	A secret key used by software to authenticate with an API.
Token	A personal access token, deployment token, session token, or integration token.
Secure note	Sensitive text that does not fit the other types.

4. Add your first item

Use a test value first

For the current unencrypted version, practice with a fake value such as test-key-12345.

1 Open the form

Select the blue **Add item** button in the top-right area.

2 Enter a clear name

Use a name that identifies both the service and environment, for example **Stripe Test** or **GitHub Personal**.

3 Choose the type

Select Password, API key, Token, or Secure note.

4 Enter the username

Add an email address, account name, or service user if applicable. This field is optional.

5 Enter the secret value

Paste or type the password, key, or token. This field is required.

6 Enter the website

Add the full address, including https://, for example **https://github.com**.

7 Add tags

Separate tags with commas, for example **work, production, billing**. Tags improve search results.

8 Add notes

Record useful context such as the key's purpose, environment, owner, or rotation schedule. Do not duplicate the secret in Notes.

9 Save the item

Select **Add to vault**. A confirmation message appears and the new item moves to the top because it was updated most recently.

Example practice item

Name	Demo Deployment Key
Type	API key
Username	demo@example.com
Secret value	test-key-12345
Website	https://example.com
Tags	demo, test
Notes	Practice record for learning Keyring.

5. Find, sort, and organize items

Search the vault

1 Select Search vault

Click or tap inside the search field.

2 Enter any identifying text

You can search by item name, type, username, website, tag, or notes.

3 Review the count

The count under the page heading changes to show the number of matching items.

4 Clear the search

Select the X inside the search field, or delete the search text.

Filter by category

Select one of the sidebar categories:

All items	Shows every saved record.
Favorites	Shows only records whose star is active.
Passwords	Shows Password records.
API keys	Shows API key records.
Tokens	Shows Token records.
Secure notes	Shows Secure note records.

Mark an item as a favorite

1 Locate the star

The star is at the left edge of each row.

2 Select the star

A filled gold star means the item is a favorite.

3 Open Favorites

Select Favorites in the sidebar to see only starred items.

Sort the list

Open the sort menu near the search field and choose one of these options:

Recently updated	Newest or most recently edited item first.
Name	Alphabetical order by item name.
Type	Groups records alphabetically by credential type.

6. View, copy, reveal, edit, and delete

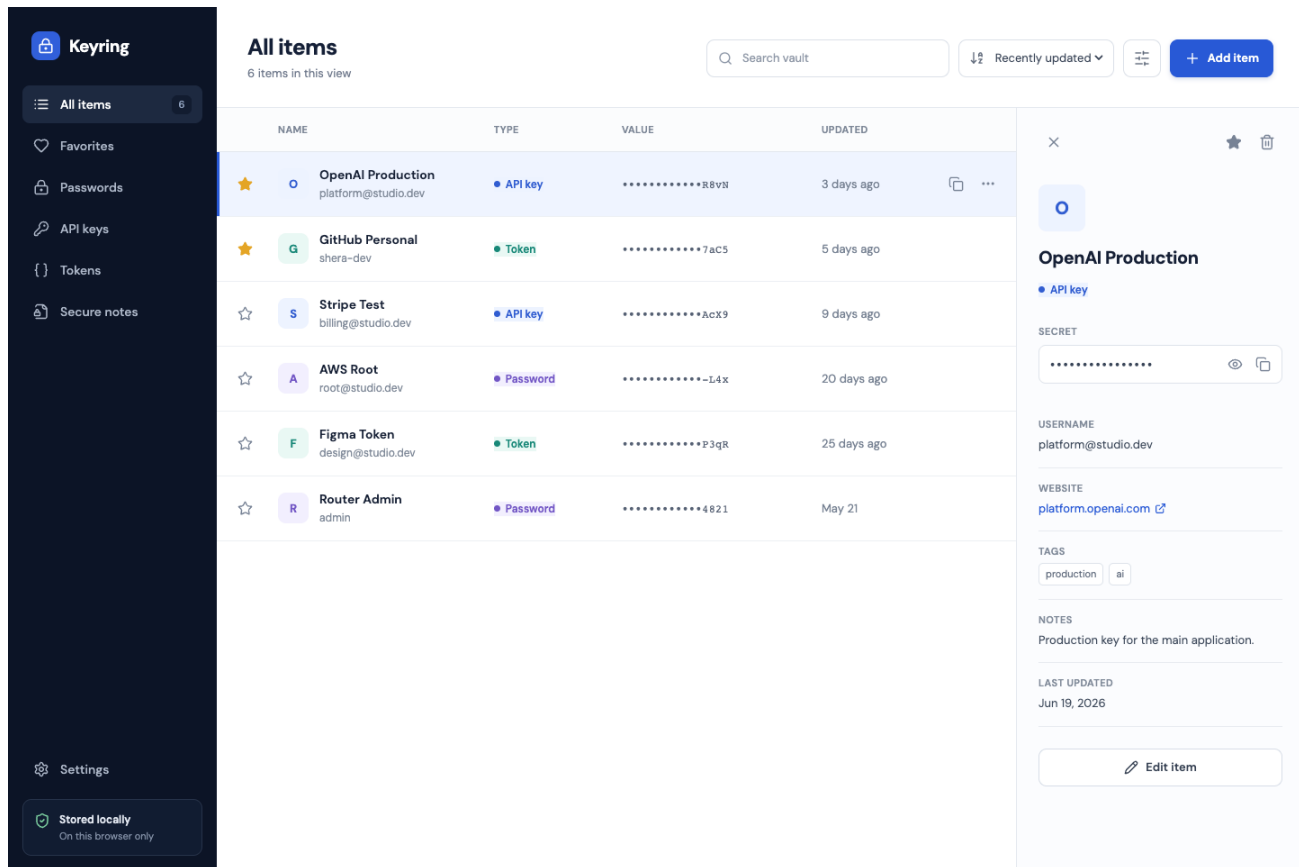


Figure 2. Selecting a row opens the detail inspector.

Open an item

Select anywhere on a credential row. The details panel opens on the right and displays the username, website, tags, notes, update date, and masked secret.

Reveal a secret

1 Find the Secret field

It is near the top of the details panel.

2 Select the eye icon

The full value becomes visible.

3 Hide it again

Select the eye icon again before another person can view your screen.

Copy a secret

Select the copy icon in the Secret field. You can also hover over a desktop table row and select its copy icon. Keyring shows a **Copied to clipboard** message.

Clipboard safety

A copied secret may remain available to other applications and clipboard-history tools. Paste it only where needed and replace the clipboard contents afterward.


Edit an item

Select **Edit item**, change the fields, and select **Save changes**. The update date changes and the item moves according to the active sort order.

Delete an item

Select the trash icon in the details panel. Confirm the browser prompt. Deletion is immediate and there is no undo or recycle bin.

7. Use Keyring on a small screen

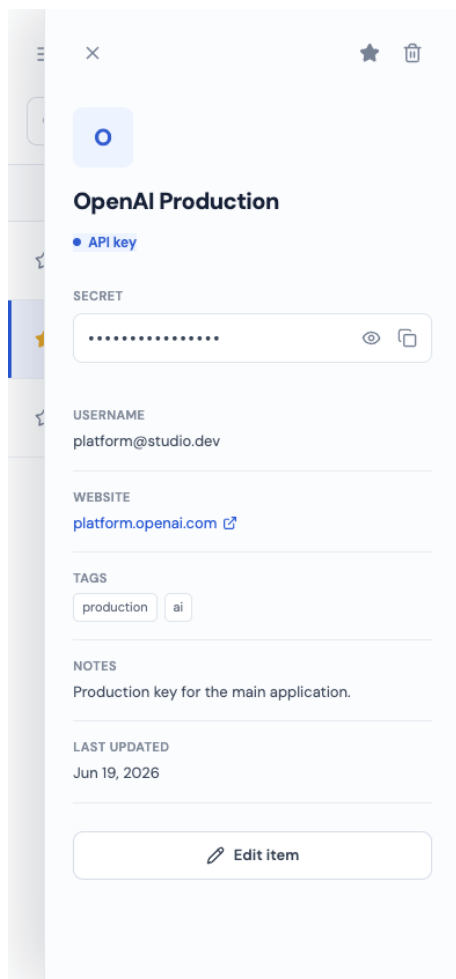

Mobile layout

On a narrow screen, Keyring simplifies the list to show the favorite state and item identity. Select a row to open its full details.

Menu: Select the three-line button in the upper-left corner to open categories.

Search: The search field remains directly below the heading.

Add: Select the blue + button to add a record.

Details: The details panel slides over the list. Select X to return.

Actions: Reveal, copy, favorite, delete, and edit work the same way as on desktop.

Mobile security

Do not leave a revealed value on screen. Lock your device when it is unattended, and avoid using Keyring over screen sharing or in public places.

Responsive browser testing

The interface has been verified at a 390 x 844 mobile viewport. It also supports standard desktop layouts, including the 1440 x 960 reference shown earlier.

8. Storage, privacy, and safe usage

Where the data is saved

Keyring saves records in the browser's local storage under the current browser profile and local app address. The information is not sent to a backend by this version.

What can remove your data

Clear site data	Clearing browser cookies and site data for 127.0.0.1 can erase the vault.
Private browsing	Private or incognito storage may disappear when the private session closes.
Different browser	Chrome, Safari, Firefox, and Edge use separate storage.
Different address	localhost and 127.0.0.1 may be treated as different sites.
Different computer	The vault is not synchronized to another device.
Browser profile reset	Deleting or resetting the profile can remove all saved records.

Safe operating rules for this prototype

1	Use fake, test, or low-risk credentials only.
2	Do not store recovery codes, private SSH keys, wallet seed phrases, or banking passwords.
3	Do not share screenshots that show revealed values.
4	Do not run unknown scripts or browser extensions in the same profile.
5	Do not assume that local storage is a backup.
6	Rotate any real credential immediately if it was accidentally saved here.

Required upgrades before real-secret use

A production version should encrypt the vault with a strong key derived from a master password, lock automatically, clear clipboard values, provide encrypted backup and recovery, protect against script injection, and receive an independent security review.

Bottom line

The current build organizes data well, but it is not yet a replacement for a security-reviewed password manager.

9. Troubleshooting

npm: command not found	Install Node.js from https://nodejs.org , close and reopen Terminal, then run <code>node --version</code> and <code>npm --version</code> .
Wrong project folder	Run <code>pwd</code> to see the current folder. Then run <code>cd /Users/shera184/dev/cx/STR</code> .
Dependencies missing	Run <code>npm install</code> inside the project folder, then run <code>npm run dev</code> again.
Address will not open	Confirm that <code>npm run dev</code> is still running. Use the exact Local address printed by Terminal.
Port already in use	Vite may select another port. Open the new address shown after Local in Terminal.
Items disappeared	Check that you are using the same browser, browser profile, and local address. Cleared site data cannot currently be restored.
Search shows nothing	Clear the search field and select All items. Confirm that the selected category matches the credential type.
Copy does not work	Allow clipboard access if the browser requests it. You can reveal the value and copy it manually if necessary.
Website link fails	Edit the item and confirm that the Website field starts with <code>https://</code> or <code>http://</code> .
Build fails	Run <code>npm install</code> , then <code>npm run lint</code> and <code>npm run build</code> . Read the first reported error rather than later follow-on errors.

Useful diagnostic commands

```
node --version
npm --version
pwd
npm run lint
npm run build
```

Protect secrets while asking for help

Never paste a real password, API key, token, local-storage dump, or screenshot of a revealed secret into a support message.

10. Quick reference checklist

Start Keyring

```
cd /Users/shera184/dev/cx/STR
npm install    # First time or after dependency changes
npm run dev
```

Daily workflow

Add	Select Add item or the mobile + button, complete the form, and save.
Find	Use Search vault or select a category in the sidebar.
Sort	Choose Recently updated, Name, or Type.
Favorite	Select the star beside an important record.
Open	Select the row.
Reveal	Select the eye icon in the Secret field.
Copy	Select the copy icon and paste only into the intended destination.
Edit	Open details, select Edit item, update fields, and save.
Delete	Open details, select the trash icon, and confirm.
Stop	Return to Terminal and press Control + C.

Before closing

- Hide any revealed secret.
- Replace sensitive clipboard contents.
- Close the browser tab.
- Stop the local server with Control + C.
- Lock the computer if you are leaving it unattended.

You are ready to use the prototype

You can now install and start Keyring, add test records, organize them, inspect details, and stop the app safely. Keep the security limitations in mind until encryption is added.