# Manufacturer Recall System



By Brian Sheridan Samuel Pearce

# **Description of the application:**

The Manufacture Recall System is an application that will allow individuals to discover, create and manage recalls for products they are using. This application would be used as a central hub for most vehicle manufacturers and can be tailored into other industries. This would allow administrators to do research on certain products, discover what recalls have occurred with that product as well as implementing a new recall. It also gives administrators the ability to add new product lines to the database. The application would also allow sales personnel to fill out invoices about the product a consumer has purchased and to acquire contact information in the event of a recall. This would allow them to keep track of which products have recalls and information to notify the consumer in the event of a recall.

## Information needed for the application:


- 1. Add a new product
  - a. Product Name
  - b. Product Description
- 2. New invoice
  - a. Full name
  - b. Address
  - c. Phone Number
  - d. Email
  - e. Serial Number
  - f. Product Type
  - g. Manufacture Date
- 3. Create new recall
  - a. Product ID
  - b. Start date of the problem
  - c. End date of the problem
  - d. Description of the problem

#### The users and user interactions:


The users would be required to fill out certain information before they can proceed with submitting anything in the application. This ensures that there will be no errors when the user is navigating and activating the system. Users are able to add new products, create invoices and provide new recall updates.

#### Picture of the database:


#### **Customer Info**

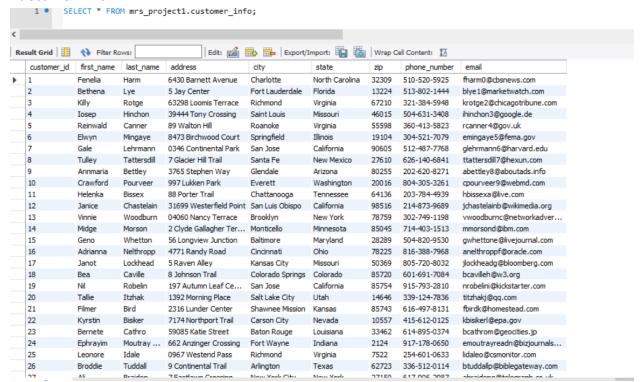

#### **Customer Purchases**

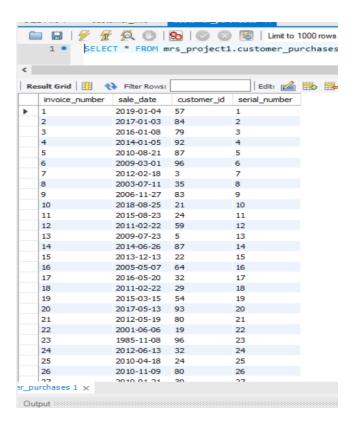


# **Product Type**

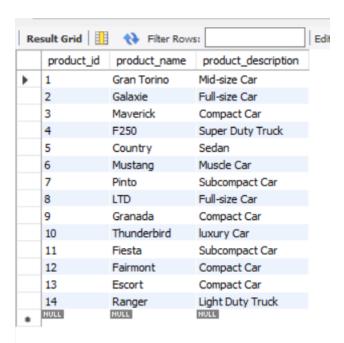


# **Products**

| serial_number | product_id | manufactured_date |
|---------------|------------|-------------------|
| 1             | 5          | 2008-08-14        |
| 2             | 10         | 1999-02-11        |
| 3             | 11         | 2000-09-10        |
| 4             | 8          | 2006-08-05        |
| 5             | 13         | 2003-11-23        |
| 6             | 7          | 1989-07-21        |
| 7             | 9          | 1996-01-31        |
| 8             | 4          | 2000-11-26        |
| 9             | 1          | 1985-06-01        |
| 10            | 8          | 2016-01-31        |
| 11            | 2          | 2015-08-17        |
| 12            | 2          | 1988-02-13        |
| 13            | 1          | 1995-05-15        |
| 14            | 11         | 2012-05-22        |
| 15            | 4          | 2009-12-05        |
| 16            | 7          | 1999-12-14        |
| 17            | 3          | 1996-10-30        |
| 18            | 14         | 1999-06-13        |
| 19            | 1          | 2013-03-31        |
| 20            | 10         | 2013-03-16        |
| 21            | 7          | 1988-03-17        |
| 22            | 6          | 1997-04-20        |
| 23            | 14         | 1980-03-21        |
| 24            | 1          | 2007-10-29        |
| 25            | 12         | 2005-05-06        |
| 26            | 3          | 2005-09-29        |
| 77            | 0          | 2010 02 15        |

#### **Recall Notices**

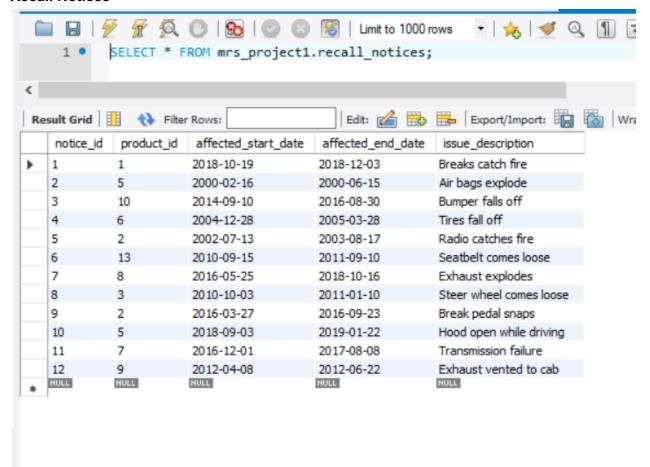

# Picture of the EER diagram:

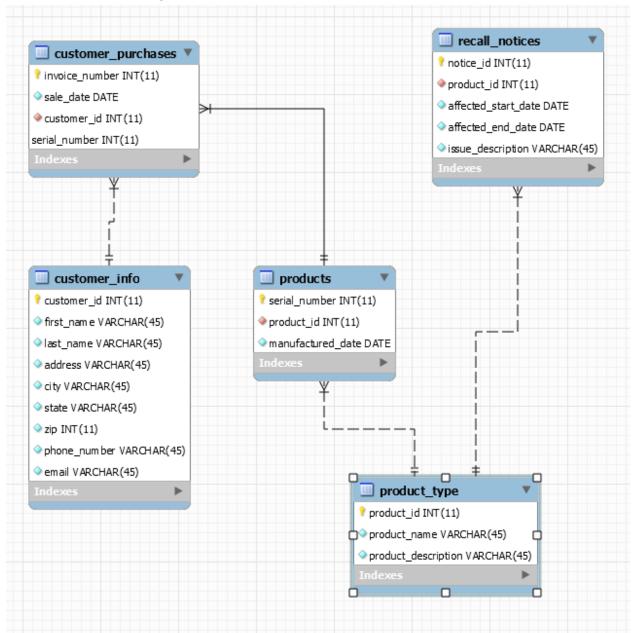

## How is the design is normalized(Or denormalized):

Our design is normalized due to the fact that each table relies on a primary key to keep information scalar throughout each of the tables and information is broken down into smaller tables to reduce any duplicate entries. With that, every non-key column is dependent only on the primary key.