Darsi

درسي · Know more, teach more — in your own language.

darsi
درسي

Design system

Brand book, tokens and component library — درسي

Exported 2026-10-25 · 45 components · 27 colour tokens · themes: Day, Sunlight (high contrast)

CONTENTS

Darsi

1. Brand book
2. Logos & app icons
3. Colour
4. Typography
5. Space, shape & depth
6. Icons
7. Components — Identity
8. Components — Actions
9. Components — App shell
10. Components — Learning
11. Components — Questions
12. Components — Video
13. Components — AI lab
14. Components — Motivation
15. Components — Teacher kit
16. Components — Onboarding
17. Components — Settings
18. Components — PWA
19. Components — States
20. Components — Flows

1 · BRAND BOOK

Darsi (درسي — "my lesson") helps school and university teachers learn AI, IoT and cyber security in five-minute lessons, in their own language, on whatever phone they have. It ships as an installable, offline-first PWA.

The brand is warm, bright and tactile, built for low-cost Android phones, patchy data and classrooms in full sun. It treats teachers as professionals, not as charity cases.

The name

Dars means "lesson" across a wide belt of the world, so the name is understood far beyond Arabic:

- Arabic **درسي** *darsi* — "my lesson"; Persian and Dari **درسی** — "educational, of the classroom"
- Urdu **درس** *dars* — lesson; Turkish *ders*; Hausa *darasi* — lesson; Swahili *darasa* — class
- Two syllables, no sounds that are hard in English, French, Portuguese or Hindi; spelled the same way everywhere in Latin script.

Write the name **Darsi** in running Latin text, **درسي** in Arabic-script text. The logo lettering is lowercase "darsi". Never translate or transliterate it differently per market.

Principles

1. **Teacher first, tech second.** Every lesson ends with something usable in class tomorrow.
2. **Every language is a first language.** Arabic, Urdu or Amharic screens are designed, not translated afterwards. RTL is a default path, not an edge case.
3. **Offline is normal.** Everything a teacher downloaded works with no signal; the app never blocks on the network.
4. **Light on data, light on battery.** Under 2 MB to install; SVG and flat colour; no blur, no autoplay video.
5. **Encourage, never punish.** Mistakes teach; streaks forgive.

Voice and copy

- Speak peer to peer: "you" for the teacher, "we" for Darsi. Warm, short, concrete — a helpful colleague in the staff room.
- Sentence case everywhere. Never all caps — Arabic, Devanagari, Ge'ez and Chinese have no case.
- Verb-first buttons: "Start lesson", "Check", "Download unit" / "ابدأ الدرس"، "تحقّق"، "تنزيل".
- Plain words over jargon; define a term the first time ("A **sensor** turns something in the room into a number").
- Feedback explains *why*: "Correct — it turns heat into a number." Not "Great job!!!".
- Never in the product: "poor", "developing", "underprivileged", "beginner teacher". Describe situations ("low data", "shared phone"), not people.
- No emoji in UI — they render differently on every Android version. Use the Icons group.
- Examples come from real classrooms in the learner's region: school WhatsApp groups, exam timetables, solar lamps, market prices.

- Arabic copy is Modern Standard Arabic, friendly and direct; avoid stiff formal constructions.

Language and direction

- Build with logical properties only (`margin-inline-start`, `padding-inline`, `inset-inline-end`, `text-align: start`). Set `dir` and `lang` on `<html>`; components mirror themselves.
- Mirror directional icons (`back`, `next`, progress, path direction, switch thumbs). Do NOT mirror check, cross, audio, clocks, logos or the `streak` flame.
- Numbers follow the locale via `Intl.NumberFormat` and `Intl.DateTimeFormat` — Arabic-Indic digits (٠١٢٣) where the teacher's locale uses them.
- Separators: in Arabic-script text never use the middle dot "·" — at display sizes it reads as the Arabic zero "٠". Use "،" for lists and ":" or "—" between a unit and its title ("الوحدة ٢: المستشعرات").
- Budget 40% text expansion from English; nothing has a fixed width. Lines wrap; lesson and certificate titles never truncate.
- Arabic-script and Devanagari text gets taller line-height (`:lang(ar)` → 1.7). Never letter-space Arabic — it breaks joining.
- Wrap user names, answers and mixed-direction strings in `<bdi>`; inputs use `dir="auto"`. Codes and URLs are always LTR.
- Never bake words into images or icons. Languages are chosen by native name, never by flag.

Colour

Light grey `paper` ground, white `surface` cards, deep `ink` text, one loud brand colour, three track colours. Colour always comes with an icon or a word.

- `kola` (tangerine) is the brand: primary buttons, streak flame, active nav, the logo bubble. Text on it is `on-kola` (ink), **never white**. For orange text use `kola-deep`.
- Tracks own their colours: **AI =** `sunbird` (yellow), **IoT =** `lagoon` (teal), **Cyber security =** `hibiscus` (pink). Solids for fills and chips, `-soft` for backgrounds, `-ink` for coloured text. Text on every solid is `ink`.
- Status: right = `correct` (blue) + check; wrong = `wrong` (red) + cross. Blue/red so colour-blind teachers can tell them apart.
- `focus` is reserved for the 3px focus ring with 2px offset. `scrim` dims the page behind sheets.
- A typical screen: ~70% `paper` / `surface`, ~20% `ink`, ≤10% `kola` and track colour.
- Do not use gradients, put track colours on status messages, or set body text in anything but `ink` / `ink-muted`.

Themes

- **Day** (default): light grey paper, white cards and full brand colour.
- **Sunlight (high contrast)**: for outdoor classrooms, cheap screens at low brightness, and low vision. White ground, black text, every text pair 7:1+, controls outlined in black. A Switch in Settings and a quick toggle in the lesson menu.

- There is no dark theme by design: most target phones have LCD screens (no battery gain) and the Sunlight theme serves the real need — readability.

Type

- `display` — Baloo 2 (Latin) with Baloo Bhaijaan 2 (Arabic): one rounded, friendly design across scripts. For `display-xl`, `display`, `title`, `heading`, button labels and big numbers.
- `sans` — Noto Sans with Noto Sans Arabic, then the system's Noto for Devanagari, Bengali and Ethiopic (already on most Android phones, so no download).
- Fonts are self-hosted WOFF2 in `fonts/` (≈230 KB in all) and precached by the service worker — never load fonts from a CDN at runtime; the app must render offline on first launch. Precache only the scripts the teacher's language needs.
- `body-lg` (18px) for lesson reading and answers; `body` (16px) is the floor for anything a teacher must read. `caption` only for timestamps.
- All fonts are SIL Open Font License 1.1.

Shape, depth and space

- Rounded and soft: buttons and options `radius-md`, cards and sheets `radius-lg`, chips and toggles `radius-pill`; path nodes are circles, checkpoints rounded squares.
- Depth only from hard offset shadows: `shadow-press` on buttons (removed on press, with a 4px drop), `shadow-card` on cards and options. No blur.
- 4px base, `space-1` to `space-12`. Screen gutter `space-4`; between cards `space-6`. Lesson column max `content-max`.
- Every tap target at least `tap-min` (48px). App bar `appbar-h`, bottom nav `bottomnav-h`. Layers: `z-appbar` < `z-banner` < `z-sheet` < `z-toast`.

Motion

- Short and functional: 80ms press, 150–200ms state change, one celebration (≤1.2s) at lesson end.
- Every animation stops under `prefers-reduced-motion` (built into the stylesheet).

The PWA

Manifest

- `name`: "Darsi — درسي", `short_name`: "Darsi" (localise `short_name` per language build: "درسي").
- `display`: `standalone`; `orientation`: `portrait`; `start_url`: `/?source=pwa`; `dir`: `auto`; `lang` per build.
- `theme_color`: `#f2f2f2` (`paper`, dark status-bar icons); `background_color`: `#f2f2f2`. The splash is the mark on paper.
- Icons from the App icons group: `any` 192/512, `maskable` 192/512, `monochrome` 512; `apple-touch-icon` 180.

- Add `shortcuts` for "Continue lesson" and "Downloads"; a `share_target` is not needed.

Offline and sync

- App shell, fonts and icons precached; lessons cached per unit on download (DownloadRow). Progress and answers queue locally and sync with Background Sync when the connection returns.
- ConnectionStatus tells the truth: offline (calm `ink` band), syncing, saved. Never show a spinner where cached content exists.
- Show sizes in MB before every download; honour the Data saver setting (Wi-Fi only, no images on mobile data).

Install and update

- InstallPrompt after the first completed lesson, never on first visit; after "Not now" wait 14 days. On iOS show the Share → Add to Home Screen steps.
- New versions wait: UpdateToast offers "Reload" on the home screen or after LessonComplete, never mid-lesson.
- Notifications: opt-in, at most one gentle weekly reminder (Switch), sent in the teacher's language.

Performance budget

- Install ≤ 2 MB including fonts for one script; a lesson ≤ 300 KB; first screen interactive in < 3 s on a low-end Android over 3G.

Lessons

Every lesson follows one shape, 5–7 minutes long: **watch** (VideoPlayer, ≤ 4 min, pauses for questions) → **practise** (4–8 questions, mixed types) → **feedback** after each (FeedbackSheet) → **reflect** (Reflection) → **done** (LessonComplete with "Try it in class tomorrow") → **classroom kit** unlocked (ClassroomKit). See the LessonFlow page.

Question types

Every question starts with a QuestionHeader naming the type. Mix at least three types per lesson; never two of the same in a row.

Type	Component	Best for
Choose one	QuizOption	Facts, definitions, "which is a…"
Select all that apply	QuizOption `multi`	Spotting several right answers (strong passwords, AI tools)
True or false	TrueFalse	Naming a common misconception
Pick the picture	ImageChoice	Devices, screenshots, diagrams
Match the pairs	MatchPairs	Vocabulary, device ↔ measurement, threat ↔ protection
Put in order	OrderSteps	Processes: how a model learns, how a sensor system works

Type	Component	Best for
Fill the gaps	FillBlank	Key terms in context
Type the answer	TextField + QuestionHeader	Short recall, numbers
Spot it	HotspotImage	Phishing messages, settings screens, chatbot answers
What would you do?	ScenarioCard	Judgement, ethics, safety in school
Video question	VideoPlayer `checkpoint`	Checking understanding mid-video
Listen and choose	QuestionHeader `onAudio` + QuizOption	Teachers learning in a second language
Reflect	Reflection	Planning how to use it in class (ungraded)

- Feedback always explains why, in one or two sentences. Wrong answers come back later in the unit for another try — never as a penalty.
- Write questions about the classroom, not about trivia: "Which of these could help you mark homework?" beats "What year was AI invented?"

Video

- Short (≤ 4 min), one idea each, filmed or animated with local faces, places and languages; captions are separate `<track>` files per language, never burned into the picture.
- Defaults: 240p, captions on, no autoplay, `preload="none"`, size in MB shown before play; 144p, 360p and audio-only on offer; downloadable with the unit.
- Each video has chapters and 1–2 checkpoints (diamond markers) that pause it with a question. The control bar is always left-to-right; captions follow the lesson language.
- Every video has a text transcript — some teachers will read rather than spend data.

The AI lab

Hands-on tools that make AI and gen AI concrete. They work offline with pre-written examples, so no learner ever sees unreviewed AI output; each ends with a one-line takeaway.

- **PromptBuilder** — add role, task, context, format and language to a prompt and watch the answer improve.
- **TokenViewer** — see how text is split into tokens, and why some languages cost more.
- **NextWordLab** — next-word probabilities and a temperature slider: how chatbots really write.
- **TrainClassifier** — teach a tiny model with examples, then test it; shows how bias in examples causes wrong answers.
- **FactCheck** — mark claims in an AI answer as correct, wrong or "check a source": hallucinations made visible.
- Labs sit inside lessons (after the video) and on their own in an "AI lab" shelf. Each lab card uses `sunbird` as its accent because the labs belong to the AI track.

Classroom kits and print

After each lesson and unit the teacher unlocks a ClassroomKit of PDFs: lesson plan, pupil worksheet, and per unit a poster, answer key and slides; plus a certificate per level. See the Print templates asset group for two finished samples (English and Arabic) and their source templates.

- A4 with 15 mm margins (fits US Letter); black-and-white safe — the track is a labelled, striped chip, never colour alone; no large fills, to save toner.
- Activities work with no devices and no electricity (cards, board, paper) unless the unit is about devices.
- Every page carries the mark, unit and lesson, "free to copy for your school" and a QR to the lesson video.
- Arabic editions are typeset RTL with Arabic-Indic numbering — never a mirrored English page.
- Kits are cached offline after download and include the teacher's own Reflection notes.

Onboarding and placement

- Four skippable steps (see the OnboardingFlow page): language first, by native name — the interface switches language and direction at once; where you teach (ChoiceCard); tracks (ChoiceCard `multi`); weekly time.
- Then a 9-question placement quiz (TrueFalse and QuizOption, with "I don't know yet" always available) and a PlacementResult per track. Levels are suggestions and can be changed any time.
- No account is needed before the first lesson; ask for a name only when the first certificate is earned.

Empty and error states

- Every list has an EmptyState that offers a next step ("Browse units"). Offline is calm and points to downloads; errors say progress is safe and offer Retry and "Report a problem".
- Never show a blank screen or a raw error code.

Iconography

- Use `Darsi.Icon` (40 icons, see the Icon card) or the Icons group files: 24px grid, 2px rounded strokes, `ink` or `currentColor`.
- One icon per track: `track-ai` (spark), `track-iot` (connected nodes), `track-cyber` (shield with check).
- Icons accompany words; an icon alone needs an accessible label.

Logo

- The mark: a tangerine speech bubble (many voices, many languages) holding a sunbird spark (the moment something clicks).
- Use the bilingual lockup (darsi over درسي) by default; the LTR lockup in Latin-only contexts; the RTL lockup in Arabic-script interfaces; the mark alone in the app bar and as favicon.

- Minimum size 24px for the mark. Clear space = the height of the spark on every side. Never recolour, rotate, mirror, or place on track colours. Inverse lockups go on `ink`.

Gamification, the Darsi way

- Streaks count **teaching weeks**, not days (StreakCounter). Missing a week pauses; nothing resets with a guilt message.
- No hearts, lives or paywalled retries. Wrong answers cost nothing but a moment of learning.
- Progress becomes what matters to teachers: CertificateCards per track level, verifiable and shareable with school leaders.
- Every lesson ends with "Try it in class tomorrow" (LessonComplete).

Logos & app icons



darsi-mark.svg



darsi-mark-mono.svg



darsi-lockup-bilingual.svg



darsi-lockup-ltr.svg



darsi-lockup-rtl.svg



darsi-lockup-bilingual-inverse.svg




darsi-lockup-ltr-inverse.svg




darsi-lockup-rtl-inverse.svg

App icons



app-icon — exported as PNG 192 / 512 (and 180 apple-touch)



app-icon-maskable — exported as PNG 192 / 512 (and 180 apple-touch)

app-icon-monochrome — exported as PNG 192 / 512 (and 180 apple-touch)

Colour

Each swatch shows the token in every theme (**Day** / **Sunlight (high contrast)**).

#f2f2f2 #ffffff

paper

Page background — neutral light grey; calmer than pure white on cheap LCDs.

#ffffff #ffffff

surface

Cards, sheets, quiz options sitting on `paper`.

#f6ebdd #f2f2f2

surface-sunk

Inset wells: progress-bar tracks, input fields, empty states.

#ead9c4 #000000

line

Hairline dividers and resting card outlines (decorative, carries no meaning).

#8a7560 #000000

line-strong

Borders of interactive controls (quiz options, inputs, secondary buttons) — 3:1+ on `paper` and `surface`.

#1e1a33 #000000

ink

Primary text and icons on `paper`, `surface`, `surface-sunk`, every `-soft` tint, `kola`, `sunbird` and `lagoon`. Also the hard press shadow.

#5c5470 #1f1f1f

ink-muted

Secondary text (meta, captions, helper copy) on `paper`, `surface`, `surface-sunk`.

#fff8ee #ffffff

ink-inverse

Text on `ink` fills (tooltips, the dark cover block, toasts).

#ff6a2b #ff6a2b

kola

THE brand colour. Primary button fill, streak flame, active tab. Text on it is always `on-kola`, never white.

#b43c0a #7a2700

kola-deep

Orange as text or link colour on `paper` / `surface` (4.5:1+). Pressed edge of `kola` fills.

#ffe2d2 #ffd9c6

kola-soft

Brand tint: selected states, highlight panels, the Today card. Text on it: `ink`.

#1e1a33 #000000

on-kola

Text and icons on `kola` fills.

#ffc53d #ffc53d

sunbird

Track colour — AI. Fills for the AI chip, AI lesson cards and AI progress. Text on it: `ink`.

#fff0c4 #fff0c4

sunbird-soft

AI tint backgrounds. Text on it: `ink` or `sunbird-ink`.

#7a5000 #523500

sunbird-ink

AI-coloured text (labels, chip text) on `sunbird-soft`, `surface`, `paper`.

#14b8a6 #14b8a6

lagoon

Track colour — IoT. Fills for the IoT chip, cards and progress. Text on it: `ink`.

#ccf2ec #ccf2ec

lagoon-soft

IoT tint backgrounds. Text on it: `ink` or `lagoon-ink`.

#065f56 #033f39

lagoon-ink

IoT-coloured text on `lagoon-soft`, `surface`, `paper`.

#f04a7e #ff5c8d

hibiscus

Track colour — Cyber security. Fills for the Cyber chip, cards and progress. Text on it: `ink`, never white.

#fdd9e5 #fdd9e5

hibiscus-soft

Cyber tint backgrounds. Text on it: `ink` or `hibiscus-ink`.

#a3123f #6e0a29

hibiscus-ink

Cyber-coloured text on `hibiscus-soft`, `surface`, `paper`.

#1660c4 #0b3f8f

correct

Right answer: border, icon and text on `surface` / `paper`. Blue, not green, so it never relies on red/green hue alone; always paired with the check icon and a word.

#dceafc #dceafc

correct-soft

Right-answer fill behind `ink` text and the `correct` icon.

#c4271f #8f130d

wrong

Wrong answer: border, icon and text on `surface` / `paper`. Always paired with the cross icon and a word.

#fde1de #fde1de

wrong-soft

Wrong-answer fill behind `ink` text and the `wrong` icon.

rgba rgba

scrim

Dimmed backdrop behind bottom sheets and dialogs.

#2f4bdb #0000ee

focus

Focus ring, 3px solid with 2px offset, on every interactive element. 3:1+ on `paper`, `surface` and all `-soft` tints.

Typography

Family	Stack
`display`	"Baloo 2", "Baloo 2 Ext", "Baloo Bhaijaan 2", "Noto Sans Devanagari", "Noto Sans Ethiopic", system-ui, sans-serif
`sans`	"Noto Sans", "Noto Sans Arabic", "Noto Sans Devanagari", "Noto Sans Bengali", "Noto Sans Ethiopic", system-ui, sans-serif

Display

`display-xl`
48px / 52px · 800 · -0.01em
Wordmark, lesson-complete celebration. One per screen.

darsi · درسي

`display`
36px / 42px · 800
Screen heroes, unit titles.

You finished Unit 3

`title`
26px / 32px · 700
Lesson titles, question prompts.

ما هو الذكاء الاصطناعي؟

`heading`
20px / 28px · 700
Section and card headings.

Today's practice

Text

`body-lg`
18px / 28px · 400
Lesson reading text and quiz answers.

A sensor turns something in the room into a number.

`body`
16px / 24px · 400
Default UI copy. Never set running text smaller.

Download this unit to keep learning offline.

`label`
14px / 20px · 600
Buttons, chips, meta lines.

5 min · Offline ready

`caption`
12px / 16px · 500
Timestamps, footnotes. Not for anything a teacher must read to proceed.

Updated 2 days ago

Font files

Family	Weight	File
Baloo 2	700	`fonts/baloo-2-latin-700-normal.woff2`
Baloo 2	800	`fonts/baloo-2-latin-800-normal.woff2`
Baloo 2 Ext	700	`fonts/baloo-2-latin-ext-700-normal.woff2`
Baloo 2 Ext	800	`fonts/baloo-2-latin-ext-800-normal.woff2`
Baloo Bhaijaan 2	700	`fonts/baloo-bhaijaan-2-arabic-700-normal.woff2`
Baloo Bhaijaan 2	800	`fonts/baloo-bhaijaan-2-arabic-800-normal.woff2`
Noto Sans	100 900	`fonts/noto-sans-latin-wght-normal.woff2`
Noto Sans Arabic	100 900	`fonts/noto-sans-arabic-arabic-wght-normal.woff2`

All fonts: SIL Open Font License 1.1.

Space, shape & depth

Spacing

Token	Value	Sample	Usage
`space-1`	4px		Icon-to-label gap, chip inner gap.
`space-2`	8px		Tight stacks: meta lines, chip padding.
`space-3`	12px		Between quiz options; button vertical padding.
`space-4`	16px		Card padding on phones; screen gutter.
`space-6`	24px		Between cards and sections.
`space-8`	32px		Screen-level separation; hero padding.
`space-12`	48px		Celebration and empty-state breathing room.

Radius

Token	Value	Sample	Usage
`radius-sm`	8px		Chips' inner icons, inputs, progress bars.
`radius-md`	14px		Buttons and quiz options.
`radius-lg`	22px		Lesson cards, sheets, dialogs.
`radius-pill`	999px		Track chips, streak counter, toggles.

Shadow

Hard offset shadows only — no blur. They read as tactile, print well, and cost nothing to render on low-end phones.

Token	Value	Sample	Usage
`shadow-press`	0 4px 0 0 #1e1a33		Primary and secondary buttons at rest; removed (with a 4px translate) while pressed.
`shadow-card`	0 3px 0 0 #ead9c4		Lesson cards and quiz options at rest.

Sizes

Token	Value	Sample	Usage
`tap-min`	48px		Minimum height/width of anything tappable — teachers often learn on small, cracked or shared phones.
`icon-md`	24px		Default icon size in buttons, chips and options.
`content-max`	560px		Max width of the lesson column on tablets and desktop.
`appbar-h`	56px		Top app bar height, below the safe-area inset.
`bottomnav-h`	64px		Bottom navigation height, above the safe-area inset.
`path-node`	72px		Diameter of a lesson node on the UnitPath.


Layers (z-index)

Token	Value	Sample	Usage
`z-appbar`	10		AppBar and BottomNav.
`z-banner`	20		ConnectionStatus and InstallPrompt banners.
`z-sheet`	40		FeedbackSheet and other bottom sheets, with `scrim` behind.
`z-toast`	50		UpdateToast — always on top.

6 · ICONOGRAPHY

Icons

24px grid, 2px rounded strokes, `ink` or `currentColor`. Directional icons mirror in RTL.

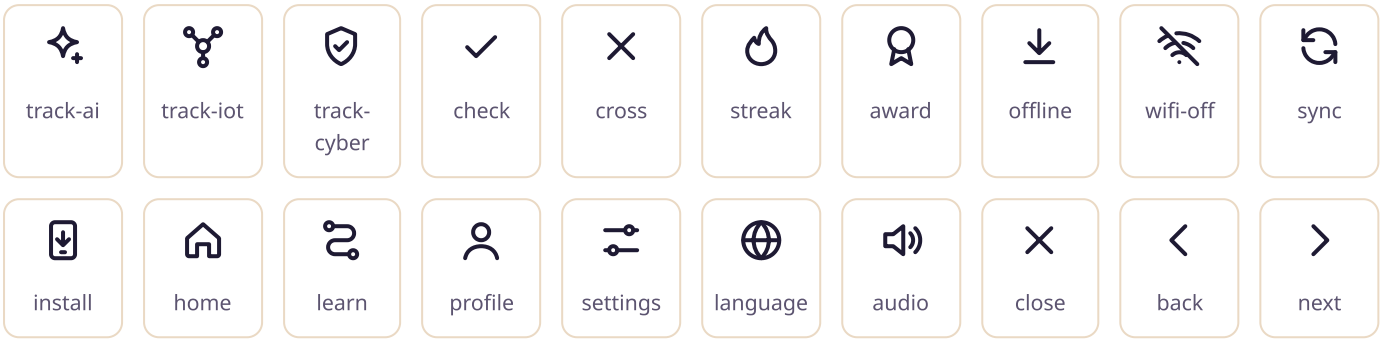


Identity

Icon

The Darsi icon set inline as React — 24px grid, 2px round strokes, `currentColor` so it takes the text colour around it.


- Consumer provides `name` and optional `size`; pass `label` only when the icon stands alone and carries meaning (it then gets `role="img"`).
- `back` and `next` mirror automatically under `dir="rtl"`; nothing else mirrors (check, play, clocks, streak flame keep their shape).
- `Darsi.Mark` renders the logo mark inline (token-coloured) for app bars, certificates and the install prompt.
- The same shapes ship as SVG files in the Icons asset group for non-React use.

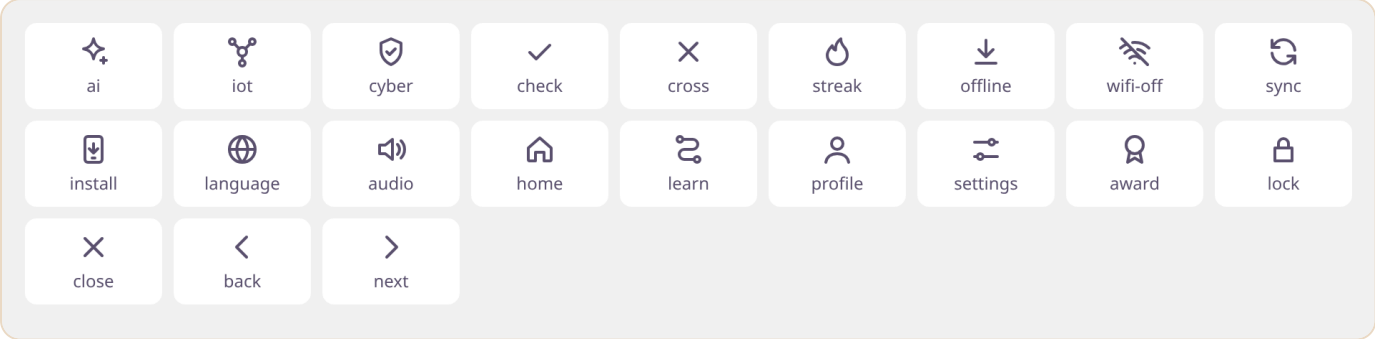

TrackChip

Labels content with its learning track — AI (`sunbird`), IoT (`lagoon`) or Cyber security (`hibiscus`) — always as icon + word, never colour alone.

- Tint (default) in lists and cards; `solid` on track headers, certificates and the track picker.
- Consumer provides `track` and, outside English, the localised name as children.
- Track colours belong to tracks only. Do not use `sunbird` for warnings or `hibiscus` for errors.




Actions

Button

Chunky, pressable buttons with a hard `shadow-press` that disappears (and the button drops 4px) on tap — the core tactile moment of Darsi.

- **primary** (`kola` fill, `on-kola` text): the one thing this screen is for — "Check", "Continue", "Start lesson". At most one per screen.
- **secondary** (`surface` fill, `ink` border): real alternatives — "Download", "Review".
- **ghost** (`kola-deep` text): skip, cancel, "Not now".
- `loading` swaps the icon for a spinner and disables the button — use for saves and sync, never longer than a few seconds without a ConnectionStatus.
- `iconOnly` makes a square 48px button; `children` becomes its accessible label (it is not shown). Use for close, audio, language.
- Consumer provides: a verb-first label in the learner's language, an optional `icon` / `iconEnd` (`back` / `next` mirror in RTL). Use `block` for the lesson bottom bar.
- Labels may grow 40% in translation. Never fix a button's width; let it wrap rather than truncate. Never all caps. Never white text on `kola`.

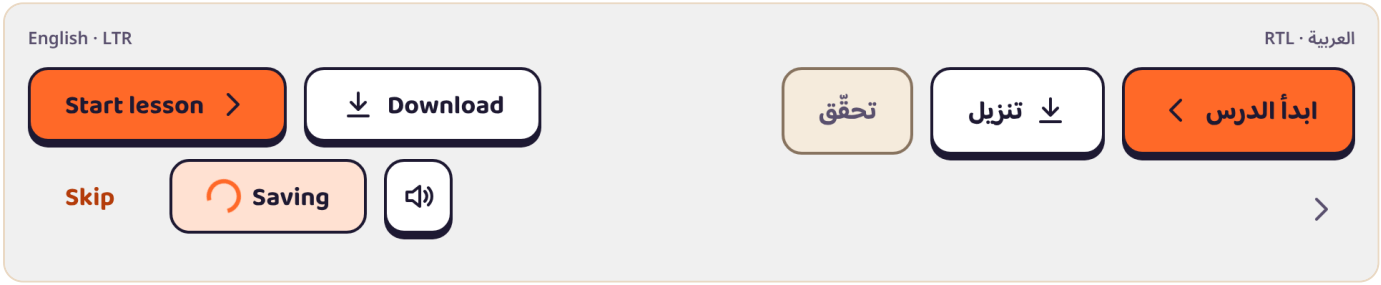


App shell

AppBar

Top bar of every tab screen: brand mark (or back), title, up to two actions.

- Consumer provides `title`, optional `onBack` (+ localised `backLabel`), and `actions` — typically a compact StreakCounter and a language Button.
- Set `floating` to make it sticky; it respects the top safe-area inset in standalone PWA mode.
- Height `appbar-h`, `paper` ground, `line` divider. Titles truncate with an ellipsis here only — the full title must appear on the screen below.
- In RTL the back arrow points right and the mark sits on the right, automatically.

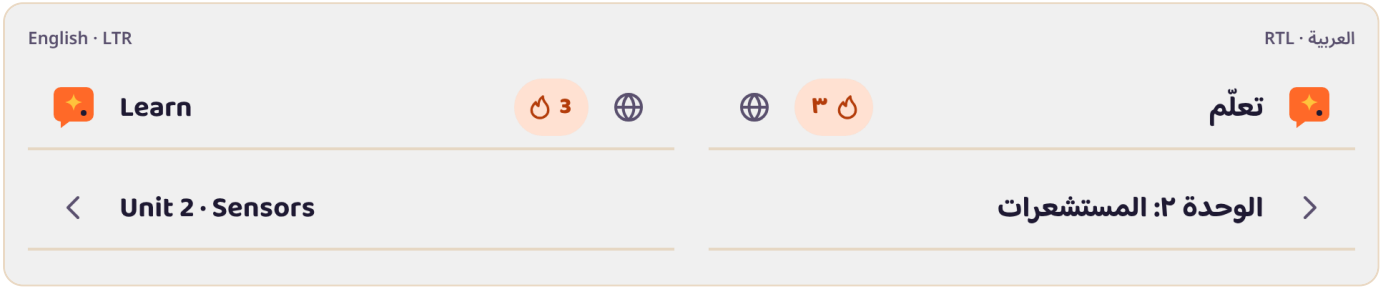

BottomNav

Primary navigation for the installed app: 3–5 destinations, icon + label always.

- Consumer provides `items` `[{icon, label, href, active, badge}]` and a localised `label` for the landmark.
- Default set: Learn (`learn`), Downloads (`offline`, badge = units waiting), Certificates (`award`), Me (`profile`).
- `floating` pins it to the bottom with the safe-area inset. Hide it inside a lesson (LessonTopBar takes over).
- Labels never hide, even on small screens — icons alone are not understood across cultures.



Learning

FeedbackSheet

Slides up after "Check" to say right or wrong, explain why, and move on.


- Consumer provides `result` (`correct` | `wrong`), a short `title` ("Correct!", "Not quite"), an `explanation` that teaches, optional `answer` (shown isolated with `<bdi>` for mixed-language answers), and `onContinue` + `continueLabel`.
- Correct: `correct-soft` with check badge and a primary Continue. Wrong: `wrong-soft` with cross badge and a secondary "Got it".
- Fixed to the bottom by default (`floating={false}` to place it inline). Announces itself to screen readers (`role="status"`).
- No sounds by default — classrooms and staff rooms are shared spaces.



LessonCard

The unit of the home feed: a lesson with its track, title, duration, offline status, progress and one action.

- Consumer provides `track`, `title` (a task the teacher can use tomorrow: "Use AI to draft a lesson plan — then check it"), `meta` (lesson number · minutes · format), optional `progress`, `offline` and one `action` (a small primary Button).
- Show "Offline ready" whenever the lesson is downloaded — data cost is a real decision for our users.
- Max width `content-max`; stack cards with `space-6`.
- One action per card. Long titles wrap; never truncate a title.

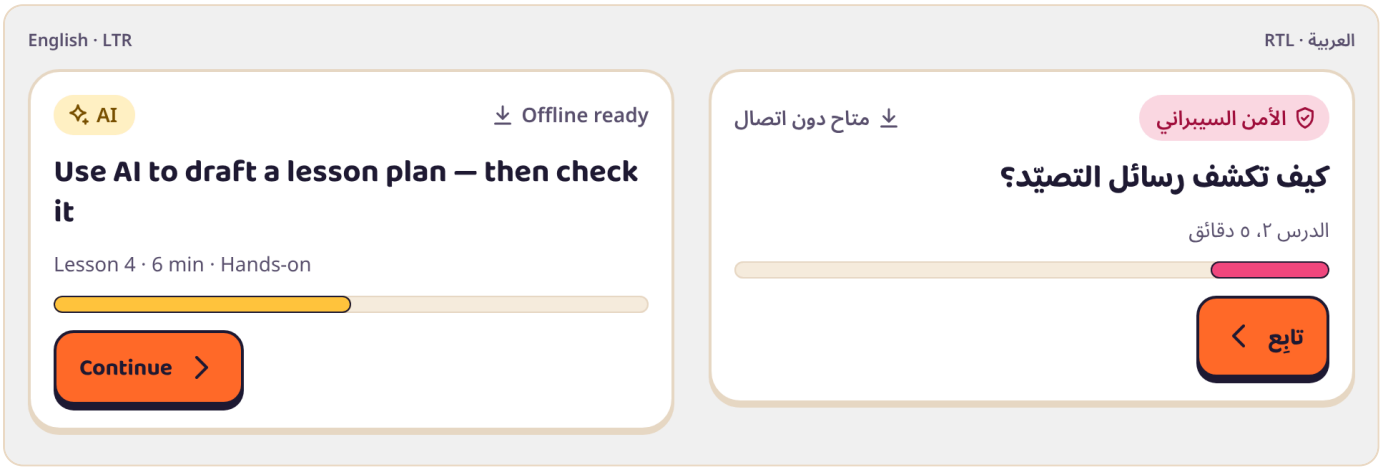

LessonComplete

End-of-lesson screen: celebrate briefly, show what was earned, and give one idea to use in class tomorrow.


- Consumer provides `title`, `subtitle` (lesson — track), up to three `stats` `[{label, value, tone}]`, `tryTomorrow` (+ `tryLabel`) and `actions` (Next lesson as primary block, Share as ghost).
- "Try it in class tomorrow" is mandatory content — it is the product's promise.
- Keep celebration ≤1.2s and honour reduced motion. Stats are localised strings (٩٠٪), never raw numbers.



LessonTopBar

The only chrome inside a lesson: close, a thick progress bar in the track colour, and read-aloud.


- Consumer provides `value`, `track`, `onClose`, optional `onAudio`, and localised labels (`closeLabel`, `audioLabel`, `progressLabel`).
- Closing mid-lesson keeps progress — say so in the confirmation; never threaten loss.
- Read-aloud matters: many teachers are stronger listeners in a second language than readers. Offer it on every text screen.

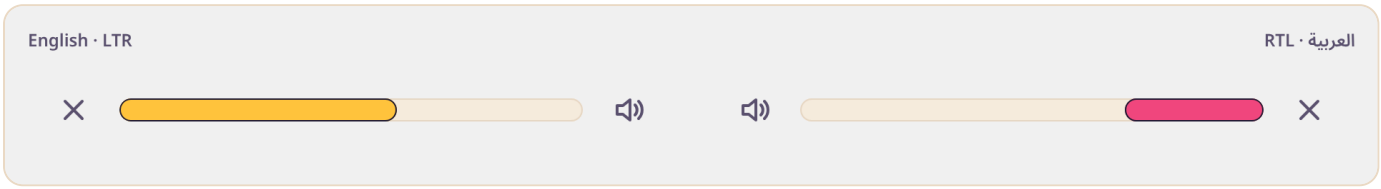

ProgressBar

Shows progress through a unit, track or weekly goal; fills from the inline-start edge, so it runs right-to-left in RTL automatically.


- Consumer provides `value` (0–100), a `label`, and in non-Latin locales a localised `valueText` ("٨٠٪", "٤٥%").
- `track` colours the fill by track; omit for personal goals (`kola`).
- Prefer concrete counts ("2 of 5 lessons") over bare percentages for goals.

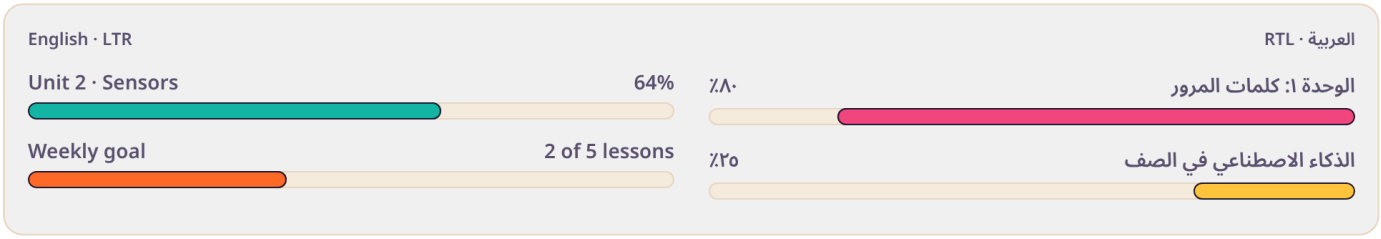

UnitPath

The learning map for one unit: a winding path of lesson nodes — done, current, locked, and a checkpoint at the end.

- Consumer provides `track`, a `label`, and `nodes` `[{label, state: done|current|locked, checkpoint, callout, stateLabel}]`.
- The zigzag uses logical offsets, so the path winds the other way in RTL.
- Exactly one `current` node, with a short `callout` ("Start", "ابدأ"). Checkpoints are rounded squares in `sunbird` and award a certificate step.
- Node size `path-node`; labels sit under nodes and wrap (max 140px). Locked nodes stay readable — teachers want to see what is coming.

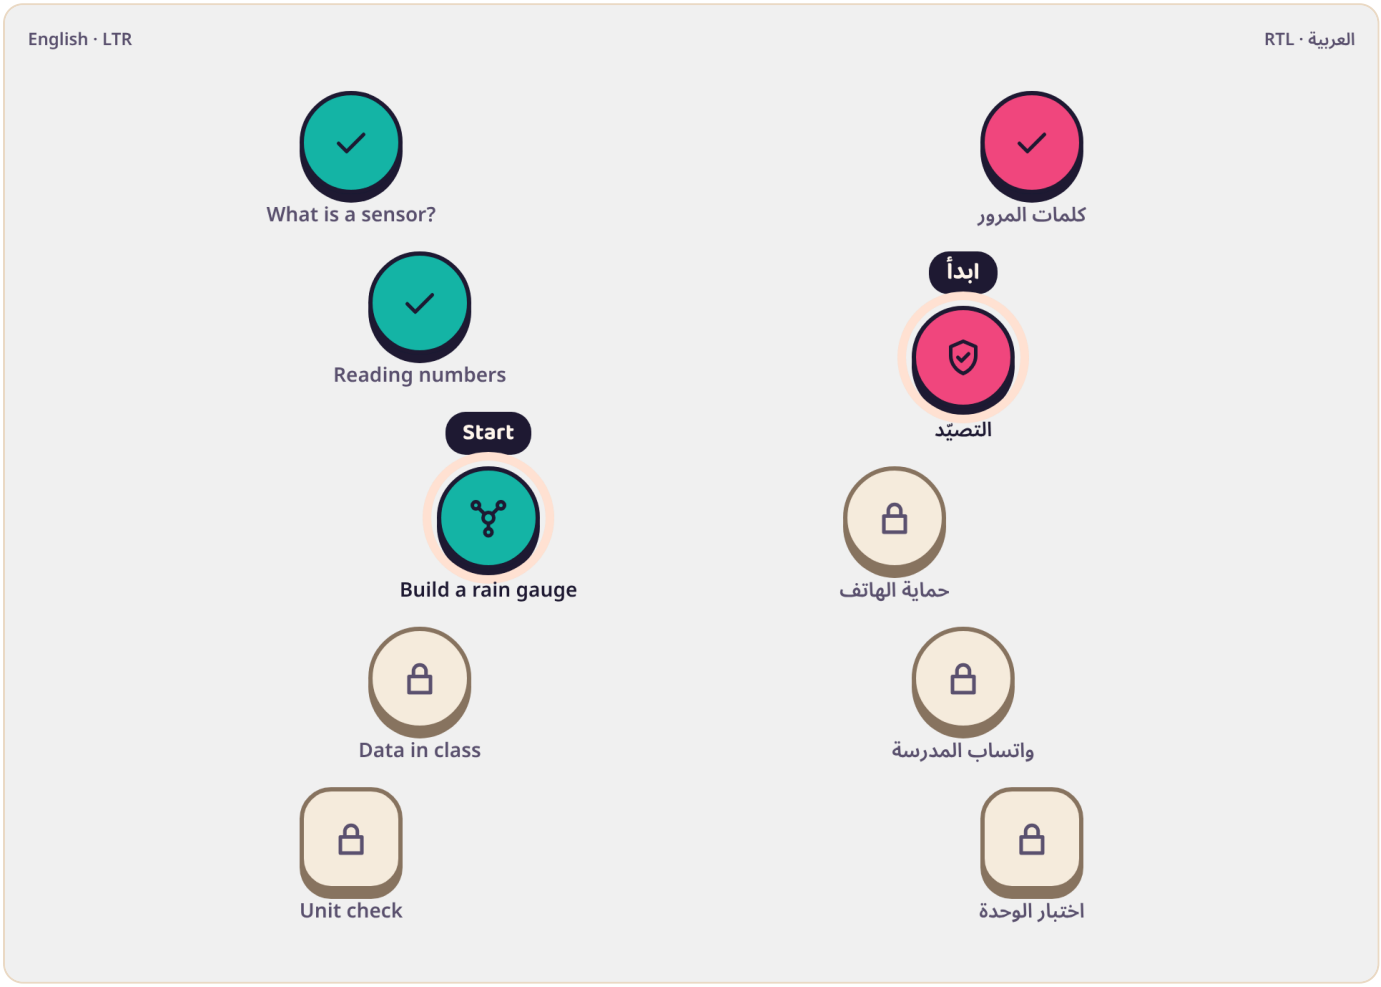


Questions

FillBlank

A sentence with gaps and a word bank; tap a word to fill the next gap, tap a filled gap to empty it.

- Consumer provides `parts` (strings and `{blank: n}`), the `bank` (include 1–2 distractors), optional `filled`, `onChange`, and after checking `result` + `answer`.
- Words are isolated with `<bdi>`, so English technical terms sit correctly inside Arabic sentences.
- Keep the sentence to one or two lines; gaps should test the key idea, not grammar.

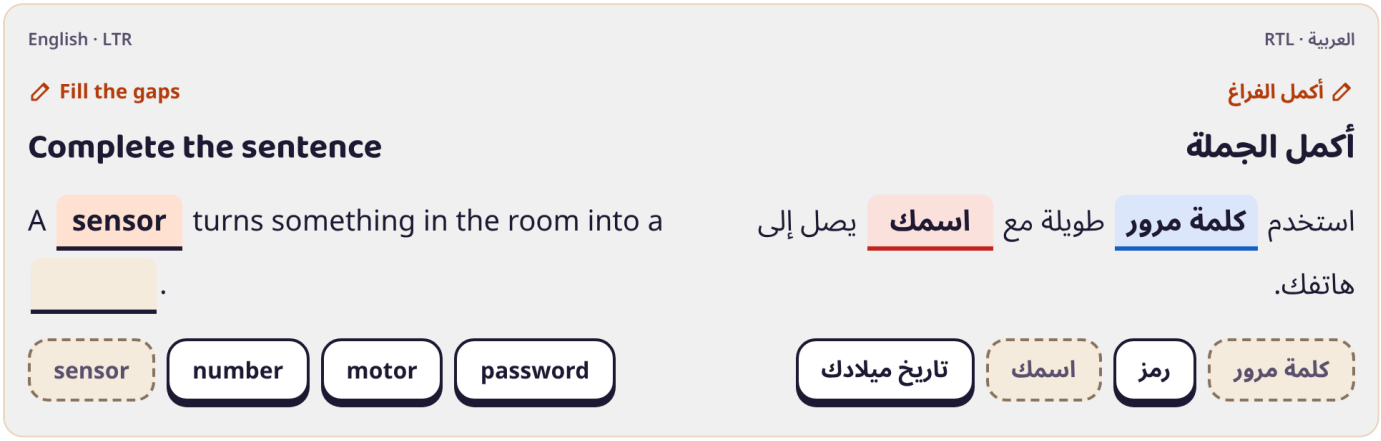

HotspotImage

Tap the right areas of a picture — a phishing email, a router's lights, a chatbot answer, a circuit.


- Consumer provides the picture as `children`, `spots` `[{id, x, y, w, h, label}]` in % of the picture, optional `found`, `onChange` and a localised `counter(found, total)`.
- Each found spot gets a numbered ring and its explanation in the list below.
- Spots use physical positions (`left` / `top`): pictures never mirror in RTL. Rebuild screenshots per language instead of mirroring them.



ImageChoice

Pick the right picture from a 2×2 grid — for devices, screenshots, diagrams and anything easier to see than to read.


- Consumer provides `options` `[{id, label, media}]`, `value`, `onChange`, and after checking `result` and `answer` (the right one is revealed even if the teacher picked wrong).
- `media` is an SVG or a small image (≤ 30 KB, WebP); always add a text `label` — never rely on the picture alone.
- Images never contain words, so the same question works in every language.

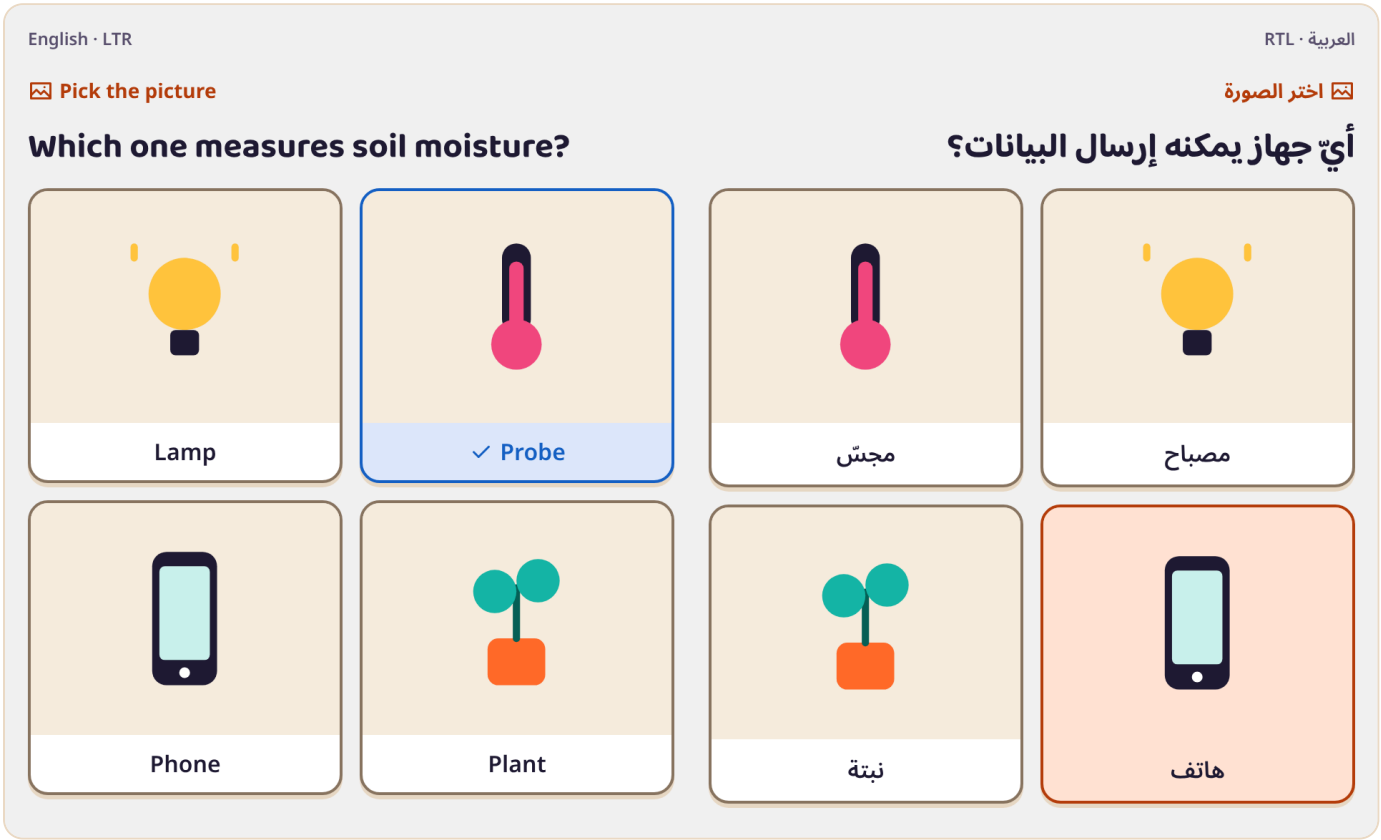

MatchPairs

Tap an item on the left, then its partner on the right; each pair gets a colour and a number so it never relies on colour alone.


- Consumer provides `left` and `right` `[{id, label}]`, optional initial `pairs` `{leftId: rightId}`, `onChange`, and after checking `result` + `answer`.
- 3–5 pairs. Tap a matched left item again to undo. Columns swap sides in RTL automatically.
- Use for vocabulary (term ↔ meaning), devices ↔ what they measure, threats ↔ protections.

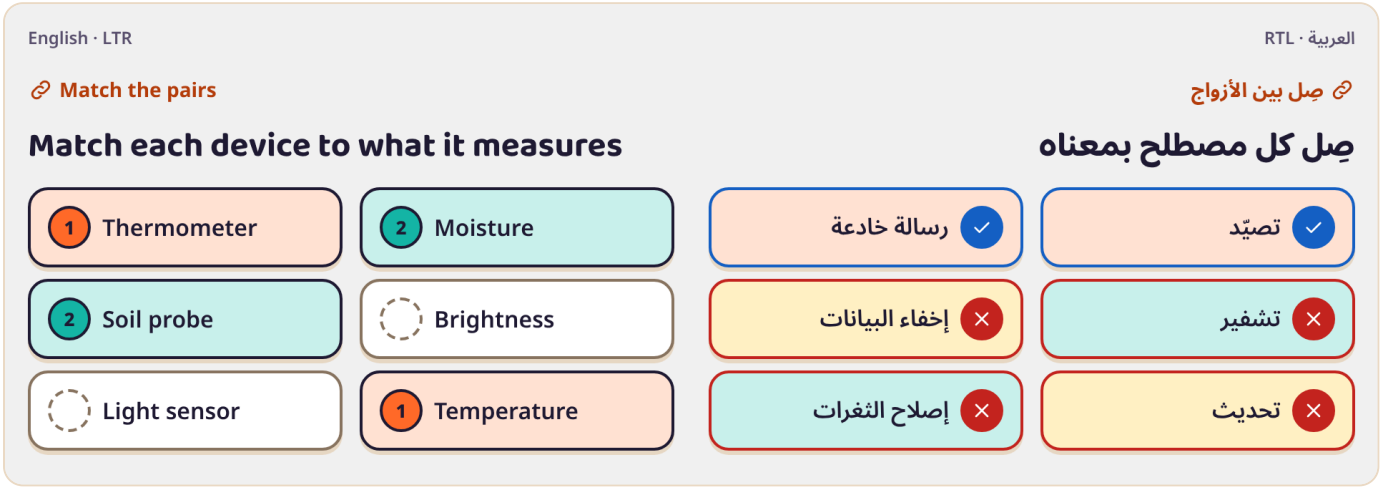

OrderSteps

Put steps in the right order with up/down buttons (works without drag, on any phone, with screen readers).

- Consumer provides `items` `[{id, label}]` in scrambled order, `onChange`, localised `upLabel` / `downLabel`, optional `numerals` (e.g. ["٣","٢","١"]), and after checking `result` + `answer` (ids in the right order).
- 3–6 steps, each one short line. Ideal for processes: how a sensor system works, how a model is trained, what to do after a phishing click.

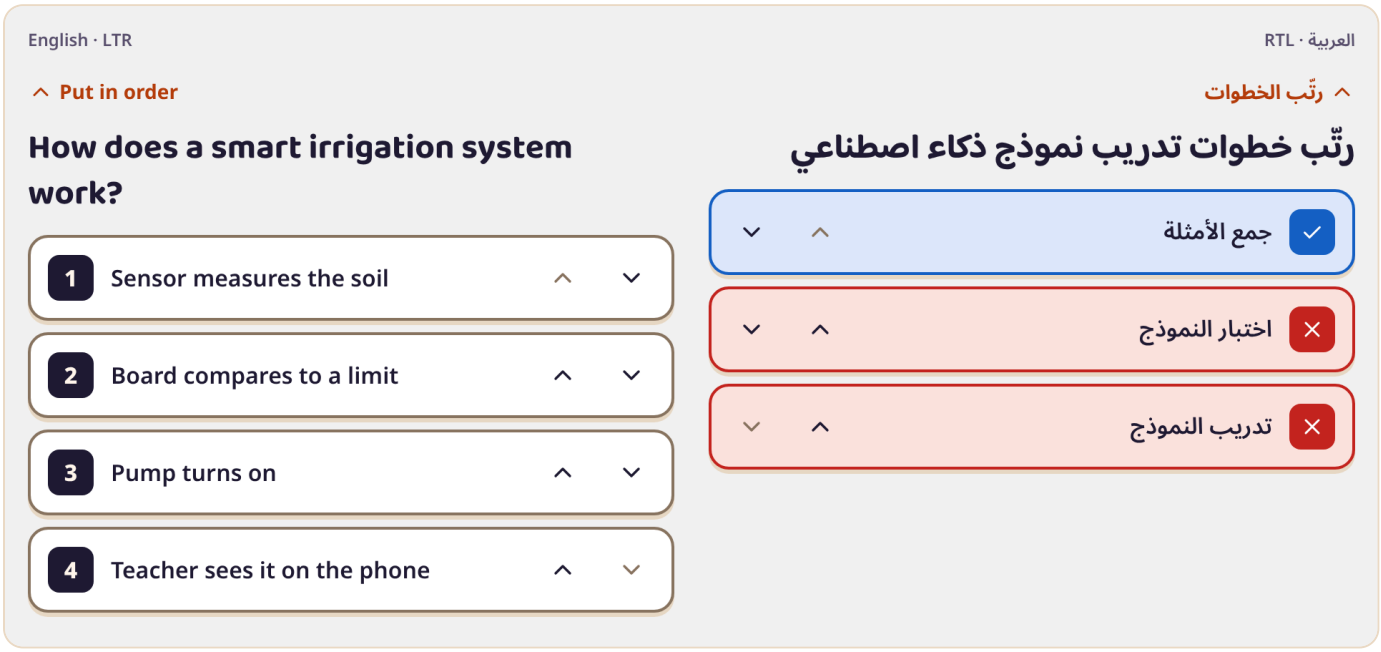

QuestionHeader

Top of every question: a type label with its icon, the prompt, an optional hint, media and read-aloud.


- Consumer provides `type` (choice, multi, truefalse, image, match, order, fill, type, hotspot, scenario, reflect, video, listen), a localised `typeLabel`, `prompt`, optional `hint`, `media`, `onAudio`.
- The type label tells teachers *how* to answer before they read the question — keep it 1–3 words ("Choose one", "Match the pairs", "اختر كل ما ينطبق").
- Offer read-aloud on every question; many teachers learn in a second language.



QuizOption

One tappable answer in a multiple-choice question — single answer, or "select all that apply" with `multi`.


- Consumer provides: `keyLabel` in the learner's script (A/B/C, أ/ب/ج, क/ख/ग), the answer text, the `state`, and after checking a one-line `feedback` that teaches — say *why*, not just "Wrong".
- `multi` turns the key into a checkbox (square, `role="checkbox"`); always say "Select all that apply" in the QuestionHeader.
- Correct is `correct` blue + check icon + a word; wrong is `wrong` red + cross icon + a word. Never rely on colour alone.
- Stack options vertically with `space-3` gaps; whole row is the tap target (min 56px tall).
- Wrong answers are framed as learning, never as failure: no shaking, no buzzer, no lost "hearts".

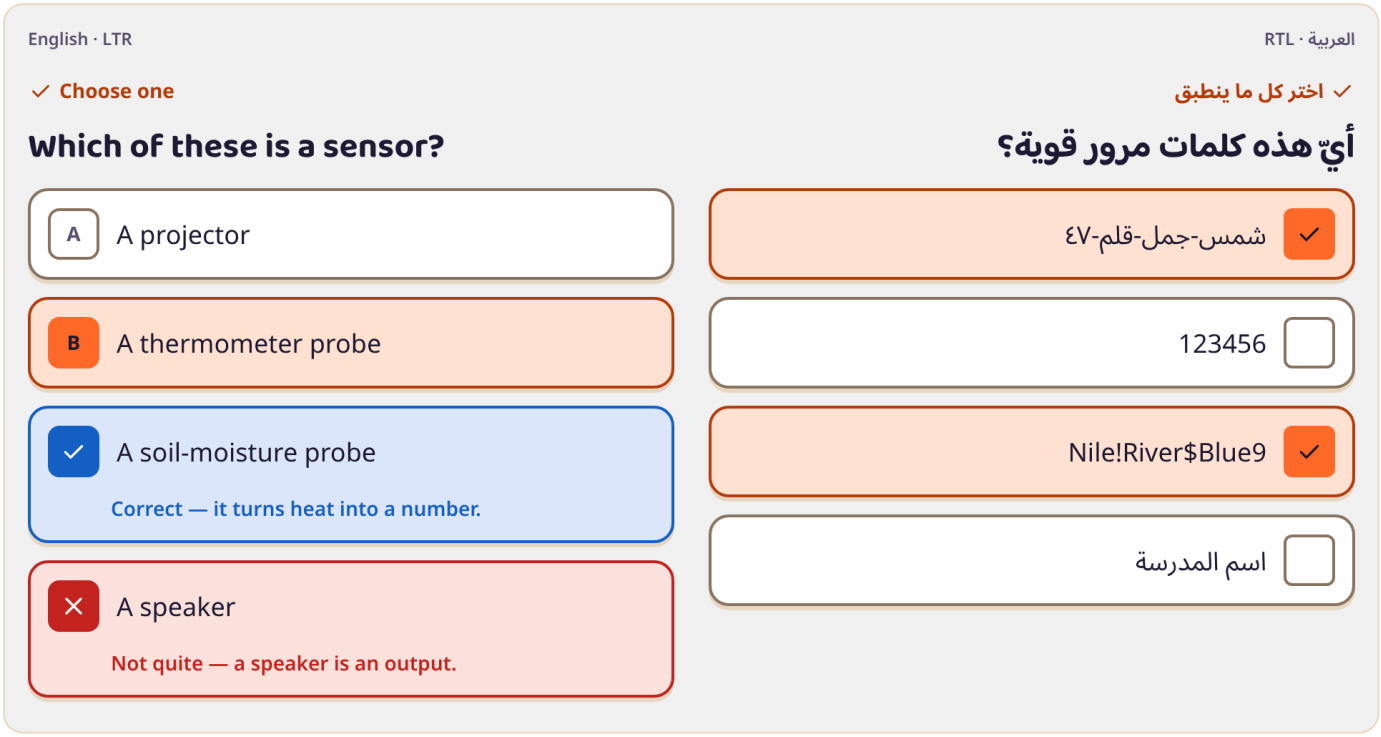

Reflection

An open question with no grading — "How will you use this in your class?" — saved to the teacher's notes, with an optional AI suggestion.


- Consumer provides `prompt`, `placeholder`, `value`, `onChange`, `countText(words)`, an `action` (Save) and optional `feedback` + `feedbackLabel` + `feedbackNote`.
- The input is `dir="auto"`. The AI suggestion is always labelled as AI and says it can be wrong.
- Notes feed the teacher's classroom kit, so their own ideas come back to them in print.

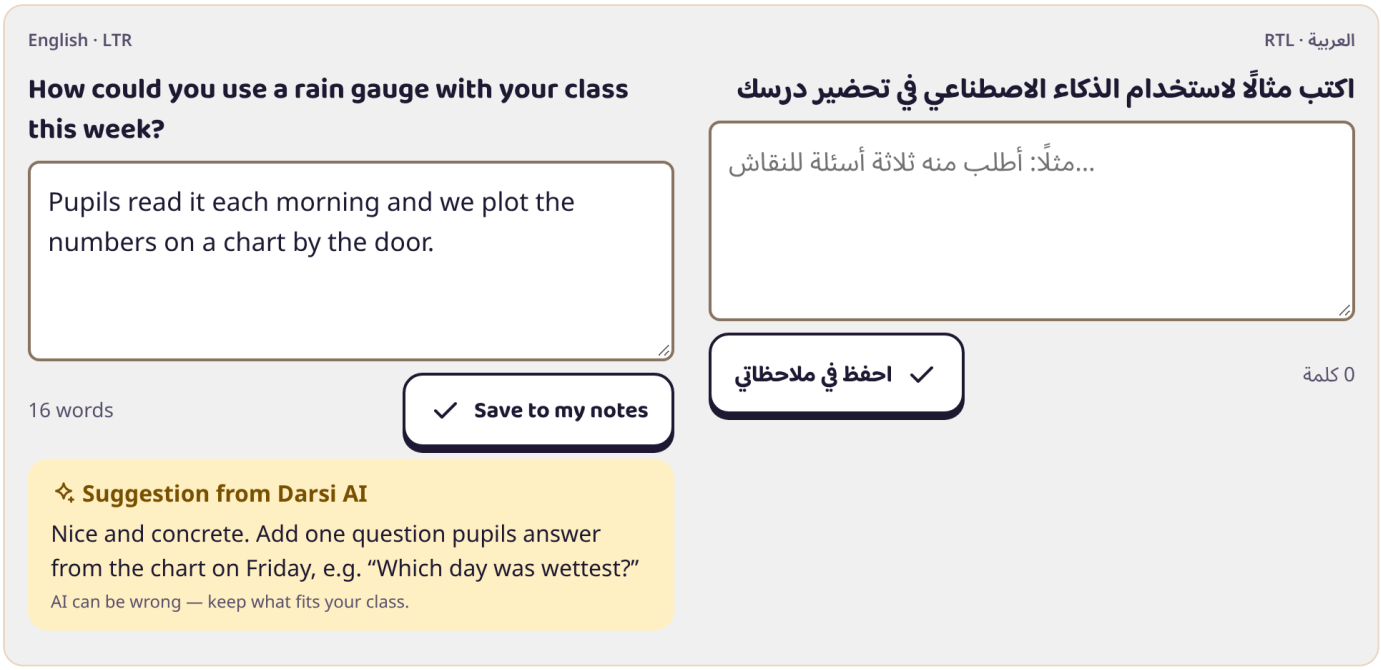

ScenarioCard

A short classroom situation and "What would you do?" — for judgement, ethics and safety, where there is a better choice rather than a single right answer.


- Consumer provides `who` and `initial` (a fictional colleague), `situation`, `ask`, `choices` `[{id, label, tone: "good"|"consider", toneLabel, consequence}]`, optional `chosen`.
- Outcomes explain consequences calmly ("Strong choice" / "Think again"); they never shame.
- Use real staff-room situations: an AI-written essay, a suspicious WhatsApp link, a parent asking about pupil data.

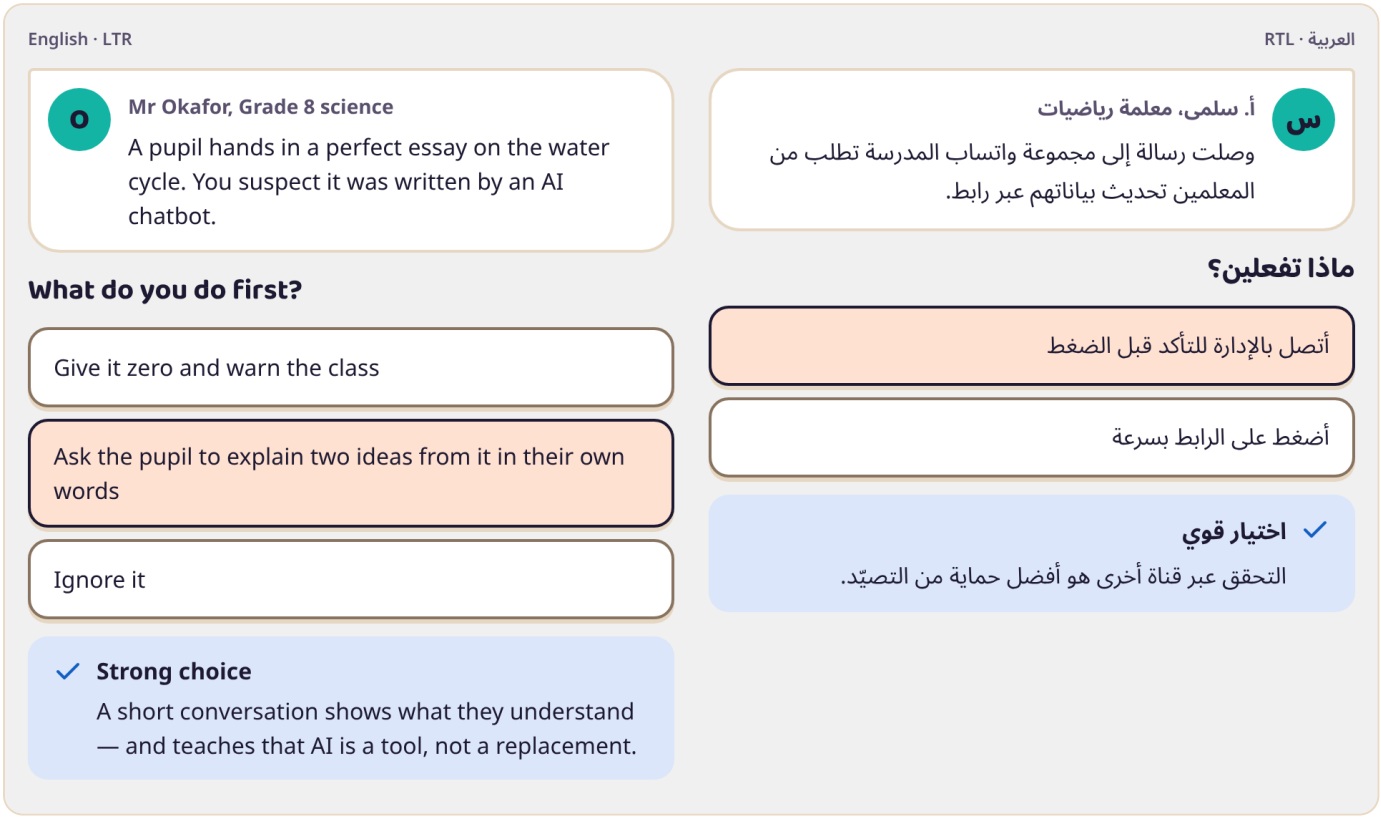

TrueFalse

Two big answers side by side for true/false and yes/no statements.

- Consumer provides `value` (true/false/undefined), optional `result` after checking, `onChange`, localised `trueLabel` / `falseLabel` and a group `label`.
- Use for misconceptions worth stating plainly ("AI chatbots always give correct facts"). Follow with a FeedbackSheet that explains.
- Pair with a ghost "I don't know yet" in placement quizzes so guessing doesn't skew the level.

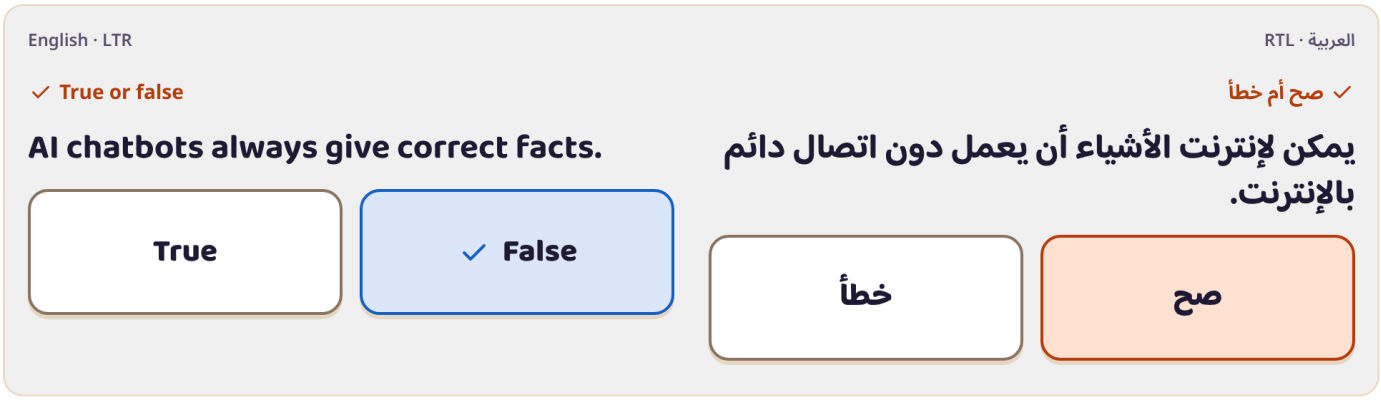


Video

VideoPlayer

A low-data video player with captions, chapters, in-video questions and a "Pause and answer" checkpoint.

- Consumer provides `poster` (node or URL), optional `src` + `tracks` (`<track>` captions), `title`, `meta` (length · quality · size · caption language), `duration`, `current`, `chapters` `[{at, label}]`, `questionsAt` (seconds), `caption` (current line), `checkpoint` (a question node — shown over the paused video) and `actions` (Audio only, Transcript, Download).
- Defaults: 240p, captions on, no autoplay, `preload="none"`. Offer 144p/360p and audio-only; always show the MB size before playing.
- The control bar stays left-to-right in every language (media timelines never mirror); captions follow the lesson language.
- Videos are short (≤ 4 min) and pause for a question at each diamond marker.

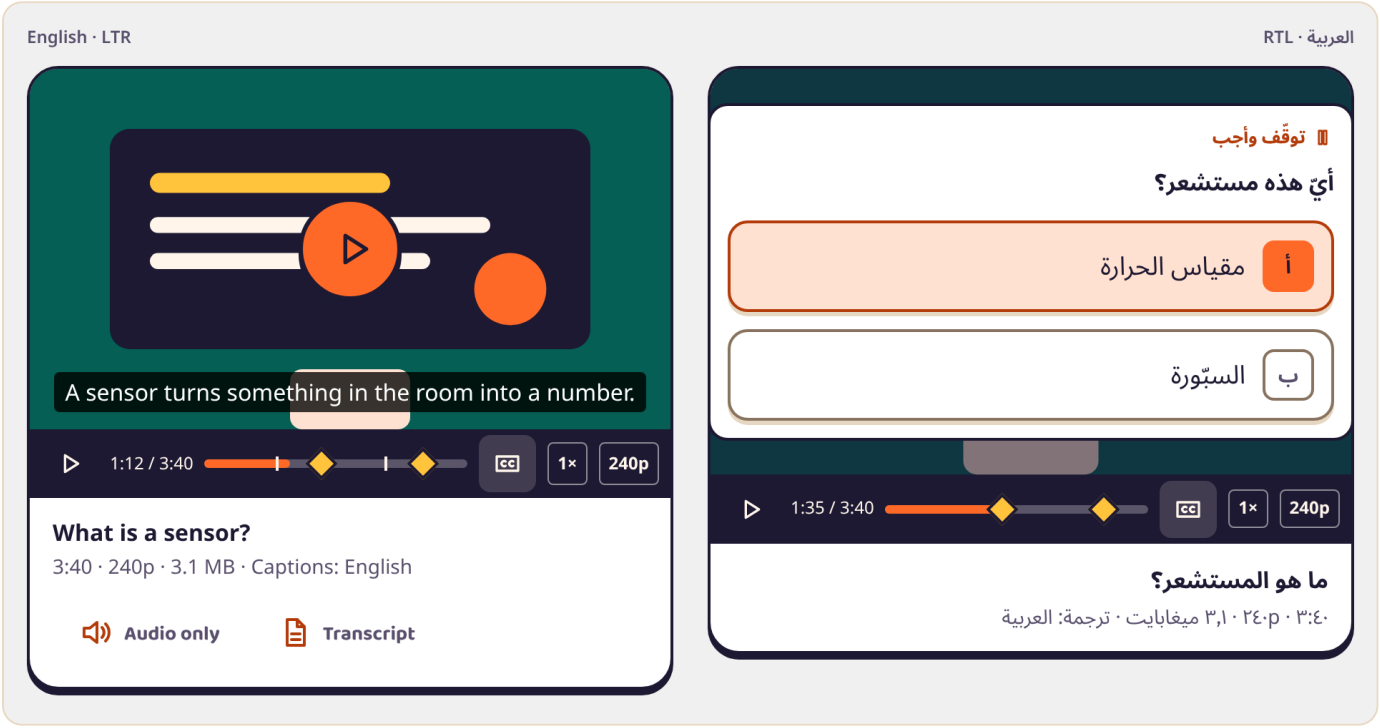


AI lab

FactCheck

Gen AI lab: an AI answer with underlined claims; the teacher marks each one Correct, Wrong or "Check a source" and sees the truth.


- Consumer provides `answer` (text parts, some with `claim: {id, verdict, note}`), optional `verdicts` and `open`, `labels`, `checkedText(done, total)` and a `takeaway`.
- Mix true claims, confident errors and one invented "hallucination" per answer. The note always says how to verify.

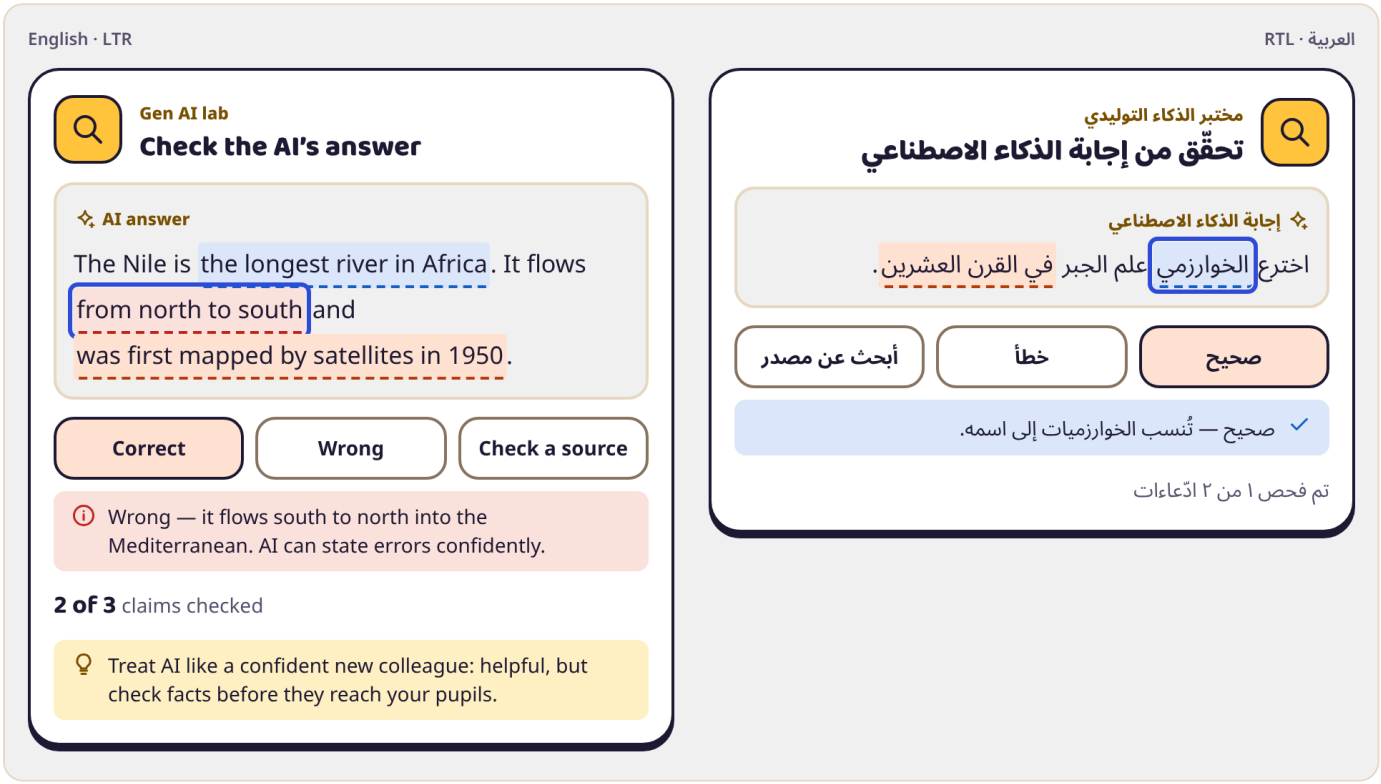

NextWordLab

Gen AI lab: a sentence, the likely next words with probability bars, and a temperature slider that makes the model predictable or creative.


- Consumer provides `context`, `candidates` `[{word, p}]`, optional `temperature`, labels and a `takeaway`.
- Probabilities are recomputed live from the temperature; "Pick the next word" samples one. Works fully offline.

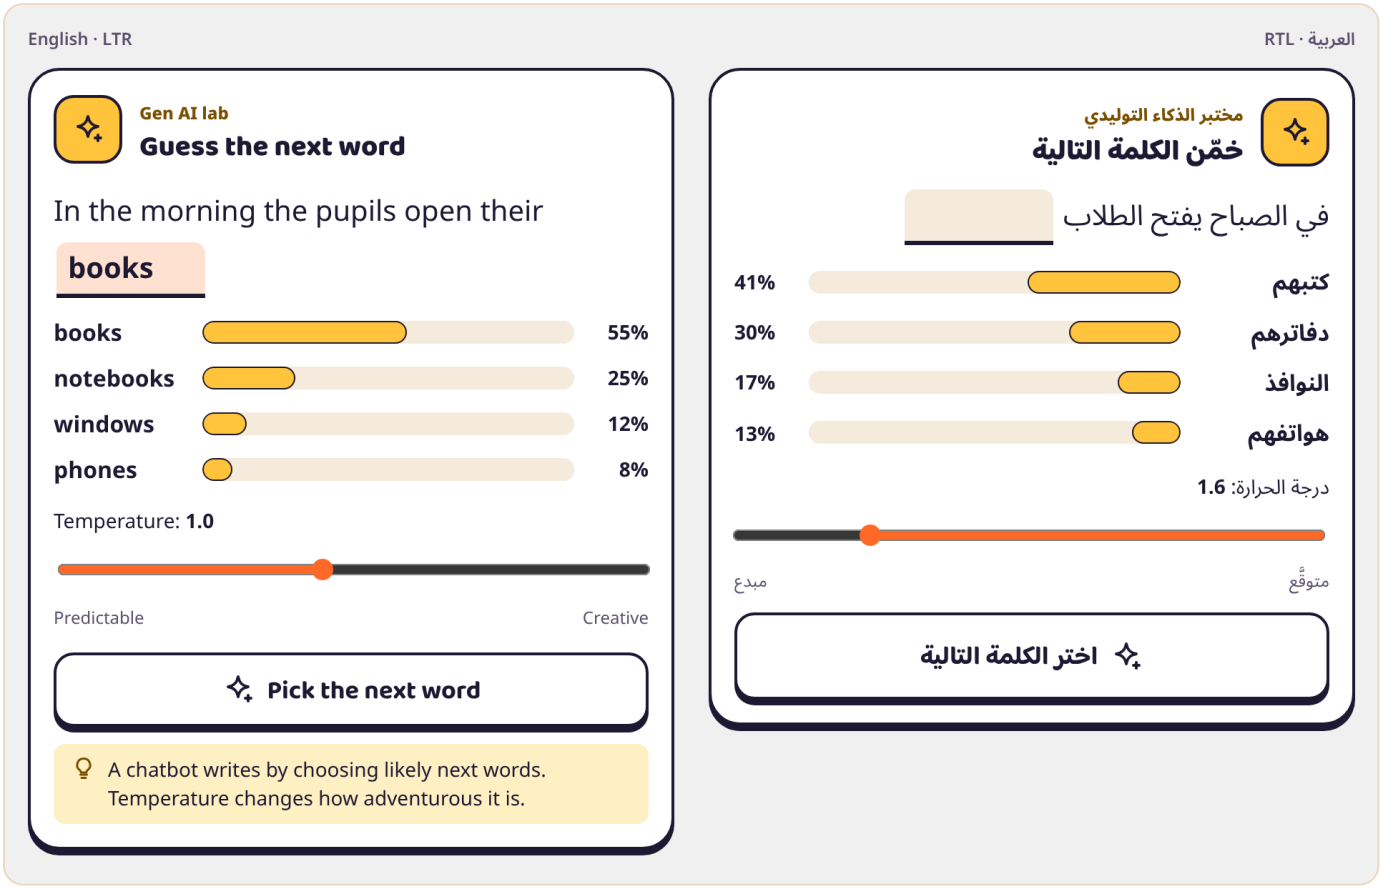

PromptBuilder

Gen AI lab: build a prompt from ingredients (role, task, context, format, language) and see how the answer improves.


- Consumer provides `ingredients` `[{key, label, text, on}]`, `outputs` (one example answer per number of active ingredients), labels and a `takeaway`.
- Outputs are pre-written examples, so the tool works offline and never shows unreviewed AI text to a learner. Connect a live model only with a teacher-safe filter.

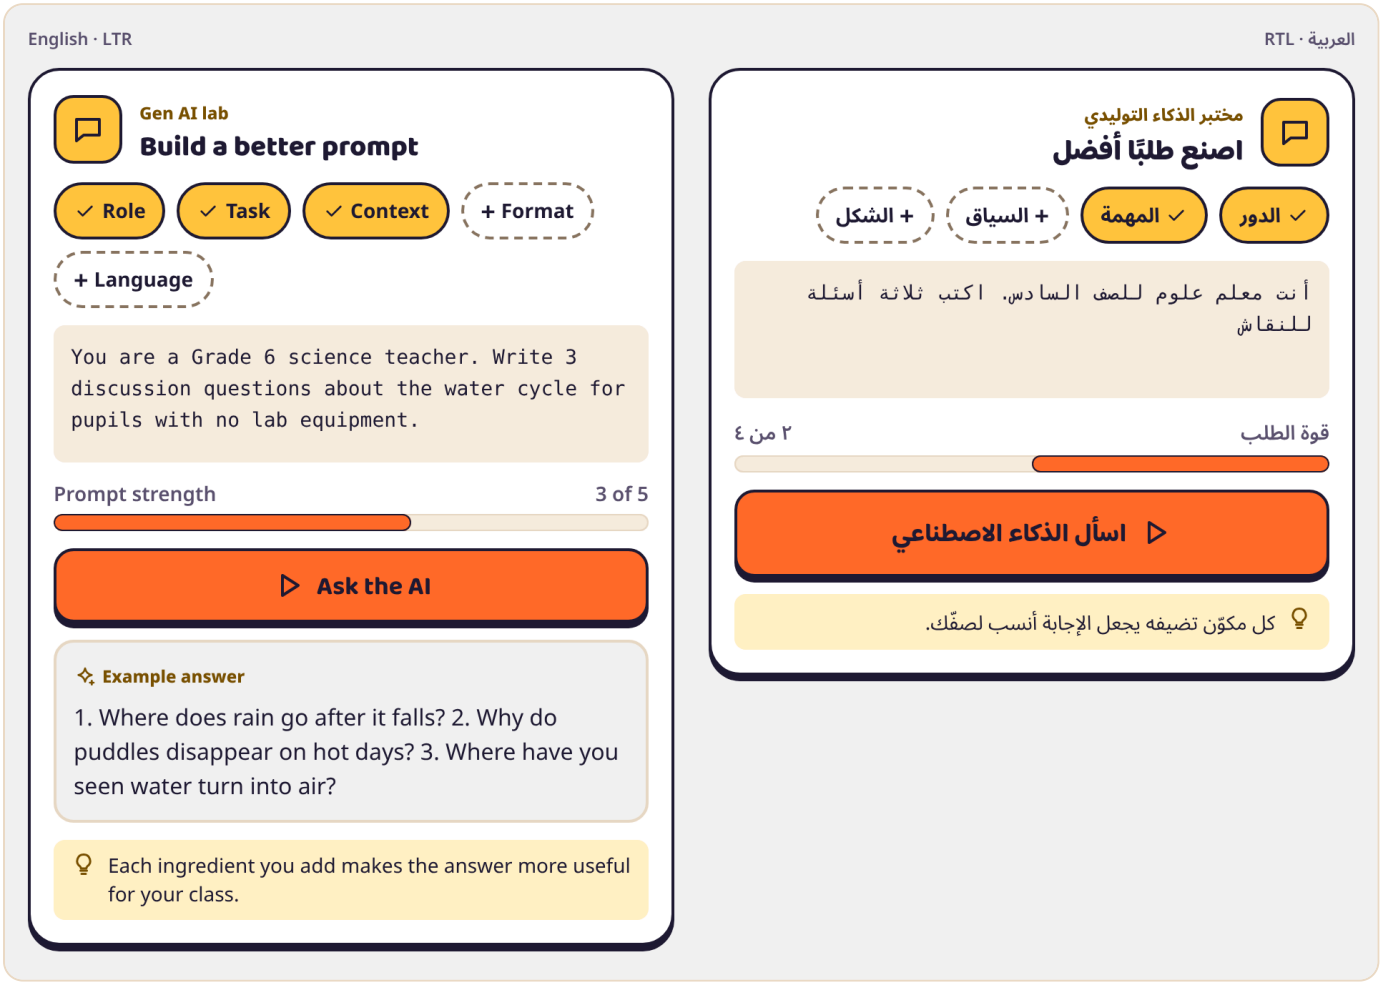

TokenViewer

AI lab: type any text and see it split into tokens — the pieces a language model actually reads.


- Consumer provides `text` (editable), labels and a `takeaway`. Splitting is a teaching approximation (long words → 4-letter pieces), not a real tokenizer.
- Show it in the teacher's language: Arabic, Amharic and Hindi usually need more tokens than English, which affects cost and speed — a useful classroom discussion.

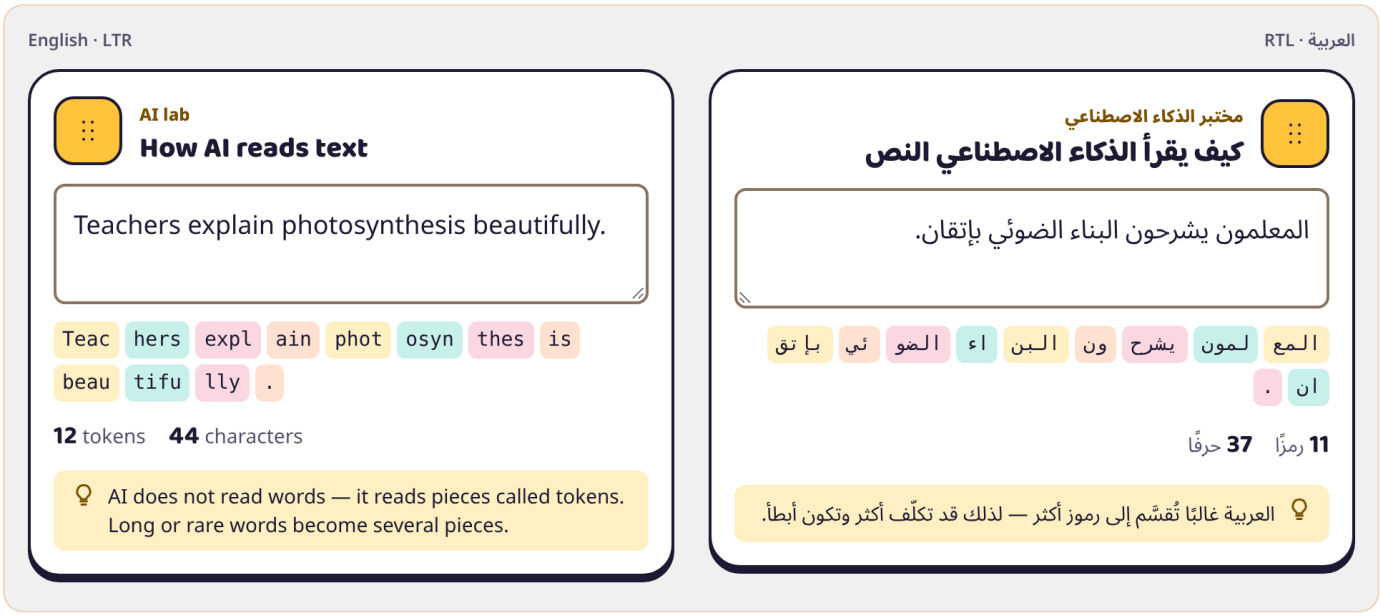

TrainClassifier

AI lab: teach a tiny model with examples in two buckets, then test it on new text and see its guess and confidence.

- Consumer provides `classes` `[{id, label, tone, examples}]`, an initial `test` sentence and labels.
- The model is a transparent word-overlap counter — simple enough to explain, real enough to show how few or biased examples cause wrong answers.
- Good pairs: safe vs phishing messages, question vs statement, fruit vs not fruit.

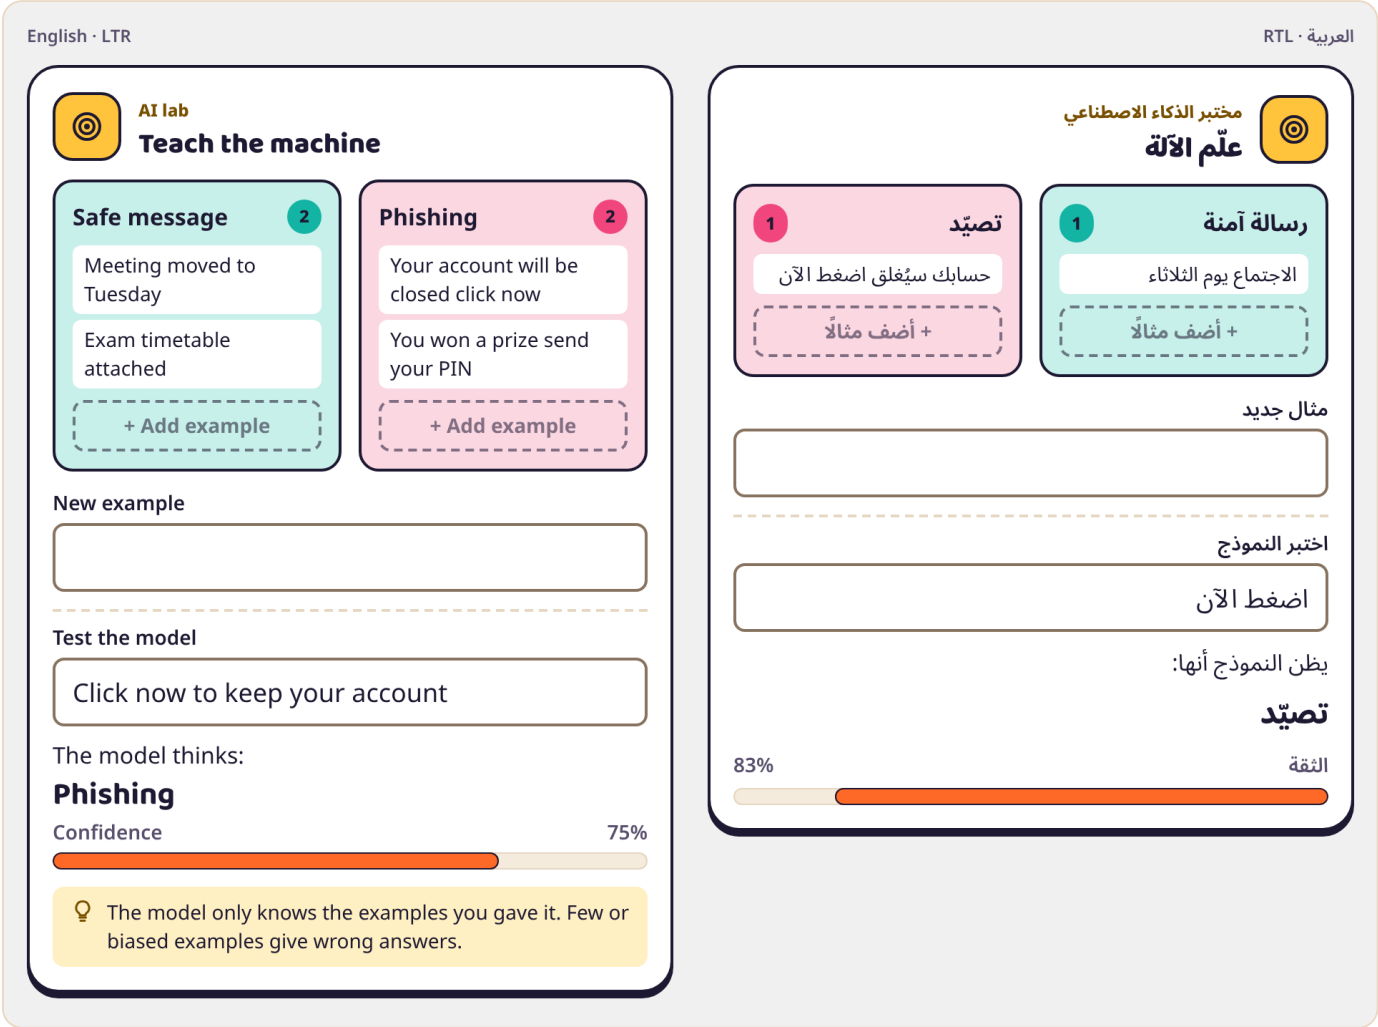


Motivation

CertificateCard

A shareable certificate for finishing a track level — the recognition teachers can show school leaders.


- Consumer provides `track`, `name` (isolated with `<bdi>`), `title`, localised `date`, verification `code` (always LTR), optional `kicker`, `trackLabel` and `action`.
- Track colour fills the top band and chip; everything else stays `ink` on `surface` so it prints well in black and white.
- The verification code links to a public check page; never print personal data beyond the name.

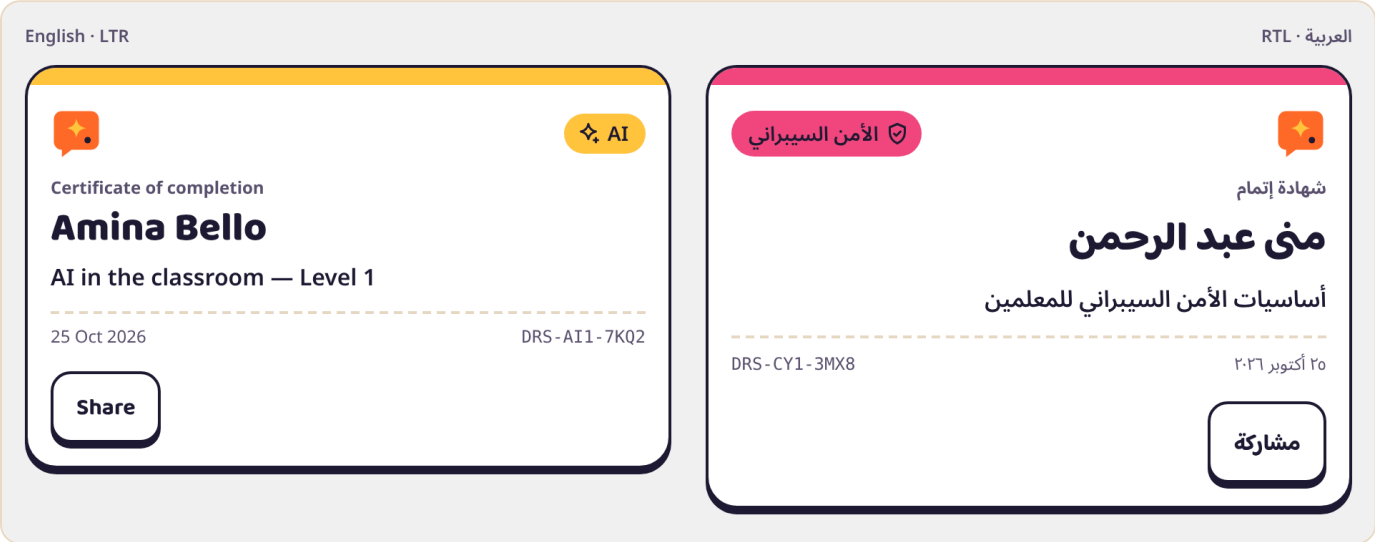

StreakCounter

A forgiving streak counted in teaching weeks, not days — teachers have exam weeks, power cuts and holidays.

- Consumer provides `count` (localised, "3 weeks" / "٣ أسابيع"), a `label`, and the week's `done` / `days` (use 5 for a school week).
- A week counts once the teacher hits their own goal (default 2 lessons). Missing a week pauses, it never resets to zero with a guilt message.
- `kola` flame on `kola-soft`. Never pair it with loss language ("You lost your streak!").
- `compact` renders a small pill (flame + number) for the AppBar; pass `label` so screen readers hear the unit.

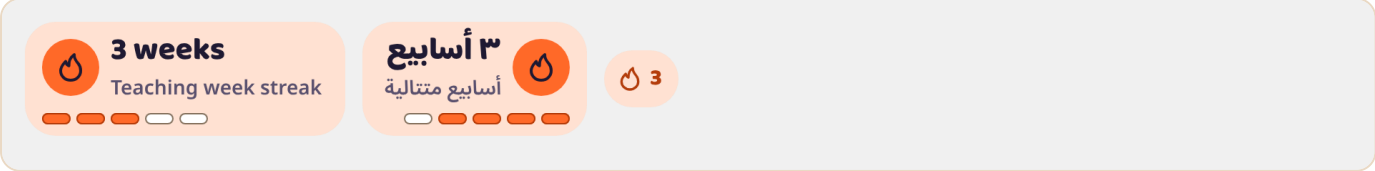


Teacher kit

ClassroomKit

The teacher's printable materials for a lesson or unit, unlocked when they finish it — the bridge from learning to teaching.

- Consumer provides `track`, `title`, `subtitle`, `items` (ResourceCard props), optional `kicker` and an `action` ("Download all · size").
- Every kit has at least a lesson plan and a pupil worksheet; units add a poster and answer key. See the Print templates asset group for the PDF design.
- Kits are cached offline once downloaded and are free to copy for the teacher's school — say so.

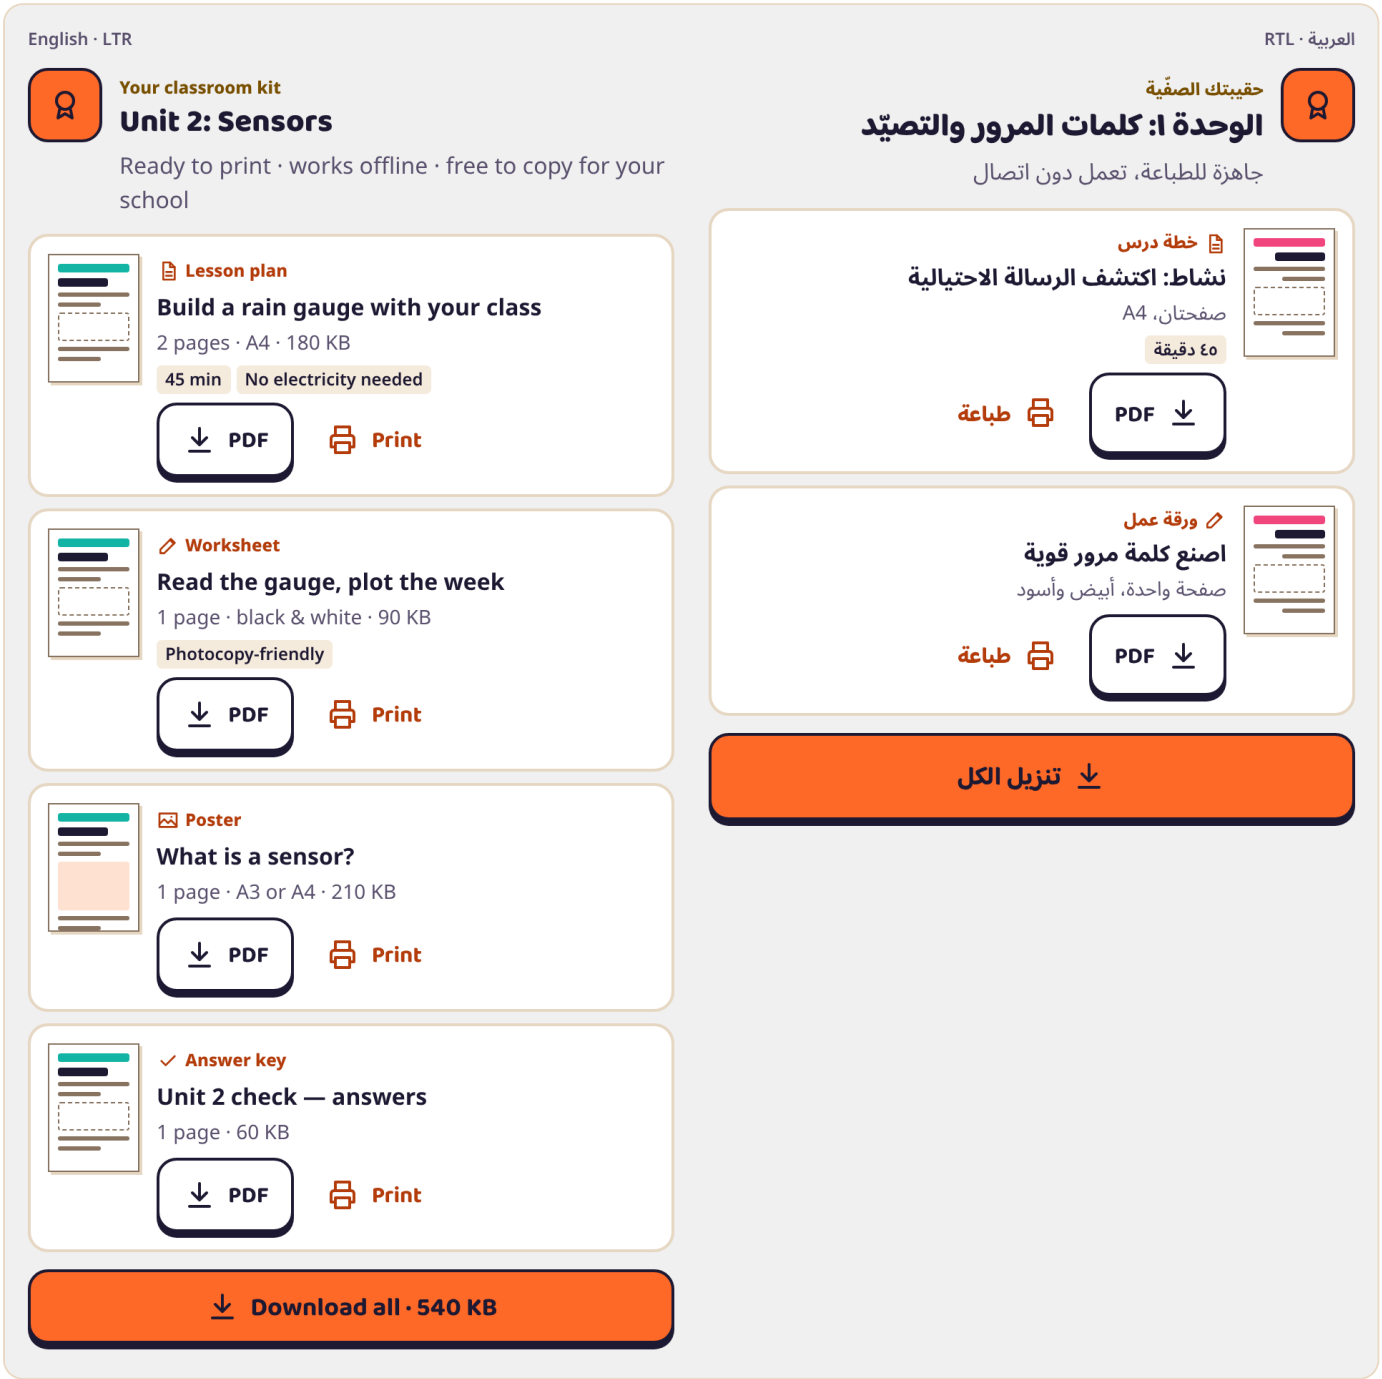

ResourceCard

One downloadable, printable file: lesson plan, worksheet, poster, slides, answer key or certificate.

- Consumer provides `kind`, `kindLabel`, `title`, `meta` (pages · paper · size), optional `tags` (time, "No electricity needed", "Photocopy-friendly"), `track`, `onDownload`, `onPrint` and labels.
- The thumbnail is drawn in CSS from the track — no image download. Always show file size.




Onboarding

ChoiceCard

A large selectable card for onboarding and settings choices — single (radio) or `multi` (checkbox).


- Consumer provides `title`, optional `description`, `icon`, `selected`, `multi`, `onClick`.
- Use for 2–5 options. The check sits at inline-end, so it moves left in RTL.

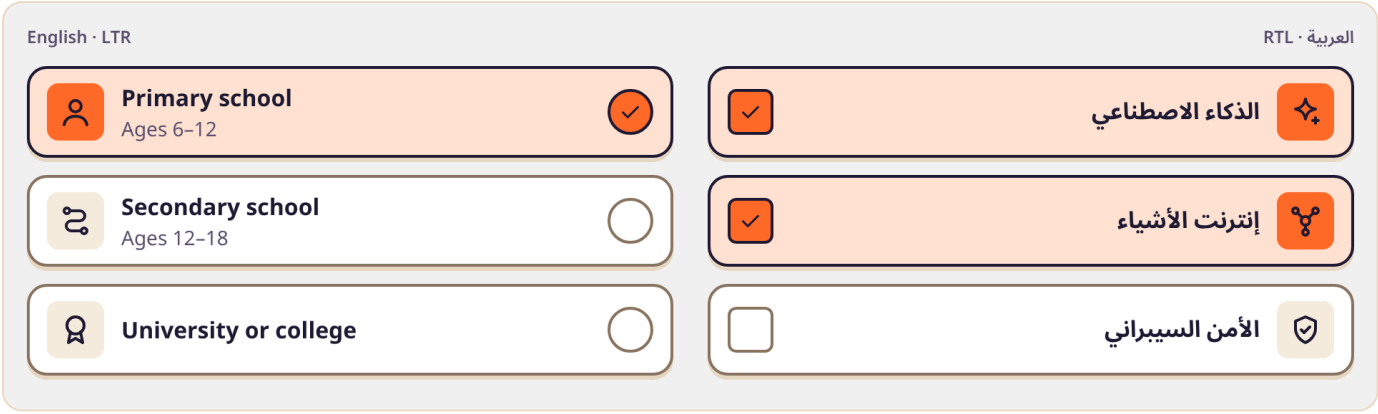

OnboardingStep

One step of first-run setup: progress, optional art, title, short body, choices and actions.


- Consumer provides `step`, `total`, `title`, `body`, optional `art`, children (ChoiceCards) and `primary` / `secondary` buttons.
- Four steps maximum: language → where you teach → tracks → weekly time; then the placement quiz. Every step can be skipped and changed later.

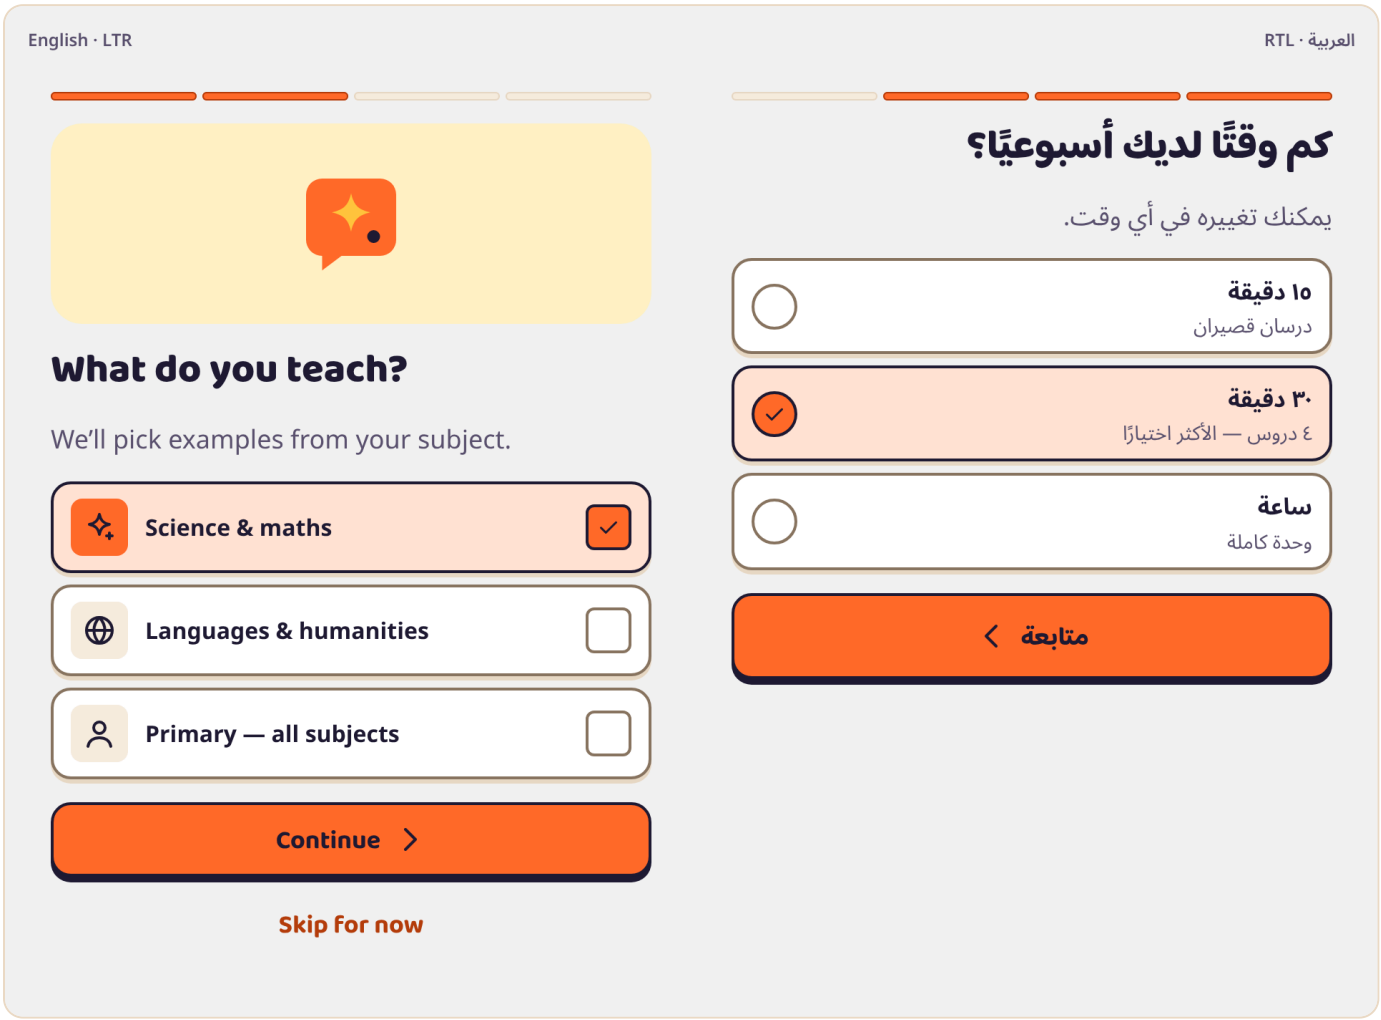

PlacementResult

The end of the placement quiz: a starting level per track, with what that means and what comes next.

- Consumer provides `title`, `summary`, `levels` `[{track, trackLabel, level, of, label}]` and `actions`.
- Levels are meters of 4 steps, coloured by track and labelled in words. Always say levels can be changed — the quiz is a suggestion, not a test.

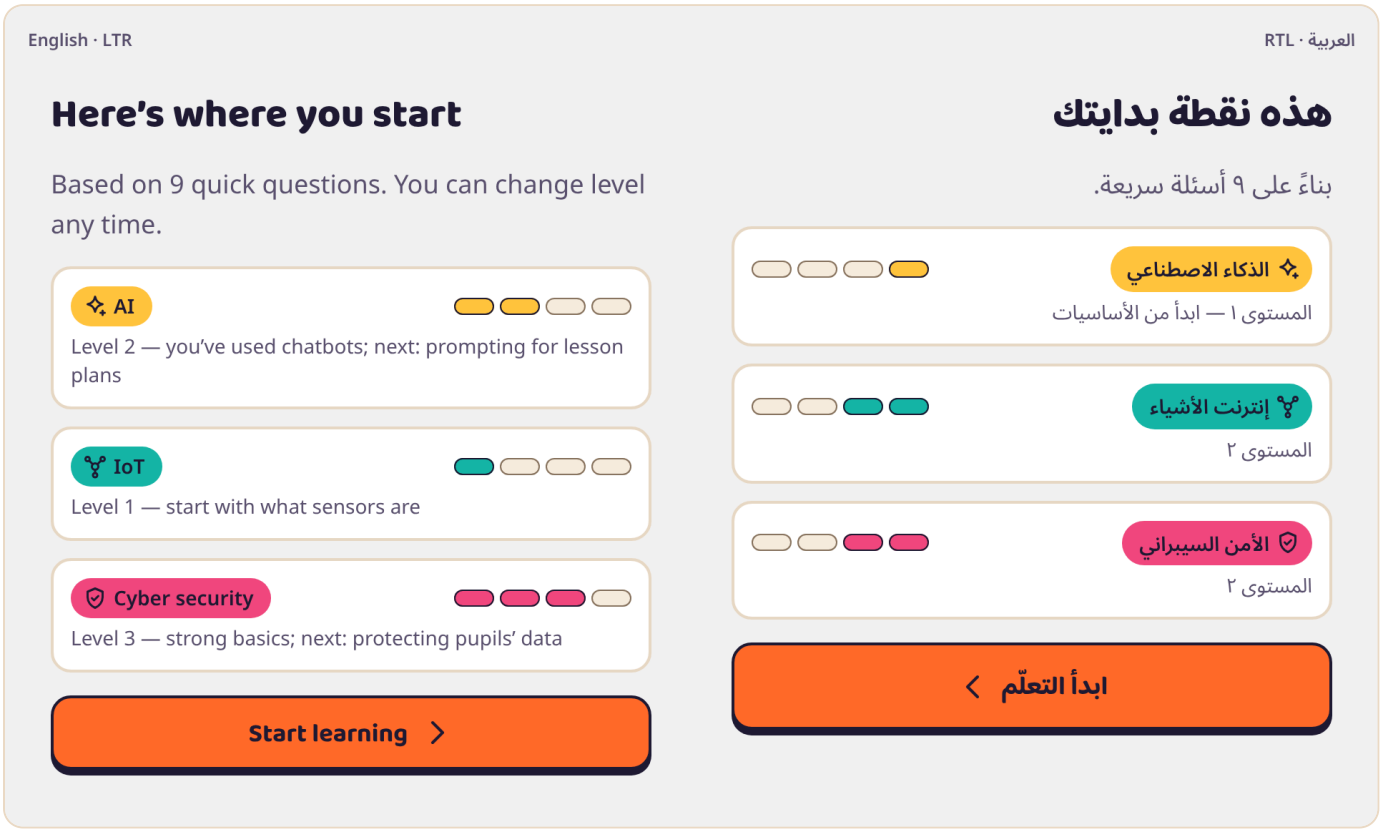


Settings

LanguagePicker

Choose the interface language: each option shows its name in its own script first, the English name second.


- Consumer provides `languages` `[{code, native, english, dir}]`, the selected `value`, `onChange` and a `label`.
- The native name carries its own `lang` and `dir`, so Arabic and Urdu names render correctly inside an LTR list.
- Never use flags — languages are not countries (Arabic spans 22, French and English dozens).
- Offer it on the first screen before sign-up, and from the globe button in the AppBar.

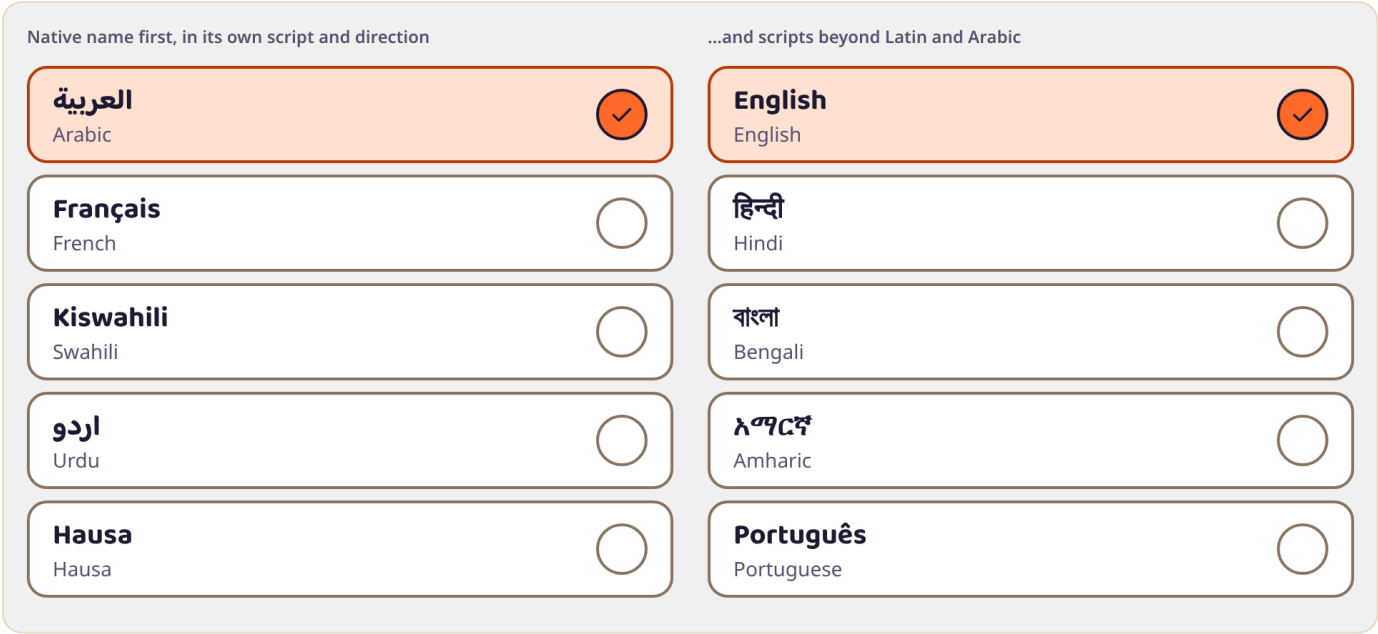

Switch

On/off setting with a label and a one-line description.


- Consumer provides `label`, `description`, `checked`, `onChange`.
- Core settings: Sunlight mode (switches the theme), Data saver, Weekly reminder (at most one notification a week).
- The thumb slides toward inline-end when on, so it moves left in RTL.

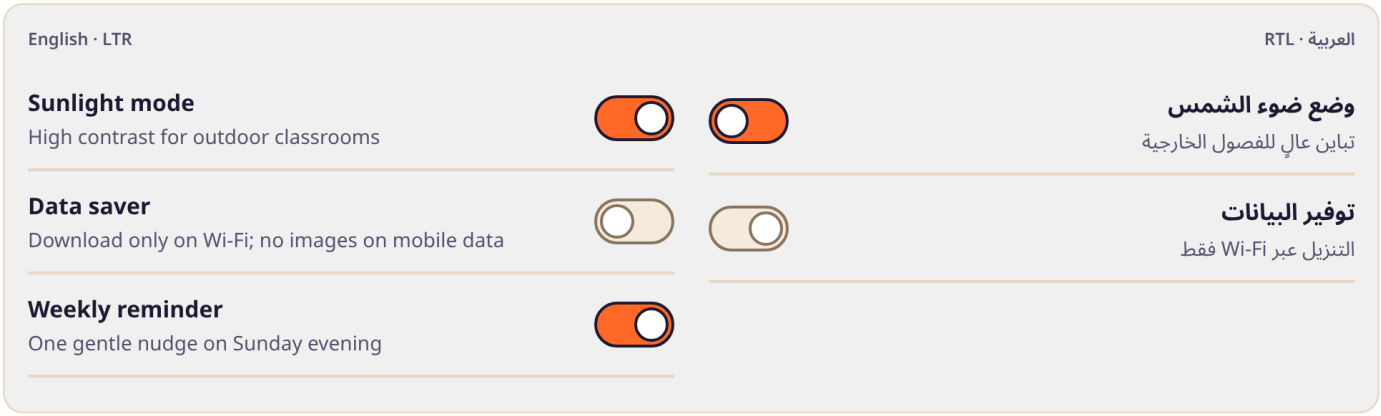

TextField

Single-line text input with label, hint and error.

- Consumer provides `label`, `hint` or `error`, and normal input props (`value`, `onChange`, `placeholder`, `inputMode`).
- `dir="auto"` is built in: the field follows the language being typed, so an English term inside an Arabic form still reads correctly.
- Errors say what to do next, in a full sentence, with the cross icon.

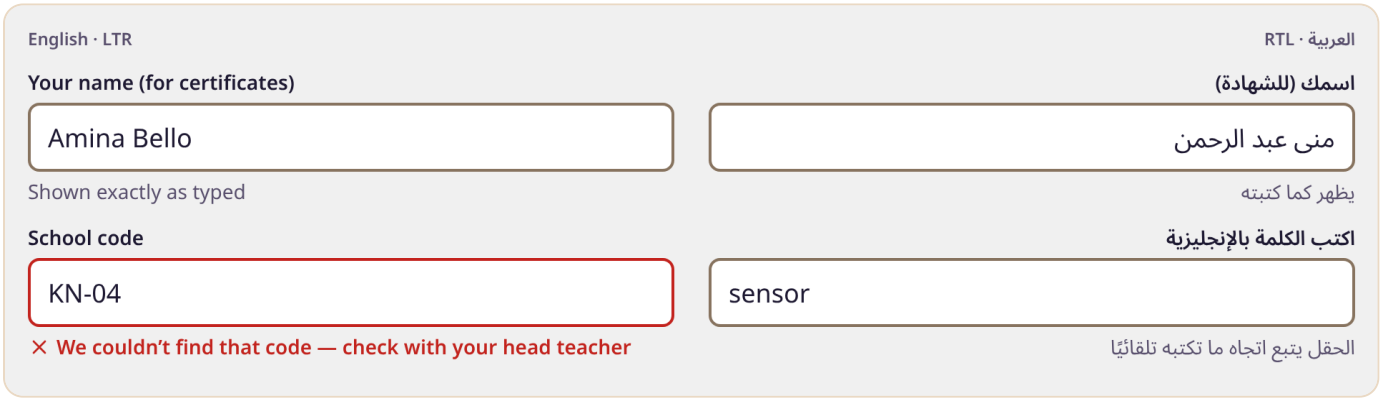


PWA

ConnectionStatus

A thin banner that tells the truth about the network: offline, syncing, or saved.


- Consumer provides `state` (`offline` | `syncing` | `synced`), the message, and optionally an `action` (e.g. a ghost "Retry").
- Offline is calm, not an error: `ink` band, "downloaded lessons still work". Never block the screen.
- Show `synced` for 3 seconds after reconnecting, then hide. Set `floating` to stick under the AppBar.

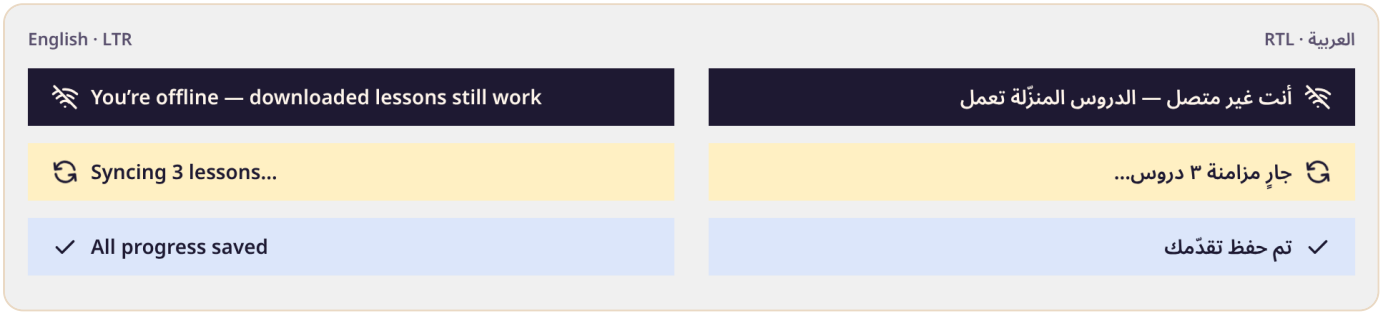

DownloadRow

One downloadable unit with its size, state and action — data cost is a real decision for teachers on prepaid bundles.


- Consumer provides `track`, `title`, `meta` (lessons · size in MB), `state` (`idle` | `downloading` | `done` | `error`), `progress`, handlers and localised labels.
- Always show the size before download. Respect the Data saver Switch (Wi-Fi only).
- Errors explain and offer Retry; partial downloads resume.

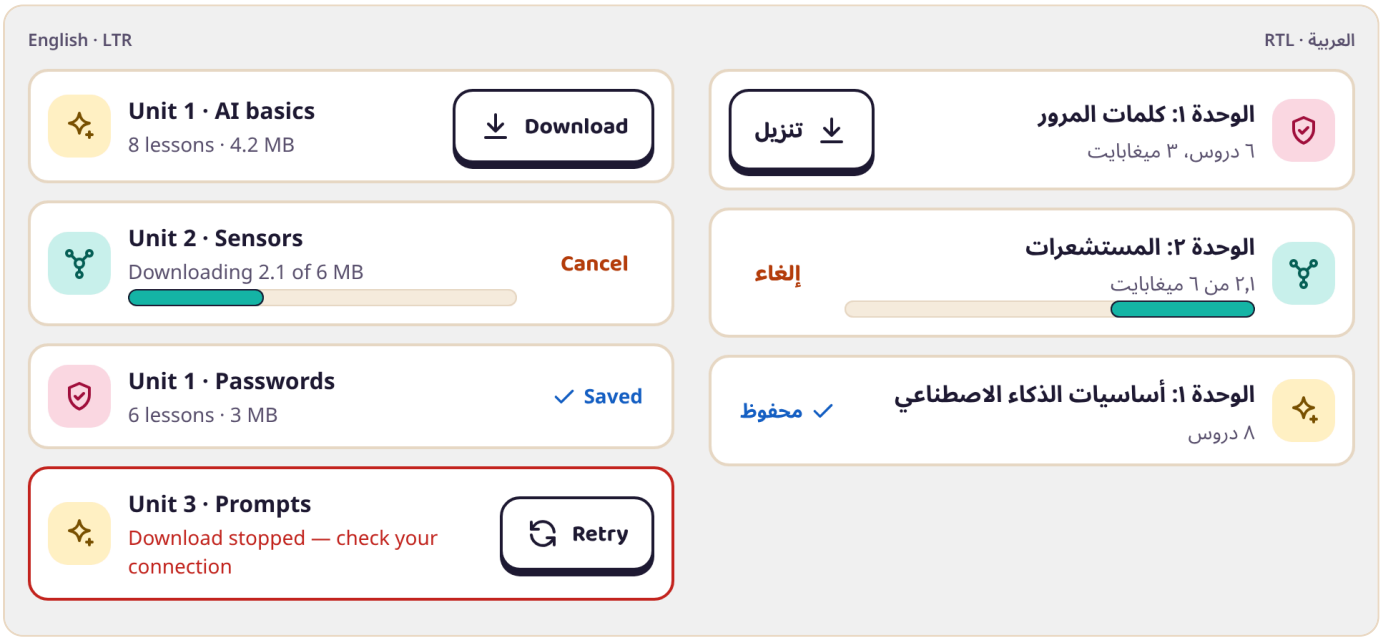

InstallPrompt

Invites the teacher to add Darsi to the home screen, triggered by the browser's `beforeinstallprompt` event.


- Consumer provides `title`, `body` (lead with benefits that matter here: offline, tiny size), `onInstall`, `onDismiss` and localised button labels.
- Show it only after the first completed lesson, never on first visit. After "Not now", wait 14 days.
- iOS has no install event: show the same card with "Share → Add to Home Screen" steps instead of the button.

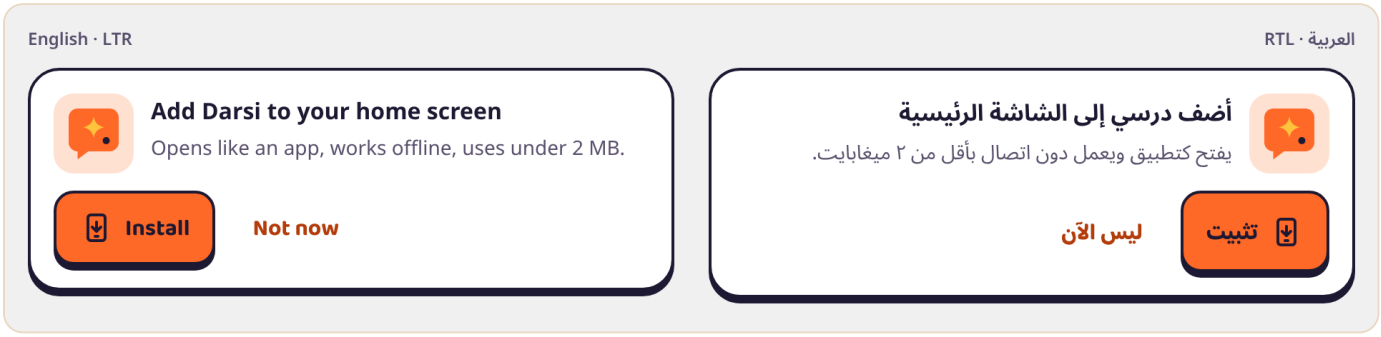

UpdateToast

Tells the teacher a new version is waiting (service worker `waiting`) and lets them reload when it suits them.

- Consumer provides the message, `actionLabel` ("Reload") and `onAction` (post `SKIP_WAITING`, then reload).
- Never reload automatically during a lesson. Show it on the home screen or after LessonComplete.

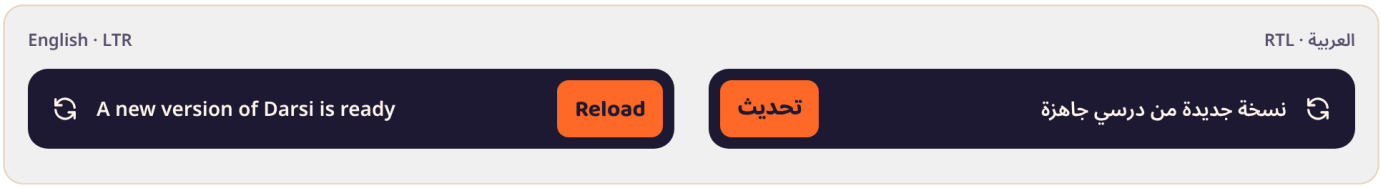


States

EmptyState

What a screen says when there is nothing to show yet, the teacher is offline, or something failed.


- Consumer provides `title`, `body`, optional `icon`, `tone` (`neutral` | `offline` | `error`), `action` and `secondary`.
- Always offer a next step. Offline is calm (point to downloads); errors say progress is safe and offer Retry and "Report a problem".

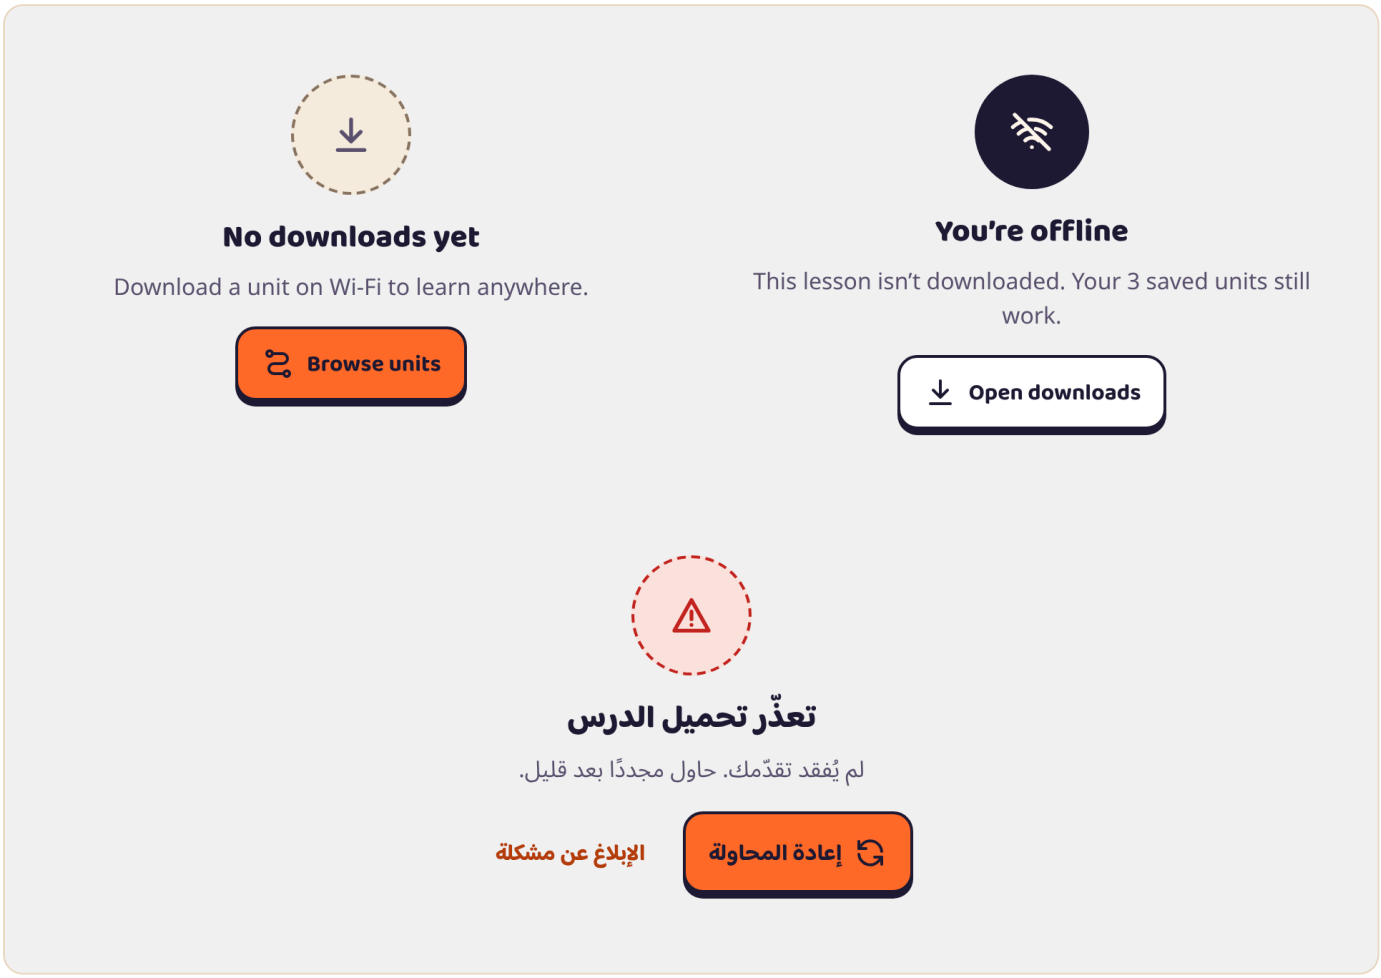

Flows


LessonFlow

A full lesson end to end: home → video with a checkpoint → practice → feedback → lesson complete → the unlocked classroom kit.

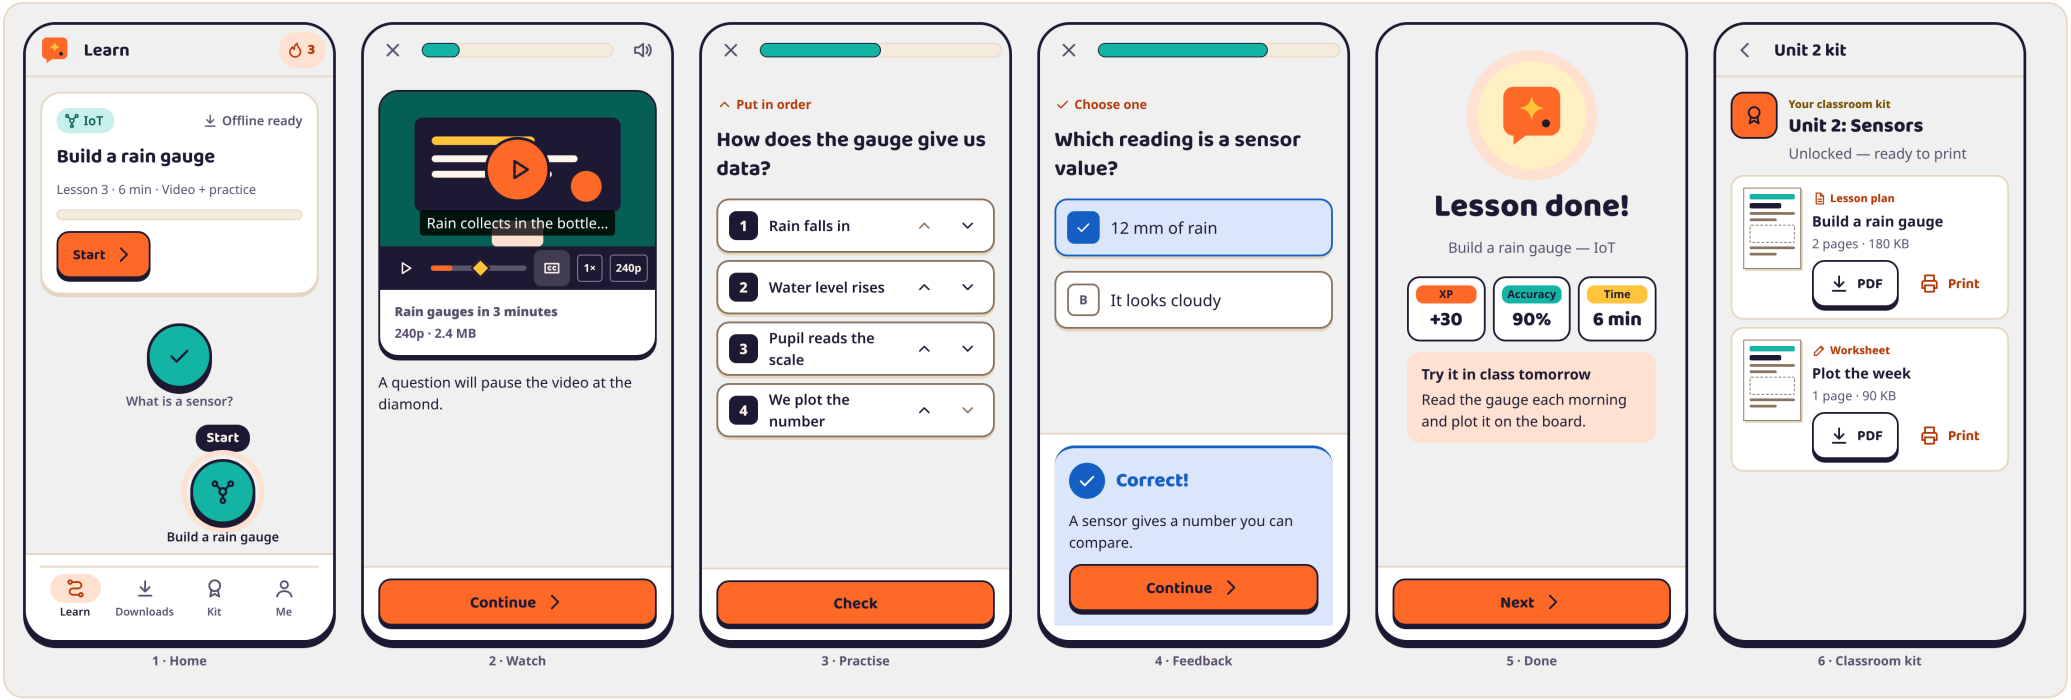

OnboardingFlow


First run in Arabic: choose language (the app switches to RTL immediately) → where you teach → tracks → placement quiz → starting levels.

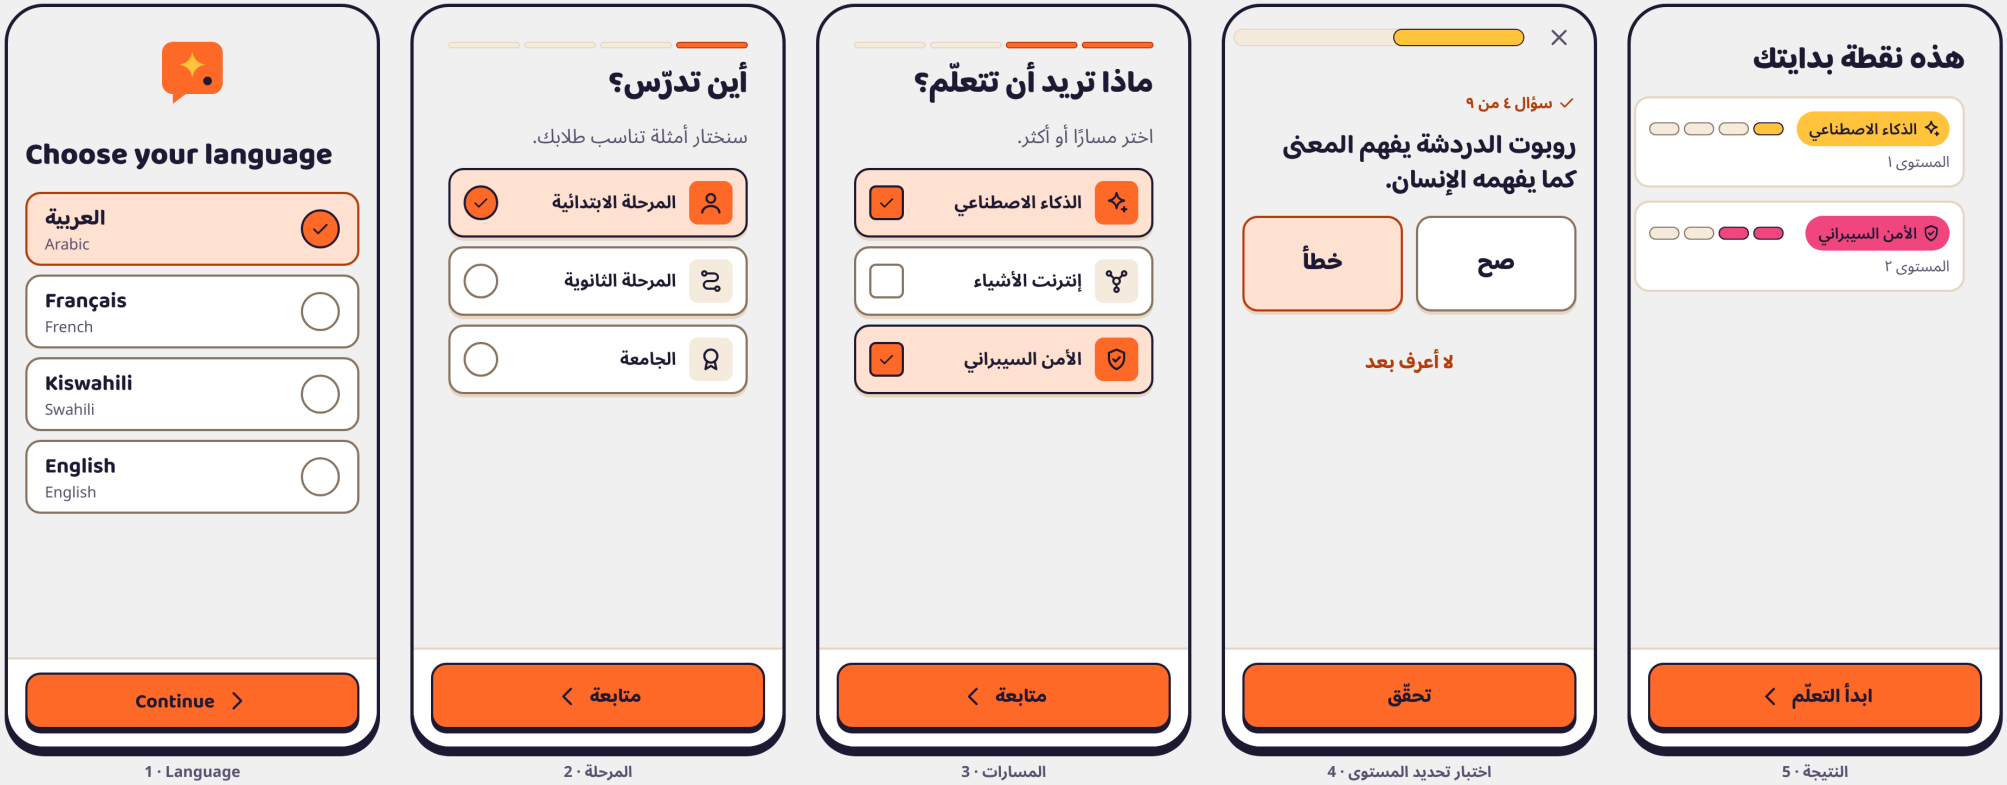

PhoneFrame

A 340×680 phone outline for flows, prototypes and documentation — not used in the app itself.

- Consumer provides children: optional top bar, a `dr-phone-scroll` body, an optional `dr-phone-bottom` action area, plus `caption`, `dir` and `lang`.
- See the LessonFlow and OnboardingFlow pages for complete journeys.

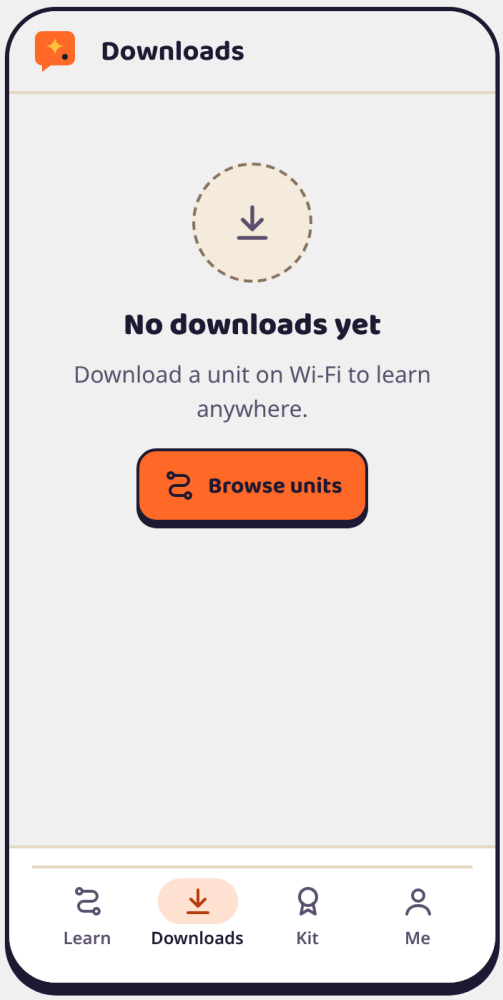

Phone frame · 340×680