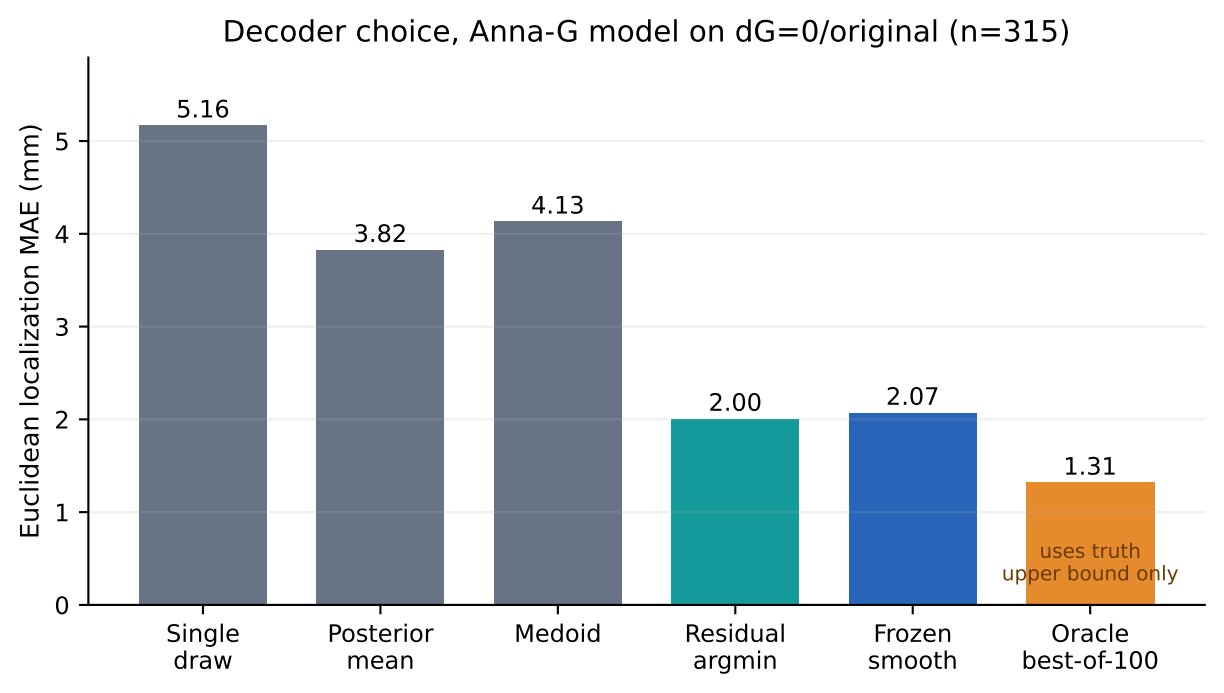
Decoder choice, Anna-G model on dG=0/original (n=315)
Euclidean localization MAE (mm)
0
1
2
3
4
5
5.16
3.82
4.13
2.00
2.07
1.31
uses truth
upper bound only
Single draw
Posterior mean
Medoid
Residual argmin
Frozen smooth
Oracle best-of-100