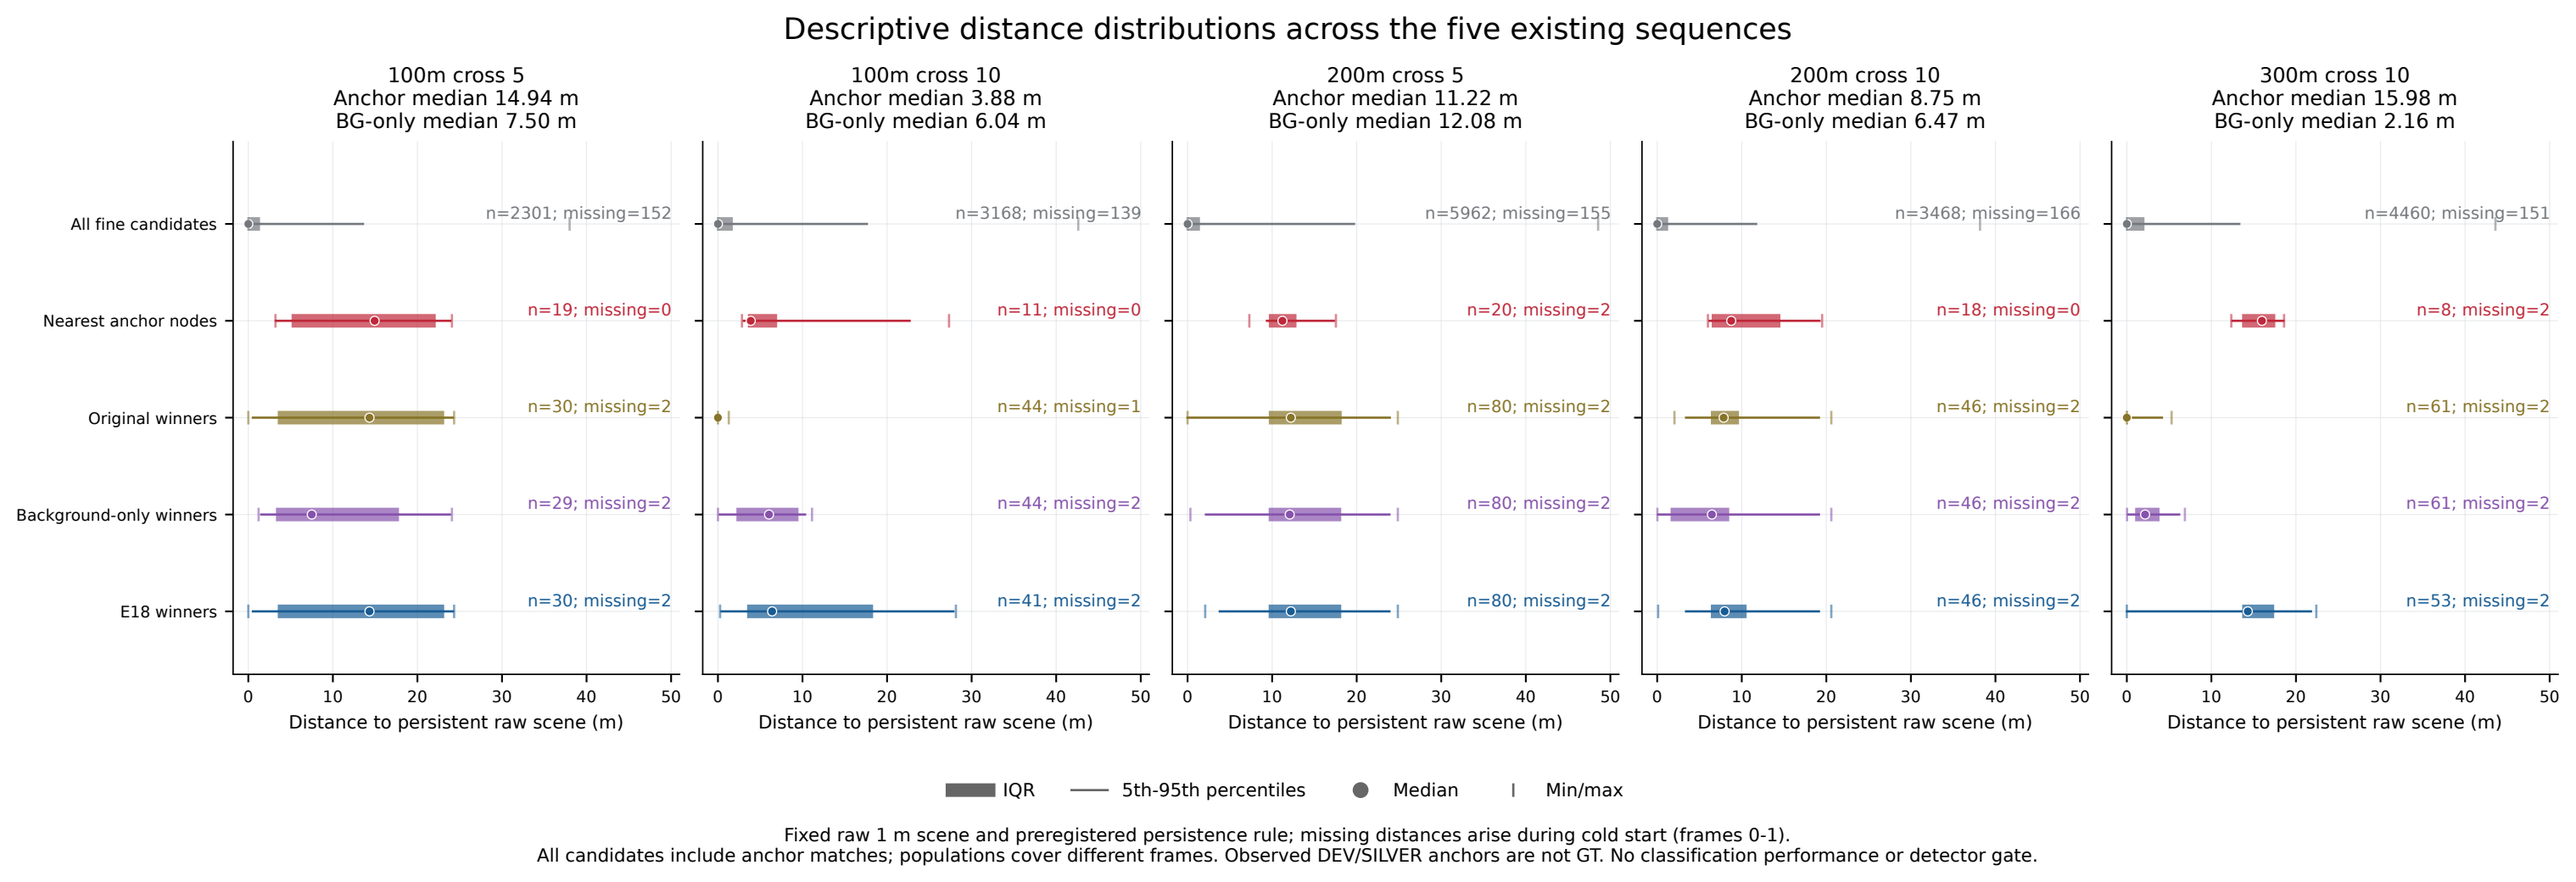
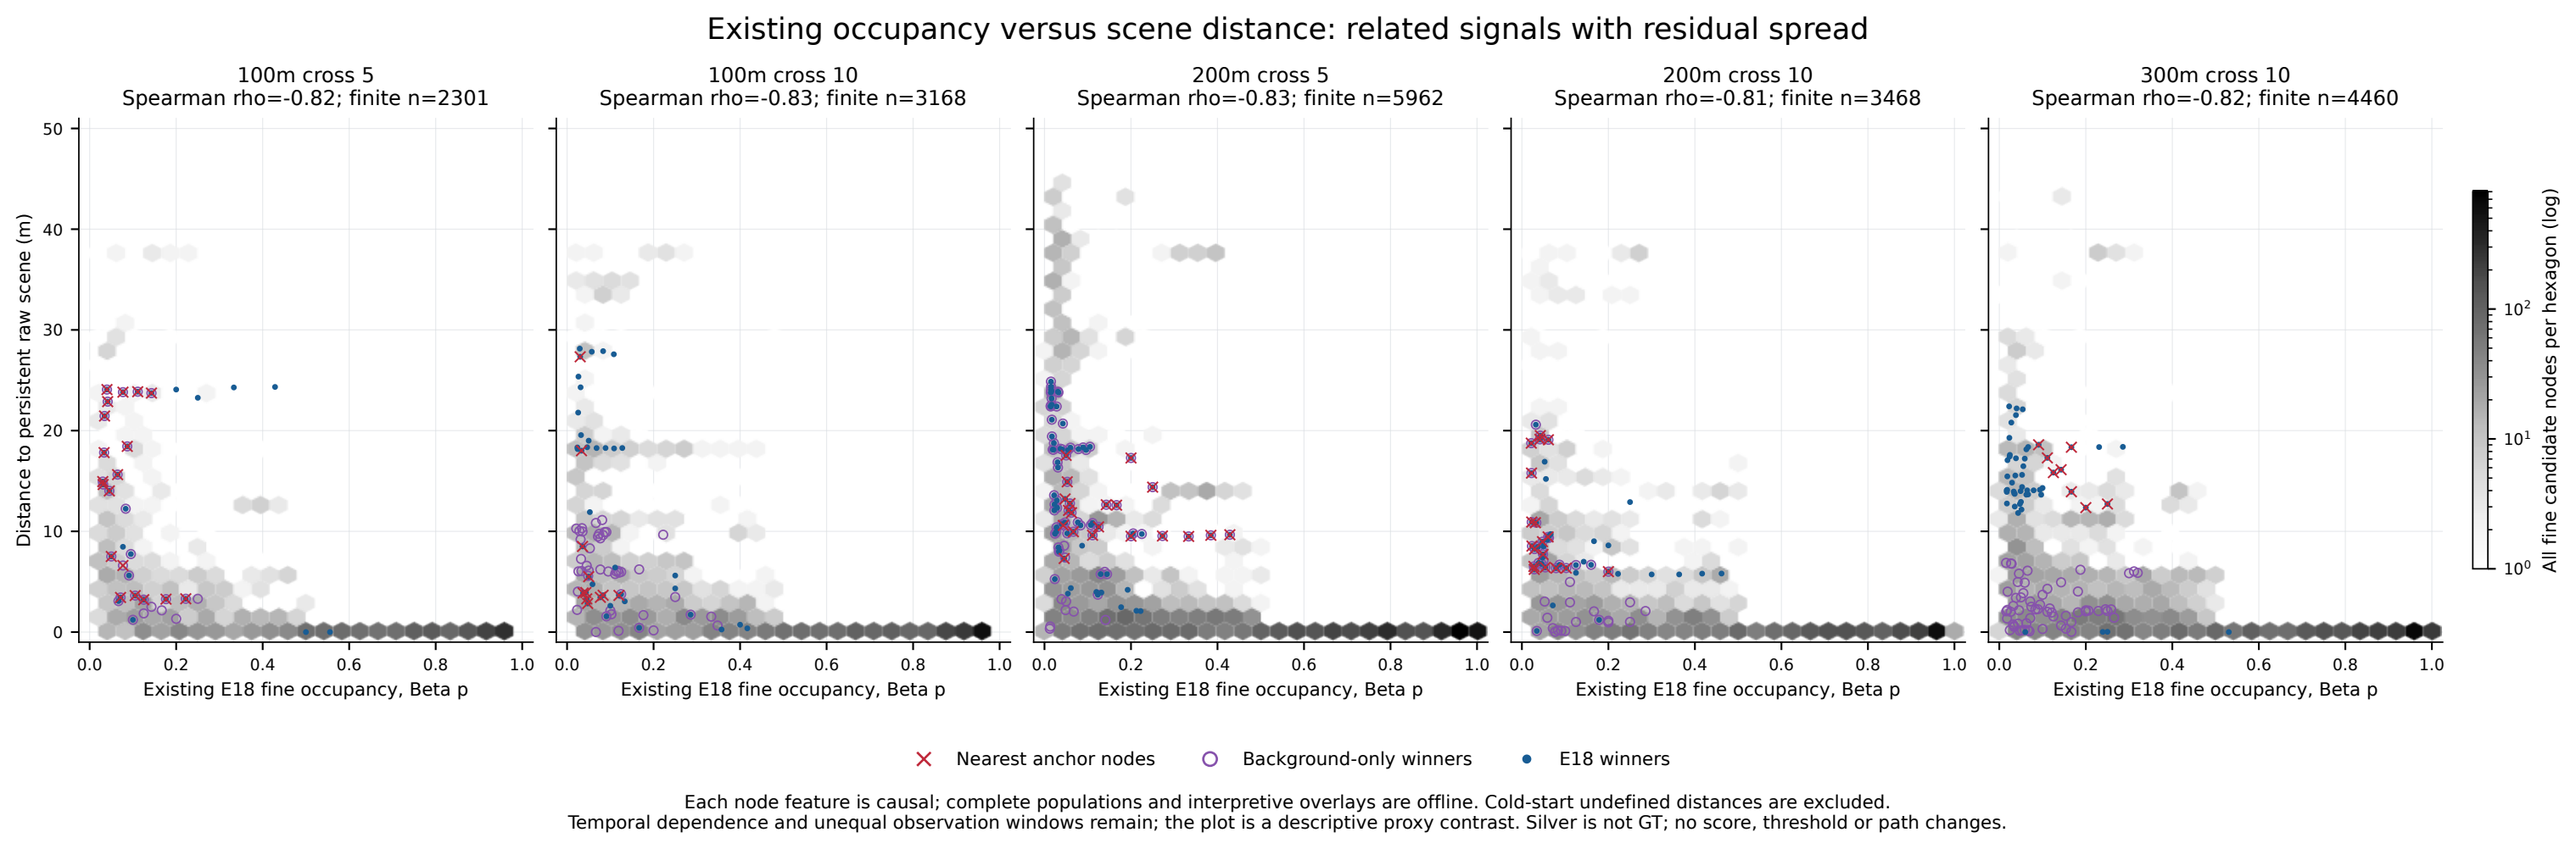



Fixed raw 1 m scene and preregistered persistence rule; missing distances arise during cold start (frames 0-1).
All candidates include anchor matches; populations cover different frames. Observed DEV/SILVER anchors are not GT. No classification performance or detector gate.


Existing occupancy versus scene distance: related signals with residual spread
100m cross 5
Spearman rho=-0.82; finite n=2301
100m cross 10
Spearman rho=-0.83; finite n=3168
200m cross 5
Spearman rho=-0.83; finite n=5962
200m cross 10
Spearman rho=-0.81; finite n=3468
300m cross 10
Spearman rho=-0.82; finite n=4460
Distance to persistent raw scene (m)
Existing E18 fine occupancy, Beta p
All fine candidate nodes per hexagon (log)
Nearest anchor nodes
Background-only winners
E18 winners
Each node feature is causal; complete populations and interpretive overlays are offline. Cold-start undefined distances are excluded.
Temporal dependence and unequal observation windows remain; the plot is a descriptive proxy contrast. Silver is not GT; no score, threshold or path changes.