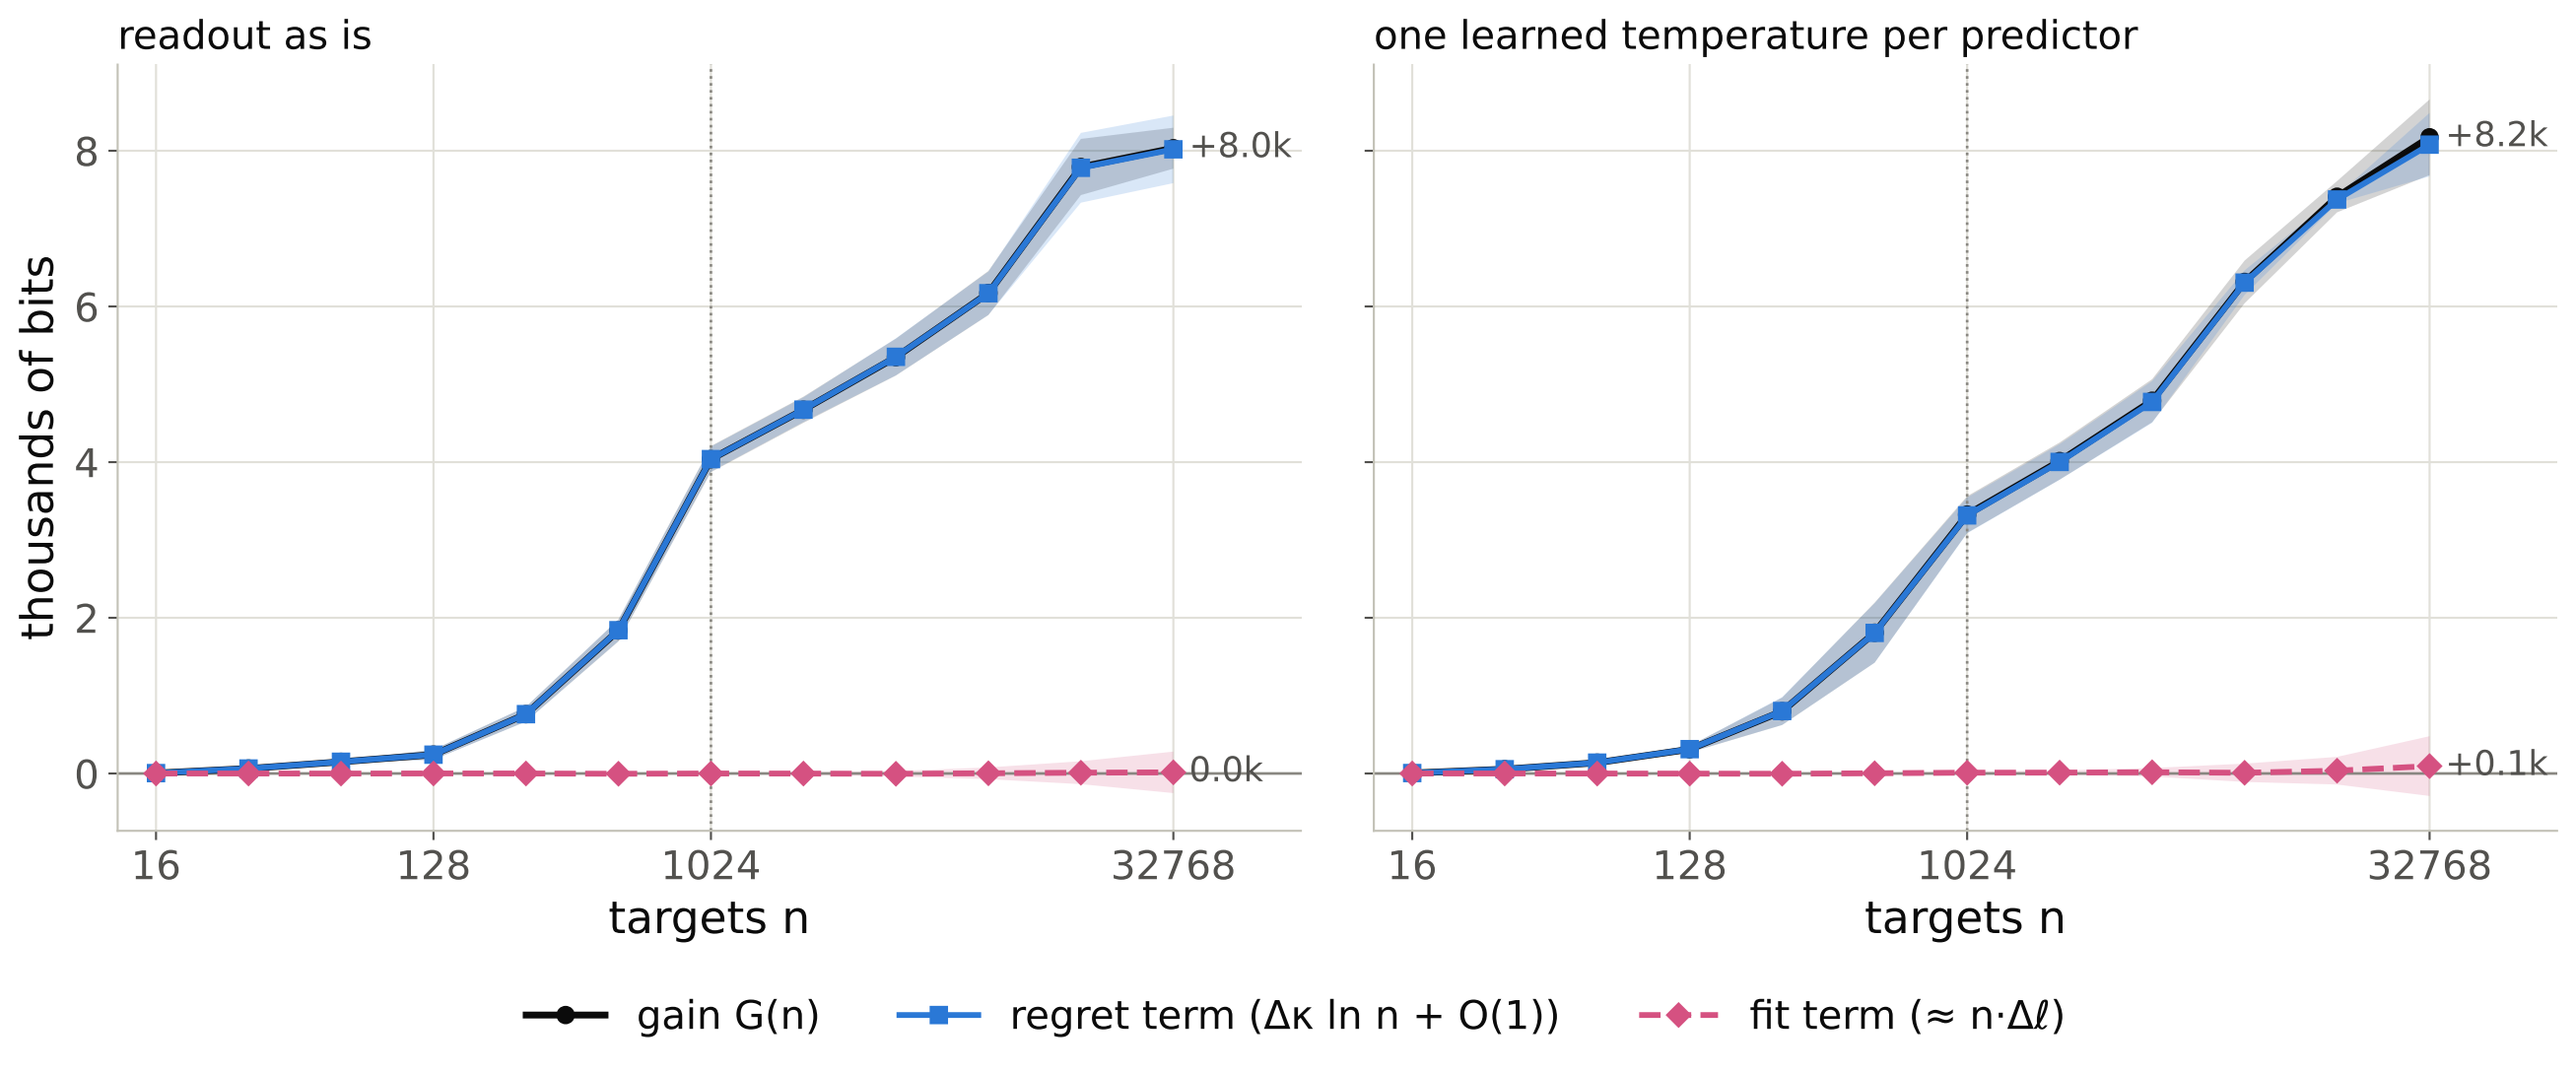
readout as is
one learned temperature per predictor
thousands of bits
0
2
4
6
8
+8.0k
0.0k
+8.2k
+0.1k
16
128
1024
32768
targets n
gain G(n)
regret term (Δκ ln n + O(1))
fit term (≈ n·Δℓ)