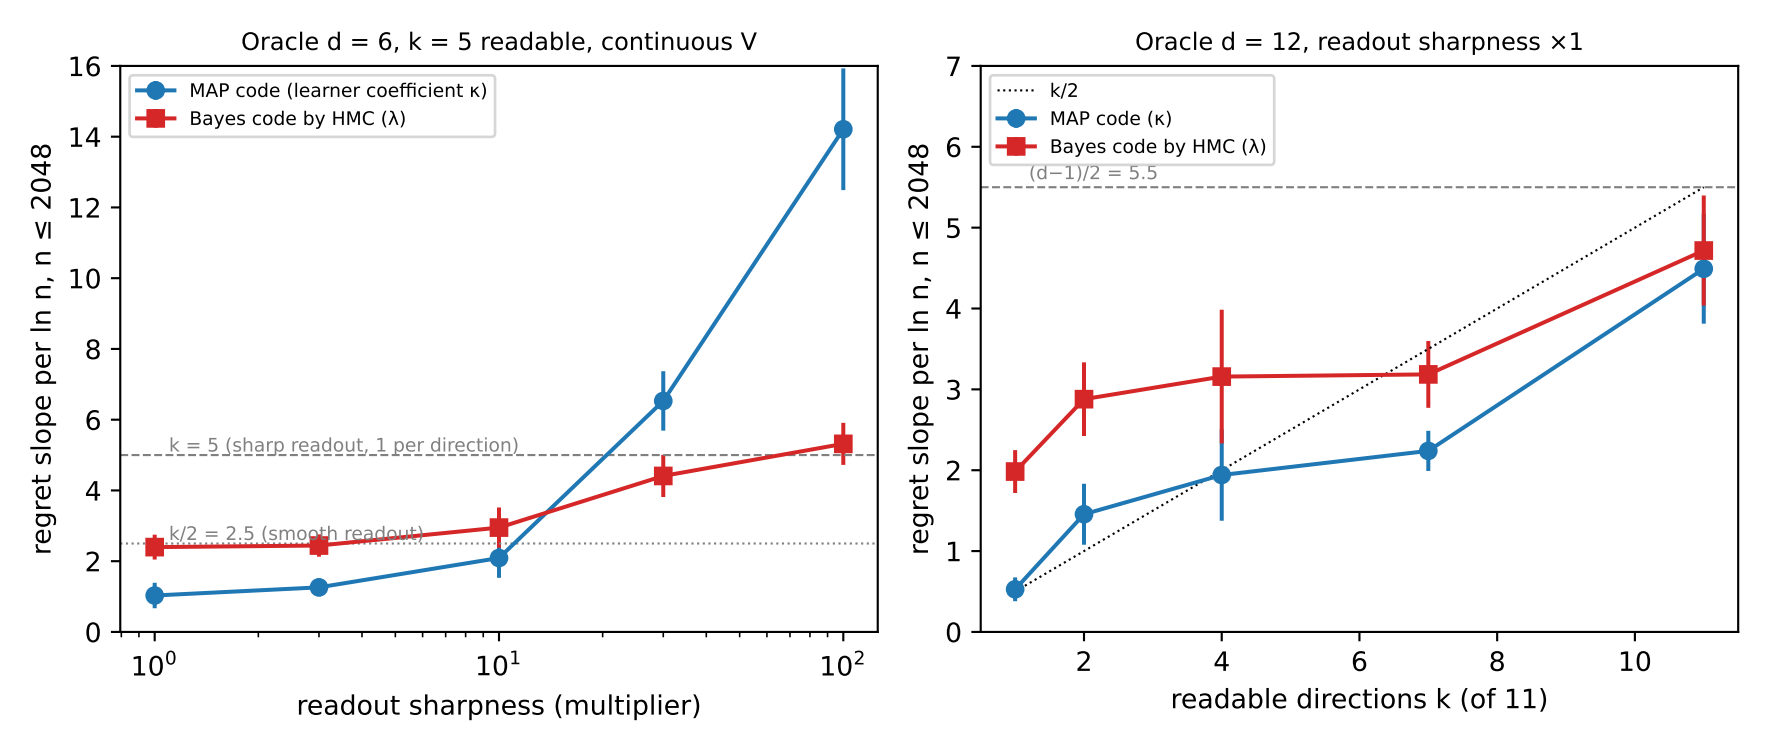
Oracle d = 6, k = 5 readable, continuous V
MAP code (learner coefficient κ)
Bayes code by HMC (λ)
k = 5 (sharp readout, 1 per direction)
k/2 = 2.5 (smooth readout)
regret slope per ln n, n ≤ 2048
readout sharpness (multiplier)
Oracle d = 12, readout sharpness ×1
k/2
MAP code (κ)
Bayes code by HMC (λ)
(d−1)/2 = 5.5
regret slope per ln n, n ≤ 2048
readable directions k (of 11)