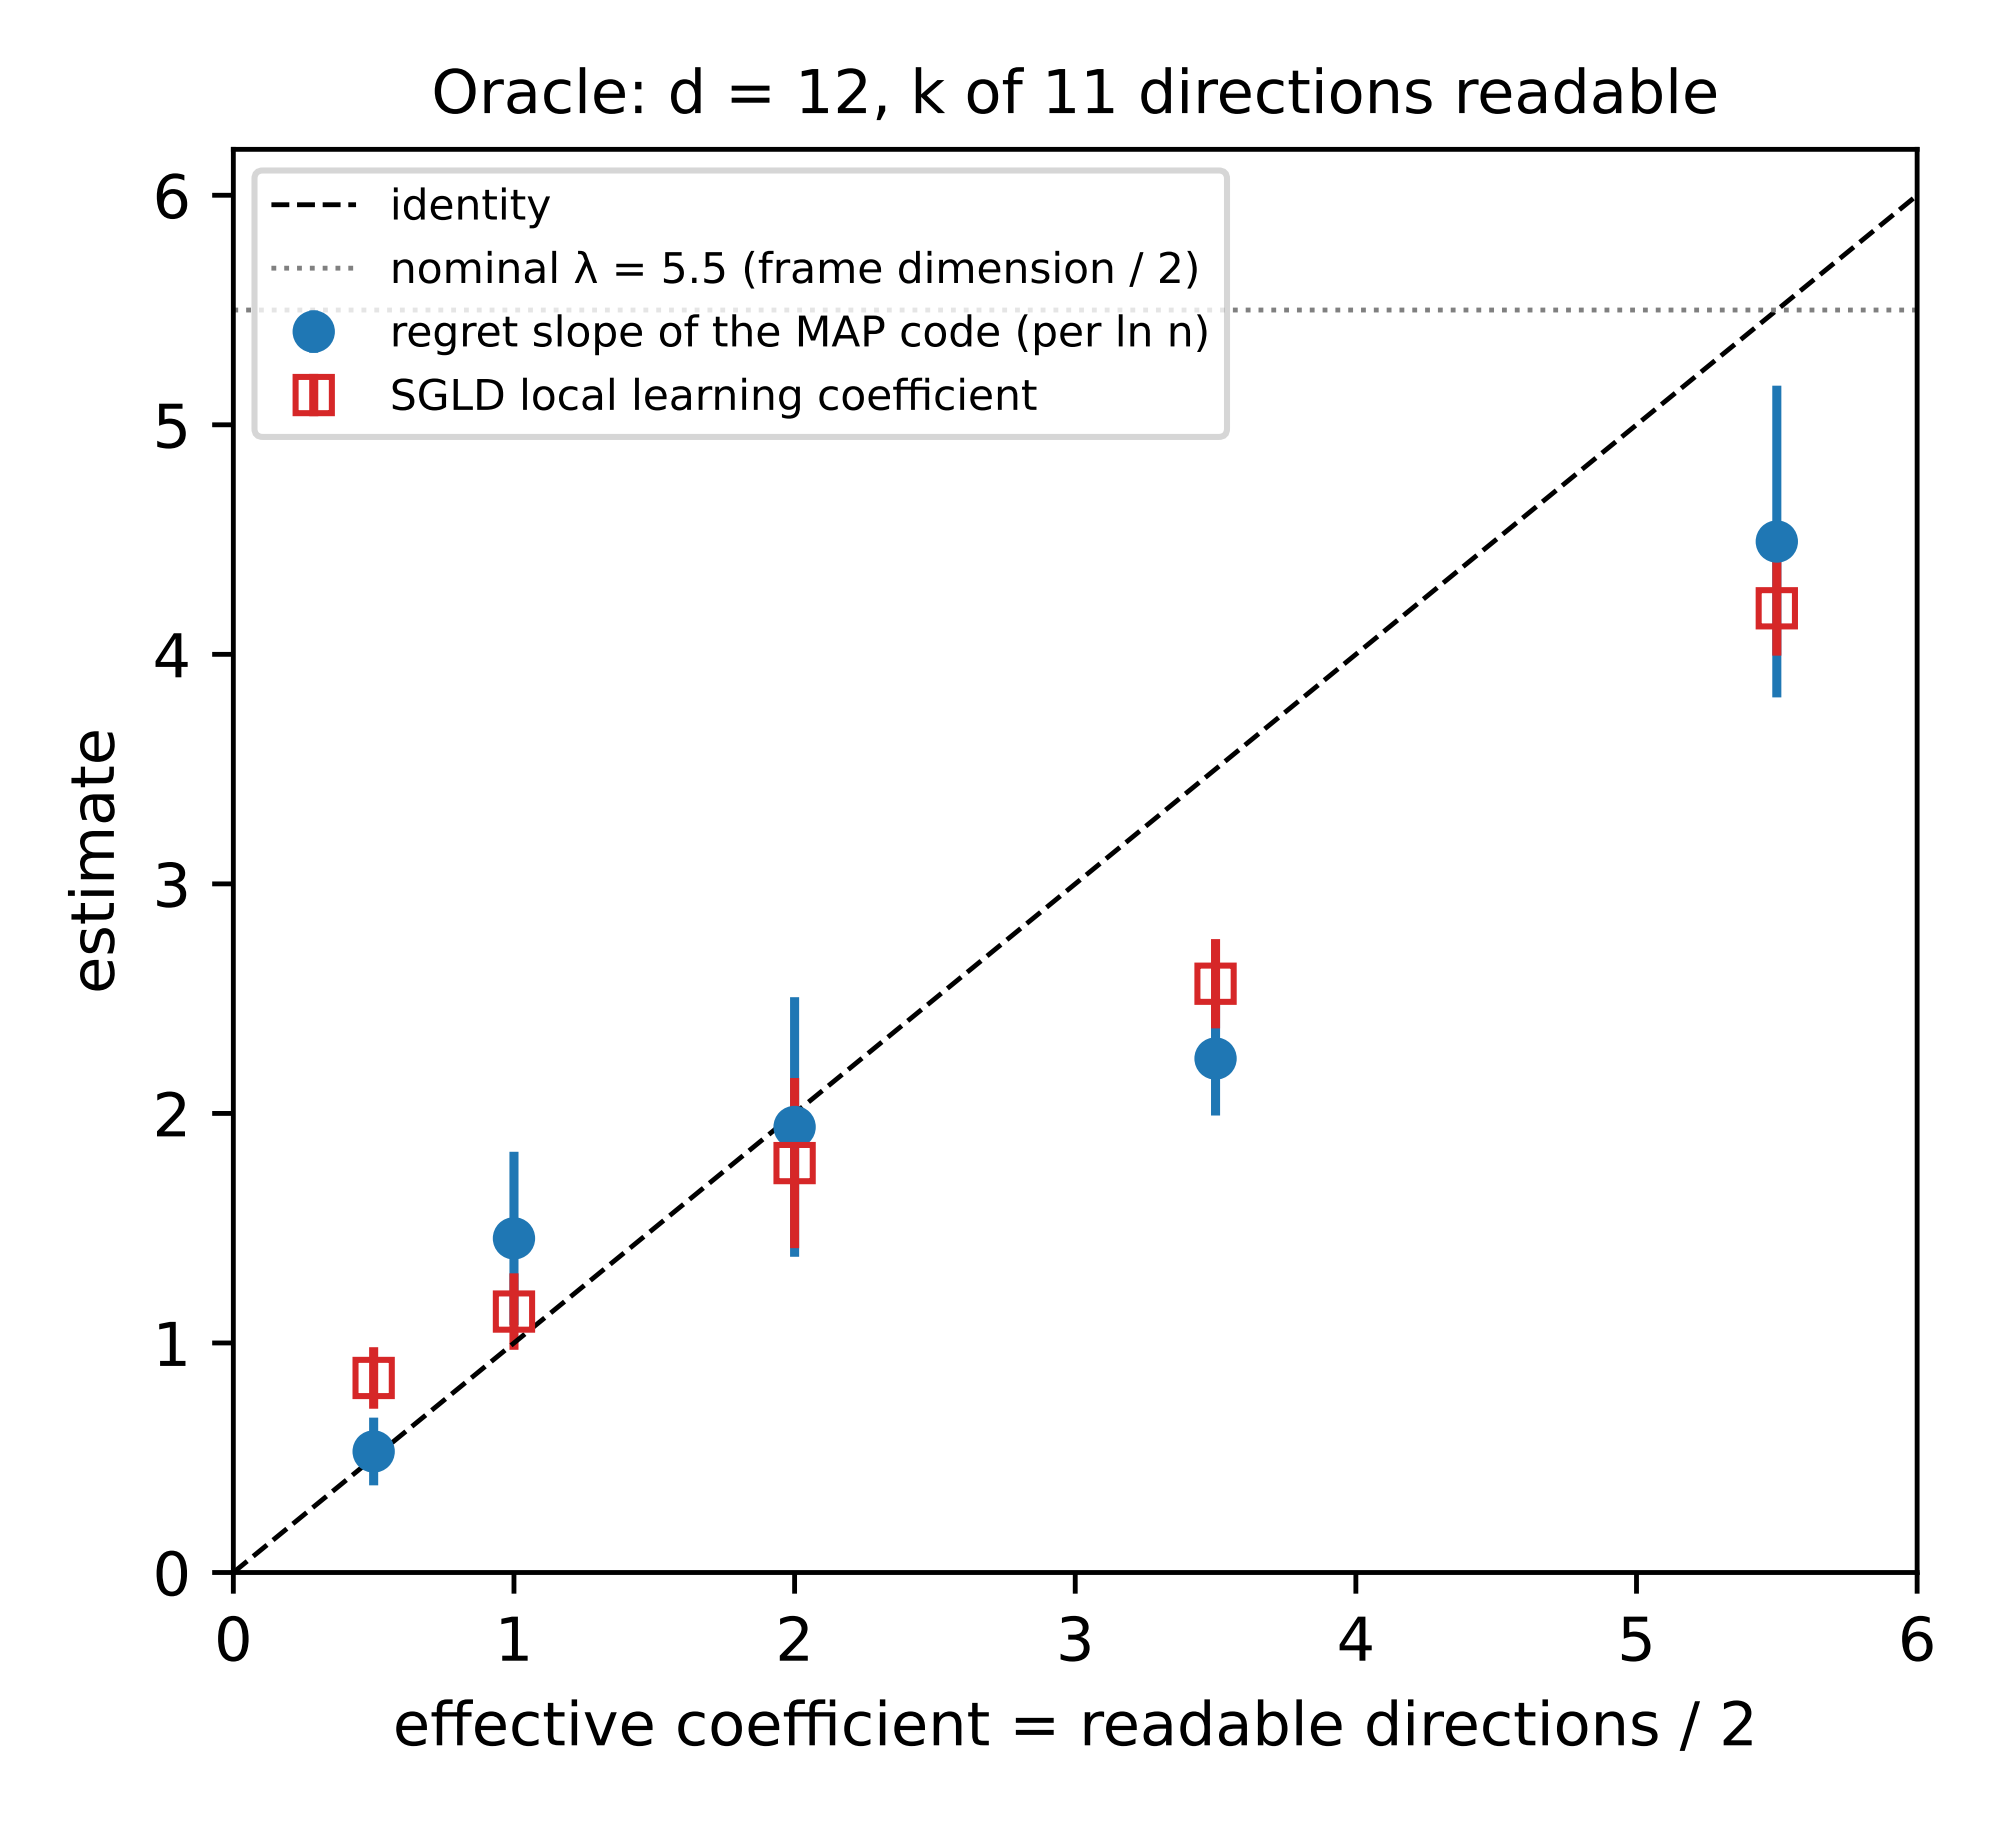
Oracle: d = 12, k of 11 directions readable
identity
nominal λ = 5.5 (frame dimension / 2)
regret slope of the MAP code (per ln n)
SGLD local learning coefficient
estimate
effective coefficient = readable directions / 2
0
1
2
3
4
5
6