Calibrated ridge map for token-embedding transplantation (closed form, no gradient steps)

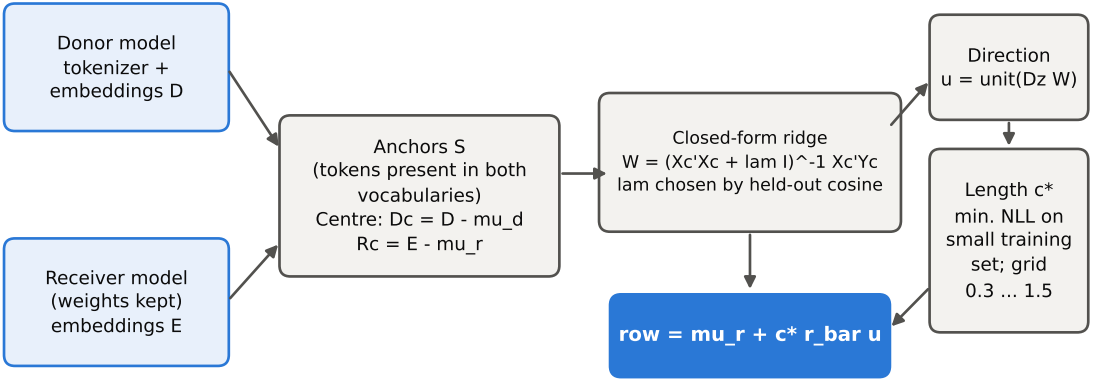

r_bar = mean length of the centred receiver anchor rows. One row is built per missing token; anchors keep their own embeddings.