



IdentityIQ® AI-Driven Identity Security

Version: 8.5

Revised: July 2025

This document and the information contained herein is SailPoint Confidential Information

Copyright and Trademark Notices

Copyright © 2025 SailPoint Technologies, Inc. All Rights Reserved.

All logos, text, content, including underlying HTML code, designs, and graphics used and/or depicted on these written materials or in this Internet website are protected under United States and international copyright and trademark laws and treaties, and may not be used or reproduced without the prior express written permission of SailPoint Technologies, Inc.

“SailPoint Technologies” (design and word mark), “SailPoint” (design and word mark), “Identity IQ,” “IdentityNow,” “Identity AI,” “Identity Cube,” and “SailPoint Predictive Identity” are registered trademarks of SailPoint Technologies, Inc. “Identity is Everything,” “The Power of Identity,” “Navigate,” and “Identity University” are trademarks of SailPoint Technologies, Inc. None of the foregoing marks may be used without the prior express written permission of SailPoint Technologies, Inc.

All other trademarks shown herein are owned by the respective companies or persons indicated.

SailPoint Technologies, Inc. makes no warranty of any kind regarding these materials or the information included therein, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose. SailPoint Technologies shall not be liable for errors contained herein or direct, indirect, special, incidental or consequential damages in connection with the furnishing, performance, or use of this material.

Patents Notice: <https://www.sailpoint.com/legal/patents>

Restricted Rights Legend. All rights are reserved. No part of this document may be published, distributed, reproduced, publicly displayed, used to create derivative works, or translated to another language, without the prior written consent of SailPoint Technologies. The information contained in this document is subject to change without notice.

Use, duplication or disclosure by the U.S. Government is subject to restrictions as set forth in subparagraph (c) (1) (ii) of the Rights in Technical Data and Computer Software clause at DFARS 252.227-7013 for DOD agencies, and subparagraphs (c)(1) and (c)(2) of the Commercial Computer Software Restricted Rights clause at FAR 52.227-19 for other agencies.

Regulatory/Export Compliance. The export and re-export of this software is controlled for export purposes by the U.S. Government. By accepting this software and/or documentation, licensee agrees to comply with all U.S. and foreign export laws and regulations as they relate to software and related documentation. Licensee will not export or re-export outside the United States software or documentation, whether directly or indirectly, to any Prohibited Party and will not cause, approve or otherwise intentionally facilitate others in so doing. A Prohibited Party includes: a party in a U.S. embargoed country or country the United States has named as a supporter of international terrorism; a party involved in proliferation; a party identified by the U.S. Government as a Denied Party; a party named on the U.S. Department of Commerce’s Entity List in Supplement No. 4 to 15 C.F.R. § 744; a party prohibited from participation in export or re-export transactions by a U.S. Government General Order; a party listed by the U.S. Government’s Office of Foreign Assets Control as ineligible to participate in transactions subject to U.S. jurisdiction; or any party that licensee knows or has reason to know has violated or plans to violate U.S. or foreign export laws or regulations. Licensee shall ensure that each of its software users complies with U.S. and foreign export laws and regulations as they relate to software and related documentation.

Contents

About SailPoint AI-Driven Identity Security	1
Integrating SailPoint AI-Driven Identity Security	3
Prerequisites for Integrating AI-Driven Identity Security	3
Importing the AI-Driven Identity Security Integration File	3
AI-Driven Identity Security Limitations for Customizing Hibernate Files	3
Configuring AI-Driven Identity Security	5
Sharing IdentityIQ Data with AI-Driven Identity Security	6
Enabling Recommendations for Access Request Approvals	18
Enabling Recommendations for Access Requests	18
Enabling Access Recommendations and Automatic Approvals Globally for Certifications	20
Enabling Automatic Approvals in Individual Certifications	20
Enabling Access Modeling	23
Monitoring AI-Driven Identity Security Status	25
Disabling AI-Driven Identity Security	25
Using Automatic Approvals	26
How Automatic Approvals Work	26
Reporting on Automatic Approvals	27
Discovering Common Access	29
Common Access Roles Discovery	29
Specialized Roles Discovery	30
GenAI Descriptions for Entitlements	33
GenAI Entitlements on the Entitlement Catalog Page	33
GenAI Entitlement Descriptions Page	35
Generating GenAI Descriptions for Entitlements	36
Reviewing Generated Descriptions for Entitlements	37
Approving GenAI Descriptions for Entitlements	38
Assigning GenAI Administrator Capability	39
Configuring GenAI Descriptions for Entitlements	39
AI-Driven Identity Security Reports	42

About SailPoint AI-Driven Identity Security

SailPoint's AI-Driven Identity Security is a SaaS-delivered data analysis product designed to work with IdentityIQ and Identity Security Cloud. The goal of AI-Driven Identity Security is to improve your identity governance process through data analysis and machine learning.

Integrating AI-Driven Identity Security with IdentityIQ helps your organization determine who should have access to what. AI-Driven Identity Security uses peer group analysis and identity attributes to recommend access to your users, and to help certifiers decide when user access should be approved or denied. AI-Driven Identity Security can also identify user access patterns to determine potential roles that accurately align with what users actually do in an organization.

Decision Access Recommendations

AI-Driven Identity Security can be configured to give decision access recommendations to the people performing access reviews and approving access requests. This can help them make more informed decisions about the access they are granting.

For example, an access reviewer may not be entirely familiar with what item in the access review is. The AI-Driven Identity Security integration can provide access recommendations to display in IdentityIQ about whether the access should be granted or not. AI-Driven Identity Security can provide two types of access recommendations – a thumbs up indicating Recommended, or a thumbs down indicating Not Recommended – or not provide any recommendation at all.

Users can also filter access recommendations by type, making it easy to review all items with the same recommendation status, together.

Decision access recommendations can be enabled both globally, and at the individual certification level. See [Enabling Access Recommendations and Automatic Approvals Globally for Certifications](#) for details on how to enable automatic approvals globally.

Access Request Recommendations

AI-Driven Identity Security can be configured to give access recommendations to people requesting access. With this option, users managing their own access are shown a set of access recommendations, based on information such as the user's manager, department, location, and colleagues. This can help reduce confusion on the user's part about what access to request, and save valuable time and effort in the request process.

See [Enabling Recommendations for Access Requests](#) for details on how to enable access request recommendations.

Automatic Approvals

You can use AI-Driven Identity Security to automatically approve access based on access recommendations. With this feature enabled, any access review item that has a recommendation of "thumbs up" is automatically moved from the reviewer's **Open** tab to the **Review** tab, with an "Approved" decision. Reviewers retain the option of changing the automated decision, as needed, before signing off on the review. Automated approvals help your reviewers process access reviews quickly and more efficiently by taking easy decisions out of the way so that they can focus on exceptional items.

Automated approvals can be enabled both globally, and at the individual certification level. See [Enabling Access Recommendations and Automatic Approvals Globally for Certifications](#) for details on how to enable automatic approvals globally.

Access Modeling

SailPoint's AI-Driven Identity Security includes an Access Modeling service which uses patented machine learning algorithms to identify user access patterns and determine potential roles that accurately align with what users actually do in an organization.

In IdentityIQ, AI-Driven Identity Security Access Modeling gives you the option to use this service for role discovery, to display potential roles based on the optimal role granularity derived from AI-Driven Identity Security algorithms.

The Access Modeling feature is part of your AI-Driven Identity Security integration. See [Enabling Access Modeling](#).

Integrating SailPoint AI-Driven Identity Security

Note: Plugins must be enabled in IdentityIQ for AI-Driven Identity Security to be installed. Ensure that `plugins.enabled=true` in the `identityiq_home/WEB-INF/classes/iiq.properties` file of your installation.

Prerequisites for Integrating AI-Driven Identity Security

Because SailPoint's AI-Driven Identity Security are a part of Identity Security Cloud, you will need a connection to an Identity Security Cloud tenant to integrate AI-Driven Identity Security with IdentityIQ. You can read about AI-Driven Identity Security prerequisites, the onboarding process, and deployment steps at *Getting Started with AI-Driven Identity Security for IdentityIQ*.

Importing the AI-Driven Identity Security Integration File

Begin your implementation of SailPoint AI-Driven Identity Security in IdentityIQ by importing the AI-Driven Identity Security `init-ai.xml` file into IdentityIQ:

1. Log in to IdentityIQ as an administrator.
2. Select the **gear** icon > **Global Settings** > **Import from File**.
3. Click **Browse** and browse to the following directory:
`identityiq_home\WEB-INF\config`
where `identityiq_home` is the directory in which you extracted the `identityiq.war` file during the IdentityIQ installation procedure.
4. Select the `init-ai.xml` file and click **Import**.
5. When the import is complete, click **Done**.

This process enables AI-Driven Identity Security and installs the AI-Driven Identity Security Recommender Plugin into your IdentityIQ instance.

AI-Driven Identity Security Limitations for Customizing Hibernate Files

IdentityIQ allows you to customize extended and searchable attributes by editing various `.hbm.xml` files (such as `IdentityExtended.hbm.xml` or `LinkExtended.hbm.xml`) when IdentityIQ is installed and configured. The AI-

Driven Identity Security feature requires that all the *default* values in IdentityIQ's `.hbm.xml` files are present.

The AI-Driven Identity Security feature will not function properly if any default fields have been removed from any of the `.hbm.xml` files. Do not remove any default fields from the `.hbm.xml` files if you plan to implement the AI-Driven Identity Security integration.

See the *IdentityIQ Installation Guide* for more details.

Configuring AI-Driven Identity Security

Use the AI-Driven Identity Security Configuration page to connect IdentityIQ to AI-Driven Identity Security. From the **gear** icon, select **Global Settings > AI Configuration**. Note that the AI Configuration option does not appear in the Global Settings page until you have completed the steps in [Integrating SailPoint AI-Driven Identity Security](#).

Note: Websphere and IBM JDK: Connections to AI-Driven Identity Security using the IBM JDK require a JVM argument to support TLS version 1.2. If you deploy IdentityIQ on WebSphere, or other application servers using the IBM JDK, you must specify the JVM argument `-Dcom.ibm.jsse2.overrideDefaultTLS=true` for your Java process. To do this in WebSphere, add the JVM argument to the Generic JVM arguments at: **Servers > Java and Process Management > Process Definition > Java Virtual Machine > Generic JVM** arguments.

For general information on getting started with AI-Driven Identity Security, see *Getting Started with AI-Driven Identity Security for IdentityIQ*.

Connection Information for AI-Driven Identity Security

AI-Driven Identity Security Hostname

The host name of the AI-Driven Identity Security access recommendation API.

For example, `https://<org>.api.identitynow.com`

Client ID

OAuth client ID for the AI-Driven Identity Security access recommendation API. See *Generating Client Credentials in Your Identity Security Cloud Tenant* for details on how to generate this credential.

Client Secret

OAuth client secret for the AI-Driven Identity Security access recommendation API. See *Generating Client Credentials in Your Identity Security Cloud Tenant* for details on how to generate this credential.

Advanced

Read Timeout

The number of seconds IdentityIQ will wait to read access recommendations from AI-Driven Identity Security before reporting a failure.

Connect Timeout

The number of seconds IdentityIQ will wait to connect to AI-Driven Identity Security before reporting a failure.

Testing Your Connection

Once your configuration details have been entered, you can click **Test Connection** to verify that the connection information is accurate and operating.

If you are using an HTTP or HTTPS proxy for IdentityIQ's communications, and you want to make an exception for connecting to AI-Driven Identity Security, you can configure your AI-Driven Identity Security connection to bypass the proxy connection by adding this key to the **IdentityAIConfiguration** object:

```
<entry key="ignoreProxyProperties" value="true" />
```

Save your settings before leaving the page.

Sharing IdentityIQ Data with AI-Driven Identity Security

IdentityIQ connects to AI-Driven Identity Security through a bespoke Identity Security Cloud tenant. Customers deploy an AI-Driven Identity Security Virtual Appliance for all communication, which requires configuration of a firewall to allow outbound HTTPS traffic.

For more information on the Identity Security Cloud tenant and the AI-Driven Identity Security Virtual Appliance, see *Getting Started with AI-Driven Identity Security for IdentityIQ*.

For each identity, customers can configure identity attributes collected during the provisioning of their tenant.

All data movements are done via encrypted channels, via Amazon Kinesis Data Firehose, which encrypts data using AWS Key Management Service, and AWS SQS.

IdentityIQ Data Collected for AI

Select data, as configured by each individual organization, is gathered by the AI-Driven Identity Security Virtual Appliance and stored in both Identity Security Cloud and AI-Driven Identity Security repositories. All data movements are done via encrypted channels. Data, once transmitted, is stored according to the mechanisms of the final repository.

These are the objects and the associated information that is collected from IdentityIQ and stored in the AI-Driven Identity Security repository:

Application

- ID
- Name

-
- Created
 - Modified
 - Extended attributes (as defined in the ObjectConfig attribute definitions)
 - Connector
 - Type
 - isAuthoritative
 - Features
 - Owner

Bundle (Role)

- Id
- Name
- Created
- Modified
- Type
- Description
- displayName
- Selector summary (getSelector().generateSummary())
- roleTypeDefinition (used to determine if the role is assignable)
- activationDate
- deactivationDate
- Owner

-
- Profiles
 - Inheritance
 - Requirements
 - Permits

Certification

- Id
- Name
- Created
- Modified
- isComplete
- Phase
- isBulkReassignment
- Cert definition (used to calculate the due date)
- Signed date
- Finished date
- Expiration date
- Tags
- isElectronicallySigned
- isProcessRevokesImmediately
- Application
- certificationGroups

-
- Reviewers
 - Signer
 - Manager
 - Parent certification (if there is one)

CertificationGroup

- Id
- Name
- Created
- Modified
- Certification definition (used to find the cert type)
- Status

CertificationItem

- Id
- Name
- Created
- Modified
- Use item type and Identity name (to calculate item name)
- Type
- summaryStatus
- hasDifferences
- Subtype

-
- Completed date
 - Action object
 - action.approved
 - action.status
 - action.decisionDate
 - action.isBulkCertified
 - action.isRemediationCompleted
 - action.remediationAction
 - action.mitigationExpiration
 - Certification
 - Id (of the identity)
 - Actor
 - Certification definition (used to check showRecommendations)
 - Recommendation
 - DataOwner
 - nativeIdentity
 - Instance
 - isAccountOnly
 - Application
 - Related Link objects
 - Managed attributes tied to the entitlement

-
- Type of Bundle (bundle id)
 - Type of PolicyViolation
 - constraint name
 - policy name
 - status
 - mitigationExpiration
 - identity
 - revokedRoleIds
 - revokedEntitlementReferences

Identity

For the Identity object, a configurable list of identity attributes is collected. These additional attributes include details such as first name, last name, department, and other attributes. These attributes are at the customer's discretion and are configured during the provisioning of the customer's tenant.

- Id
- Name
- Created
- Modified
- Attributes (certain attributes can be excluded)
- Score
- Links
- Manager
- assignedRoles

-
- detectedRoles
 - Workgroups
 - IdentityEntitlement objects
 - policyViolations
 - Type
 - softwareVersion
 - Administrator

For Workgroup Identities

- Id
- Name
- Created
- Modified
- All attributes
- Owner

IdentityRequest

Categorized as accessRequest, passwordRequest, identityChangeRequest, or identityRequest.

- Id
- Name
- Created
- Modified
- Type

-
- endDate
 - executionStatus
 - completionStatus
 - Priority
 - requesterDisplayName
 - targetIdentity
 - Requester
 - affectedAccounts
 - affectedApplications
 - affectedBundles
 - affectedEntitlements
 - Items

IdentityRequestItem

- Id
- Name
- Created
- Modified
- Application
- Instance
- nativeIdentity
- displayName

-
- Name
 - Value
 - Annotation
 - Operation
 - Startdate
 - Enddate
 - isApproved
 - isRejected
 - provisioningState
 - compilationStatus
 - expansionCause
 - Retries
 - provisioningEngine
 - Owner
 - Approver
 - targetIdentity (to get affected accounts)
 - affectedApplications
 - affectedBundles
 - affectedEntitlements
 - Recommendation
 - Number of attachments

Link

For the Link object, a configurable list of identity attributes is collected. These additional attributes include details such as first name, last name, department, and other attributes. These attributes are at the customer's discretion and are configured during the provisioning of the customer's tenant.

- Id
- Name
- Created
- Modified
- nativeIdentity
- isDisabled
- isLocked
- Application
- Attributes (certain attributes can be excluded)
- Identity

ManagedAttributes

- Id
- Name
- Created
- Modified
- displayableName
- Attribute
- Value
- Description

-
- isAggregated
 - isRequestable
 - Owner
 - Application
 - Permissions

PolicyViolation

- Id
- Name
- Created
- Modified
- constraintName
- policyName
- Status
- migrationExpiration
- Identity
- revokedRoleIds
- revokedEntitlements

Profile

- Id
- Name
- Created

-
- Modified
 - accountType
 - Owner
 - Application
 - Bundle
 - Managed attributes (for entitlement references)

Enabling Recommendations for Access Request Approvals

Note: This option is not available until `init-ai.xml` is imported into IdentityIQ and a connection to AI-Driven Identity Security is configured.

AI-Driven Identity Security can make access recommendations for decisions on access requests. This feature must be enabled in your Lifecycle Manager settings, in order to generate access recommendations for access request approvals.

1. Log in as an IdentityIQ administrator.
2. Under the **gear** icon, select **Lifecycle Manager**.
3. In the **AI-Driven Identity Security Approval Recommendation** section of the Configure tab, check the **Enable the generation of AI-Driven Identity Security access recommendations on approvals** option.
4. **Save** your changes.

After this option is enabled, your access reviewers can see decision access recommendations when they review access requests. See the **Lifecycle Manager** documentation for more information.

Enabling Recommendations for Access Requests

Note: This option is not available until `init-ai.xml` is imported into IdentityIQ and a connection to AI-Driven Identity Security is configured.

IdentityIQ can make access recommendations for self-service requests for roles, using AI-Driven Identity Security. AI-Driven Identity Security uses peer group analysis, based on information such as the user's manager, department, location, and colleagues, to make access recommendations about what access a particular user should have. The access recommendations and the final decision are captured in reports, supplying important information about access decisions for auditors.


This feature must be enabled in your Lifecycle Manager settings, in order to generate access recommendations for access requests.

1. Log in as an IdentityIQ administrator.
2. Under the **gear** icon, select **Lifecycle Manager**.
3. In the **AI-Driven Identity Security Approval Recommendation** section of the Configure tab, check the **Enable the generation of AI-Driven Identity Security Access recommendations on access requests**

option.

4. **Save** your changes.

After this option is enabled, your users have the option to see access recommendations when they request access.

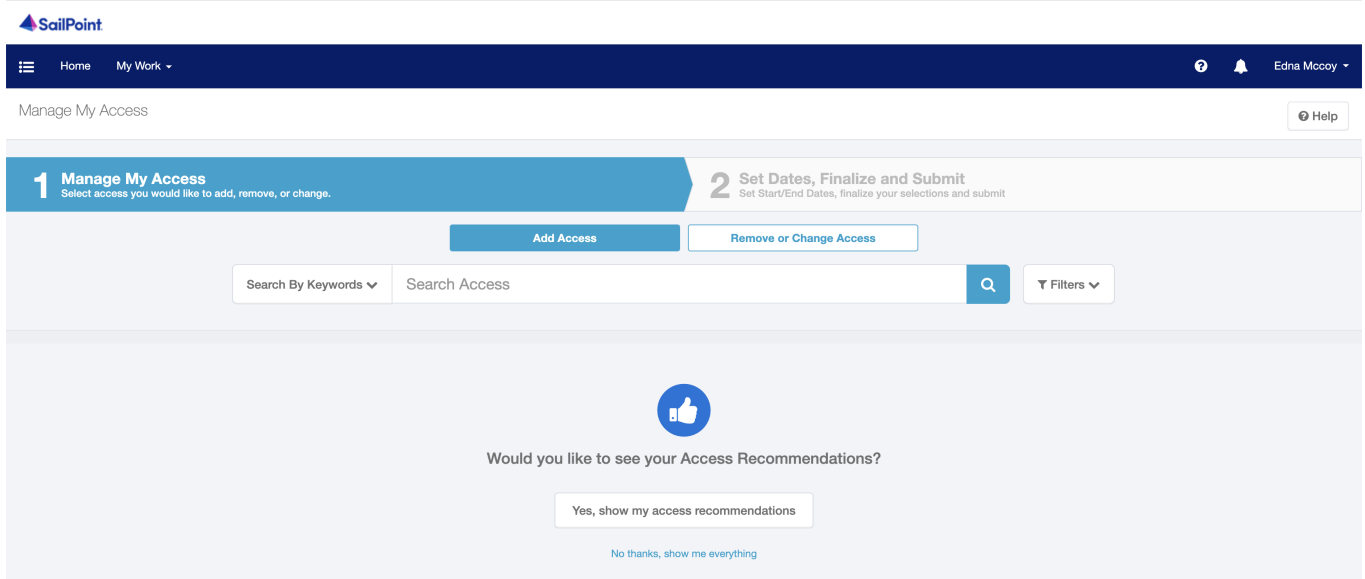

See the **Lifecycle Manager** documentation for more information.

Enabling Access Recommendations and Automatic Approvals Globally for Certifications

Note: This option is not available until `init-ai.xml` is imported into IdentityIQ and a connection to AI-Driven Identity Security is configured.

AI-Driven Identity Security can provide decision access recommendations during the access certification process, and can also make automatic approvals. Access recommendations and automatic approvals can be enabled globally for *all* applicable certification types, or can be enabled at the individual certification level.

Note: Items automatically marked as approved still require a reviewer's sign-off to complete the certification. Reviewers retain the option of changing the automated decision, as needed, before signing off on the review.

To set a global default for all applicable certifications

1. Log in as an IdentityIQ administrator.
2. Under the **gear** icon select **Compliance Manager**.
3. In the **Decisions** section, check the **Show Access Recommendations** option.
4. If you want to automatically mark access review items as approved and move them from the Open to the Review tab of the access review, check the **Automatically Approve Recommended Items** option. When you enable automatic approvals, your reviewers will still have the opportunity to review and, if needed, change decisions before their final sign-off on the access review.
5. **Save** your changes.

To change the default setting on an individual certification, see the **Certifications and Access Reviews** documentation.

After this option is enabled, your certifiers can see decision access recommendations when they perform access reviews.

Enabling Automatic Approvals in Individual Certifications

You can use automatic approvals in these types of certification:

-
- Targeted
 - Manager
 - Application Owner
 - Advanced
 - Role Membership

Important: Exercise caution when **staging** certifications that have automatic approvals enabled. If you include a staging period with a certification that has automatic approvals enabled, then later disable either access recommendations or automatic approvals, items that were flagged for automatic approval during staging will lose the starred automatically-approved icon, but will remain approved and will still show initially on the reviewer's Review tab rather than the Open tab.

To enable automatic approvals in **Targeted** certifications:

1. Click **Setup > Certifications**.
2. Click **New Certification > Targeted**.
3. In the **Additional Settings** section, click **Advanced Options**.
4. Select both the **Show Access Recommendations** and **Automatically Approve Recommended Items** boxes.
5. Set the rest of your certification parameters as needed and schedule the certification.

To enable automatic approvals in all other supported certification types:

1. Click **Setup > Certifications**.
2. Click **New Certification** and choose one of the certification types that supports automatic approvals (Manager, Advanced, Role Membership, or Application Owner).
3. On the **Behavior** tab, select both the **Show Access Recommendations** and **Automatically Approve Recommended Items** boxes.
4. Set the rest of your certification parameters as needed and schedule the certification.

Enabling Access Modeling

SailPoint's AI-Driven Identity Security includes an Access Modeling service, which uses patented machine learning algorithms to identify user access patterns and determine potential roles that accurately align with what users actually do in an organization.

In IdentityIQ, AI-Driven Identity Security Access Modeling gives you the option to use this service for role discovery, to display potential roles based on the optimal role granularity derived from AI-Driven Identity Security algorithms.

The Access Modeling feature is part of the AI-Driven Identity Security integration. For more information, see **Configuring IdentityIQ for Access Modeling** in the *AI-Driven Identity Security Guide*.

Note: AI-Driven Identity Security modules may be licensed separately. Please direct questions to your account manager to clarify your agreement.

Prerequisites for Access Modeling

To use Access Modeling for role discovery, AI-Driven Identity Security must be integrated into your IdentityIQ instance. See [Integrating SailPoint AI-Driven Identity Security](#) for details.

You can read about AI-Driven Identity Security prerequisites, the onboarding process, and deployment steps at *Getting Started with AI-Driven Identity Security for IdentityIQ*.

Configuring Access Modeling Discover Common Access Functionality

Discover Common Access functionality is only available to organizations using IdentityIQ's AI functionality.

Note: Configuration settings automatically copy over for those running the AI-Driven Identity Security Access Modeling plugin prior to IdentityIQ version 8.4.

Begin by enabling AI – see [Configuring AI-Driven Identity Security](#) – then configure Discover Common Access and Role Discovery:

1. Log in to IdentityIQ as an administrator.
2. Navigate to **gear > Global Settings > AI-Driven Identity Security Configuration** and enter:
 - Connection information, including AI-Driven Identity Security Hostname, Client ID, and Client Secret.
 - Identity Security Cloud URL. This is specific to each customer.
 - Minimum number of identities on which to model roles. The default is 20.

Note: Selecting fewer identities on which to model roles yields more potential role options. Using a higher minimum number of identities avoids yielding many highly-specific roles.

3. Select **Save**.

Using Access Modeling for Role Discovery in Advanced Analytics

After the Access Modeling is enabled and configured, you can use it to explore potential roles based on users' current roles and create new roles that align with the access users need.

See [Common Access Roles Discovery](#) and [Specialized Roles Discovery](#).

Monitoring AI-Driven Identity Security Status

You can use the SailPoint Modules and Extensions page of the Administrator Console to view the status of AI-Driven Identity Security.

1. Log in as an IdentityIQ administrator.
2. Under the **gear** icon select **Administrator Console**.
3. Click the **Environment** item in the menu bar on the left.
4. Click the **SailPoint Modules and Extensions** tab.
5. On this tab you can view the current status of the AI-Driven Identity Security connection, and can click on the module name to see the status of AI-Driven Identity Security connections for each host.

Disabling AI-Driven Identity Security

If you no longer want to use the AI-Driven Identity Security features, AI-Driven Identity Security can be disabled.

1. Log in as an IdentityIQ administrator.
2. Disable the AI-Driven Identity Security feature in the Debug pages:
 - a. Navigate to the Debug pages through the Debug URL: `https://<hostname>/identityiq/debug` (for example, `http://localhost:8080/identityiq/debug`).
 - b. From the **Configuration Objects** dropdown list, choose **System Configuration**.
 - c. Locate the **identityAIEnabled** key and change the value from true to false:
`<entry key="identityAIEnabled" value="false"/>`
 - d. **Save** your change to the System Configuration object.
3. Disable the AI-Driven Identity Security plugins:
 - a. Click the **gear icon > Plugins**.
 - b. Disable the **AI-Driven Identity Security Recommender Plugin** by clicking the power button icon to enable or disable plugins, and confirming your decision.


Using Automatic Approvals

You can use AI-Driven Identity Security to automatically approve access based on access recommendations. With this feature enabled, any access review item that has a recommendation of "thumbs up" is automatically moved from the reviewer's **Open** tab to the **Review** tab, with an "Approved" decision. Reviewers retain the option of changing the automated decision, as needed, before signing off on the review. Automated approvals help your reviewers process access reviews quickly and more efficiently by taking easy decisions out of the way so that they can focus on exceptional items.

Automated approvals can be enabled both globally, and at the individual certification level. See [Enabling Access Recommendations and Automatic Approvals Globally for Certifications](#) for details on how to enable automatic approvals globally.

How Automatic Approvals Work

The icon for Auto Approved Access Recommendations is the standard "thumbs up" icon, with a star.

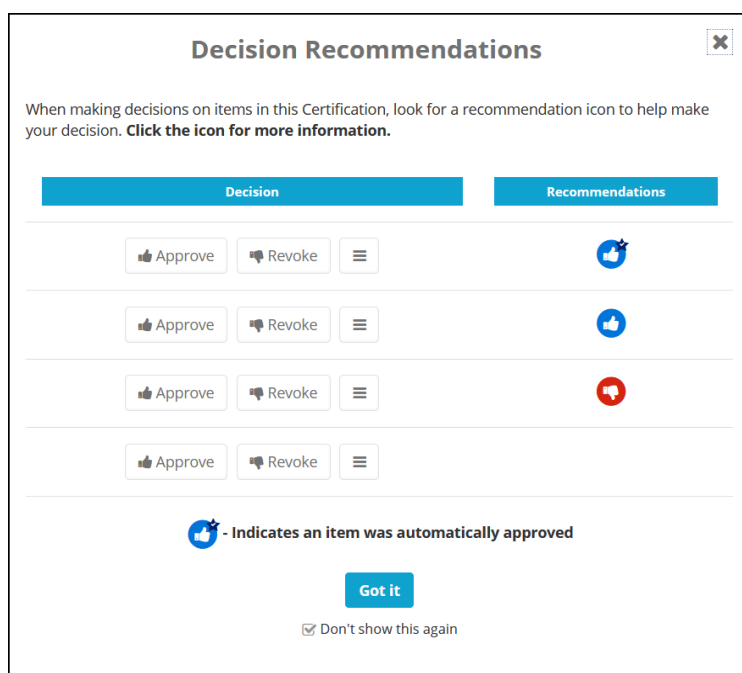

Any access review item that has a recommendation of "thumbs up" is automatically moved from the reviewer's **Open** tab to the **Review** tab, with an "Approved" decision.

Type	Display Name	Description	Application	Account Name	Identity	Department	MGR Department	Decision
Entitlement	allActiveEmployees on ent_code	allActiveEmployees	Dynamic IdentityAI Entitlements	10003	Bradley Jones			Approved
Entitlement	itHelpDeskNewsletter on ent_code	itHelpDeskNewsletter	Dynamic IdentityAI Entitlements	10003	Bradley Jones			Approved
Entitlement	weeklyCorporateNewsletter on ent_code	weeklyCorporateNewsletter	Dynamic IdentityAI Entitlements	10003	Bradley Jones			Approved

Reviewers retain the option of changing the automated decision, as needed, before signing off on the review.

Users still have to sign off on automatically approved items in the Review tab. If the user reverses an automatic approval, the item is moved back to the user's Open tab for further review as needed.

Finding Automatically Approved Items

For quick viewing of all automatically approved items, you can filter the items in your Access Review:

1. In the Access Review, click **Filter**.
2. Click **Add Filter** and select **Auto Approved**.
3. Choose a value of **True** to find automatically approved items; you can choose **False** if you want to filter items to show those that are not automatically approved.
4. Click **Apply**.

Reporting on Automatic Approvals

You can include automated approval information in reports to help track and monitor items that have been automatically approved.

To report on automatically-approved items:

1. Click **Intelligence > Reports**.
2. From the **Access Reviews and Certifications** reports section, choose a "live report" option for one of the certification types (Manager, Targeted, Application Owner, Advanced, or Role Membership) that supports automatic approvals.
3. In the **Report Layout** section, choose the columns related to automatic approvals that you want to display, such as:
 - Decision Maker
 - Decision Maker Comments
 - Recommendation
 - Recommendation Reasons
 - Recommendation Timestamp
 - Auto Decision Generated
 - Auto Decision Accepted

Discovering Common Access

The AI Access Modeling – Discover Common Access feature uses AI analytics and scoring methodologies to evaluate access for a given population, then presents a recommended role that includes the entitlements that are common across those identities. You can create and assign the common access role to large populations of employees to provide broad-based access from the first day an employee joins your organization. Once entitlements are labeled as part of a common access role, they are excluded from future access modeling role mining, role insights, and access request recommendations, which helps simplify your AI model.

This feature is available to organizations using AI Access Modeling. You need the `Man-
ageAICommonAccessDiscovery` SPRight, which is part of the `AIAccessModelingAdministrator` and `AISe-
rvicesAdministrator` capabilities. Your system configuration needs to have AI enabled. See [About SailPoint AI-Driven Identity Security](#).

Note: Access Modeling, available prior to version 8.4 as an IdentityIQ plugin, may be part of your AI subscription as of version 8.4. You will no longer need to download a separate plugin, and you will no longer see it listed with your Installed Plugins.

Note: AI-Driven Identity Security modules may be licensed separately. Please direct questions to your account manager to clarify your agreement.

Common Access Roles Discovery

IdentityIQ Administrators can use this functionality to determine which access should be common to nearly all identities in an organization. Common access roles are not tied to specific job functions.

Note: Only roles created using Discover Common Access will be designated as common access in AI, and only these roles will have their entitlements excluded from future Access Modeling mining sessions.

To discover a common access role:

1. Navigate to **Intelligence > Advanced Analytics**.
2. In the Search Type field, make sure **Identity** is selected.
3. Enter and apply search criteria.
4. Select the identity or identities to discover roles for.

Note: AI Access Modeling limits the number of identities to 25,000 per population to be mined.

5. Select the **Discover Common Access Roles** button.
6. You will be redirected to the Access Modeling page in Identity Security Cloud, using the URL that you configured in [Enabling Access Modeling](#). If you are not already logged in to Identity Security Cloud, you will have to enter admin credentials and authenticate.

AI displays the potential role.

Note: Once you are in a role mining session, you can select the Settings button at the right side of the screen to adjust settings and use the granularity slider to adjust the minimum number of identities in a group.

7. The Potential Role page includes the following tabs:
 - On the Composition tab, use the slider to exclude entitlements beyond your chosen popularity threshold, then select **Apply**.
 - On the Exclusions tab, indicate exclusions.
 - On the Identity Overview tab, use the Show Chart dropdown to view the Identity Attributes. A list of identities shows those that would be included in this role, listed by display name, department, job title, and location.
8. Select the **Create a Role** button. Alternately, you may select **Save Draft** if it needs additional work.
9. On the Create a Role page, enter a name, owner, and description to create it. This role will be excluded from future Access Modeling role mining, role insights, and Access Request recommendations.

Select the **Include Identities** checkbox to indicate that you want the identities listed in the Identity Overview tab to be included in the new role when it is created.

10. Select the **Create a Role** button.

Specialized Roles Discovery

Specialized Roles Discovery, part of Access Modeling, identifies user access patterns and determines potential roles, or bundles of access, that accurately align with what users actually do in an organization. IdentityIQ Administrators can use this functionality to generate roles for specific job functions, such as Accounting or Sales.

To discover specialized roles:

1. Navigate to **Intelligence > Advanced Analytics**.
2. In the Search Type field, make sure **Identity** is selected.
3. Enter and apply search criteria.
4. Select the identity or identities to discover roles for.

Note: AI Access Modeling limits the number of identities to 25,000 per population to be mined.

5. Select the **Discover Specialized Roles** button.
6. You will be redirected to the Access Modeling page in Identity Security Cloud, using the URL that you configured in [Enabling Access Modeling](#). If you are not already logged in to Identity Security Cloud, you will have to enter admin credentials and authenticate.

AI displays a list of potential roles.

Note: Once you are in a role mining session, you can select the **Settings** button at the right side of the screen to adjust settings and use the granularity slider to adjust the minimum number of identities in a group.

7. Select a role from the list.
8. The Potential Role page includes the following tabs:
 - On the Composition tab, use the slider to exclude entitlements beyond your chosen popularity threshold, then select **Apply**.
 - On the Exclusions tab, indicate exclusions.
 - On the Identity Overview tab, use the **Show Chart** dropdown to view the Identity Attributes. A list of identities shows those that would be included in this role, listed by display name, department, job title, and location.
9. Select the **Create a Role** button. Alternately, you may select **Save Draft** if it needs additional work.
10. On the Create a Role page, enter a name, owner, and description to create it. This role will be excluded from future Access Modeling role mining, role insights, and Access Request recommendations.

- Select the **Include Identities** checkbox to indicate that you want the identities listed in the Identity Overview tab to be included in the new role when it is created.

11. Select the **Create a Role** button.

GenAI Descriptions for Entitlements

IdentityIQ uses Generative AI (GenAI) to generate descriptions for your organization's entitlements. On the Entitlement Catalog page, users can select one or more entitlements to request a generated description. The progress of these requests can be tracked on the GenAI Entitlement Descriptions page, which also allows users to submit new descriptions for approval.

For each approval request:

- Users can select either single or multiple entitlements to request descriptions.
- Once generated, a description can be submitted. If approvals are enabled for GenAI Description for Entitlements, then they must be approved before the new description is applied to the entitlement.
- A workflow determines who can approve the initial description that GenAI generates. Typically, this is the Entitlement Owner, but the feature can be configured to let users approve their own generated descriptions themselves.

See

- [GenAI Entitlements on the Entitlement Catalog Page](#)
- [GenAI Entitlement Descriptions Page](#)

GenAI Entitlements on the Entitlement Catalog Page

To access the Entitlement Catalog page, select **Applications > Entitlement Catalog**. See [Entitlement Catalog](#) for details and functionalities on Entitlement Catalog page.

In addition to the details and functionalities described in [Entitlement Catalog](#), users with the AI Entitlement Description Administrator capability will see these options in the Entitlement Catalog table:

- **Checkbox** in the Application column
- **Magic Wand** icon in the Description column
- **Review GenAI Descriptions** button

Users with this capability can also generate GenAI Descriptions for Entitlements associated with applications on the page.

See [Assigning GenAI Administrator Capability](#) for more information on how to assign the AI Entitlement Description Administrator capability to a user.

Entitlement Catalog								
Filter Entitlements	Q	Advanced Search	Review GenAI Descriptions	Import	Export	Add New Entitlement		
Application	Attribute	Display Name	Type	Description	Owner	Requestable	Classifications	
Procurement_System	groups	@AUDIT	Entitlement	Audit ability within RACF	Randy Knight	✓		
Procurement_System	groups	@OPER	Entitlement	ALTER, DELETE, CHANGE DATASETS - no security func	Randy Knight	✓		
Procurement_System	groups	@SPEC	Entitlement	Full security ability within RACF	Randy Knight	✓		
ADDirectDemodata	memberOf	a2c	Group	This entitlement grants access to the a2c application, which is a core component of the organization's enterprise resource planning (ERP) system. Users with this entitlement can perform various financial and accounting-related tasks within the a2c application.		✓		
ADDirectDemodata	memberOf	a2d	Group	This entitlement provides access to the a2d application, which is another key component of the organization's ERP system. Users with this entitlement can access and manage various data and reporting functionalities within the a2d application.		✓		
ADDirectDemodata	memberOf	AbandonedHydropticLegumins	Group	The entitlement name 'AbandonedHydropticLegumins-IQSR635' does not provide enough information to determine a clear and concise description. The name appears to be a randomly generated string and does not clearly indicate the purpose or functionality of the entitlement.		✓		

Use the checkbox to select a single Entitlement or multiple Entitlements, then right click and select **Generate Descriptions** to generate a request for generating GenAI Descriptions for Entitlements. A maximum of 100 entitlements can be selected in a single request. See [Generating GenAI Descriptions for Entitlements](#) for more information.

The Entitlement Catalog table displays a magic wand icon for entitlement descriptions generated through GenAI. The color of the magic wand represents its status in the workflow as follows:


Magic Wand Icon Color	Status	Description
Grey	Requested	GenAI Description for Entitlement has been requested but has not yet been created.
Purple	Suggested	GenAI Description for Entitlement has successfully created.
Red	Failed	GenAI Description for Entitlement was not created, due to an error.
Yellow	Pending Approval	GenAI Description for Entitlement has been sent to an approver but has not yet been approved.
Green	Approved	GenAI Description for Entitlement has been approved or provisioned without need for approval.
Amber	Rejected	GenAI Description for Entitlement has not been approved, due to it not meeting the quality and accuracy standards of the approver.

Select the **Review GenAI Descriptions** button to navigate to the GenAI Entitlement Descriptions page. See [GenAI Entitlement Descriptions Page](#) for more information.

GenAI Entitlement Descriptions Page

Users with the AI Entitlement Description Administrator capability can access the GenAI Entitlement Descriptions page to monitor the request progress by selecting the **Review GenAI Descriptions** button on the Entitlement Catalog page.

Users can also access this page directly via a URL: `https://<host-name>/identityiq/define/groups/entitlementDescription.jsf#/genai`.

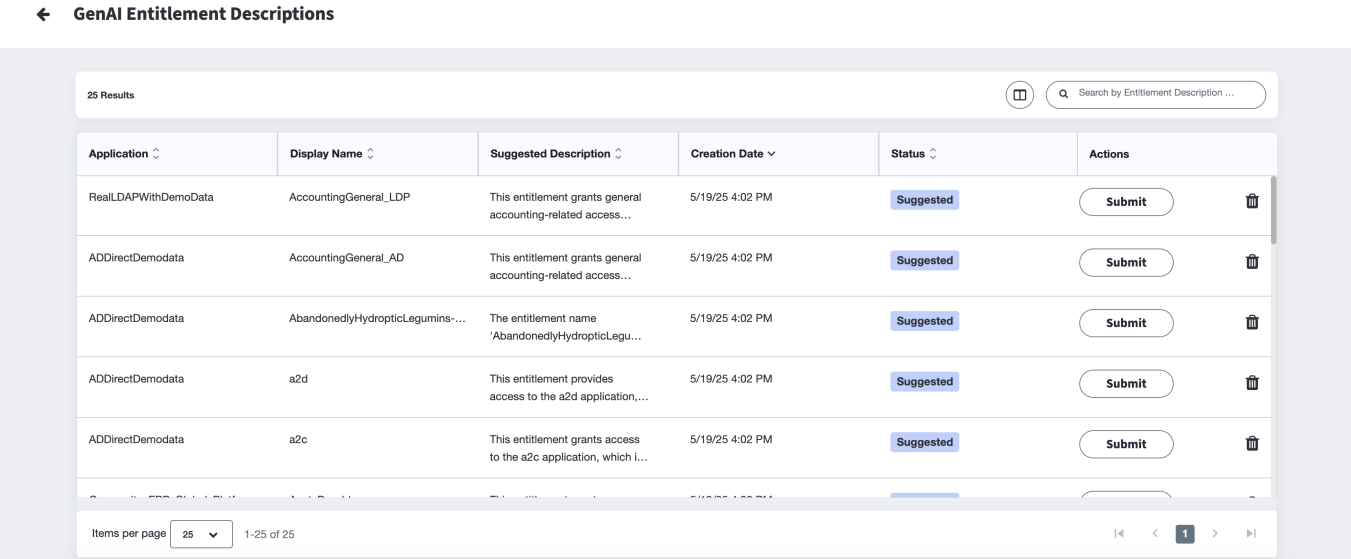

The GenAI Entitlement Descriptions page provides a comprehensive overview of the suggested descriptions, status, and actions buttons. Users should refresh the page to see the progress of requests.

The GenAI Entitlement Descriptions page displays a table with all relevant data associated with entitlements and descriptions generated using GenAI.

Column	Description
Application	The application to which the managed attribute belongs.
Display Name	Display the name of the managed attribute. If no display name was defined, this field displays the value of the attribute.
Suggested Description	GenAI suggested entitlement descriptions.
Creation Date	The creation date and actual time of the request to generate GenAI Descriptions for Entitlement.
Status	Status of the request for generating GenAI Descriptions for Entitlement. The status can be Requested, Suggested, Failed, Pending Approval, Approved, or Rejected.

Column	Description
Action	The action that users can take on the suggested descriptions under various statuses. Users can submit or discard a description.

The table data is displayed by the entitlement Creation Date in descending order, with the most recent entitlements created displayed first, independent of their status. Users can reposition (drag and drop) and sort the table columns as required.

The page has both “full text” and “contains” type search functionality. The search includes all entitlements on all pages in the table, and the result count is displayed on the page.

To configure which columns appear in the table, select the **column configure** icon.

Users can perform the following actions on the page:

- **Submit** – Submits the GenAI Descriptions for Entitlement to the workflow approver for approval.
- **Discard** – Discards the GenAI Descriptions for Entitlement. This action will remove the entitlement descriptions from the table, but the user can resubmit the request.

Generating GenAI Descriptions for Entitlements

Users with the AI Entitlement Description Administrator capability can generate entitlement descriptions on the Entitlement Catalog page. They can generate descriptions for a single entitlement or multiple entitlements through a single request.

They can generate descriptions for entitlements with and without existing descriptions.

Currently, IdentityIQ supports GenAI Descriptions for Entitlement only in English, irrespective of the browser locale settings.

Generating a Single Entitlement Description

To generate a description for a single entitlement:

1. Select the checkbox and right-click on the table **OR** on the entitlement. A contextual menu is opened.
2. On the contextual menu, select **Generate Descriptions**. The GenAI Entitlement Descriptions page loads, including the additional selected entitlements.

Note: You cannot generate descriptions for entitlements that already have a GenAI description, or that have a status of Requested, Suggested or Pending Approval.

Generating Multiple Entitlement Descriptions

To generate descriptions for multiple entitlements through a single request:

1. On the Entitlement Catalog table, select the checkboxes for the entitlements. You can also select all entitlements on the page by selecting the header checkbox and selecting **Select Current Page** from the contextual menu.

Note: Once you have initiated a request for a description, the checkbox is disabled, except when the entitlement generation has failed or was approved or rejected by the approver.

Note: You can select a maximum of 100 entitlements in a single request to generate descriptions. If you try to select more than 100 entitlements, an error message will appear.

2. On the table, right-click in the selected area. A contextual menu display.
3. Select **Generate Descriptions**. The GenAI Entitlement Descriptions page loads, including the additional selected entitlements.

Note: When you select multiple entitlements, the Edit and Delete options on the contextual menu are disabled, because multiple edits and multiple deletes of entitlements are not allowed.

Reviewing Generated Descriptions for Entitlements

The GenAI Entitlement Descriptions page provides a comprehensive overview of the suggested descriptions, status, and actions buttons. The page shows the progress of the requests.

Submitting an Entitlement Description

Select **Submit** to submit the entitlement description, with Suggested status, for approval. An approval workflow (or whichever workflow is registered as the `workflowManagedAttribute` workflow) is launched, and the request is routed to the Entitlement approver for approval. If approvals are turned off via the **Enable approvals for GenAI Descriptions for Entitlements** checkbox, the descriptions will be auto approved once submitted. See [Configuring GenAI Descriptions for Entitlements](#) for details.

Note: The requester for the description can also be the approver. In this scenario, the entitlement description is instantly approved. See [Configuring GenAI Descriptions for Entitlements](#) for information on how to configure a requester as an approver.

Discard an Entitlement Description

If an entitlement description is incorrect, users can discard the entitlement descriptions with Failed, Suggested, and Rejected status. To discard an entitlement description, select **Discard** icon. It will remove the description from the GenAI Entitlement Descriptions page. Users can then select the entitlement again from the Entitlement Catalog page to generate a description, if they want.

Entitlement Description Status Change

When a user takes an action on the GenAI Entitlement Descriptions page, the entitlement description status changes as follows:

No action = Suggested status

Submit = Pending Approval status

When the user sends the descriptions to the Entitlement approver, the status changes according to the approver's action, or changes to Approved if approvals were auto-approved. See [Approving GenAI Entitlement Description](#) for more information.

Approving GenAI Descriptions for Entitlements

As an Entitlement approver, you may be asked to review and approve a GenAI Descriptions for Entitlement.

Entitlements are the access that an application can provide to an identity. Entitlement descriptions should provide useful information about the entitlement and its access. To ensure that a GenAI Descriptions for Entitlement is accurate, approval by the Entitlement approver is optionally required before the suggested description can be applied to the entitlement. If the Entitlement owner does not exist, the description is approved by the Application owner.

When you need to approve an entitlement description, you will receive an email notifying you that it is ready for your review.

1. Select the **Approvals** Quicklink card to open the Approvals page, where you can view the GenAI-generated Descriptions for Entitlement received for approval.

Alternatively, navigate to **My Tasks > Approvals** to open the Approvals page.

2. Review the proposed description.
3. Select **Approve** or **Deny**.

When you approve a description, it is instantly updated on the entitlement.

Entitlement Description Status Change

When the Entitlement approver takes an action on the approval request for an entitlement description, the entitlement description status on the GenAI Entitlement Descriptions page changes as follows:

No action = Pending Approval status

Approve = Approved status

Deny = Rejected status

Assigning GenAI Administrator Capability

The IdentityIQ administrator can assign the AI Entitlement Description Administrator capability to other users. The capability enables the users to generate GenAI Descriptions for Entitlements on the Entitlement Catalog page and review the descriptions on the GenAI Entitlement Descriptions page.

To assign the capability to a user, perform the following:

1. Log in as an IdentityIQ administrator.
2. Navigate to **Identities > Identity Warehouse**.
3. On the Identity Warehouse page, search for the user you want to assign the **AI Entitlement Description Administrator** capability to.
4. Select the identity to open the View Identity page.
5. Select the **User Rights** tab.
6. Select **AI Entitlement Description Administrator** under User Capabilities.
7. Select **Save**.

Configuring GenAI Descriptions for Entitlements

IdentityIQ Administrator can activate the GenAI Descriptions for Entitlements feature in IdentityIQ.

From the IdentityIQ gear icon, select **Global Settings > AI-Driven Identity Security Configuration**.

Select the **Enable GenAI Descriptions for Entitlements** checkbox under the **GenAI Settings** section to see all the settings available in the section.

AI-Driven Identity Security Configuration

Connection Information for AI-Driven Identity Security

AI-Driven Identity Security Hostname*

Client ID*

Client Secret*

Advanced Connection Settings

Read Timeout Seconds

Connect Timeout Seconds

[Test Connection](#)

Access Modeling

IdentityNow URL*

Minimum Identities

GenAI Settings

Enable GenAI Descriptions for Entitlements ☒

Delete GenAI Descriptions for Entitlements requests older than (days)

Enable approvals for GenAI Descriptions for Entitlements ☒

Connection Information for GenAI

GenAI Hostname*

Client ID*

Client Secret*

Advanced Connection Settings for GenAI

Read Timeout Seconds

Connect Timeout Seconds

[Test Connection](#)

[Save](#) [Return to Global Settings](#)

© Copyright 2025 SailPoint Technologies. All rights reserved.

1. **Delete GenAI Descriptions for Entitlements requests older than (days)** – Deletes all stored requests for GenAI Descriptions for Entitlements older than the defined number of days with the statuses; Requested, Suggested, Failed, Pending Approval, Approved, and Rejected. However, GenAI Descriptions for Entitlements that have been approved will still be applied to the entitlements.
2. **Enable approvals for GenAI Descriptions for Entitlements** – Enable workflow approvals for GenAI Descriptions for Entitlements. When this is enabled, GenAI Descriptions for Entitlements will follow established workflow approvals when they are submitted.

Note: If an Entitlement approval workflow has not been configured and the **Enable approvals for GenAI Descriptions for Entitlements** is selected, entitlement descriptions will be automatically approved when submitted through the GenAI Entitlement Descriptions page due to no approver existing.

3. Provide the following details under Connection Information for GenAI:
 - a. **GenAI Hostname** – The API Gateway URL for your tenant. For example: `https://<org>.api.identitynow.com` **OR** `https://<org>.api.saas.sailpointfedramp.com`.
 - b. **Client ID** – OAuth client ID for the GenAI API.
 - c. **Client Secret** – OAuth client secret for the GenAI API.

Note: See [Generating Client Credentials in Your Tenant](#) to generate Client ID and Client Secret.

4. Provide the following details under Advance Connection Settings for GenAI:
 - a. **Read Timeout** – The number of seconds IdentityIQ will wait to read GenAI Descriptions for Entitlements before reporting failure.
 - b. **Connection Timeout** – The number of seconds IdentityIQ will wait to connect to GenAI LLM proxy before reporting a failure.
5. Select **Test Connection** to ensure that LLM APIs are being called to establish connection with the GenAI host.
6. Select **Save**.

AI-Driven Identity Security Reports

AI-Driven Identity Security recommendation information is included in the following IdentityIQ reports. For more information see the **Reports** documentation.

- Access Review Decision Report – note that the Roles table for this report intentionally does not contain the recommendation columns
- Access Request Status Report
- Advanced Access Review Live Report
- Application Owner Access Review Live Report
- Certification Activity by Application Report
- Manager Access Review Live Report
- Role Membership Access Review Live Report
- Targeted Access Review Live Report
- Work Item Archive Report

The following columns are included in these access review and certification reports. In live reports, the columns function the same as the other IdentityIQ columns on the Report Layout tab.

Note: These columns are always blank on Policy Violation tables. Access recommendations are not evaluated for policy violations.

- Recommended Decision
- Recommendation Timestamp
- Recommendation Reasons
- Auto Decision Generated
- Auto Decision Accepted

For request types that are not supported by access recommendations, the reports return the following:

- **Recommendation** – Not Consulted
- **Recommendation Timestamp** – Blank
- **Recommendation Reasons** – The recommender in use does not support recommendations for this work item type
- **Auto Decision Generated** – False
- **Auto Decision Accepted** – False

If a recommendation is not found for a line item, the report returns the following:

- **Recommendation** – Not Found
- **Recommendation Reasons** – We do not have a recommendation for this access because the identity was not found within AI-Driven Identity Security
- **Recommendation Timestamp** – Blank
- **Auto Decision Generated** – False
- **Auto Decision Accepted** – False

AI-Driven Identity Security IdentityIQ Console Commands

You can use the IdentityIQ console to view the status of your recommender or to disable access recommendations for this IdentityIQ instance.

These commands are available in the IdentityIQ console after `init-ai.xml` is imported:

- **reco list** – a list of all recommender definitions and their status: In Use, Available, or Unavailable
- **reco use <Recommender_Name>** – the name of the recommender to use. If the recommender name contains white spaces, put quotation marks around the name ("Recommender Name")
- **reco use --** – disable and clear the recommender selection

For more information see the **IdentityIQ Console** documentation.