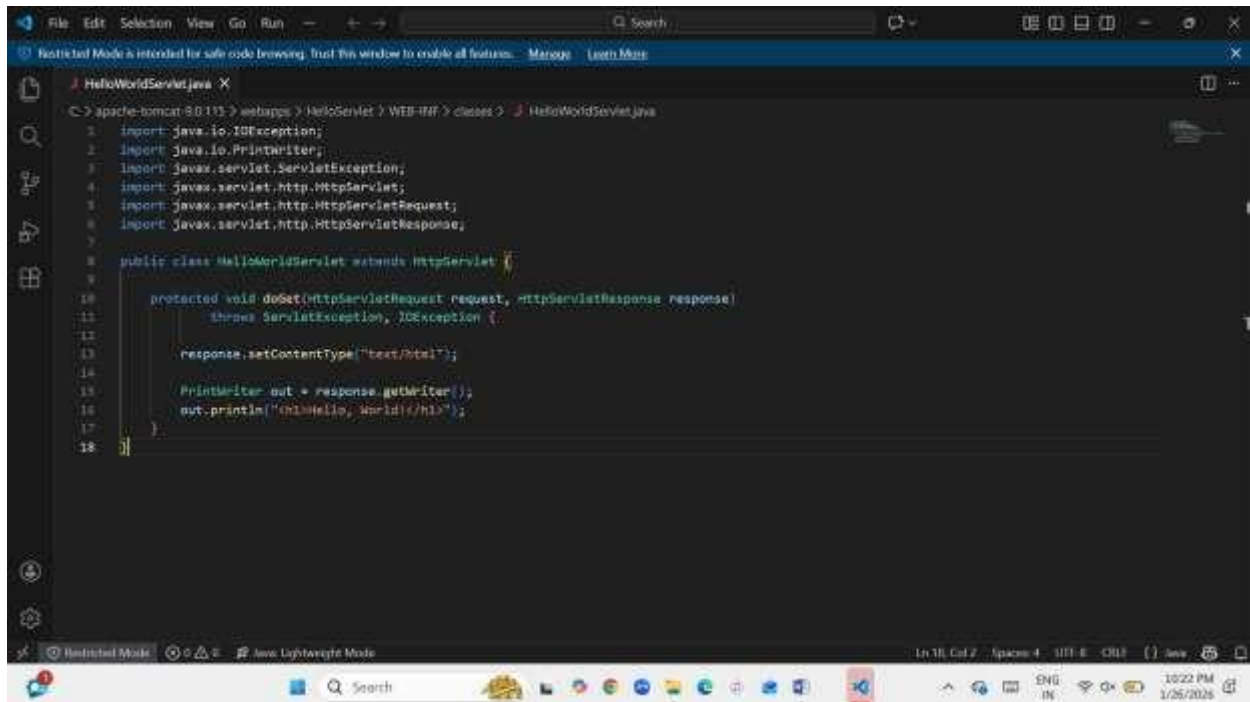


SHIKHA AJITH

241801263

Experiment 3

Code:

A screenshot of an IDE window showing the code for HelloWorldServlet.java. The code is as follows:

```
1 import java.io.IOException;
2 import java.io.PrintWriter;
3 import javax.servlet.ServletException;
4 import javax.servlet.http.HttpServlet;
5 import javax.servlet.http.HttpServletRequest;
6 import javax.servlet.http.HttpServletResponse;
7
8 public class HelloWorldServlet extends HttpServlet {
9
10     protected void doGet(HttpServletRequest request, HttpServletResponse response)
11         throws ServletException, IOException {
12
13         response.setContentType("text/html");
14
15         PrintWriter out = response.getWriter();
16         out.println("HiHello, World!</h1>");
17     }
18 }
```

The IDE interface includes a menu bar (File, Edit, Selection, View, Go, Run), a search bar, and a status bar at the bottom showing "Ln 16, Col 2, Spaces: 4, UTF-8, CRLF, Java".

```
<web-app xmlns="http://xmlns.jcp.org/xml/ns/javaee"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xsi:schemaLocation="http://xmlns.jcp.org/xml/ns/javaee
    http://xmlns.jcp.org/xml/ns/javaee/web-app_3_1.xsd"
  version="3.1">

  <servlet>
    <servlet-name>HelloWorld</servlet-name>
    <servlet-class>HelloWorldServlet</servlet-class>
  </servlet>

  <servlet-mapping>
    <servlet-name>HelloWorld</servlet-name>
    <url-pattern>/hello</url-pattern>
  </servlet-mapping>

</web-app>
```

