

LaunchPad AI

AI-Specialist-Track Project Documentation
SEC. 7
Project Executable Files & Execution Guide

Project Executable Files & Execution Guide

Everything an evaluator needs to access, install, and run LaunchPad AI

Project Name	LaunchPad AI
Maximum Marks	3 Marks

To successfully evaluate this project, evaluators require access to the source code, live deployment, and clear instructions on how to build and run the application locally.

Step 1: Project Links & Access

Resource Type	URL / Access Link
Source Code Repository (GitHub, GitLab)	https://github.com/shilpasingh89q69-dottie/Launchpad-ai.git
Live Deployed Application (Ngrok public URL)	https://opossum-ripping-feminize.ngrok-free.dev
Demo Video Link	Watch on YouTube

Step 2: Key Executable Files & Folder Structure

S.No	Folder / File Name	Description & Purpose
1	app.py	Main Flask entry point — routes, database models, and Ngrok tunnel initialization
2	services/ai_engine.py	Gemini API orchestration: prompt construction, JSON parsing, and validation
3	templates/index.html	Main dashboard template — input form and results cards
4	static/css/style.css	Theme styling (Bootstrap-based, custom color palette)
5	static/js/main.js	Fetch API logic — async submit handling and dynamic result rendering
6	requirements.txt	Python dependency list (Flask, google-generativeai, SQLAlchemy, pyngrok, python-dotenv)
7	.env.example	Template for environment variables required to run the app (GEMINI_API_KEY, NGROK_AUTHTOKEN, PORT)
8	instance/launchpad.db	Auto-generated SQLite database storing startup reports

LaunchPad AI

AI-Specialist-Track Project Documentation

SEC. 7


Project Executable Files & Execution Guide

Step 3: Local Setup & Execution Instructions

Step	Action / Terminal Command	Expected Outcome / Notes
1	git clone https://github.com/shilpasingh89q69-dot-tie/Launchpad-ai.git	Downloads the project to the local machine
2	python -m venv env	Creates an isolated virtual environment
3	env\Scripts\activate (Windows) source env/bin/activate (macOS/Linux)	Activates the virtual environment
4	pip install -r requirements.txt	Installs Flask, Gemini SDK, SQLAlchemy, pyngrok, python-dotenv
5	Configure .env with GEMINI_API_KEY and NGROK_AUTHTOKEN	Enables AI calls and public tunneling
6	python app.py	Launches the local server at 127.0.0.1:5000 and prints the public Ngrok URL

Live Run — Evidence

Terminal output after running **python app.py**, showing the public Ngrok URL:

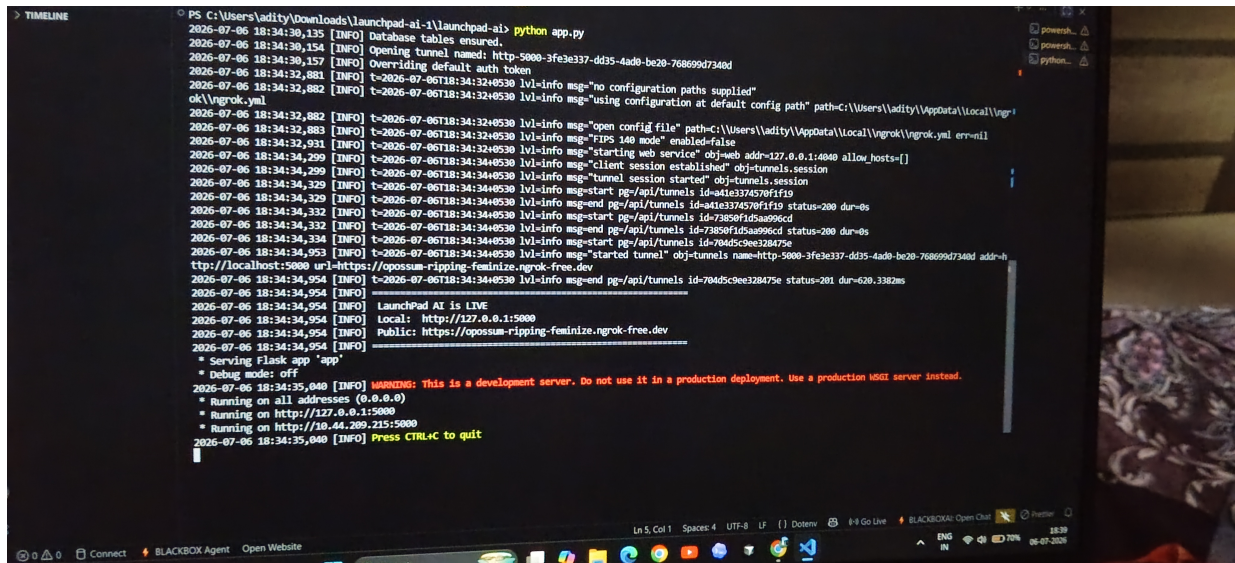

```
> PS C:\Users\adity\Downloads\Launchpad-ai> python app.py
2026-07-06 18:34:30,135 [INFO] Database tables ensured.
2026-07-06 18:34:30,154 [INFO] Opening tunnel named: http-5000-3fe3e337-dd35-4ad0-be20-768699d7340d
2026-07-06 18:34:30,157 [INFO] Overriding default auth token
2026-07-06 18:34:32,881 [INFO] t-2026-07-06T18:34:32.40530 lvl-info msg="no configuration paths supplied"
2026-07-06 18:34:32,882 [INFO] t-2026-07-06T18:34:32.40530 lvl-info msg="using configuration at default config path" path=C:\Users\adity\AppData\Local\Ngrok\ngrok.yml
2026-07-06 18:34:32,882 [INFO] t-2026-07-06T18:34:32.40530 lvl-info msg="open config file" path=C:\Users\adity\AppData\Local\Ngrok\ngrok.yml err=nil
2026-07-06 18:34:32,931 [INFO] t-2026-07-06T18:34:32.40530 lvl-info msg="FIPS 140 mode" enabled=false
2026-07-06 18:34:34,299 [INFO] t-2026-07-06T18:34:34.40530 lvl-info msg="starting web service" obj=web addr=127.0.0.1:4040 allow_hosts=[]
2026-07-06 18:34:34,329 [INFO] t-2026-07-06T18:34:34.40530 lvl-info msg="client session established" obj=tunnels.session
2026-07-06 18:34:34,329 [INFO] t-2026-07-06T18:34:34.40530 lvl-info msg="tunnel session started" obj=tunnels.session
2026-07-06 18:34:34,332 [INFO] t-2026-07-06T18:34:34.40530 lvl-info msg="start pg/api/tunnels id=a41e3374570f1f19 status=200 dur=0s
2026-07-06 18:34:34,332 [INFO] t-2026-07-06T18:34:34.40530 lvl-info msg="start pg/api/tunnels id=73850f1d5aa996cd status=200 dur=0s
2026-07-06 18:34:34,334 [INFO] t-2026-07-06T18:34:34.40530 lvl-info msg="start pg/api/tunnels id=704d5c9ee328475e status=200 dur=0s
2026-07-06 18:34:34,953 [INFO] t-2026-07-06T18:34:34.40530 lvl-info msg="started tunnel" obj=tunnels name=http-5000-3fe3e337-dd35-4ad0-be20-768699d7340d addr=h
http://localhost:5000 url=https://opossum-ripping-feminize.ngrok-free.dev
2026-07-06 18:34:34,954 [INFO] t-2026-07-06T18:34:34.40530 lvl-info msg="end pg/api/tunnels id=704d5c9ee328475e status=201 dur=620.3382ms
LaunchPad AI is LIVE
Local: http://127.0.0.1:5000
Public: https://opossum-ripping-feminize.ngrok-free.dev
Serving Flask app 'app'
* Debug mode: off
2026-07-06 18:34:35,040 [INFO] WARNING: This is a development server. Do not use it in a production deployment. Use a production WSGI server instead.
* Running on all addresses (0.0.0.0)
* Running on http://127.0.0.1:5000
* Running on http://10.44.209.215:5000
2026-07-06 18:34:35,040 [INFO] Press CTRL+C to quit
```

Terminal: LaunchPad AI is LIVE — Public: <https://opossum-ripping-feminize.ngrok-free.dev>


LaunchPad AI

AI-Specialist-Track Project Documentation

SEC. 7

Project Executable Files & Execution Guide

Browser screenshot — LaunchPad AI running at the live Ngrok URL:

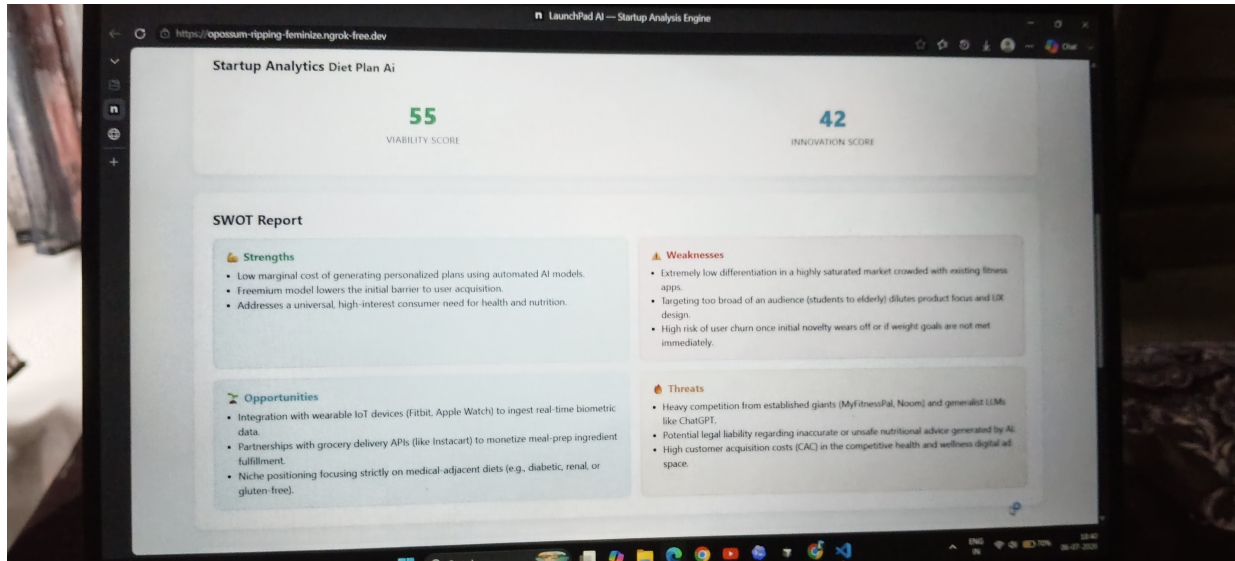

Live app open at <https://opossum-ripping-feminize.ngrok-free.dev> showing the generated SWOT report and scores

Demo Video

A full walkthrough of LaunchPad AI is available here: <https://youtu.be/YsTFeSHNZYA?si=cQPSG-K8Kb3LpWpO>

LaunchPad AI — Team Submission | Prepared by Shilpa Kumari