


# Graphical Abstract

## This is a specimen title

CV Radhakrishnan,Han Theh Thanh,CV Rajagopal,Rishi T.

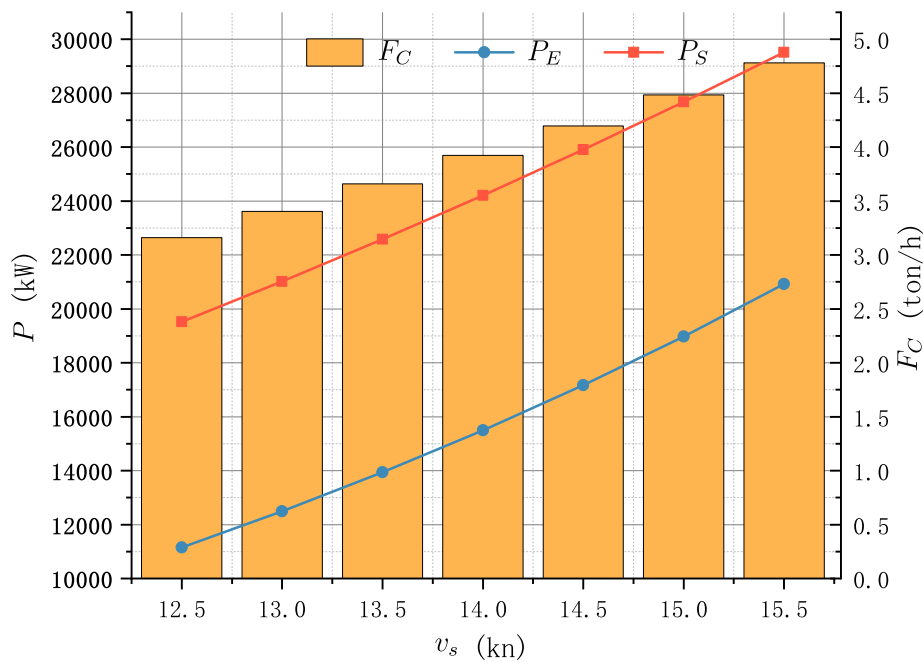

# Highlights

## This is a specimen title

CV Radhakrishnan,Han Theh Thanh,CV Rajagopal,Rishi T.

- Research highlights item 1
- Research highlights item 2
- Research highlights item 3

# This is a specimen title<sup>\*,\*\*</sup>

Sir CV Radhakrishnan<sup>a,c,\*,1</sup> (Researcher), Han Theh Thanh<sup>b,d</sup>, CV Rajagopal Jr<sup>b,c,2</sup> (Co-ordinator) and Rishi T.<sup>a,c,\*,1,3</sup>

<sup>a</sup>Elsevier B.V., Radarweg 29, 1043 NX Amsterdam, The Netherlands

<sup>b</sup>Sayahna Foundation, Jagathy, Trivandrum 695014, India

<sup>c</sup>STM Document Engineering Pvt Ltd., Mepukada, Malayinkil, Trivandrum 695571, India

## ARTICLE INFO

### Keywords:

quadrupole exciton  
polariton

## ABSTRACT

This template helps you to create a properly formatted L<sup>A</sup>T<sub>E</sub>X manuscript.

`\beginabstract ... \endabstract` and `\begin{keyword} ... \end{keyword}` which contain the abstract and keywords respectively.

Each keyword shall be separated by a `\sep` command.

## 1. Introduction

The Elsevier cas-dc class is based on the standard article class and supports almost all of the functionality of that class. In addition, it features commands and options to format the

- document style
- baselineskip
- front matter
- keywords and MSC codes
- theorems, definitions and proofs
- lables of enumerations
- citation style and labeling.

This class depends on the following packages for its proper functioning:

1. natbib.sty for citation processing;
2. geometry.sty for margin settings;
3. fleqn.clo for left aligned equations;
4. graphicx.sty for graphics inclusion;


\*This document is the results of the research project funded by the National Science Foundation.


\*\*The second title footnote which is a longer text matter to fill through the whole text width and overflow into another line in the footnotes area of the first page.

This note has no numbers. In this work we demonstrate  $a_b$  the formation  $Y_1$  of a new type of polariton on the interface between a cuprous oxide slab and a polystyrene micro-sphere placed on the slab.

\*Corresponding author

\*\*Principal corresponding author

 [cvr\\_1@tug.org.in](mailto:cvr_1@tug.org.in) (C. Radhakrishnan); [cvr3@sayahna.org](mailto:cvr3@sayahna.org) (C. Rajagopal); [rishi@stmdocs.in](mailto:rishi@stmdocs.in) (R. T.)

 [www.cvr.cc](http://www.cvr.cc), [cvr@sayahna.org](http://cvr@sayahna.org) (C. Radhakrishnan); [www.sayahna.org](http://www.sayahna.org) (C. Rajagopal); [www.stmdocs.in](http://www.stmdocs.in) (R. T.)

ORCID(S): 0000-0001-7511-2910 (C. Radhakrishnan)

<sup>1</sup>This is the first author footnote, but is common to third author as well.

<sup>2</sup>Another author footnote, this is a very long footnote and it should be a really long footnote. But this footnote is not yet sufficiently long enough to make two lines of footnote text.

5. hyperref.sty optional packages if hyperlinking is required in the document;

All the above packages are part of any standard L<sup>A</sup>T<sub>E</sub>X installation. Therefore, the users need not be bothered about downloading any extra packages.

## 2. Installation

The package is available at author resources page at Elsevier (<http://www.elsevier.com/locate/latex>). The class may be moved or copied to a place, usually, `$TEXMF/tex/latex/elsevier/`, or a folder which will be read by L<sup>A</sup>T<sub>E</sub>X during document compilation. The T<sub>E</sub>X file database needs updation after moving/copying class file. Usually, we use commands like `mktexlsr` or `texhash` depending upon the distribution and operating system.

## 3. Front matter

The author names and affiliations could be formatted in two ways:

- (1) Group the authors per affiliation.
- (2) Use footnotes to indicate the affiliations.


See the front matter of this document for examples. You are recommended to conform your choice to the journal you are submitting to.

## 4. Bibliography styles

There are various bibliography styles available (Fortunato, 2010). You can select the style of your choice in the preamble of this document (Fortunato, 2010; Newman and Girvan, 2004). These styles are Elsevier styles based on standard styles like Harvard and Vancouver. Please use BibT<sub>E</sub>X to generate your bibliography and include DOIs whenever available (Fortunato, 2010; Vehlow, Reinhardt and Weiskopf, 2013).

## 5. Floats

Figures may be included using the command, `\includegraphics` in combination with or without its several options to further control graphic. `\includegraphics` is provided by `graphic[s,x].sty` which is part of any standard  $\text{\LaTeX}$  distribution. `graphicx.sty` is loaded by default.  $\text{\LaTeX}$  accepts figures in the postscript format while  $\text{pdf\LaTeX}$  accepts \*.pdf, \*.mps (metapost), \*.jpg and \*.png formats.  $\text{pdf\LaTeX}$  does not accept graphic files in the postscript format.

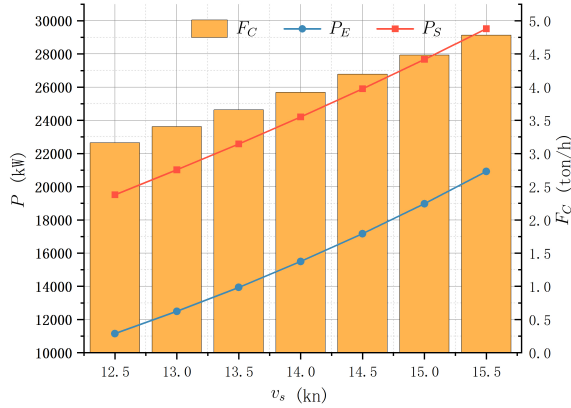

**Figure 1:** The evanescent light See also Table ).

The `table` environment is handy for marking up tabular material. If users want to use `multirow.sty`, `array.sty`, etc., to fine control/enhance the tables, they are welcome to load any package of their choice and `cas-dc.cls` will work in combination with all loaded packages.

**Table 1**

This is a test caption. This is a test caption. This is a test caption. This is a test caption.

Col 1	Col 2	Col 3	Col4
12345	12345	123	12345
12345	12345	123	12345
12345	12345	123	12345
12345	12345	123	12345
12345	12345	123	12345

## 6. Theorem and theorem like environments

`cas-dc.cls` provides a few shortcuts to format theorems and theorem-like environments with ease. In all commands the options that are used with the `\newtheorem` command will work exactly in the same manner. `cas-dc.cls` provides three commands to format theorem or theorem-like environments:

$$M_i = \max[M_{i+1} - 2r_i, M_{i+1} - 2(M_{i+1} - r_i), r_i] \quad (1)$$

where

$$M_2 \leq K \quad (2)$$

$$M_n = r_n \quad (3)$$

The `\newtheorem` command formats a theorem in  $\text{\LaTeX}$ 's default style with italicized font, bold font for theorem heading and theorem number at the right hand side of the theorem heading. It also optionally accepts an argument which will be printed as an extra heading in parentheses.

The `\newdefinition` command is the same in all respects as its `\newtheorem` counterpart except that the font shape is roman instead of italic. Both `\newdefinition` and `\newtheorem` commands automatically define counters for the environments defined.

The `\newproof` command defines proof environments with upright font shape. No counters are defined.

## 7. Enumerated and Itemized Lists

`cas-dc.cls` provides an extended list processing macros which makes the usage a bit more user friendly than the default  $\text{\LaTeX}$  list macros. With an optional argument to the `\begin{enumerate}` command, you can change the list counter type and its attributes.

1. The `enumerate` environment starts with an optional argument '1.', so that the item counter will be suffixed by a period.
2. You can use 'a)' for alphabetical counter and '(i)' for roman counter.
  - a) Another level of list with alphabetical counter.
  - b) One more item before we start another.
  - c) One more item before we start another.
  - d) One more item before we start another.
  - e) One more item before we start another.

Further, the enhanced list environment allows one to prefix a string like 'step' to all the item numbers.

- Step 1. This is the first step of the example list.  
 Step 2. Obviously this is the second step.  
 Step 3. The final step to wind up this example.

## 8. Cross-references

In electronic publications, articles may be internally hyperlinked. Hyperlinks are generated from proper cross-references in the article. For example, the words Fig. 1 will never be more than simple text, whereas the proper cross-reference `\ref{tiger}` may be turned into a hyperlink to the figure itself: Fig. 1. In the same way, the words Ref. [1] will fail to turn into a hyperlink; the proper cross-reference is `\cite{Knuth96}`. Cross-referencing is possible in  $\text{\LaTeX}$  for sections, subsections, formulae, figures, tables, and literature references.

ocean wind speed 2021-08-01T12:00:00

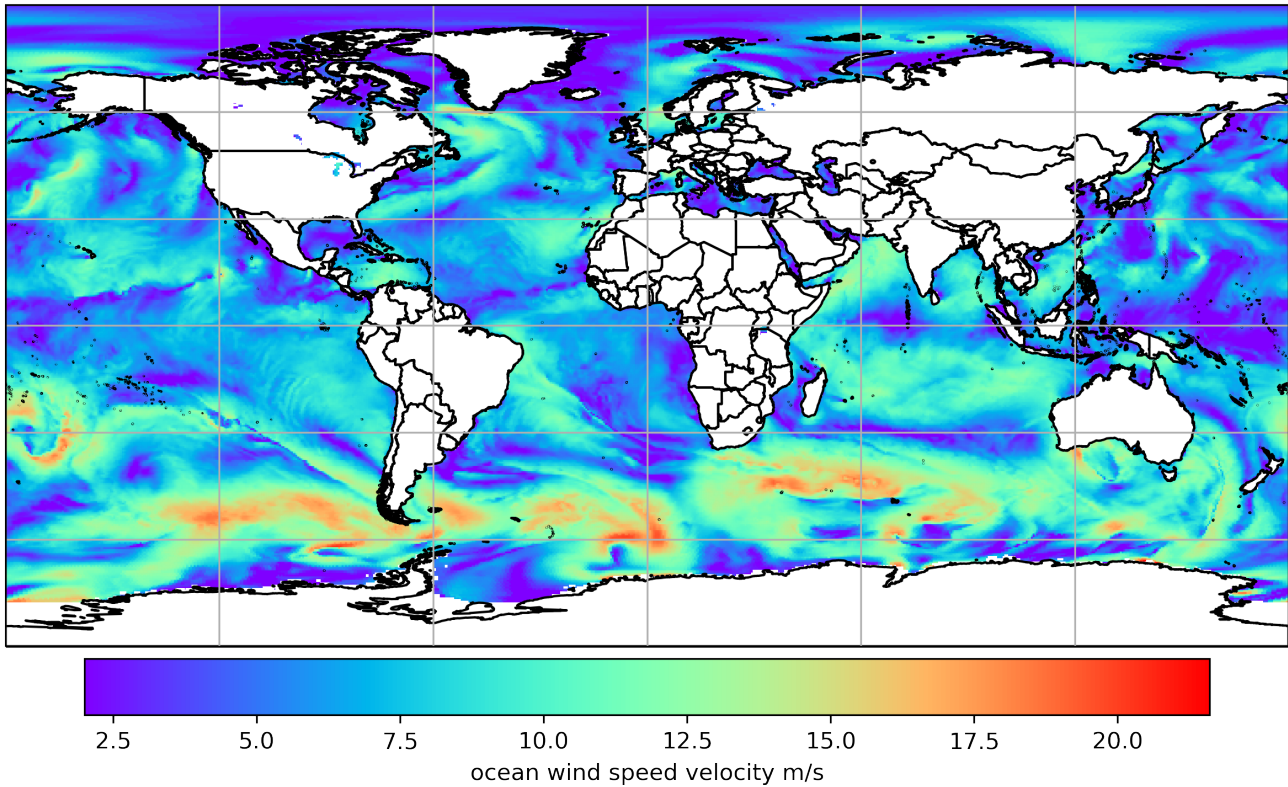


Figure 2: The evanescent light See also Table ).

**Table 2**  
Masked Face Image Datasets

Datasets	Subsets	Classes				Total/set	Total	Images
		With mask	Poor mask	None mask	others			
MAFA	All	31,032	4,774	-	-	35,806	35,806	30,811
MAFA-FMD	All	28,233	1,388	26,463	-	56,084	56,084	27,152
AIZOO	Train	2,957	-	10,619	-	13,576	16,636	7,959
	Vaild	1,036	-	2,024	-	3,060		
NFM	Train	48,736	-	317,527	24,594	390,857	581,108	18,088
	Vaild	6,030	-	154,973	11,307	190,251		
MaskedFace-Net	All	67,193	69,823	-	-	137,016	137,016	137,016
RMFRD	Train	5,000	-	90,000	-	95,000	99,015	99,015
	Vaild	3,589	-	426	-	4,015		
SMFRD	All	500,414	-	6,000	-	506,414	506,414	506,414
CMFD	All	53,039	47,203	31,180	-	131,422	131,422	55,905

## 9. Bibliography

Two bibliographic style files (\*.bst) are provided — model1-num-names.bst and model2-names.bst — the first one can be used for the numbered scheme. This can also be used for the numbered with new options of natbib.sty. The second one is for the author year scheme. When you use model2-names.bst, the citation commands will be like \citep, \citett, \citealt etc. However when you use model1-num-names.bst, you may use only \cite command.

thebibliography environment. Each reference is a \bibitem and each \bibitem is identified by a label, by which it can be cited in the text:

In connection with cross-referencing and possible future hyperlinking it is not a good idea to collect more than one literature item in one \bibitem. The so-called Harvard or author-year style of referencing is enabled by the L<sup>A</sup>T<sub>E</sub>X package natbib. With this package the literature can be cited as follows:

- (1) Parenthetical: `\citep{WB96}` produces (Wettig & Brown, 1996).
- (2) Textual: `\citett{ESG96}` produces Elson et al. (1996).
- (3) An affix and part of a reference: `\citep[e.g.]{Ch. 2}{Gea97}` produces (e.g. Governato et al., 1997, Ch. 2).

In the numbered scheme of citation, `\cite{<label>}` is used, since `\citep` or `\citett` has no relevance in the numbered scheme. `natbib` package is loaded by `cas-dc` with numbers as default option. You can change this to author-year or harvard scheme by adding option `authoryear` in the class loading command. If you want to use more options of the `natbib` package, you can do so with the `\biboptions` command. For details of various options of the `natbib` package, please take a look at the `natbib` documentation, which is part of any standard  $\text{\LaTeX}$  installation.

## A. My Appendix

Appendix sections are coded under `\appendix`.

`\printcredits` command is used after appendix sections to list author credit taxonomy contribution roles tagged using `\credit` in frontmatter.

## CRedit authorship contribution statement

**CV Radhakrishnan:** Conceptualization of this study, Methodology, Software. **CV Rajagopal:** Data curation, Writing - Original draft preparation.

## References

- Fortunato, S., 2010. Community detection in graphs. *Phys. Rep.-Rev. Sec. Phys. Lett.* 486, 75–174.
- Newman, M.E.J., Girvan, M., 2004. Finding and evaluating community structure in networks. *Phys. Rev. E.* 69, 026113.
- Vehlow, C., Reinhardt, T., Weiskopf, D., 2013. Visualizing fuzzy overlapping communities in networks. *IEEE Trans. Vis. Comput. Graph.* 19, 2486–2495.