

Quantum Statistics and Networks

Mori

2021/2/14

About

- We explain the numerical procedures and the methods of data analysis of the network model proposed in .

Model

- We explain the algorithm for generating random networks.
- We start from a complete network with $r + 1$ nodes. We label the nodes by $t = 1, 2, \dots, r + 1$.
- We denote the numbers of in-degrees and the out-degrees of node i as k_i^{IN} and k_i^{OUT} , respectively. The degree of node i is $k_i = k_i^{IN} + k_i^{OUT}$.
- Node 1 has no in-degree $k_1^{IN} = 0$ and r out-degrees $k_1^{OUT} = r$.
- Node 2 has 1 in-degree $k_2^{IN} = 1$ and $r - 1$ out-degrees $k_2^{OUT} = r - 1$.
- In general, node $t = 1, \dots, r + 1$ has $t - 1$ in-degrees and $t - (r + 1)$ out-degrees.
- The evolution of the network starts from node $t = r + 2$. We add new nodes to the network and connect them with the existing nodes $1, \dots, t - 1$.
- We generalize the preferential attachment process of the BA model by discriminating the in-degrees and the out-degrees. In the BA model, the attachment probability of node i is proportional to its degree k_i . In order to take into account the difference between in-degree and out-degree, we introduce "popularity". The "popularity" l_i of node i is defined as

$$l_i = k_i^{IN} + \omega k_i^{OUT}$$

- In the definition, the importance of the in-degree and out-degree are different and we denote the relative importance of the out-degree to the in-degree link by a parameter ω . When ω is positive (negative), the popularity increases (decreases) as the nodes is selected by newly added nodes.
- When node t attaches to the network, it chooses at most r different nodes from the previous $t - 1$ nodes.
- The probability that node i is selected by node t is given as

$$P(\text{Node } i \text{ is selected}) = p_i(t) = \frac{\text{Max}(l_i, 0)}{\sum_{s=1}^{t-1} \text{Max}(l_s, 0)}$$

- Node t chooses r different nodes with the probability $p_i(t)$. $k_t^{IN} = r$ and the chosen nodes' out-degrees increase by one.
If the number r' of the nodes with positive p_i is less than or equal r , node t chooses all the r' nodes, $k_t^{IN} = r'$ and chosen r' nodes out-degrees increase by one. When $\omega > 0$, such a case does not occur and $k_t^{IN} = r$.

- When $\omega < 0$, as $p_i(t) = 0$ for $k_i^{OUT} > k_i^{IN}/|\omega|$ the maximum number of k_i^{OUT} is $\lceil k_i^{IN}/|\omega| \rceil$. Here, $\lceil x \rceil$ is the ceiling function of x . In particular, for $\omega = -1$, k_i^{OUT} cannot exceed k_i^{IN} . We can expect the resemblance with the Fermi statistics of quantum statistical mechanics, where one energy level can be occupied by one particle by the Pauli's exclusion principle. When $\omega = -1$, a node can be linked by one node per one in-degree.
- R-function to generate the network.

```

Network<-function(N,r,omega){
  k_IN<-rep(0,N);k_OUT<-rep(0,N);Link<-matrix(0,ncol=r,nrow=N)
  # Initial Complete Network
  for(t in 1:r+1) k_IN[t]<-(t-1)
  for(t in 1:r) k_OUT[t]<-r+1-t
  for(t in 2:(r+1)){
    for(s in 1:(t-1)){
      Link[t,s]<-s
    }
  }
  t_n=(r+1)
  net<-list(N=N,r=r,omega=omega,t=t_n,k_IN=k_IN,k_OUT=k_OUT,Link=Link)
  # Evolution of Network
  if(t<N){
    for(t in (t_n+1):N){
      net$t<-t
      t_p<-t-1
      Z=0;l<-numeric(t_p);prob<-numeric(t_p)
      l[1:t_p]<-ifelse(net$k_IN[1:t_p]+omega*net$k_OUT[1:t_p]>0,net$k_IN[1:t_p]+omega*ne
t$k_OUT[1:t_p],0)
      prob<-l/sum(l)
      rd<-sum(prob>0)
      if(rd>=r) rd<-r
      out<-sample(1:t_p,rd,prob=prob)
      net$k_IN[t]<-rd
      net$Link[t,1:rd]<-out[1:rd]
      net$k_OUT[out[1:rd]]<-net$k_OUT[out[1:rd]]+1
    }
  }
  return(net)
}

```

```

N<-30
r<-3
omega<-1
net<-Network(N,r,omega)
net

```





```

## $N
## [1] 30
##
## $r
## [1] 3
##
## $omega
## [1] 1
##
## $t
## [1] 30
##
## $k_IN
## [1] 0 1 2 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3
##
## $k_OUT
## [1] 10 12 10 9 5 2 3 4 6 4 2 5 4 1 1 1 1 0 1 0 2 1 0 0 0
## [26] 0 0 0 0 0
##
## $Link
##      [,1] [,2] [,3]
## [1,]    0    0    0
## [2,]    1    0    0
## [3,]    1    2    0
## [4,]    1    2    3
## [5,]    2    4    1
## [6,]    4    1    5
## [7,]    1    3    6
## [8,]    5    2    4
## [9,]    8    5    2
## [10,]   9    3    2
## [11,]    1    3    7
## [12,]    9    4   10
## [13,]    1    4    8
## [14,]   11    3    8
## [15,]   13    5    4
## [16,]    3   13   15
## [17,]    3   12   14
## [18,]    3    2   10
## [19,]    1    7    2
## [20,]    8    5    9
## [21,]   12    4   19
## [22,]    2   12   21
## [23,]    2    4   13
## [24,]   22    9    3
## [25,]    6    7   12
## [26,]    2    3    9
## [27,]    9   17   12
## [28,]   10   16    2
## [29,]   21    1   13
## [30,]   10   11    4


```

Visualization

- $N = 100, r = 3, \omega = \{-1, 0, 1, 100\}^3$

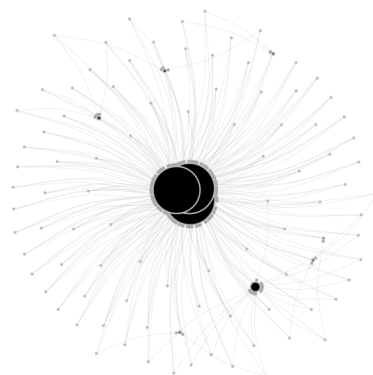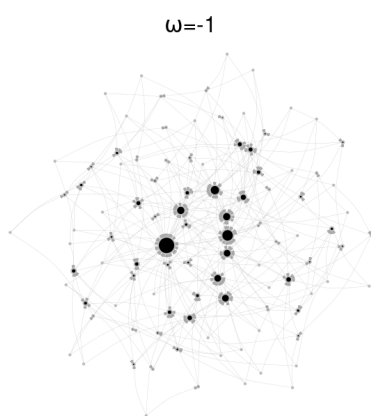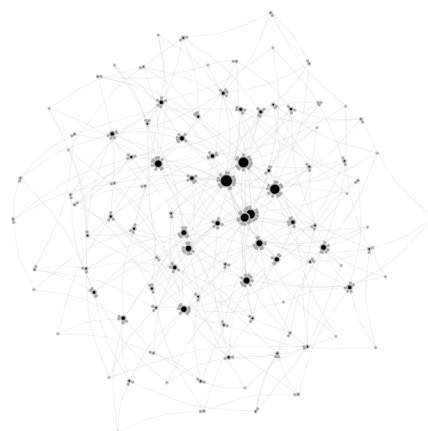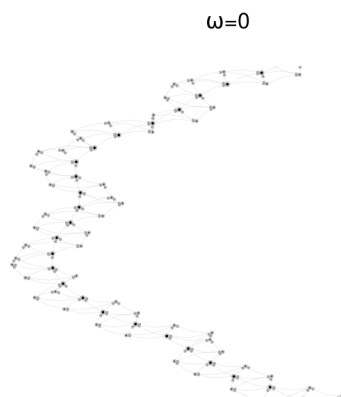

- $N = 100, r = 1, \omega = \{-1, 0, 1, 100\}^3$

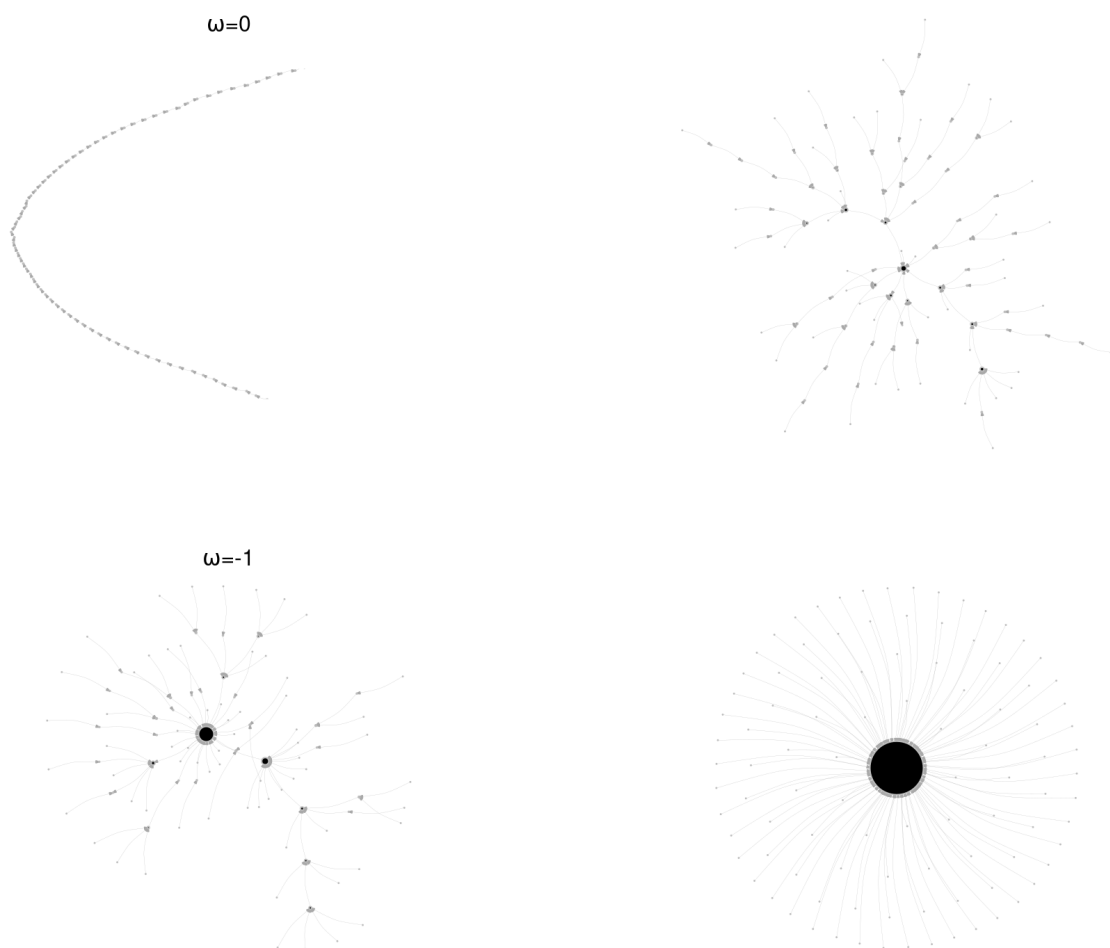

Probability that the node i is selected,

- $\omega > 0$

$$\frac{l_i}{(1+\omega)t} = \frac{r}{1+\omega} \left(\frac{1}{t_i} \right)^{\omega/(1+\omega)} t^{-1/(1+\omega)}$$

- $\omega = 0$

$$\frac{l_i}{t} = \frac{rt_i}{t}$$


- $-1 < \omega < 0$

$$\frac{l_i}{(1+\omega)t} = \frac{r}{1+\omega} \left(\frac{1}{t_i} \right)^{-\omega/(1+\omega)} t^{-1/(1+\omega)}$$

- $\omega = -1$

$$\frac{l_i}{C} \sim \frac{r}{C} e^{-(t-t_i)/C}$$

- $t_i = 1, r = 3, C < -1$

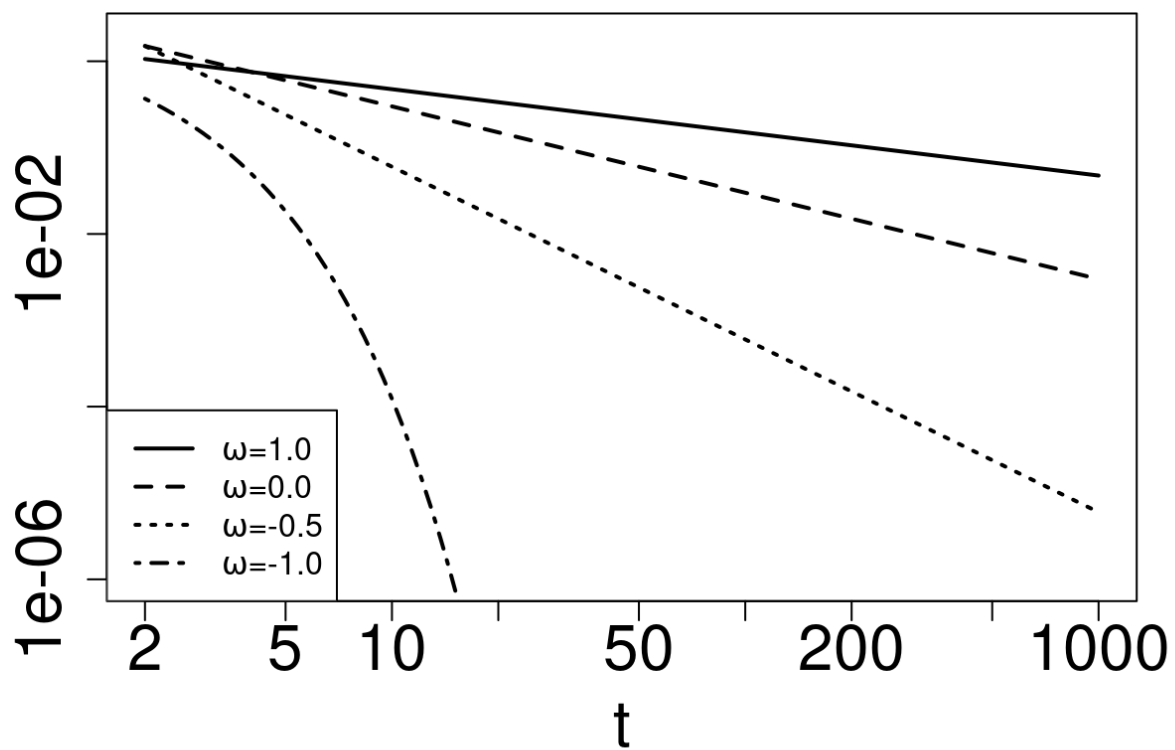

Degree distribution

- A. $\omega > 0$: Scale Free Network

$$p_k \propto k^{-\frac{1+2\omega}{\omega}}.$$

$$\gamma(\omega) = \frac{1+2\omega}{\omega}$$

- Power-law exponent γ

$$p_k \propto k^{-\gamma} = k^{-\frac{1+2\omega}{\omega}} \text{ for } k \geq k_{min}$$

- Estimator of γ

$$\hat{\gamma} = 1 + n \left[\sum_{i=1}^n \ln \frac{k_i}{k_{min}} \right]^{-1}$$

- standard error of $\hat{\gamma}$

$$\text{SE}(\hat{\gamma}) = \frac{\hat{\gamma} - 1}{\sqrt{n}}$$

```

omega2gamma<-function(omega) (1+2*omega)/omega
k_i2gamma<-function(k_i,k_min){
  n<-sum(k_i>=k_min)
  ans<-1+n/sum(ifelse(k_i>=k_min,log(k_i/k_min),0))
  se<-(ans-1)/sqrt(n)
  return(c(ans,se))
}

```

- B. $\omega = 0$: Random Network

$$p_k \propto e^{-k/r}$$

- C. $-1 < \omega < 0$:

$$p_k \propto \left(\frac{1 + |\omega|}{|\omega|} r - k \right)^{\frac{1}{|\omega|} - 2}$$

- D. $\omega \rightarrow -1$: Extended lattice

$$k_i(t) = r(2 - e^{-(t-t_i)/C}) \xrightarrow{t \rightarrow \infty} 2r$$


$$p_k = \delta_{2r,k}$$

- Numerical Study

```

load("omega_vs_gamma_hist.RData")
is<-3:14
par(mar = c(5.5, 6.0, 4.1, 2))
plot(omegas[is], gammas_emp[is], col=1, ylim=c(2,7), cex=1.5, cex.lab=2, cex.main=2, cex.
axis=2, xlab=expression(omega), ylab=expression(gamma))
arrows(omegas[is], gammas_emp[is]-gammas_emp_se[is], omegas[is], gammas_emp[is]+gamma
s_emp_se[is], col=8, ylim=c(2,5), code=3, angle=90)
curve(omega2gamma, col=1, type="l", lty=1, lwd=2, add=TRUE)
legend("topright", legend=c(expression(hat(gamma)), "Eq. (2)"), lty=c(-1,1), pch=c(1, -
1), cex=1.5, col=1)

```

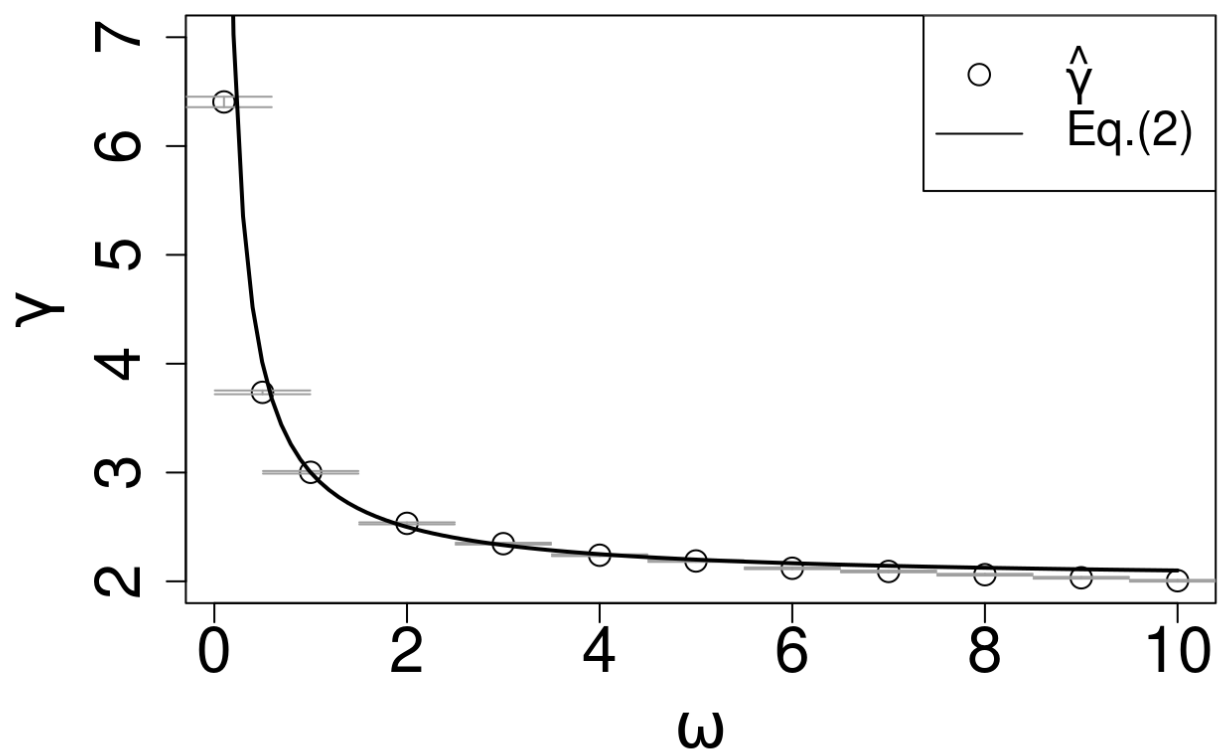

```
#pdf("omega_vs_gamma.pdf")
#par(mar = c(5.5, 6.0, 4.1, 2))
#plot(omegas[is], gammas_emp[is], col=1, ylim=c(2, 7), cex=1.5, cex.lab=2, cex.main=2, ce
x.axis=2, xlab=expression(omega), ylab=expression(gamma))
#arrows(omegas[is], gammas_emp[is]-gammas_emp_se[is], omegas[is], gammas_emp[is]+gamm
as_emp_se[is], col=8, ylim=c(2, 5), code=3, angle=90)
#curve(omega2gamma, col=1, type="l", lty=1, lwd=2, add=TRUE)
#legend("topright", legend=c(expression(hat(gamma)), "Eq. (2)"), lty=c(-1, 1), pch=c(1, -
1), cex=1.5, col=1)
#dev.off()
```

- $\omega = 0.5, 1, 3, 10$


```
t1<-expression(paste("Data:", omega, "=0.5"))
t2<-expression(paste("Data:", omega, "=1.0"))
t3<-expression(paste("Data:", omega, "=3.0"))
t4<-expression(paste("Data:", omega, "=10.0"))
t5<-expression(k^-(4-1))
t6<-expression(k^-(3-1))
t7<-expression(k^-(7/3-1))
t8<-expression(k^-(2.1-1))
ks<-seq(20, 100, 1)

par(mar = c(5.5, 6.0, 4.1, 2))
plot(hist_deg[[4]]$mids, 1-cumsum(hist_deg[[4]]$density), log="xy", xlab="k", ylab=exp
ression(paste(P, "[l]>="k))), main="", xlim=c(10, 1000), ylim=c(0.0001, 0.1), type="l", l
ty=2, col=1, lwd=2, cex.lab=2, cex.main=2, cex.axis=2)
```



```
## Warning in xy.coords(x, y, xlabel, ylabel, log): 1 y value <= 0 omitted from
## logarithmic plot
```


```
points(hist_deg[[5]]$mids,1-cumsum(hist_deg[[5]]$density),type="l",lty=2,col=8,lwd
=2)
points(hist_deg[[7]]$mids,1-cumsum(hist_deg[[7]]$density),type="l",lty=4,col=1,lwd
=2)
points(hist_deg[[14]]$mids,1-cumsum(hist_deg[[14]]$density),type="l",lty=4,col=8,l
wd=2)
points(ks,100*ks**(-3),type="l",lwd=4,col=1)
points(ks,10*ks**(-2),type="l",lwd=4,col=8)
points(ks,2*ks**(-(7/3-1)),type="l",lty=3,lwd=2,col=1)
points(ks,1*ks**(-1.1),type="l",lty=3,lwd=2,col=8)
legend("topright",legend=c(t1,t2,t3,t4,t5,t6,t7,t8),col=c(1,8),lwd=c(2,2,2,2,4,4,
3,3),lty=c(2,2,4,4,1,1,3,3),cex=1.2)
```

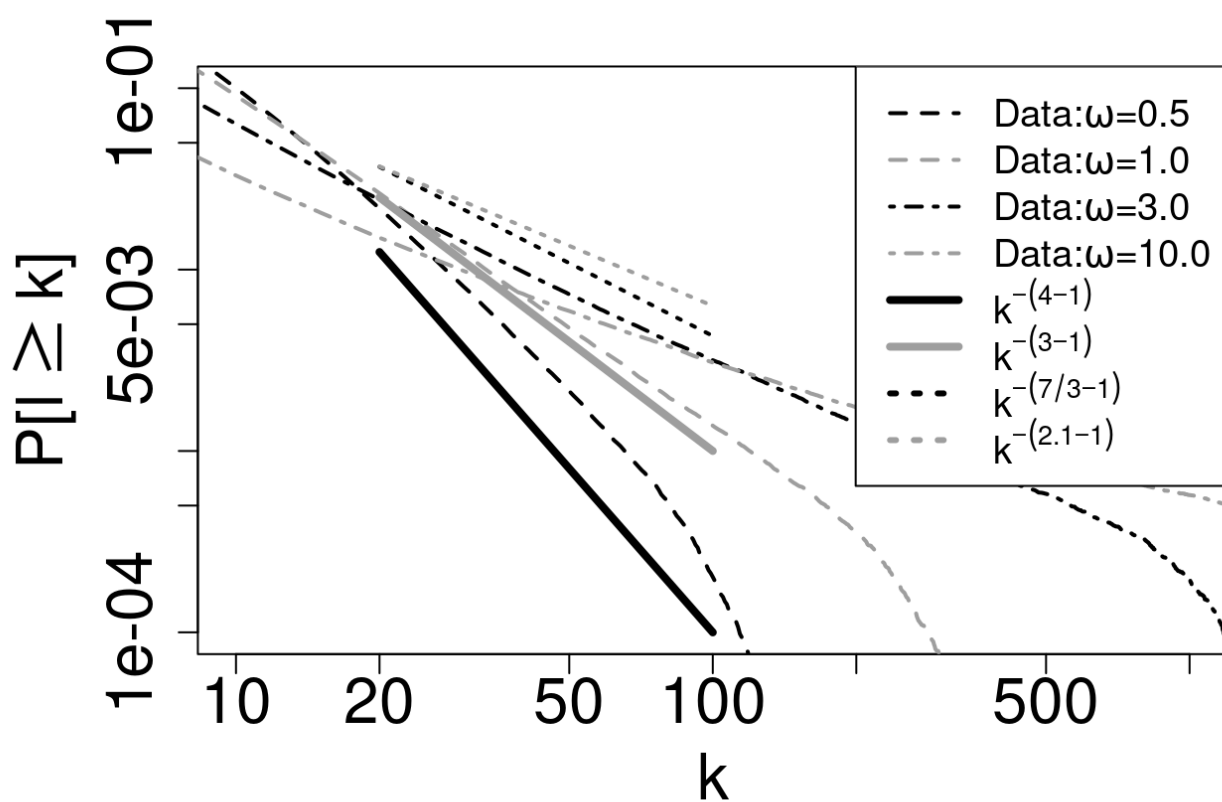

```
#pdf("omega_vs_dist_k.pdf")
#par(mar = c(5.5, 6.0, 4.1, 2))
#plot(hist_deg[[4]]$mids,1-cumsum(hist_deg[[4]]$density),log="xy",xlab="k",ylab=expression(paste(P,"[l]>="k))),main="",xlim=c(10,1000),ylim=c(0.0001,0.1),type="l",lty=2,col=1,lwd=2,cex.lab=2,cex.main=2,cex.axis=2)
#points(hist_deg[[5]]$mids,1-cumsum(hist_deg[[5]]$density),type="l",lty=2,col=8,lwd=2)
#points(hist_deg[[7]]$mids,1-cumsum(hist_deg[[7]]$density),type="l",lty=4,col=1,lwd=2)
#points(hist_deg[[14]]$mids,1-cumsum(hist_deg[[14]]$density),type="l",lty=4,col=8,lwd=2)
#points(ks,100*ks**(-3),type="l",lwd=4,col=1)
#points(ks,10*ks**(-2),type="l",lwd=4,col=8)
#points(ks,2*ks**(-(7/3-1)),type="l",lty=3,lwd=2,col=1)
#points(ks,1*ks**(-1.1),type="l",lty=3,lwd=2,col=8)
#legend("topright",legend=c(t1,t2,t3,t4,t5,t6,t7,t8),col=c(1,8),lwd=c(2,2,2,2,4,4,3,3),lty=c(2,2,4,4,1,1,3,3),cex=1.2)
#dev.off()
```

- $\omega = 0, -1$

```
r<-3
t1<-expression(paste("Data:",omega,"=0"))
t2<-expression(paste("Data:",omega,"=-1.0"))
t3<-expression(paste(0.8*exp(-k/r)))
par(mar = c(5.5, 6.0, 4.1, 2))
plot(hist_deg[[2]]$mids-0.06,hist_deg[[2]]$density,xlab="k",ylab=expression(p[k]),main="",xlim=c(3,15),ylim=c(0.0,0.7),type="h",lty=1,col=1,lwd=6,cex.lab=2,cex.main=2,cex.axis=2)
curve(0.8*exp(-x/r),add=TRUE,lty=3,lwd=2)
points(hist_deg[[1]]$mids+0.06,hist_deg[[1]]$density,type="h",lty=1,col=8,lwd=6)
legend("topright",legend=c(t1,t2,t3),col=c(1,8,1),lwd=c(4,4,2),lty=c(1,1,3),cex=1.2)
```

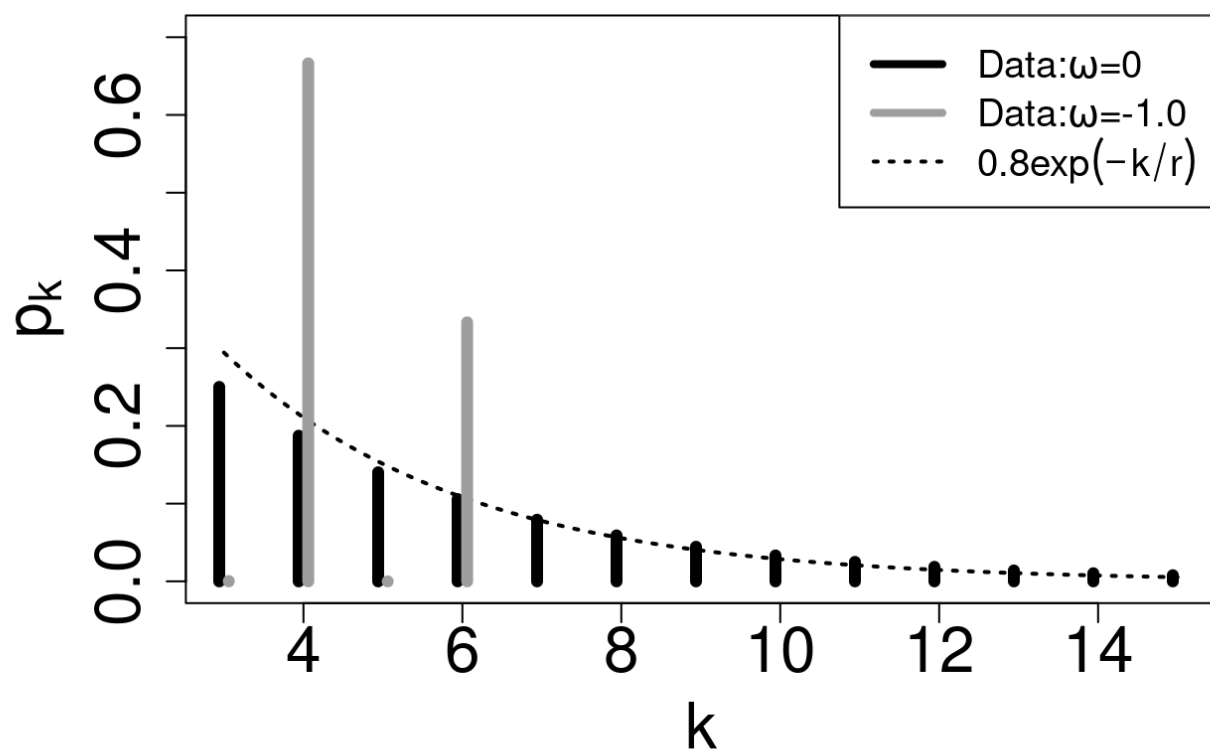





```
#pdf("omega_vs_dist_k_2.pdf")
#par(mar = c(5.5, 6.0, 4.1, 2))
#plot(hist_deg[[2]]$mids-0.06,hist_deg[[2]]$density,xlab="k",ylab=expression(p
[k]),main="",xlim=c(3,15),ylim=c(0.0,0.7),type="h",lty=1,col=1,lwd=6,cex.lab=2,ce
x.main=2,cex.axis=2)
#curve(0.8*exp(-x/r),add=TRUE,lty=3,lwd=2)
#points(hist_deg[[1]]$mids+0.06,hist_deg[[1]]$density,type="h",lty=1,col=8,lwd=6)
#legend("topright",legend=c(t1,t2,t3),col=c(1,8,1),lwd=c(4,4,2),lty=c(1,1,3),cex=
1.2)
#dev.off()
```

Degree distributions for $\omega < 0$

```

load("neg_omega_vs_deg_dist.RData")
N<-10000
r<-3
S<-100
par(mfrow=c(2,2))
par(mar = c(5.5, 6.0, 4.1, 2))
t<-expression(paste(omega,"=-1/3"))
barplot(table(net_033)/(N*S),xlab="k",main=t,cex.lab=2,cex.main=2,cex.axis=2)
t<-expression(paste(omega,"=-1/2"))
barplot(table(net_05)/(N*S),xlab="k",main=t,cex.lab=2,cex.main=2,cex.axis=2)
t<-expression(paste(omega,"=-0.9"))
barplot(table(net_09)/(N*S),xlab="k",main=t,cex.lab=2,cex.main=2,cex.axis=2)
t<-expression(paste(omega,"=-0.999"))
barplot(table(net_0999)/(N*S),xlab="k",main=t,cex.lab=2,cex.main=2,cex.axis=2)

```

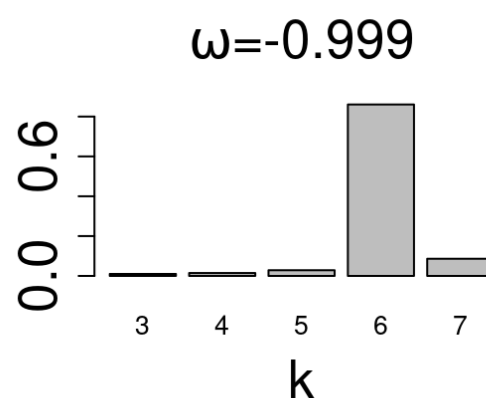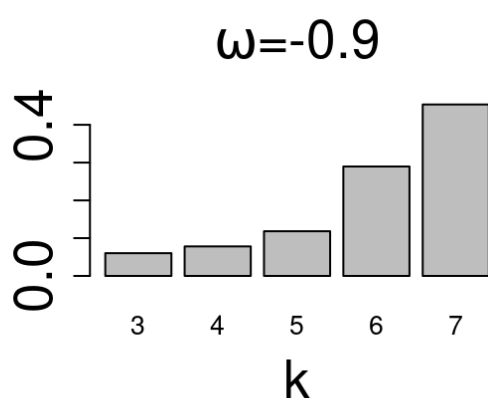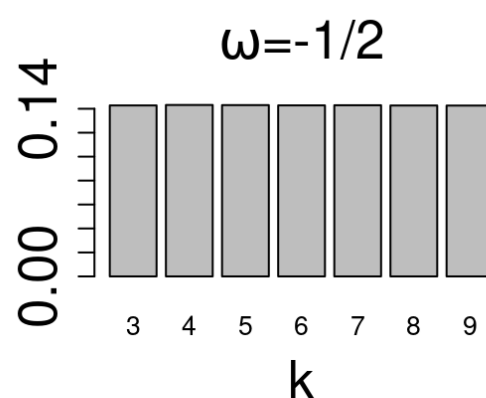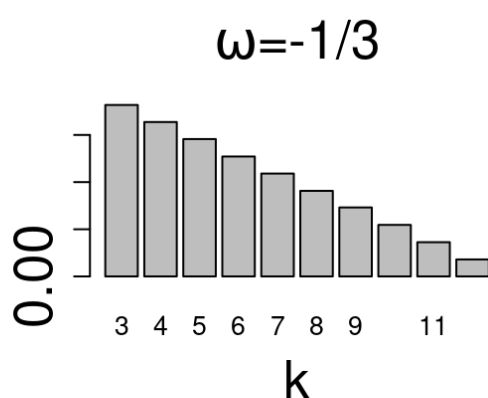

```

#pdf("neg_omega_vs_deg_dis.pdf")
#par(mfrow=c(2,2))
#par(mar = c(5.5, 6.0, 4.1, 2))
#t<-expression(paste(omega,"=-1/3"))
#barplot(table(net_033)/(N*S),xlab="k",main=t,cex.lab=2,cex.main=2,cex.axis=2)
#t<-expression(paste(omega,"=-1/2"))
#barplot(table(net_05)/(N*S),xlab="k",main=t,cex.lab=2,cex.main=2,cex.axis=2)
#t<-expression(paste(omega,"=-0.9"))
#barplot(table(net_09)/(N*S),xlab="k",main=t,cex.lab=2,cex.main=2,cex.axis=2)
#t<-expression(paste(omega,"=-0.999"))
#barplot(table(net_0999)/(N*S),xlab="k",main=t,cex.lab=2,cex.main=2,cex.axis=2)
#dev.off()

```

Cluster Coef. and Average Distance


- WS model
- $N = 10^3, 10^4, r = 3$
- Network Model for $\omega < 0$
- $N = 10^3, 10^4, r = 3, \omega < 0$
- $N = 1000, r = 3, S = 10^3, \omega \geq 0, -1$

```
load("WS_N1000.RData")
load("NETWORK_neg_omega_N1000.RData")
os1<-os
o2dis1<-o2dis
o2cc1<-o2cc
load("NETWORK_omega.RData")
os2<-os
o2dis2<-o2dis
o2cc2<-o2cc
os<-c(os1,os2)
o2dis<-c(o2dis1,o2dis2)
o2cc<-c(o2cc1,o2cc2)
c1<-o2dis[1]
c2<-o2cc[1]
t1<-expression(paste("L(",omega,")/L(0)"))
t2<-expression(paste("C(",omega,")/C(0)"))
xlabel=expression(paste("1+",omega,"p"))
t3<-expression(paste("p=1,",omega,"=0"))

par(mar = c(5.5, 6.0, 4.1, 2))
plot(1+os,o2dis/c1,pch=20,cex=1,col=1,ylim=c(0,1.6),log="x",xlim=c(0.00000001,10
0),xlab=xlabel,ylab="",cex.lab=2,cex.main=2,cex.axis=2,type="l",lty=1,lwd=2)
```

```
## Warning in xy.coords(x, y, xlabel, ylabel, log): 2 x values <= 0 omitted from
## logarithmic plot
```

```
points(1+os,o2cc/c2,pch=20,cex=1,col=8,type="l",lwd=2)
points(ps,p2dis/p2dis[1],type="l",cex=1,lty=3,col=1,lwd=3)
points(ps,p2cc/p2cc[1],type="l",cex=1,lty=2,col=8,lwd=1)
abline(v=1,col=8,lwd=2,lty=2)
legend("bottomleft",legend=c(t1,t2,"WS:L(p)/L(0)","WS:C(p)/C(0)",t3),pch=-1,lty=c
(1,1,3,3,2),lwd=c(2,2,3,3,2),cex=0.8,col=c(1,8,1,8,8))
```

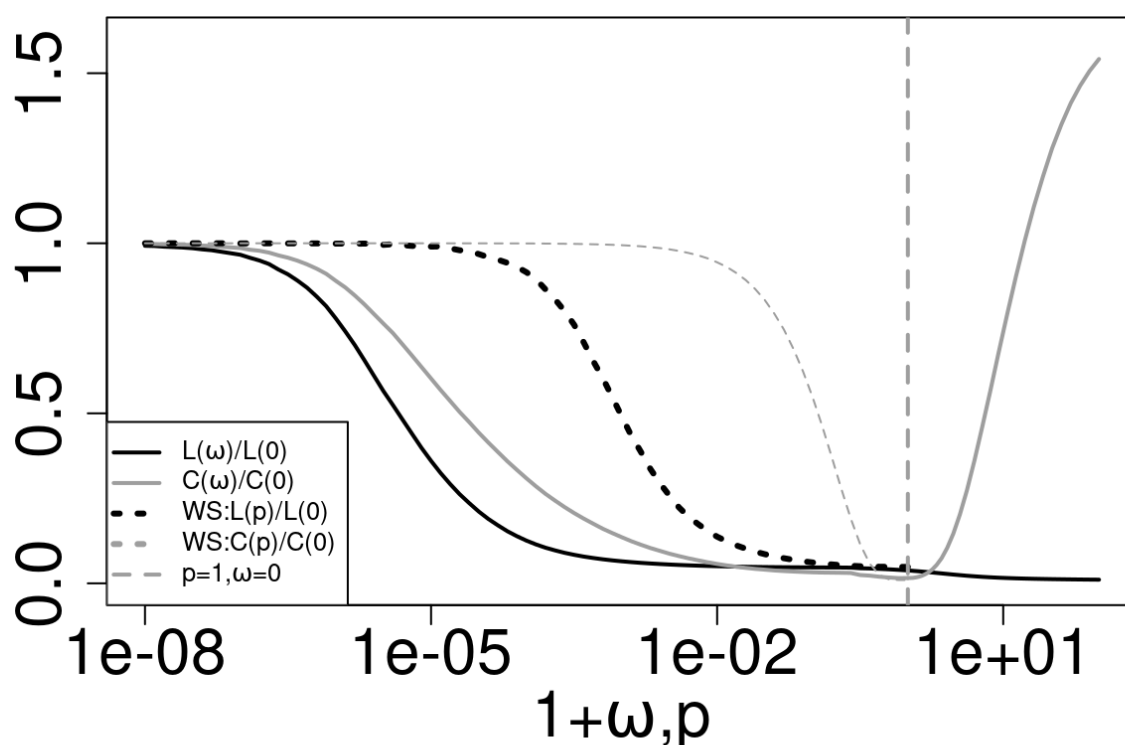


```
#pdf("omega_vs_CL.pdf")
#par(mar = c(5.5, 6.0, 4.1, 2))
#plot(1+os,o2dis/c1,pch=20,cex=1,col=1,ylim=c(0,1.6),log="x",xlim=c(0.00000001,10
0),xlab=xla#bel,ylab="",cex.lab=2,cex.main=2,cex.axis=2,type="l",lty=1,lwd=2)
#points(1+os,o2cc/c2,pch=20,cex=1,col=8,type="l",lwd=2)
#points(ps,p2dis/p2dis[1],type="l",cex=1,lty=3,col=1,lwd=3)
#points(ps,p2cc/p2cc[1],type="l",cex=1,lty=2,col=8,lwd=1)
#abline(v=1,col=8,lwd=2,lty=2)
#legend("topleft",legend=c(t1,t2,"WS:L(p)/L(0)","WS:C(p)/C(0)",t3),pch=-1,lty=c(1,
1,3,3,2),lwd=c(2,2,3,3,2),cex=1.2,col=c(1,8,1,8,8))
#dev.off()
```

- Check of Finite Size Effect

```
load("NETWORK_neg_omega_N100.RData")
load("NETWORK_neg_omega_N1000.RData")
load("NETWORK_neg_omega_N10000.RData")
t1<-expression(paste("L(",omega,")/L(0),N=10"^4))
t2<-expression(paste("C(",omega,")/C(0),N=10"^4))
t3<-expression(paste("L(",omega,")/L(0),N=10"^5))
t4<-expression(paste("C(",omega,")/C(0),N=10"^5))
t5<-expression(paste("L(",omega,")/L(0),N=10"^3))
t6<-expression(paste("C(",omega,")/C(0),N=10"^3))
xlabel=expression(paste("1+",omega))
par(mar = c(5.5, 6.0, 4.1, 2))
plot(1+os,o2dis/o2dis[1],pch=20,cex=1,col=1,ylim=c(0,1.2),log="x",xlim=c(0.0000000
1,1),xlab=xlabel,ylab="",cex.lab=2,cex.main=2,cex.axis=2,type="l",lty=1,lwd=2)
```

```
## Warning in xy.coords(x, y, xlabel, ylabel, log): 1 x value <= 0 omitted from
## logarithmic plot
```

```
points(1+os,o2cc/o2cc[1],pch=20,cex=1,col=8,type="l",lwd=2)
points(1+os,o2dis2/o2dis2[1],pch=20,cex=1,col=1,type="l",lty=2,lwd=2)
points(1+os,o2cc2/o2cc2[1],pch=20,cex=1,col=8,type="l",lty=2,lwd=2)
points(1+os,o2dis3/o2dis3[1],pch=20,cex=1,col=1,type="l",lty=4,lwd=2)
points(1+os,o2cc3/o2cc3[1],pch=20,cex=1,col=8,type="l",lty=4,lwd=2)
legend("topright",legend=c(t1,t2,t3,t4,t5,t6),pch=-1,lty=c(1,1,3,3,4,4),lwd=c(2,2,
3,3,2,2),cex=0.8,col=c(1,8,1,8,1,8))
```

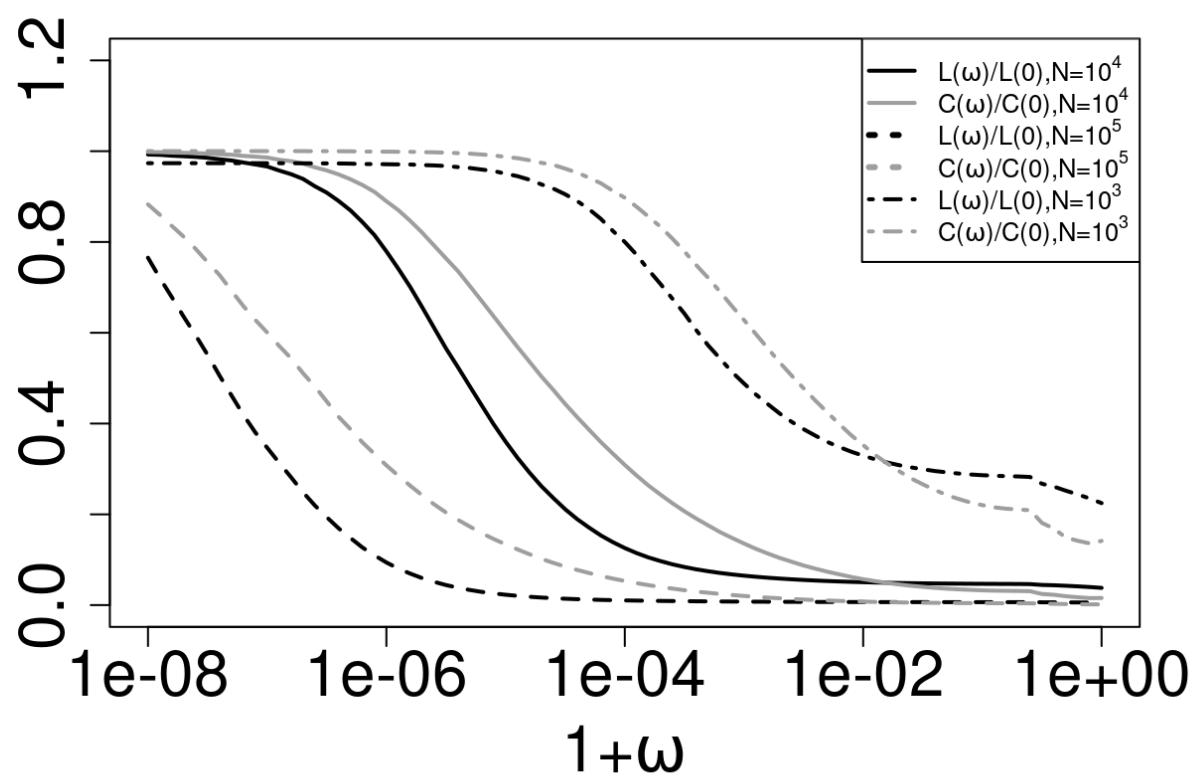

```
#pdf("omega_vs_CL2.pdf")
#par(mar = c(5.5, 6.0, 4.1, 2))
#plot(1+os,o2dis/o2dis[1],pch=20,cex=1,col=1,ylim=c(0,1.2),log="x",xlim=c(0.000000
01,1),xlab=xlabel,ylabel="",cex.lab=2,cex.main=2,cex.axis=2,type="l",lty=1,lwd=2)
#points(1+os,o2cc/o2cc[1],pch=20,cex=1,col=8,type="l",lwd=2)
#points(1+os,o2dis2/o2dis2[1],pch=20,cex=1,col=1,type="l",lty=2,lwd=2)
#points(1+os,o2cc2/o2cc2[1],pch=20,cex=1,col=8,type="l",lty=2,lwd=2)
#points(1+os,o2dis3/o2dis3[1],pch=20,cex=1,col=1,type="l",lty=4,lwd=2)
#points(1+os,o2cc3/o2cc3[1],pch=20,cex=1,col=8,type="l",lty=4,lwd=2)
#legend("topright",legend=c(t1,t2,t3,t4,t5,t6),pch=-1,lty=c(1,1,3,3,4,4),lwd=c(2,
2,3,3,2,2),cex=1.2,col=c(1,8,1,8,1,8))
#dev.off()
```

- WS Model

```

load("WS_N1000.RData")
load("WS_N10000.RData")
t1<-expression(paste("L(p)/L(0)",N=10"^4))
t2<-expression(paste("C(p)/C(0)",N=10"^4))
t3<-expression(paste("L(p)/L(0)",N=10"^5))
t4<-expression(paste("C(p)/C(0)",N=10"^5))

c1<-p2dis[1]
c2<-p2cc[1]
c12<-p2dis2[1]
c22<-p2cc2[1]
par(mar = c(5.5, 6.0, 4.1, 2))
plot(ps,p2dis/p2dis[1],pch=20,cex=1,col=1,ylim=c(0,1.6),log="x",xlim=c(0.00000001,
1),xlab="p",ylab="",cex.lab=2,cex.main=2,cex.axis=2,type="l",lty=1,lwd=2)

```

```

## Warning in xy.coords(x, y, xlabel, ylabel, log): 1 x value <= 0 omitted from
## logarithmic plot

```

```

points(ps,p2cc/p2cc[1],pch=20,cex=1,col=8,type="l",lwd=2)
points(ps,p2dis2/p2dis2[1],pch=20,cex=1,col=1,type="l",lty=2,lwd=3)
points(ps,p2cc2/p2cc2[1],pch=20,cex=1,col=8,type="l",lty=2,lwd=3)
legend("topright",legend=c(t1,t2,t1,t2),pch=-1,lty=c(1,1,3,3,2),lwd=c(2,2,3,3,2),c
ex=0.8,col=c(1,8,1,8,8))

```

