

ORDER MANAGEMENT SYSTEM

Pepperyfry furniture E-commerce Database management system

1. Database Design


1.1 Orders Table

Attribute	Data Type	Key Type / Constraint
Order_ID	NUMBER	Primary Key
Customer_ID	NUMBER	Foreign Key
Order_Date	DATE	NOT NULL
Total_Amount	NUMBER(10,2)	CHECK (> 0)
Order_Status	VARCHAR2(20)	NOT NULL
Payment_ID	NUMBER	Foreign Key

1.2 Orders_Details Table

Attribute	Data Type	Key Type / Constraint
Order_Detail_ID	NUMBER	Primary Key
Order_ID	NUMBER	Foreign Key
Product_ID	NUMBER	Foreign Key
Quantity	NUMBER	CHECK (> 0)
Unit_Price	NUMBER(10,2)	CHECK (> 0)

2. Table Relationships

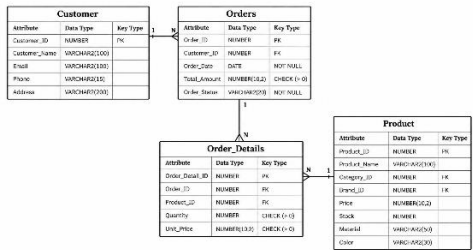

3. Table Creation

3.1 Create Order Table

```
SQL> CREATE TABLE Orders (  
2     Order_ID NUMBER PRIMARY KEY,  
3     Customer_ID NUMBER,  
4     Order_Date DATE NOT NULL,  
5     Total_Amount NUMBER(10,2) CHECK (Total_Amount > 0),  
6     Order_Status VARCHAR2(20) NOT NULL,  
7     FOREIGN KEY (Customer_ID) REFERENCES Customer(Customer_ID)  
8 );
```

Table created.

3.2 Create Order_Details

```
SQL> CREATE TABLE Order_Details (  
2     Order_Detail_ID NUMBER PRIMARY KEY,  
3     Order_ID NUMBER,  
4     Product_ID NUMBER,  
5     Quantity NUMBER CHECK (Quantity > 0),  
6     Unit_Price NUMBER(10,2) CHECK (Unit_Price > 0),  
7     FOREIGN KEY (Order_ID) REFERENCES Orders(Order_ID),  
8     FOREIGN KEY (Product_ID) REFERENCES Product(Product_ID)  
9 );
```

Table created.

4. Order Data Insertion

```
SQL>  
SQL> INSERT INTO Orders VALUES  
2 (1, 101, TO_DATE('2026-09-01','YYYY-MM-DD'), 25000, 'Delivered');  
  
1 row created.  
  
SQL>  
SQL> INSERT INTO Orders VALUES  
2 (2, 102, TO_DATE('2026-09-02','YYYY-MM-DD'), 18500, 'Shipped');  
  
1 row created.  
  
SQL>  
SQL> INSERT INTO Orders VALUES  
2 (3, 103, TO_DATE('2026-09-03','YYYY-MM-DD'), 32000, 'Processing');  
  
1 row created.  
  
SQL>  
SQL> INSERT INTO Orders VALUES  
2 (4, 104, TO_DATE('2026-09-04','YYYY-MM-DD'), 12500, 'Delivered');  
  
1 row created.  
  
SQL>  
SQL> INSERT INTO Orders VALUES  
2 (5, 105, TO_DATE('2026-09-05','YYYY-MM-DD'), 45000, 'Shipped');  
  
1 row created.
```

5. Order_Details Data Insertion

```
SQL> INSERT INTO Order_Details VALUES
  2  (1, 1, 1, 2, 12500);

1 row created.

SQL>
SQL> INSERT INTO Order_Details VALUES
  2  (2, 2, 2, 1, 18500);

1 row created.

SQL>
SQL> INSERT INTO Order_Details VALUES
  2  (3, 3, 3, 2, 16000);

1 row created.

SQL>
SQL> INSERT INTO Order_Details VALUES
  2  (4, 4, 4, 1, 12500);

1 row created.

SQL>
SQL> INSERT INTO Order_Details VALUES
  2  (5, 5, 5, 3, 15000);

1 row created.
```

6. Order Modification Operations

6.1 Modify Order Amount

```
SQL> UPDATE Orders
  2  SET Total_Amount = 28000
  3  WHERE Order_ID = 1;

1 row updated.

SQL> UPDATE Orders
  2  SET Total_Amount = 20000
  3  WHERE Order_ID = 2;

1 row updated.

SQL> SELECT Order_ID, Total_Amount
  2  FROM Orders
  3  WHERE Order_ID IN (1, 2);

ORDER_ID TOTAL_AMOUNT
-----
1         28000
2         20000
```

6.2 Modify Order Data

```
SQL> UPDATE Orders
  2 SET Total_Amount = 30000
  3 WHERE Order_ID = 1;

1 row updated.

SQL> UPDATE Orders
  2 SET Order_Status = 'Shipped'
  3 WHERE Order_ID = 2;

1 row updated.

SQL> SELECT Order_ID, Order_Date, Total_Amount, Order_Status
  2 FROM Orders
  3 WHERE Order_ID IN (1, 2);
```

ORDER_ID	ORDER_DAT	TOTAL_AMOUNT	ORDER_STATUS
1	01-SEP-26	30000	Delivered
2	02-SEP-26	20000	Shipped

7. Order_Details Modification

```
SQL> UPDATE Order_Details
  2 SET Quantity = 4
  3 WHERE Order_Detail_ID = 1;

1 row updated.

SQL> UPDATE Order_Details
  2 SET Unit_Price = 16000
  3 WHERE Order_Detail_ID = 2;

1 row updated.

SQL> SELECT Order_Detail_ID, Order_ID, Product_ID, Quantity, Unit_Price
  2 FROM Order_Details
  3 WHERE Order_Detail_ID IN (1, 2);
```

ORDER_DETAIL_ID	ORDER_ID	PRODUCT_ID	QUANTITY	UNIT_PRICE
1	1	1	4	12500
2	2	2	1	16000

8. Customer Order History Report

```

SQL> SELECT
2     c.Customer_ID,
3     c.FIRST_NAME || ' ' || c.LAST_NAME AS Customer_Name,
4     o.Order_ID,
5     o.Order_Date,
6     p.Product_Name,
7     od.Quantity,
8     od.Unit_Price,
9     o.Total_Amount,
10    o.Order_Status
11 FROM Customer c
12 JOIN Orders o
13     ON c.Customer_ID = o.Customer_ID
14 JOIN Order_Details od
15     ON o.Order_ID = od.Order_ID
16 JOIN Product p
17     ON od.Product_ID = p.Product_ID
18 ORDER BY c.Customer_ID, o.Order_Date;

CUSTOMER_ID
-----
CUSTOMER_NAME
-----
ORDER_ID ORDER_DAT
-----
PRODUCT_NAME
-----
QUANTITY UNIT_PRICE TOTAL_AMOUNT ORDER_STATUS
-----
101
Ananya Sharma
1 01-SEP-26

```

9. Customer-wise Order Summary

```

SQL> SELECT
2     c.Customer_ID,
3     c.FIRST_NAME || ' ' || c.LAST_NAME AS Customer_Name,
4     COUNT(o.Order_ID) AS Total_Orders,
5     SUM(o.Total_Amount) AS Total_Amount
6 FROM Customer c
7 JOIN Orders o
8     ON c.Customer_ID = o.Customer_ID
9 GROUP BY
10    c.Customer_ID,
11    c.FIRST_NAME,
12    c.LAST_NAME
13 ORDER BY c.Customer_ID;

CUSTOMER_ID
-----
CUSTOMER_NAME
-----
TOTAL_ORDERS TOTAL_AMOUNT
-----
101
Ananya Sharma
1 25000
102
Priya Kumar
1 18500
CUSTOMER_ID
-----
CUSTOMER_NAME
-----

```