


Code

```
#include <stdint.h>
#define u8 uint8_t

int main() {
    u8 a[8] = {6, 5, 3, 7, 0, 1, 4, 2};
    u8 *p = &a[0];
    u8 *q = &a[2];
    u8 *r = &a[3];
    // <<< Evaluate values at here!
}
```

Memory

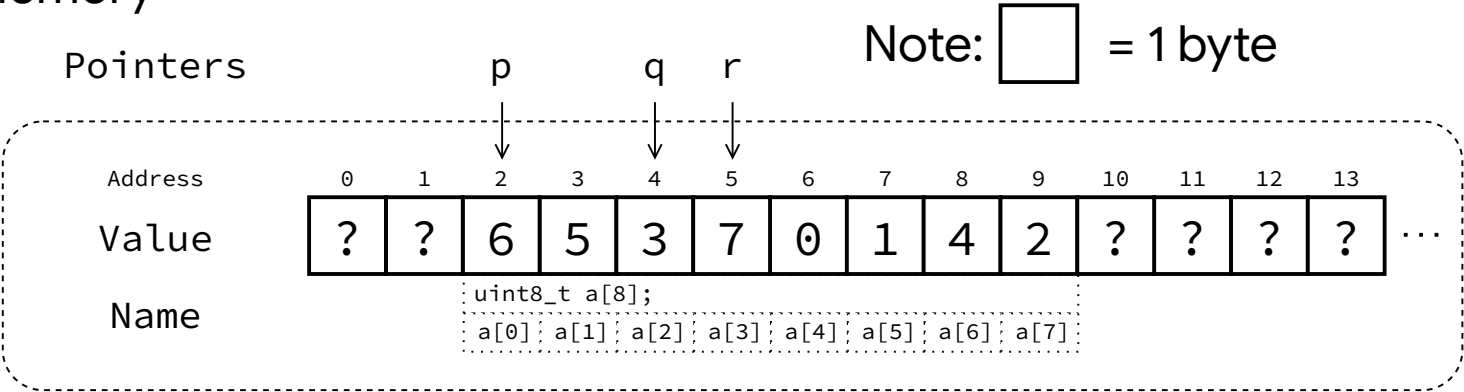

Q. Fill answers in digits (or ? for undefined behavior)

Note: _ is a place holder
So the cell on row "a[_]" and col "0" should be filled with the value of "a[0]"

	0	1	a[0]	a[1]	p	q	r	*p	*q	*r
-	0	1	6	5	2	4	5	6	3	7
1+_	1	2	7	6	3	5	6	7	4	8
(u8*)_	?	?	0	7	6	3	7	0	5	4
((u8)_)	?	?	?	1	0	5	1	?	7	3
a[_]	6	5	4	1	3	0	1	4	7	2
a[1+_]	5	3	2	4	7	1	4	2	0	?
r[_]	?	?	0	7	6	3	7	0	5	1
r[3+_]	5	3	2	4	7	1	4	2	0	?
((u8*)_) [0]	?	?	?	1	0	5	1	?	7	3
((u8*)_) [2]	?	?	6	2	4	7	2	6	1	0