



UniFi Access API Documentation

Leverage the power of the UniFi Access API



1. Introduction	16
1.1 Create API Token & Download API Documentation	16
1.2 Obtain Your Hostname	16
1.3 Use the API	16
1.4 Security Configuration	16
1.5 Important Notes	17
2. Overview	18
2.1 API Token	18
2.2 HTTP Status Code Reference	18
2.3 Success Code	18
2.4 Error Code	18
2.5 HTTP Verbs	20
2.6 API Host	20
2.7 Request Header	20
2.8 Response Schema	20
3. User	22
3.1 Schemas	22
3.2 User Registration	22
Request Header	23
Request Body	23
Response Body	23
Response Sample	23
Request Sample	23
3.3 Update User	24
Request Header	24
Request Path	24
Request Body	24
Response Body	25
Response Sample	25
Request Sample	25
3.4 Fetch User	25
Request Header	25
Request Path	26
Query Parameters	26
Response Body	26
Response Sample	26
Request Sample	27
3.5 Fetch All Users	27
Request Header	27
Query Parameters	28
Response Body	28
Response Sample	28

Request Sample	29
3.6 Assign Access Policy to User	30
Request Header	30
Request Path	30
Request Body	30
Request Sample: Shell/cURL	30
Response Sample	31
3.7 Assign NFC Card to User	31
Request Header	31
Request Path	31
Request Body	31
Request Sample: Shell/cURL	31
Response Sample	32
3.8 Unassign NFC Card from User	32
Request Header	32
Request Path	32
Request Body	32
Request Sample: Shell/cURL	33
Response Sample	33
3.9 Assign PIN Code to User	33
Request Header	33
Request Path	33
Request Body	33
Request Sample: Shell/cURL	34
Response Sample	34
3.10 Unassign PIN Code from User	34
Request Header	34
Request Path	34
Request Sample: Shell/cURL	34
Response Sample	35
3.11 Create User Group	35
Request Header	35
Request Body	35
Request Sample: Shell/cURL	35
Response Sample	36
3.12 Fetch All User Groups	36
Request Header	36
Request Sample: Shell/cURL	36
Response Sample	37
3.13 Fetch User Group	37
Request Header	37

Request Path	37
Request Sample: Shell/cURL	37
Response Sample	38
3.14 Update User Group	38
Request Header	38
Request Path	39
Request Body	39
Request Sample: Shell/cURL	39
Response Sample	39
3.15 Delete User Group	39
Request Header	40
Request Path	40
Request Sample: Shell/cURL	40
Response Sample	40
3.16 Assign User to User Group	40
Request Header	40
Request Path	41
Request Body	41
Request Sample: Shell/cURL	41
Response Sample	41
3.17 Unassign User from User Group	41
Request Header	42
Request Path	42
Request Body	42
Request Sample: Shell/cURL	42
Response Sample	42
3.18 Fetch Users in a User Group	42
Request Header	43
Request Path	43
Response Body	43
Request Sample: Shell/cURL	43
Response Sample	43
3.19 Fetch All Users in a User Group	44
Request Header	44
Request Path	44
Response Body	44
Request Sample: Shell/cURL	44
Response Sample	45
3.20 Fetch the Access Policies Assigned to a User	45
Request Header	45
Request Path	46

Query Parameters	46
Response Body	46
Request Sample: Shell/cURL	46
Response Sample	46
3.21 Assign Access Policy to User Group	47
Request Header	47
Request Path	47
Request Body	47
Request Sample: Shell/cURL	47
Response Sample	48
3.22 Fetch the Access Policies Assigned to a User Group	48
Request Header	48
Request Path	48
Response Body	49
Request Sample: Shell/cURL	49
Response Sample	49
4. Visitor	50
4.1 Schemas	50
4.2 Create Visitor	51
Request Header	51
Request Body	51
Response Body	52
Response Sample	52
Request Sample	53
4.3 Fetch Visitor	55
Request Header	55
Request Path	55
Response Body	55
Response Sample	55
Request Sample	56
4.4 Fetch All Visitors	56
Request Header	56
Query Parameters	57
Response Body	57
Request Sample	57
4.5 Update Visitor	57
Request Header	58
Request Body	58
Request Path	59
Response Body	59
Response Sample	59
Request Sample	60

4.6 Delete Visitor	62
Request Header	62
Request Path	62
Query Parameters	62
Response Sample	62
Request Sample	62
4.7 Assign NFC Card To Visitor	63
Request Header	63
Request Path	63
Request Body	63
Request Sample: Shell/cURL	63
Response Sample	64
4.8 Unassign NFC Card From Visitor	64
Request Header	64
Request Path	64
Request Body	64
Request Sample: Shell/cURL	65
Response Sample	65
4.9 Assign PIN Code To Visitor	65
Request Header	65
Request Path	65
Request Body	65
Request Sample: Shell/cURL	66
Response Sample	66
4.10 Unassign PIN Code From Visitor	66
Request Header	66
Request Path	66
Request Sample: Shell/cURL	66
Response Sample	67
5. Access Policy	68
5.1 Access Policy Schemas	68
5.2 Create Access Policy	68
Request Header	68
Request Body	68
Response Body	69
Request Sample: Shell/cURL	69
Response Sample	70
5.3 Update Access Policy	70
Request Header	70
Request Path	71
Request Body	71

Request Sample: Shell/cURL	71
Response Body	72
5.4 Delete Access Policy	72
Request Header	72
Request Body	72
Request Sample: Shell/cURL	72
Response Sample	73
5.5 Fetch Access Policy	73
Request Header	73
Request Body	73
Response Body	73
Request Sample: Shell/cURL	73
Response Sample	74
5.6 Fetch All Access Policies	74
Request Header	74
Response Body	75
Request Sample: Shell/cURL	75
Response Sample	75
5.7 Holiday Group Schemas	76
5.8 Create Holiday Group	77
Request Header	77
Request Body	77
Response Body	78
Request Sample: Shell/cURL	78
Response Sample	79
5.9 Update Holiday Group	79
Request Header	80
Request Path	80
Request Body	80
Response Body	80
Request Sample: Shell/cURL	80
Response Sample	81
5.10 Delete Holiday Group	82
Request Header	82
Request Path	82
Request Sample: Shell/cURL	82
Response Sample	83
5.11 Fetch Holiday Group	83
Request Header	83
Request Body	83
Response Body	83

Request Sample: Shell/cURL	83
Response Sample	84
5.12 Fetch All Holiday Groups	84
Request Header	85
Request Body	85
Response Body	85
Request Sample: Shell/cURL	85
Response Sample	85
5.13 Schedule Schemas	86
5.14 Create Schedule	87
Request Header	88
Request Body	88
Response Body	88
Request Sample: Shell/cURL	88
Response Sample	89
5.15 Update Schedule	91
Request Header	91
Request Path	91
Request Body	92
Response Body	92
Request Sample: Shell/cURL	92
Response Sample	93
5.16 Fetch Schedule	93
Request Header	94
Request Path	94
Response Body	94
Request Sample: Shell/cURL	94
Response Sample	94
5.17 Fetch All Schedules	96
Request Header	96
Response Body	96
Request Sample: Shell/cURL	97
Response Sample	97
5.18 Delete Schedule	97
Request Header	98
Request Path	98
Request Sample: Shell/cURL	98
Response Sample	98
6. Credential	99
6.1 Generate PIN Code	99
Request Header	99
Response Body	99

Request Sample: Shell/cURL	99
Response Sample	99
6.2 Enroll NFC Card	100
Request Header	100
Request Body	100
Response Body	100
Request Sample	100
Response Sample	100
6.3 Fetch NFC Card Enrollment Status	101
Request Header	101
Request Body	101
Response Body	101
Request Sample	101
Response Sample	102
6.4 Remove a Session Created for NFC Card Enrollment	102
Request Header	102
Request Body	102
Request Sample	102
Response Sample	102
6.5 Flowchart for NFC Card Enrollment	103
6.6 NFC Card Schemas	105
6.7 Fetch NFC Card	105
Request Header	105
Request Path	105
Response Body	106
Response Sample	106
Request Sample	106
6.8 Fetch All NFC Cards	106
Request Header	107
Query Parameters	107
Response Body	107
Response Sample	107
Request Sample	108
6.9 Delete NFC Card	108
Request Header	109
Request Path	109
Response Sample	109
Request Sample	109
7. Space	110
7.1 Fetch Door Group Topology	110
Request Header	110
Response Body	110
Request Sample	111

Response Sample	111
7.2 Create Door Group	112
Request Header	113
Request Body	113
Response Body	113
Request Sample	113
Response Sample	114
7.3 Fetch Door Group	114
Request Header	114
Request Path	114
Response Body	114
Request Sample	115
Response Sample	115
7.4 Update Door Group	116
Request Header	116
Request Path	117
Request Body	117
Response Body	117
Request Sample	117
Response Sample	118
7.5 Fetch All Door Groups	118
Request Header	118
Response Body	119
Response Sample	119
Response Sample	119
7.6 Delete Door Group	120
Request Header	120
Request Path	120
Request Sample	120
Response Sample	121
7.7 Fetch Door	121
Request Header	121
Request Path	121
Response Body	121
Request Sample	122
Response Sample	122
7.8 Fetch All Doors	123
Request Header	123
Response Body	123
Request Sample	123
Response Sample	124
7.9 Remote Door Unlocking	124

Request Header	125
Request Path	125
Request Sample	125
Response Sample	125
7.10 Set Temporary Door Locking Rule	125
Request Header	126
Request Path	126
Request Body	126
Request Sample	126
Response Sample	127
7.11 Fetch Door Locking Rule	128
Request Header	128
Request Path	128
Response Body	128
Request Sample	128
Response Sample	129
7.12 Set Door Emergency Status	129
Request Header	130
Request Body	130
Request Sample	130
Response Sample	131
7.13 Fetch Door Emergency Status	131
Request Header	131
Response Body	131
Request Sample	132
Response Sample	132
8. Device	133
8.1 Fetch Devices	133
Request Header	133
Response Body	133
Request Sample: Shell/cURL	133
Response Body	133
9. System Log	135
9.1 Topic Reference	135
9.1.1 Event Structure	135
9.2 Fetch System Logs	136
Request Header	137
Query Parameters	137
Request Body	137
Response Body	137
Request Sample: Shell/cURL	137
Response Body	138

9.3 Export System Logs	139
Request Header	139
Request Body	139
Request Sample: Shell/cURL	139
9.4 Fetch Resources in System Logs	140
Request Header	140
Request Body	140
Response Sample	140
Request Sample: Shell/cURL	141
9.5 Fetch Static Resources in System Logs	141
Request Header	141
Request Body	141
Request Sample: Shell/cURL	142
10. UniFi Identity	143
10.1 Send UniFi Identity Invitations	143
Request Header	143
Request Body	143
Request Sample: Shell/cURL	143
Response Body	144
10.2 Fetch Available Resources	144
Request Header	144
Query Parameters	144
Response Body	145
Request Sample: Shell/cURL	145
Response Sample	145
10.3 Assign Resources to Users	146
Request Header	146
Request Path	146
Request Body	146
Request Sample: Shell/cURL	146
Response Sample	147
10.4 Fetch Resources Assigned to Users	147
Request Header	147
Request Path	147
Response Body	147
Request Sample: Shell/cURL	147
Response Sample	148
10.5 Assign Resources to User Groups	148
Request Header	149
Request Path	149
Request Body	149

Request Sample: Shell/cURL	149
Response Sample	149
10.6 Fetch the Resources Assigned to User Groups	149
Request Header	150
Request Path	150
Response Body	150
Request Sample: Shell/cURL	150
Response Sample	150
11. Notification	152
11.1 Fetch Notifications [WebSocket]	152
Request Sample: wscat	152
WebSocket Payload	152
11.2 List of Supported Webhook Events [Webhook]	154
11.3 Fetch Webhook Endpoints List [Webhook]	154
Request Header	155
Response Body	155
Request Sample: Shell/cURL	155
Response Sample	155
11.4 Add Webhook Endpoints [Webhook]	156
Request Header	156
Request Body	156
Request Sample: Shell/cURL	156
Response Sample	157
11.5 Update Webhook Endpoints [Webhook]	157
Request Header	157
Request Path	158
Request Body	158
Request Sample: Shell/cURL	158
Response Sample	158
11.6 Delete Webhook Endpoints [Webhook]	159
Request Header	159
Request Path	159
Request Sample: Shell/cURL	159
Response Sample	160
11.7 Allow Webhook Endpoint Owner to Receive Webhook Events [Webhook]	160
Request from UniFi Access	160
Response Payload Sample	160
Handle Request (Using GO as a Sample)	165
Handle Request (Using Rust as a Sample)	168
Handle Request (Using Python as a Sample)	171
12. API Server	173

12.1 Upload HTTPS Certificate	173
Request Header	173
Request Body	173
Response Sample	173
Request Sample	173
12.2 Delete HTTPS Certificate	174
Request Header	174
Response Sample	174
Request Sample	174
13. Change Logs	175
V2.2.6	175
V2.2.10	175

1. Introduction

Welcome to the UniFi Access API guide, which provides a detailed step-by-step explanation of how to utilize the API effectively. The UniFi Access API is an open interface protocol that allows developers to interact with a specific service using predefined interfaces.

1.1 Create API Token & Download API Documentation

Before you can use the UniFi Access API, you need to obtain a valid API Token for authentication and access control. Follow the steps below to create an API Token:

1. Sign in to your UniFi Portal (<https://account.ui.com/login>) using your web browser.
2. Select the UniFi Console where the UniFi Access application is installed.
3. Go to **Access > Settings > General > Advanced**.
4. Go to **API Token** to **Download API documentation** and create an API Token.
5. To create an API Token, click **Create New**, enter the key name and validity period, select the permission scopes, and click **Create**.
6. Once the API Token is created, ensure to **Copy API Token** and store it safely for future use. Please note that the key is displayed only once for security purposes.

1.2 Obtain Your Hostname

The UniFi Access application can be hosted on a server within the local network and accessed via the LAN port. The hostname can either be the server's IP address or a custom domain name mapped to that IP. Connect using the specified port number (**12445**) and establish an HTTPS protocol for a secure connection.

1.3 Use the API

1. Construct the API request as per the instructions in the API documentation.
2. Send the constructed request to the server using the previously obtained API Token and hostname.
3. Parse the server's response to retrieve the required data or perform desired operations.

1.4 Security Configuration

1. Set up appropriate security measures to protect the API and the server.
2. Configure firewall rules to allow incoming traffic on the specific ports used by the API.
3. Enable HTTPS encryption using SSL/TLS certificates to secure data transmission.
4. Implement rate limiting and throttling mechanisms to prevent abuse and ensure fair usage.

1.5 Important Notes

1. Ensure your UniFi Access version is **1.9.1** or later.
2. **The API is not available after upgrading to Identity Enterprise.**
3. Obtain valid access permissions and adhere to the usage guidelines provided by the service provider before using the UniFi Access API.
4. Safeguard your API Token and do not share it with others to avoid security risks.
5. If you have any questions or concerns, please contact the technical support team of your service provider.

The steps above cover the basic process and essential considerations for using the UniFi Access API. Follow the instructions and refer to the API documentation for smooth development. Enjoy the convenience of using the UniFi Access API!

2. Overview

This section provides an introduction to essential concepts related to working with APIs, including API tokens, HTTP status codes, success and error codes, HTTP verbs, and API hosts.

2.1 API Token

To authenticate API requests with UniFi Access, you need to utilize API tokens associated with your account. If a request includes a deleted or expired token, the service will return an authentication error. The **Authorization Token** is obtained from UniFi Portal.

2.2 HTTP Status Code Reference

200	OK	Everything worked as expected.
400	Bad Request	The request is unacceptable, often due to missing required parameters.
401	Unauthorized	The request lacks a valid API token for authentication.
402	Request Failed	The request contains valid parameters, but failed for some reason.
403	Forbidden	The API token used does not have the necessary permissions to perform the request.
429	Too Many Requests	Too many requests were sent to the API in a short amount of time.
500, 502, 503, 504	Server Errors	Something went wrong on UniFi Access's end during request processing.

2.3 Success Code

```
{ "code": "SUCCESS", "msg": "success" }
```

Code	Message
SUCCESS	Success

2.4 Error Code

```
{ "code": "CODE_PARAMS_INVALID", "msg": "Invalid parameters." }
```

Code	Message
CODE_PARAMS_INVALID	The provided parameters are invalid.
CODE_SYSTEM_ERROR	An error occurred on the server's end.
CODE_RESOURCE_NOT_FOUND	The requested resource was not found.
CODE_OPERATION_FORBIDDEN	The requested operation is not allowed.
CODE_AUTH_FAILED	Authentication failed.
CODE_ACCESS_TOKEN_INVALID	The provided access token is invalid.
CODE_UNAUTHORIZED	You not are allowed to perform this action.
CODE_NOT_EXISTS	The requested item does not exist.
CODE_USER_EMAIL_ERROR	The provided email format is invalid.
CODE_USER_ACCOUNT_NOT_EXIST	The requested user account does not exist.
CODE_USER_WORKER_NOT_EXISTS	The requested user does not exist.
CODE_USER_NAME_DUPLICATED	The provided name already exists.
CODE_USER_CSV_IMPORT_INCOMPLETE_PROP	Please provide both first name and last name.
CODE_ACCESS_POLICY_USER_TIMEZONE_NOT_FOUND	The requested workday schedule could not be found.
CODE_ACCESS_POLICY_HOLIDAY_TIMEZONE_NOT_FOUND	The requested holiday schedule could not be found.
CODE_ACCESS_POLICY_HOLIDAY_GROUP_NOT_FOUND	The requested holiday group could not be found.
CODE_ACCESS_POLICY_HOLIDAY_NOT_FOUND	The requested holiday could not be found.
CODE_ACCESS_POLICY_SCHEDULE_NOT_FOUND	The requested schedule could not be found.
CODE_ACCESS_POLICY_HOLIDAY_NAME_EXIST	The provided holiday name already exists.
CODE_ACCESS_POLICY_HOLIDAY_GROUP_NAME_EXIST	The provided holiday group name already exists.
CODE_ACCESS_POLICY_SCHEDULE_NAME_EXIST	The provided schedule name already exists.
CODE_ACCESS_POLICY_SCHEDULE_CAN_NOT_DELETE	The schedule could not be deleted.
CODE_ACCESS_POLICY_HOLIDAY_GROUP_CAN_NOT_DELETE	The holiday group could not be deleted.
CODE_CREDS_NFC_HAS_BIND_USER	The NFC card is already registered and assigned to another user.
CODE_CREDS_DISABLE_TRANSFER_UID_USER_NFC	The UniFi Identity Enterprise user's NFC card is not transferrable.
CODE_CREDS_NFC_READ_SESSION_NOT_FOUND	Failed to obtain the NFC read session.
CODE_CREDS_NFC_READ_POLL_TOKEN_EMPTY	The NFC token is empty.
CODE_CREDS_NFC_CARD_IS_PROVISION	The NFC card is already registered at another site.
CODE_CREDS_NFC_CARD_PROVISION_FAILED	Please hold the NFC card against the reader for more than 5 seconds.
CODE_CREDS_NFC_CARD_INVALID	The card type is not supported. Please use a UA Card.
CODE_CREDS_NFC_CARD_CANNOT_BE_DELETE	The NFC card could not be deleted.
CODE_CREDS_PIN_CODE_CREDS_ALREADY_EXIST	The PIN code already exists.
CODE_CREDS_PIN_CODE_CREDS_LENGTH_INVALID	The PIN code length does not meet the preset requirements.
CODE_SPACE_DEVICE_BOUND_LOCATION_NOT_FOUND	The device's location was not found.
CODE_DEVICE_DEVICE_VERSION_NOT_FOUND	The firmware version is up to date.

CODE_DEVICE_DEVICE_VERSION_TOO_OLD	The firmware version is too old. Please update to the latest version.
CODE_DEVICE_DEVICE_BUSY	The camera is currently in use.
CODE_DEVICE_DEVICE_NOT_FOUND	The device was not found.
CODE_DEVICE_DEVICE_OFFLINE	The device is currently offline.
CODE_OTHERS_UID_ADOPTED_NOT_SUPPORTED	The API is not available after upgrading to Identity Enterprise.
CODE_HOLIDAY_GROUP_CAN_NOT_DELETE	The holiday group could not be deleted.
CODE_HOLIDAY_GROUP_CAN_NOT_EDIT	The holiday group could not be edited.
CODE_DEVICE_WEBHOOK_ENDPOINT_DUPLICATED	The provided endpoint already exists.

2.5 HTTP Verbs

HTTP Method	Description
GET	Used for retrieving objects.
POST	Used for creating objects or performing custom actions.
PUT	Used for replacing objects or collections.
DELETE	Used for deleting objects.

2.6 API Host

The Open API Server is hosted on port 12445 and can be accessed via HTTPS at <https://console-ip:12445>. The server certificate is self-generated and untrusted.

2.7 Request Header

The header for a request contains the following information:

Parameter	Required	Type	Description	Example
Authorization	T	String	Token required for authentication and access control.	Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg

2.8 Response Schema

The response for a request contains the following information:

```
{  
  "code": "SUCCESS",  
  "msg": "success",  
  "data": {}  
}
```

1. code: Represents the result of request handling and indicates success or failure.
2. msg: Represents the error description if the code is not equal to 1.
3. data: Represents the data of API requests.

3. User

The APIs here are designed for managing users, including handling their basic information and assigning NFC cards, PIN codes, and access policies to them.

3.1 Schemas

Parameter	Type	Description
Id	String	Identity ID of the user.
first_name	String	First name of the user.
last_name	String	Last name of the user.
full_name	String	Full name of the user.
alias	String	Preferred name of the user.
user_email	String	Email of the user. UniFi Access Requirement: 1.22.16 or later
email_status	String	The status of the user's email.
phone	String	Contact phone number of the user.
employee_number	String	Employee number of the user.
onboard_time	Integer	User onboarding date.
nfc_cards	Array[Object]	Token associated with the bound NFC card.
nfc_cards[].id	String	Display ID of the NFC card.
nfc_cards[].token	String	Unique NFC card token.
pin_code	Object	Token associated with the bound PIN code.
pin_code.token	String	The user's PIN hash code credential for unlocking a door.
access_policy_ids	Array[String]	Collection of the access policy ID.
access_policies	Array[Object]	All policies assigned to the user.
status	String	<code>enum status {ACTIVE,PENDING,DEACTIVATED}</code> ACTIVE: The user account is in active status. PENDING: A new admin account has been invited by the SSO account, but the invitation has not been accepted. DEACTIVATED: The account has been deactivated.

3.2 User Registration

This API allows you to register a new user.

- Request URL: `/api/v1/developer/users`
- Permission Key: `edit:user`

- Method: `POST`

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Request Body

Parameter	Required	Type	Description	Example	How to Get It?
first_name	T	String	First name of the user.		
last_name	T	String	Last name of the user.		
user_email	F	String	Email of the user. UniFi Access Requirement: 1.22.16 or later		
employee_number	F	String	Employee number of the user. Omit this parameter if it doesn't need to be updated.		
onboard_time	F	Integer	User onboarding date.	1689150139	

Response Body

Schemas: [Schemas](#)

Response Sample

```
1 {
2   "code": "SUCCESS",
3   "msg": "success",
4   "data": {
5     "first_name": "Fist Name",
6     "last_name": "Last Name",
7     "id": "37f2b996-c2c5-487b-aa22-8b453ff14a4b",
8     "user_email": "example@*.com"
9   }
10 }
```

Request Sample

The request body should be a JSON object containing the following fields:

```

1  curl '{{host}}/api/v1/developer/users'
2      -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'
3      -H 'accept: application/json'
4      -H 'content-type: application/json'
5      --data-raw '{
6          "first_name": "H",
7          "last_name": "L",
8          "employee_number": "100000",
9          "onboard_time": 1689150139,
10         "user_email": "example@*.com"
11     }'
12     --insecure

```

3.3 Update User

This API allows you to update user details.

- Request URL: `/api/v1/developer/users/:id`
- Permission Key: `edit:user`
- Method: `PUT`

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Request Path

Parameter	Required	Type	Description	Example
id	T	String	Identity ID of the user.	348e868e-534a-4ace-ba77-ce80394e31e3

Request Body

Parameter	Required	Type	Description	Example	How to Get It?
first_name	F	String	First name of the user.		
last_name	F	String	Last name of the user.		
user_email	F	String	Email of the user. UniFi Access Requirement: 1.22.16 or later		
employee_number	F	String	Employee number of the user.		
onboard_time	F	Integer	User onboarding date.	1689150139	
status	F	String	Status of the user.	"ACTIVE" "DEACTIVATED"	

Response Body

Schemas: [Schemas](#)

Response Sample

```
1 {
2   "code": "SUCCESS",
3   "data": null,
4   "msg": "success"
5 }
```

Request Sample

The request body should be a JSON object containing the following fields:

```
1 curl -XPUT '{{host}}/api/v1/developer/user'
2   -H 'Authorization: Bearer WHFmHRuX4I7sB2oDkD6wHg'
3   -H 'accept: application/json'
4   -H 'content-type: application/json'
5   --data-raw '{
6     "first_name": "H",
7     "last_name": "L",
8     "employee_number": "",
9     "user_email": "example@*.com",
10    "pin_code": "",
11    "onboard_time": 1689150139,
12    "status": "ACTIVE"
13  }'
14   --insecure
```

3.4 Fetch User

This API allows you to fetch user details.

- Request URL: `/api/v1/developer/users/:id`
- Permission Key: `view:user`
- Method: `GET`

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Request Path

Parameter	Required	Type	Description	Example
id	T	String	Identity ID of the user.	348e868e-534a-4ace-ba77-ce80394e31e3

Query Parameters

Parameter	Required	Type	Description	Example
expand[]	F	Boolean	Determine whether to return the access policies assigned to a user (Optional).	expand[]=access_policy

Response Body

Schemas: [Schemas](#)

Response Sample

```
1 {
2   "code": "SUCCESS",
3   "data": {
4     "access_policies": [
5       {
6         "id": "edbc80df-3698-49fd-8b53-f1867f104947",
7         "name": "test",
8         "resources": [
9           {
10            "id": "d5573467-d6b3-4e8f-8e48-8a322b91664a",
11            "type": "door_group"
12          },
13          {
14            "id": "5c496423-6d25-4e4f-8cdf-95ad5135188a",
15            "type": "door_group"
16          },
17          {
18            "id": "6ff875d2-af87-470b-9cb5-774c6596afc8",
19            "type": "door"
20          }
21        ],
22        "schedule_id": "73facd6c-839e-4521-a4f4-c07e1d44e748"
23      }
24    ],
25    "access_policy_ids": [
26      "edbc80df-3698-49fd-8b53-f1867f104947"
27    ],
28    "employee_number": "",
29    "first_name": "***",
30    "id": "17d2f099-99df-429b-becb-1399a6937e5a",
```

```

31     "last_name": "L",
32     "user_email": "example@*.com",
33     "nfc_cards": [
34         {
35             "id": "100001",
36             "token":
37 "d27822fc682b478dc637c6db01813e465174df6e54ca515d8427db623cfda1d0",
38             "type": "ua_card"
39         },
40         "onboard_time": 1689047588,
41         "pin_code": {
42             "token":
43 "5f742ee4424e5a7dd265de3461009b9ebafa1fb9d6b15018842055cc0466ac56"
44         },
45         "status": "ACTIVE"
46     },
47     "msg": "success"
48 }

```

Request Sample

The request body should be a JSON object containing the following fields:

```

1  curl -XGET '{{host}}/api/v1/developer/users/348e868e-534a-4ace-ba77-ce80394e31e3?
    expand[]=access_policy'
2      -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'
3      -H 'accept: application/json'
4      -H 'content-type: application/json'
5      --insecure

```

3.5 Fetch All Users

This API allows you to fetch all users.

- Request URL: `/api/v1/developer/users`
- Permission Key: `view:user`
- Method: `GET`

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Query Parameters

Parameter	Required	Type	Description	Example
expand[]	F	Boolean	Determine whether to return the access policies assigned to a user (Optional).	expand[]=access_policy
page_num	F	String	Current page number in the pagination.	1
page_size	F	String	Number of users per page.	25

Response Body

Schemas: [Schemas](#)

Response Sample

```
1  {
2    "code": "SUCCESS",
3    "data": [
4      {
5        "access_policies": [
6          {
7            "id": "73f15cab-c725-4a76-a419-a4026d131e96",
8            "name": "Default Admin Policy",
9            "resources": [
10             {
11               "id": "d5573467-d6b3-4e8f-8e48-8a322b91664a",
12               "type": "door_group"
13             },
14             {
15               "id": "5c496423-6d25-4e4f-8cdf-95ad5135188a",
16               "type": "door_group"
17             }
18           ],
19           "schedule_id": "73facd6c-839e-4521-a4f4-c07e1d44e748"
20         }
21       ],
22       "access_policy_ids": [
23         "73f15cab-c725-4a76-a419-a4026d131e96"
24       ],
25       "employee_number": "",
26       "first_name": "UniFi",
27       "id": "83569f9b-0096-48ab-b2e4-5c9a598568a8",
28       "last_name": "User",
29       "user_email": "",
30       "nfc_cards": [],
31       "onboard_time": 0,
32       "pin_code": null,
33       "status": "ACTIVE"
```

```

34     },
35     {
36         "access_policies": [
37             {
38                 "id": "c1682fb8-ef6e-4fe2-aa8a-b6f29df753ff",
39                 "name": "policy_1690272668035",
40                 "resources": [
41                     {
42                         "id": "6ff875d2-af87-470b-9cb5-774c6596afc8",
43                         "type": "door"
44                     }
45                 ],
46                 "schedule_id": "0616ef06-b807-4372-9ae0-7a87e12e4019"
47             }
48         ],
49         "access_policy_ids": [
50             "c1682fb8-ef6e-4fe2-aa8a-b6f29df753ff"
51         ],
52         "employee_number": "",
53         "first_name": "Ttttt",
54         "id": "3a3ba57a-796e-46e0-b8f3-478bb70a114d",
55         "last_name": "Tttt",
56         "nfc_cards": [],
57         "onboard_time": 1689048000,
58         "pin_code": null,
59         "status": "ACTIVE"
60     }
61 ],
62 "msg": "success",
63 "pagination": {
64     "page_num": 1,
65     "page_size": 97,
66     "total": 97
67 }
68 }

```

Request Sample

The request body should be a JSON object containing the following fields:

```

1  curl -XGET '{host}}/api/v1/developer/users?
    page_num=1&page_size=25&expand[]=access_policy'
2      -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'
3      -H 'accept: application/json'
4      -H 'content-type: application/json'
5      --insecure

```

3.6 Assign Access Policy to User

- Request URL: `/api/v1/developer/users/:id/access_policies`
- Permission Key: `edit:user`
- Method: `PUT`

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Request Path

Parameter	Required	Type	Description	How to Get It?
id	T	String	Identity ID of the user.	Get it from the API <code>/api/v1/developer/users</code>

Request Body

Parameter	Required	Type	Description	How to Get It?
access_policy_ids	T	Array[String]	Collection of multiple policy IDs.	Get it from the API <code>/api/v1/developer/access_policies</code>

Request Sample: Shell/cURL

The request body should be a JSON object containing the following fields:

```
1 //assign access policies to user
2 curl -XPUT '{{host}}/api/v1/developer/users/38857332-7a5e-4bb6-8837-
3     651b2a47cea5/access_policies'
4     -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'
5     -H 'accept: application/json'
6     -H 'content-type: application/json'
7     --data-raw '{
8         "access_policy_ids":[
9             "03895c7f-9f53-4334-812b-5db9c122c109",
10            "3b6bcb0c-7498-44cf-8615-00a96d824cbe"
11        ]
12    }'
13     --insecure
14
15 //remove all access policies from user
16 curl -XPUT '{{host}}/api/v1/developer/users/38857332-7a5e-4bb6-8837-
17     651b2a47cea5/access_policies'
18     -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'
```

```
17 -H 'accept: application/json'
18 -H 'content-type: application/json'
19 --data-raw '{
20     "access_policy_ids": []
21 }'
22 --insecure
```

Response Sample

```
1 {"code": "SUCCESS", "msg": "success"}
```

3.7 Assign NFC Card to User

- Request URL: `/api/v1/developer/users/:id/nfc_cards`
- Permission Key: `edit:user`
- Method: `PUT`

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Request Path

Parameter	Required	Type	Description	How to Get It?
id	T	String	Identity ID of the user.	Get it from the API <code>/api/v1/developer/users</code>

Request Body

Parameter	Required	Type	Description	How to Get It?
token	T	String	Token of the NFC card.	Get it from the API <code>/api/v1/developer/nfc_cards/sessions/{session_id}</code>
force_add	F	Boolean	Determine whether to overwrite an NFC card that has already been assigned.	true or false

Request Sample: Shell/cURL

The request body should be a JSON object containing the following fields:

```
1 curl -XPUT '{{host}}/api/v1/developer/users/17d2f099-99df-429b-becb-
1399a6937e5a/nfc_cards'
2     -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'
3     -H 'accept: application/json'
4     -H 'content-type: application/json'
5     --data-raw '{
6         "token": "d27822fc682b478dc637c6db01813e465174df6e54ca515d8427db623cfda1d0",
7         "force_add": true
8     }'
```

Response Sample

```
1 {"code": "SUCCESS", "msg": "success"}
```

3.8 Unassign NFC Card from User

- Request URL: `/api/v1/developer/users/:id/nfc_cards/delete`
- Permission Key: `edit:user`
- Method: `PUT`

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Request Path

Parameter	Required	Type	Description	How to Get It?
id	T	String	Identity ID of the user.	Get it from the API <code>/api/v1/developer/users</code>

Request Body

Parameter	Required	Type	Description	How to Get It?
token	T	String	Token of the NFC card.	Get it from the API <code>/api/v1/developer/users</code>

Request Sample: Shell/cURL

The request body should be a JSON object containing the following fields:

```
1 curl -XDELETE '{{host}}/api/v1/developer/users/17d2f099-99df-429b-becb-
1399a6937e5a/nfc_cards/delete'
2     -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'
3     -H 'accept: application/json'
4     -H 'content-type: application/json'
5     -d '{
6         "token": "d27822fc682b478dc637c6db01813e465174df6e54ca515d8427db623cfda1d0"
7     }'
8     --insecure
9
```

Response Sample

```
1 { "code": "SUCCESS", "msg": "success" }
```

3.9 Assign PIN Code to User

- Request URL: `/api/v1/developer/users/:id/pin_codes`
- Permission Key: `edit:user`
- Method: `PUT`

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Request Path

Parameter	Required	Type	Description	How to Get It?
id	T	String	Identity ID of the user.	Get it from the API <code>/api/v1/developer/users</code>

Request Body

Parameter	Required	Type	Description	How to Get It?
pin_code	T	String	Generate a PIN code for the user to unlock doors.	Get it from the API <code>/api/v1/developer/pin_codes</code>

Request Sample: Shell/cURL

The request body should be a JSON object containing the following fields:

```
1 curl -XPUT '{{host}}/api/v1/developer/users/17d2f099-99df-429b-becb-
2 1399a6937e5a/pin_codes'
3     -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'
4     -H 'accept: application/json'
5     -H 'content-type: application/json'
6     --data-raw '{
7         "pin_code": "57301208"
8     }'
9     --insecure
```

Response Sample

```
1 { "code": "SUCCESS", "msg": "success" }
```

3.10 Unassign PIN Code from User

- Request URL: /api/v1/developer/users/:id/pin_codes
- Permission Key: edit:user
- Method: DELETE

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Request Path

Parameter	Required	Type	Description	How to Get It?
id	T	String	Identity ID of the user.	Get it from the API /api/v1/developer/users

Request Sample: Shell/cURL

The request body should be a JSON object containing the following fields:

```
1 curl -XDELETE '{{host}}/api/v1/developer/users/17d2f099-99df-429b-becb-
1399a6937e5a/pin_codes'
2     -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'
3     -H 'accept: application/json'
4     -H 'content-type: application/json'
5     --insecure
6
```

Response Sample

```
1 {"code": "SUCCESS", "msg": "success"}
```

3.11 Create User Group

- Request URL: `/api/v1/developer/user_groups`
- Permission Key: `edit:user`
- Method: `POST`
- UniFi Access Requirement: `2.2.6` or later
- API version: `v1`

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Request Body

Parameter	Required	Type	Description	How to Get It?
name	T	String	Name of the group.	
up_id	F	String	Parent group ID (Optional)	Get it from the API <code>/api/v1/developer/user_groups</code>

Request Sample: Shell/cURL

The request body should be a JSON object containing the following fields:

```
1 curl -XPOST '{{host}}/api/v1/developer/user_groups'
2     -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'
3     -H 'accept: application/json'
4     -H 'content-type: application/json'
5     --data-raw '{
6         "name": "Group Name",
7         "up_id": "013d05d3-7262-4908-ba69-badbbbf8f5a6"
8     }'
9     --insecure
10
```

Response Sample

```
1 {"code": "SUCCESS", "msg": "success"}
```

3.12 Fetch All User Groups

- Request URL: `/api/v1/developer/user_groups`
- Permission Key: `view:user`
- Method: `GET`
- UniFi Access Requirement: `2.2.6 or later`
- API version: `v1`

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Request Sample: Shell/cURL

The request body should be a JSON object containing the following fields:

```
1 curl -XGET '{{host}}/api/v1/developer/developer/user_groups'
2     -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'
3     -H 'accept: application/json'
4     -H 'content-type: application/json'
5     --insecure
6
```

Response Sample

```
1 {
2   "code": "SUCCESS",
3   "data": [
4     {
5       "full_name": "Group Name",
6       "id": "75011ee6-b7ab-4927-9d9f-dd08ef0a3199",
7       "name": "Group Name",
8       "up_id": "a27899fc-a2d1-4797-8d4d-86118f8555f3",
9       "up_ids": [
10        "a27899fc-a2d1-4797-8d4d-86118f8555f3"
11      ]
12    }
13  ],
14  "msg": "success"
15 }
```

3.13 Fetch User Group

- Request URL: `/api/v1/developer/user_groups/:id`
- Permission Key: `view:user`
- Method: `GET`
- UniFi Access Requirement: `2.2.6 or later`
- API version: `v1`

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Request Path

Parameter	Required	Type	Description	How to Get It?
id	T	String	Identity ID of the user group.	Get it from the API <code>/api/v1/developer/user_groups</code>

Request Sample: Shell/cURL

The request body should be a JSON object containing the following fields:

```
1 curl -XGET '{{host}}/api/v1/developer/developer/user_groups/75011ee6-b7ab-4927-9d9f-dd08ef0a3199'
2     -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'
3     -H 'accept: application/json'
4     -H 'content-type: application/json'
5     --insecure
6
```

Response Sample

```
1 {
2     "code": "SUCCESS",
3     "data": {
4         "full_name": "Group Name",
5         "id": "75011ee6-b7ab-4927-9d9f-dd08ef0a3199",
6         "name": "Group Name",
7         "up_id": "a27899fc-a2d1-4797-8d4d-86118f8555f3",
8         "up_ids": [
9             "a27899fc-a2d1-4797-8d4d-86118f8555f3"
10        ]
11    },
12    "msg": "success"
13 }
```

3.14 Update User Group

- Request URL: `/api/v1/developer/user_groups/:id`
- Permission Key: `edit:user`
- Method: `PUT`
- UniFi Access Requirement: `2.2.6` or later
- API version: `v1`

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Request Path

Parameter	Required	Type	Description	How to Get It?
id	T	String	Identity ID of the user group.	Get it from the API <code>/api/v1/developer/user_groups</code>

Request Body

Parameter	Required	Type	Description	How to Get It?
name	T	String	Name of the group.	
up_id	F	String	Parent group ID	Get it from the API <code>/api/v1/developer/user_groups</code>

Request Sample: Shell/cURL

The request body should be a JSON object containing the following fields:

```
1  curl -XPUT '{{host}}/api/v1/developer/user_groups/75011ee6-b7ab-4927-9d9f-  
    dd08ef0a3199'  
2      -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'  
3      -H 'accept: application/json'  
4      -H 'content-type: application/json'  
5      --data-raw '{  
6          "name": "Group Name",  
7          "up_id": "013d05d3-7262-4908-ba69-badbbbf8f5a6"  
8      }'  
9      --insecure  
10
```

Response Sample

```
1  {"code": "SUCCESS", "msg": "success"}
```

3.15 Delete User Group

- Request URL: `/api/v1/developer/user_groups/:id`
- Permission Key: `edit:user`
- Method: `DELETE`
- UniFi Access Requirement: `2.2.6 or later`
- API version: `v1`

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Request Path

Parameter	Required	Type	Description	How to Get It?
id	T	String	Identity ID of the user group.	Get it from the API <code>/api/v1/developer/user_groups</code>

Request Sample: Shell/cURL

The request body should be a JSON object containing the following fields:

```
1 curl -XDELETE '{{host}}/api/v1/developer/developer/user_groups/75011ee6-b7ab-4927-9d9f-dd08ef0a3199'
2     -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'
3     -H 'accept: application/json'
4     -H 'content-type: application/json'
5     --insecure
6
```

Response Sample

```
1 {"code": "SUCCESS", "msg": "success"}
```

3.16 Assign User to User Group

- Request URL: `/api/v1/developer/user_groups/:id/users`
- Permission Key: `edit:user`
- Method: `POST`
- UniFi Access Requirement: `2.2.6 or later`
- API version: `v1`

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Request Path

Parameter	Required	Type	Description	How to Get It?
id	T	String	Identity ID of the user group.	Get it from the API <code>/api/v1/developer/user_groups</code>

Request Body

Parameter	Required	Type	Description	How to Get It?
	T	Array[String]	Identity ID of the user.	Get it from the API <code>/api/v1/developer/users</code>

Request Sample: Shell/cURL

The request body should be a JSON object containing the following fields:

```
1  curl -XPOST '{{host}}/api/v1/developer/user_groups/75011ee6-b7ab-4927-9d9f-
    dd08ef0a3199/users'
2      -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'
3      -H 'accept: application/json'
4      -H 'content-type: application/json'
5      --data-raw '[
6          "7c6e9102-acb7-4b89-8ed4-7561e6fb706c",
7          "fd63bc4c-52e0-4dbf-a699-e1233339c73b"
8      ]'
9      --insecure
10
```

Response Sample

```
1  {"code": "SUCCESS", "msg": "success"}
```

3.17 Unassign User from User Group

- Request URL: `/api/v1/developer/user_groups/:id/users/delete`
- Permission Key: `edit:user`
- Method: `POST`
- UniFi Access Requirement: `2.2.6` or later
- API version: `v1`

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Request Path

Parameter	Required	Type	Description	How to Get It?
id	T	String	Identity ID of the user group.	Get it from the API <code>/api/v1/developer/user_groups</code>

Request Body

Parameter	Required	Type	Description	How to Get It?
	T	Array[String]	Identity ID of the user.	Get it from the API <code>/api/v1/developer/users</code>

Request Sample: Shell/cURL

The request body should be a JSON object containing the following fields:

```
1  curl -XPOST '{{host}}/api/v1/developer/user_groups/75011ee6-b7ab-4927-9d9f-  
dd08ef0a3199/users/delete'  
2      -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'  
3      -H 'accept: application/json'  
4      -H 'content-type: application/json'  
5      --data-raw '[  
6          "7c6e9102-acb7-4b89-8ed4-7561e6fb706c",  
7          "fd63bc4c-52e0-4dbf-a699-e1233339c73b"  
8      ]'  
9      --insecure  
10
```

Response Sample

```
1  { "code": "SUCCESS", "msg": "success" }
```

3.18 Fetch Users in a User Group

This API allows you to fetch only the users in a user group, excluding any subgroups.

- Request URL: `/api/v1/developer/user_groups/:id/users`
- Permission Key: `view:user`
- Method: `GET`

- UniFi Access Requirement: 2.2.6 or later
- API version: v1

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Request Path

Parameter	Required	Type	Description	How to Get It?
id	T	String	Identity ID of the user group.	Get it from the API <code>/api/v1/developer/user_groups</code>

Response Body

Schemas: [Schemas](#)

Request Sample: Shell/cURL

The request body should be a JSON object containing the following fields:

```
1 curl -XGET '{{host}}/api/v1/developer/user_groups/23676a54-382e-4121-aa80-
2     878d2d9bacaa/users'
3     -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'
4     -H 'accept: application/json'
5     -H 'content-type: application/json'
6     --insecure
```

Response Sample

```
1 {
2     "code": "SUCCESS",
3     "data": [
4         {
5             "alias": "",
6             "avatar_relative_path": "",
7             "email": "*@*.com",
8             "email_status": "UNVERIFIED",
9             "employee_number": "1000000",
10            "first_name": "",
11            "full_name": "",
12            "id": "27aa91ac-2924-43d4-82e1-24b6a570d29e",
13            "last_name": "Chen",
14            "onboard_time": 1689150139,
15            "phone": "",
```

```

16         "status": "ACTIVE",
17         "user_email": "",
18         "username": ""
19     }
20 ],
21     "msg": "success"
22 }

```

3.19 Fetch All Users in a User Group

This API allows you to fetch all users in a user group, including those in subgroups.

- Request URL: `/api/v1/developer/user_groups/:id/users/all`
- Permission Key: `view:user`
- Method: `GET`
- UniFi Access Requirement: `2.2.6 or later`
- API version: `v1`

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Request Path

Parameter	Required	Type	Description	How to Get It?
id	T	String	Identity ID of the user group.	Get it from the API <code>/api/v1/developer/user_groups</code>

Response Body

Schemas: [Schemas](#)

Request Sample: Shell/cURL

The request body should be a JSON object containing the following fields:

```

1  curl -XGET '{{host}}/api/v1/developer/user_groups/23676a54-382e-4121-aa80-
2      878d2d9bacaa/users/all'
3      -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'
4      -H 'accept: application/json'
5      -H 'content-type: application/json'
6      --insecure

```

Response Sample

```
1 {
2   "code": "SUCCESS",
3   "data": [
4     {
5       "alias": "",
6       "avatar_relative_path": "",
7       "email": "*@*.com",
8       "email_status": "UNVERIFIED",
9       "employee_number": "1000000",
10      "first_name": "",
11      "full_name": "",
12      "id": "27aa91ac-2924-43d4-82e1-24b6a570d29e",
13      "last_name": "Chen",
14      "onboard_time": 1689150139,
15      "phone": "",
16      "status": "ACTIVE",
17      "user_email": "",
18      "username": ""
19    }
20  ],
21  "msg": "success"
22 }
```

3.20 Fetch the Access Policies Assigned to a User

This API allows you to fetch the access policies assigned to a user.

- Request URL: `/api/v1/developer/users/:id/access_policies`
- Permission Key: `view:user`
- Method: `GET`
- UniFi Access Requirement: `2.2.6` or later
- API version: `v1`

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Request Path

Parameter	Required	Type	Description	How to Get It?
id	T	String	Identity ID of the user.	Get it from the API <code>/api/v1/developer/users</code>

Query Parameters

Parameter	Required	Type	Description	Example
only_user_policies	F	Boolean	If 'only_user_policies' is set to false, all policies of the group the user belongs to are displayed. If set to true, only the policies assigned directly to the user are shown.	only_user_policies=true

Response Body

Schemas: [Schemas](#)

Request Sample: Shell/cURL

The request body should be a JSON object containing the following fields:

```
1 curl -XGET '{{host}}/users/27aa91ac-2924-43d4-82e1-24b6a570d29e/access_policies?
  only_user_policies=false'
2   -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'
3   -H 'accept: application/json'
4   -H 'content-type: application/json'
5   --insecure
6
```

Response Sample

```
1 {
2   "code": "SUCCESS",
3   "data": [
4     {
5       "id": "89a4ca95-1502-4ae7-954f-d986b67afe5c",
6       "name": "Default Site Policy",
7       "resources": [
8         {
9           "id": "fd2a06e2-81af-4cf4-9bd5-8bceb5e7b7d7",
10          "type": "door_group"
11        }
12      ],
13      "schedule_id": "6b79d12a-2a6e-4463-949c-f1a98fff40d2"
14    },
15    {
16      "id": "bbe48a65-2ac1-4bf6-bd65-bc8f9ee7fb75",
17      "name": "Access Policy Name",
```

```

18         "resources": [],
19         "schedule_id": "f7414bcd-f0cc-4d3e-811a-b5ac75f7ddb8"
20     }
21 ],
22 "msg": "success"
23 }

```

3.21 Assign Access Policy to User Group

This API is used to assign access policies to a user group.

- Request URL: `/api/v1/developer/user_groups/:id/access_policies`
- Permission Key: `edit:user`
- Method: `PUT`
- UniFi Access Requirement: `2.2.6` or later
- API version: `v1`

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Request Path

Parameter	Required	Type	Description	How to Get It?
id	T	String	Identity ID of the user group.	Get it from the API <code>/api/v1/developer/user_groups</code>

Request Body

Parameter	Required	Type	Description	How to Get It?
access_policy_ids	T	Array[String]	Identity ID of the access policy.	Get it from the API <code>/api/v1/developer/access_policies</code>

Request Sample: Shell/cURL

The request body should be a JSON object containing the following fields:

```

1  curl -XPUT '{{host}}/user_groups/23676a54-382e-4121-aa80-
    878d2d9bacaa/access_policies'
2      -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'
3      -H 'accept: application/json'
4      -H 'content-type: application/json'
5      --data '{
6          "access_policy_ids": [
7              "bbe48a65-2ac1-4bf6-bd65-bc8f9ee7fb75"
8          ]
9      }'
10     --insecure
11

```

Response Sample

```

1  {
2      "code": "SUCCESS",
3      "data": null,
4      "msg": "success"
5  }

```

3.22 Fetch the Access Policies Assigned to a User Group

This API allows you to fetch the access policies assigned to a user group.

- Request URL: `/api/v1/developer/user_groups/:id/access_policies`
- Permission Key: `view:user`
- Method: `GET`
- UniFi Access Requirement: `2.2.6 or later`
- API version: `v1`

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Request Path

Parameter	Required	Type	Description	How to Get It?
id	T	String	Identity ID of the user group.	Get it from the API <code>/api/v1/developer/user_groups</code>

Response Body

Schemas: [Schemas](#)

Request Sample: Shell/cURL

The request body should be a JSON object containing the following fields:

```
1 curl -XGET '{{host}}/user_groups/23676a54-382e-4121-aa80-
2 878d2d9bacaa/access_policies'
3 -H 'Authorization: Bearer WHFmHRuX4I7sB2oDkD6wHg'
4 -H 'accept: application/json'
5 -H 'content-type: application/json'
6 --insecure
```

Response Sample

```
1 {
2   "code": "SUCCESS",
3   "data": [
4     {
5       "id": "89a4ca95-1502-4ae7-954f-d986b67afe5c",
6       "name": "Default Site Policy",
7       "resources": [
8         {
9           "id": "fd2a06e2-81af-4cf4-9bd5-8bceb5e7b7d7",
10          "type": "door_group"
11        }
12      ],
13      "schedule_id": "6b79d12a-2a6e-4463-949c-f1a98fff40d2"
14    },
15    {
16      "id": "bbe48a65-2ac1-4bf6-bd65-bc8f9ee7fb75",
17      "name": "Access Policy Name",
18      "resources": [],
19      "schedule_id": "f7414bcd-f0cc-4d3e-811a-b5ac75f7ddb8"
20    }
21  ],
22  "msg": "success"
23 }
```


4. Visitor

The APIs here are designed for managing visitors, including creating, viewing, and deleting visitors. They also enable the assigning of NFC cards, schedules, PIN codes, locations, and other access resources to visitors.

4.1 Schemas

Parameter	Type	Description
Id	String	Identity ID of the visitor.
first_name	String	First name of the visitor.
last_name	String	Last name of the visitor.
status	String	The visitor's status. <code>enum status {UPCOMING=1,VISITED=2,VISITING=3,CANCELLED=4,NO_VISIT=5,ACTIVE=6}</code>
inviter_id	String	Identity ID of the inviter.
inviter_name	String	Name of the inviter.
mobile_phone	String	Contact phone number of the visitor.
remarks	String	Remarks of the visitor.
email	String	Email of the visitor.
visitor_company	String	Company of the visitor.
visit_reason	String	Visit reason: <code>enum reason {Interview,Business,Cooperation,Others}</code>
start_time	Integer	Start time of the visit.
end_time	Integer	End time of the visit.
nfc_cards	Array[Object]	Token associated with the bound NFC card.
nfc_cards[].id	String	Display ID of the NFC card.
nfc_cards[].token	String	Unique NFC card token.
pin_code	Object	Token associated with the bound PIN code.
pin_code.token	String	The user's PIN hash code credential for unlocking a door.
schedule_id	String	Identity ID of the schedule.
schedule	Object	The schedule assigned to the visitor. If the <code>schedule</code> information is present, it indicates that the visit schedule is recurring. If the <code>schedule</code> information is not included, it indicates a one-time visit schedule.
schedule.name	String	Name of the schedule.
schedule.type	String	Type of the schedule.
schedule.week_schedule	Object	The customizable scheduling strategy for each day from Sunday to Saturday. If not specified, it means access is allowed every day.
schedule.week_schedule.monday	Array[Object]	Specify the daily access time period from Sunday to Saturday.
schedule.week_schedule.monday[0].start_time	String	Start time of the access time period.
schedule.week_schedule.monday[0].end_time	String	End time of the access time period.
resources	Array[Object]	Specify the locations that the visitor can access.
resources[0].id	String	Identity ID of the door group.
resources[0].name	String	Name of the door group.
resources[0].type	String	Type of the door group.

4.2 Create Visitor

This API enables you to create a new visitor.

- Request URL: `/api/v1/developer/visitors`
- Permission Key: `edit:visitor`
- Method: `POST`

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Request Body

Parameter	Required	Type	Description	Example	How to Get It?
first_name	T	String	First name of the visitor.		
last_name	T	String	Last name of the visitor.		
remarks	F	String	Remarks about the visitor.		
mobile_phone	F	String	Mobile phone number of the visitor.		
email	F	String	Email address of the visitor.		
visitor_company	F	String	Company name of the visitor.		
start_time	T	Integer	Start time of the visit.	1688546460	
end_time	T	Integer	End time of the visit.	1688572799	
visit_reason	T	String	Visit reason: enum reason {Interview,Business,Cooperation,Others}	Interview	

Assign Available Locations to Visitor

Parameter	Required	Type	Description	Example	How to Get It?
resources	F	Array[Object]	Assign available locations to the visitor.		Get it from the API <code>/api/v1/developer/door_groups/topology</code>
resources[0].id	F	String	When resource type is <code>door_group</code> , it refers to the group ID of a building or a customized door group. When type is <code>door</code> , it refers to the ID of a door.	9bee6e0e-108d-4c52-9107-76f2c7dea4f1	
resources[0].type	F	String	Support both <code>door</code> and <code>door_group</code> .	door_group	

Assigned Schedules To Visitor

If the `week_schedule` information is present, it indicates that the visit schedule is recurring. If the `week_schedule` information is not included, it indicates a one-time visit schedule.

Parameter	Required	Type	Description	Example
week_schedule	F	Object	The customizable scheduling strategy for each day from Sunday to Saturday. If not specified, it means access is allowed every day.	
week_schedule.monday	F	Array[Object]	Specify the daily access time period from Sunday to Saturday.	
week_schedule.monday[0].start_time	F	String	Start time of the access time period.	00:00:00
week_schedule.monday[0].end_time	F	String	End time of the access time period.	23:59:59

Response Body

Schemas: [Schemas](#)

Response Sample

```
1  {
2    "code": "SUCCESS",
3    "data": {
4      "first_name": "H",
5      "id": "fbe8d920-47d3-4cfd-bda7-bf4b0e26f73c",
6      "last_name": "L",
7      "nfc_cards": [],
8      "resources": [
9        {
10         "id": "5c496423-6d25-4e4f-8cdf-95ad5135188a",
11         "name": "Test Group",
12         "type": "door_group"
13       },
14       {
15         "id": "d5573467-d6b3-4e8f-8e48-8a322b91664a",
16         "name": "UNVR",
17         "type": "door_group"
18       },
19       {
20         "id": "369215b0-cabe-49b6-aeaa-e0b7ec6424d5",
21         "name": "visitor-1691671529285",
22         "type": "door_group"
23       }
24     ],
25     "schedule": {
26       "id": "1fb849bb-e7e5-4516-8dd9-b78094a6708a",
27       "is_default": false,
28       "name": "schedule-1691671529237",
29       "type": "access",
30       "weekly": {
31         "friday": [
32           {
33             "end_time": "17:00:59",
34             "start_time": "10:00:00"
35           }
36         ]
37       }
38     }
39   }
40 }
```

```

36         ],
37         "monday": [],
38         "saturday": [],
39         "sunday": [],
40         "thursday": [
41             {
42                 "end_time": "17:00:59",
43                 "start_time": "11:00:00"
44             }
45         ],
46         "tuesday": [
47             {
48                 "end_time": "17:00:59",
49                 "start_time": "10:00:00"
50             }
51         ],
52         "wednesday": [
53             {
54                 "end_time": "17:00:59",
55                 "start_time": "10:00:00"
56             }
57         ]
58     },
59     "schedule_id": "1fb849bb-e7e5-4516-8dd9-b78094a6708a",
60     "status": "ACTIVE"
61 },
62 "msg": "success"
63 }
64 }

```

Request Sample

The request body should be a JSON object containing the following fields:

```

1  curl '{{host}}/api/v1/developer/visitors'
2      -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'
3      -H 'accept: application/json'
4      -H 'content-type: application/json' --data-raw
5      '{
6          "first_name": "H",
7          "last_name": "L",
8          "remarks": "",
9          "mobile_phone": "",
10         "email": "",
11         "visitor_company": "",
12         "start_time": 1688546460,
13         "end_time": 1788572799,
14         "visit_reason": "Interview",
15         "week_schedule": {

```

```

16         "sunday": [],
17         "monday": [],
18         "tuesday": [
19             {
20                 "start_time": "10:00:00",
21                 "end_time": "17:00:59"
22             }
23         ],
24         "wednesday": [
25             {
26                 "start_time": "10:00:00",
27                 "end_time": "17:00:59"
28             }
29         ],
30         "thursday": [
31             {
32                 "start_time": "11:00:00",
33                 "end_time": "17:00:59"
34             }
35         ],
36         "friday": [
37             {
38                 "start_time": "10:00:00",
39                 "end_time": "17:00:59"
40             }
41         ],
42         "saturday": []
43     },
44     "resources": [
45         {
46             "id": "6ff875d2-af87-470b-9cb5-774c6596afc8",
47             "type": "door"
48         },
49         {
50             "id": "5c496423-6d25-4e4f-8cdf-95ad5135188a",
51             "type": "door_group"
52         },
53         {
54             "id": "d5573467-d6b3-4e8f-8e48-8a322b91664a",
55             "type": "door_group"
56         }
57     ]
58 }'
59 --insecure

```

4.3 Fetch Visitor

This API enables you to fetch visitor details.

- Request URL: `/api/v1/developer/visitors/:id`
- Permission Key: `view:visitor`
- Method: `GET`

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Request Path

Parameter	Required	Type	Description	
id	T	String	Identity ID of the visitor.	

Response Body

Schemas: [Schemas](#)

Response Sample

```
1  {
2    "code": "SUCCESS",
3    "data": {
4      "first_name": "Hong+243",
5      "id": "3566867c-fa04-4752-98f6-43cf9a342d4a",
6      "last_name": "Lu",
7      "nfc_cards": [
8        {
9          "id": "100001",
10         "token":
11         "d27822fc682b478dc637c6db01813e465174df6e54ca515d8427db623cfda1d0",
12         "type": "ua_card"
13       }
14     ],
15     "pin_code": {
16       "token":
17       "bc3e3135013e2dcae119390b7897166e8cec3bcf5becb6b05578ab67634559ed"
18     },
19     "resources": [
20       {
21         "id": "fd293ecb-98d2-425b-a020-cb9365ea48b3",
22         "name": "visitor-1690337152955",
```

```

21         "type": "door_group"
22     }
23 },
24     "schedule": {
25         "id": "6ccf9e1e-b174-476d-b2fe-96817c780fbf",
26         "is_default": false,
27         "name": "visitor-1690337152955",
28         "type": "access",
29         "weekly": null
30     },
31     "schedule_id": "6ccf9e1e-b174-476d-b2fe-96817c780fbf",
32     "status": "VISITED"
33 },
34     "msg": "success"
35 }

```

Request Sample

The request body should be a JSON object containing the following fields:

```

1  curl -XGET '{{host}}/api/v1/developer/visitors/76794bd8-98c0-49b6-9230-ba8c5812cf29'
2      -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'
3      -H 'accept: application/json'
4      -H 'content-type: application/json'
5      --insecure

```

4.4 Fetch All Visitors

This API enables you to fetch the list of all visitors.

- Request URL: `/api/v1/developer/visitors`
- Permission Key: `view:visitor`
- Method: `GET`

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Query Parameters

Parameter	Required	Type	Description	Example
status	F	Integer	The visitor's status. <code>enum status {UPCOMING=1,VISITED=2,VISITING=3,CANCELLED=4,NO_VISIT=5,ACTIVE=6}</code>	1
keyword	F	String	Support prefix matching for first name and last name. NOTE: The status filtering is disabled when searching with keyword.	H
page_num	F	String	Current page number in the pagination.	1
page_size	F	String	Number of visitors per page.	25
expand[]	F	string	Determine whether to return the objects (Optional). currently supports the following objects: <code>enum objects {none,access_policy,resource,schedule,nfc_card,pin_code}</code> . For the "none" option, it means that no object will be returned. UniFi Access Requirement: 1.22.16 or later	<code>expand[]=access_policy &expand[]=resource &expand[]=schedule &expand[]=nfc_card &expand[]=pin_code</code>

Response Body

Schemas: [Schemas](#)

Request Sample

The request body should be a JSON object containing the following fields:

```
1  curl -XGET '{{host}}/api/v1/developer/visitors?page_num=1&page_size=25'
2      -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'
3      -H 'accept: application/json'
4      -H 'content-type: application/json'
5      --insecure
6
7  # fetch users through keyword
8  curl -XGET '{{host}}/api/v1/developer/visitors?keyword=H'
9      -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'
10     -H 'accept: application/json'
11     -H 'content-type: application/json'
12     --insecure
13
14 # using the "expands" options
15 curl -XGET '{{host}}/api/v1/developer/visitors?
expand[]=access_policy&expand[]=resource&expand[]=schedule&expand[]=nfc_card&expand
[]=pin_code'
16     -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'
17     -H 'accept: application/json'
18     -H 'content-type: application/json'
19     --insecure
```

4.5 Update Visitor

This API enables you to update a visitor.

- Request URL: `/api/v1/developer/visitors/:id`
- Permission Key: `edit:visitor`
- Method: `PUT`

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Request Body

Parameter	Required	Type	Description	Example	How to Get It?
first_name	F	String	First name of the visitor.		
last_name	F	String	Last name of the visitor.		
remarks	F	String	Remarks about the visitor.		
mobile_phone	F	String	Mobile phone number of the visitor.		
email	F	String	Email address of the visitor.		
visitor_company	F	String	Company name of the visitor.		
start_time	F	Integer	Start time of the visit.	1688546460	
end_time	F	Integer	End time of the visit.	1688572799	
visit_reason	F	String	Visit reason: <code>enum reason</code> <code>{Interview,Business,Cooperation,Others}</code>	Interview	

Assign Available Locations to Visitor

Parameter	Required	Type	Description	Example	How to Get It?
resources	F	Array[Object]	Assign available locations to the visitor. Omit this parameter if it doesn't need to be updated.		Get it from the API <code>/api/v1/developer/door_groups/topology</code>
resources[0].id	F	String	When resource type is <code>door_group</code> , it refers to the group ID of a building or a customized door group. When type is <code>door</code> , it refers to the ID of a door.	9bee6e0e-108d-4c52-9107-76f2c7dea4f1	
resources[0].type	F	String	Support both <code>door</code> and <code>door_group</code> .		

Assigned Schedules To Visitor

Parameter	Required	Type	Description	Example
week_schedule	F	Object	The customizable scheduling strategy for each day from Sunday to Saturday. If not specified, it means access is allowed every day. Omit this parameter if it doesn't need to be updated.	
week_schedule.monday	F	Array[Object]	Specify the daily access time period from Sunday to Saturday.	
week_schedule.monday[0].start_time	F	String	Start time of the access time period.	00:00:00
week_schedule.monday[0].end_time	F	String	End time of the access time period.	23:59:59

Request Path

Parameter	Required	Type	Description	
id	T	String	Identity ID of the visitor.	

Response Body

Schemas: [Schemas]

Note: Status change is not supported.

Response Sample

```
1  {
2    "code": "SUCCESS",
3    "data": {
4      "first_name": "H",
5      "id": "8564ce90-76ba-445f-b78b-6cca39af0130",
6      "last_name": "L",
7      "nfc_cards": [],
8      "pin_code": null,
9      "resources": [
10       {
11         "id": "5c496423-6d25-4e4f-8cdf-95ad5135188a",
12         "name": "Door-Group-1",
13         "type": "door_group"
14       },
15       {
16         "id": "d5573467-d6b3-4e8f-8e48-8a322b91664a",
17         "name": "UNVR",
18         "type": "door_group"
19       },
20       {
21         "id": "e311ca94-172c-49fe-9c91-49bd8ecef845",
22         "name": "visitor-1691646856144",
23         "type": "door_group"
24       }
25     ],
26     "schedule": {
27       "id": "c03bf601-0b90-4341-bce4-6061931e9f4e",
28       "is_default": false,
29       "name": "visitor-1691646856097",
30       "type": "access",
31       "weekly": {
32         "friday": [
33           {
34             "end_time": "17:00:59",
```

```

35         "start_time": "10:00:00"
36     }
37 ],
38     "monday": [
39         {
40             "end_time": "17:00:59",
41             "start_time": "10:00:00"
42         }
43     ],
44     "saturday": [],
45     "sunday": [],
46     "thursday": [
47         {
48             "end_time": "18:00:59",
49             "start_time": "11:00:00"
50         }
51     ],
52     "tuesday": [],
53     "wednesday": [
54         {
55             "end_time": "17:00:59",
56             "start_time": "10:00:00"
57         }
58     ]
59 },
60 },
61     "schedule_id": "c03bf601-0b90-4341-bce4-6061931e9f4e",
62     "status": "ACTIVE"
63 },
64     "msg": "success"
65 }

```

Request Sample

The request body should be a JSON object containing the following fields:

```

1  curl -XPUT '{{host}}/api/v1/developer/visitors/c8ldfee6-5970-4938-bd30-
2  40820e16ea01'
3  -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'
4  -H 'accept: application/json'
5  -H 'content-type: application/json'
6  --data-raw '
7  {
8      "first_name": "Test",
9      "last_name": "L",
10     "remarks": "",
11     "mobile_phone": "",
12     "email": "",
13     "visitor_company": "",

```

```

13     "start_time": 1688546460,
14     "end_time": 1788572799,
15     "visit_reason": "Interviemw",
16     "week_schedule": {
17         "sunday": [],
18         "monday": [
19             {
20                 "start_time": "10:00:00",
21                 "end_time": "17:00:59"
22             }
23         ],
24         "tuesday": [],
25         "wednesday": [
26             {
27                 "start_time": "10:00:00",
28                 "end_time": "17:00:59"
29             }
30         ],
31         "thursday": [
32             {
33                 "start_time": "11:00:00",
34                 "end_time": "18:00:59"
35             }
36         ],
37         "friday": [
38             {
39                 "start_time": "10:00:00",
40                 "end_time": "17:00:59"
41             }
42         ],
43         "saturday": []
44     },
45     "resources": [
46         {
47             "id": "6ff875d2-af87-470b-9cb5-774c6596afc8",
48             "type": "door"
49         },
50         {
51             "id": "5c496423-6d25-4e4f-8cdf-95ad5135188a",
52             "type": "door_group"
53         },
54         {
55             "id": "d5573467-d6b3-4e8f-8e48-8a322b91664a",
56             "type": "door_group"
57         }
58     ]
59 }'
60 --insecure

```

4.6 Delete Visitor

This API enables you to delete a visitor.

- Request URL: `/api/v1/developer/visitors/:id`
- Permission Key: `edit:visitor`
- Method: `DELETE`

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Request Path

Parameter	Required	Type	Description	
id	T	String	Identity ID of the visitor.	

Query Parameters

Parameter	Required	Type	Description	Example
is_force	F	Boolean	If is_force is passed, physically delete this visitor; otherwise, update to canceled status.	is_force=true

Response Sample

```
1 {  
2   "code": "SUCCESS",  
3   "data": null,  
4   "msg": "success"  
5 }
```

Request Sample

The request body should be a JSON object containing the following fields:

```
1 curl -XDELETE '{{host}}/api/v1/developer/visitors/c81dfee6-5970-4938-bd30-
40820e16ea01?is_force=true'
2     -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'
3     -H 'accept: application/json'
4     -H 'content-type: application/json'
5     --insecure
```

4.7 Assign NFC Card To Visitor

- Request URL: `/api/v1/developer/visitors/:id/nfc_cards`
- Permission Key: `edit:visitor`
- Method: `PUT`

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Request Path

Parameter	Required	Type	Description	How to Get It?
id	T	String	Identity ID of the visitor.	Get it from the API <code>/api/v1/developer/visitors</code>

Request Body

Parameter	Required	Type	Description	How to Get It?
token	T	String	Token of the NFC card.	Get it from the API <code>/api/v1/developer/nfc_cards/sessions/{session_id}</code>
force_add	F	Boolean	Determine whether to overwrite an NFC card that has already been assigned.	true or false

Request Sample: Shell/cURL

The request body should be a JSON object containing the following fields:

```
1 curl -XPUT '{{host}}/api/v1/developer/visitors/60b5c15e-9aff-4fc8-9547-  
d21d2e39c1ff/nfc_cards  
2     -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'  
3     -H 'accept: application/json'  
4     -H 'content-type: application/json'  
5     --data-raw '{  
6         "token": "d27822fc682b478dc637c6db01813e465174df6e54ca515d8427db623cfda1d0",  
7         "force_add": true  
8     }'  
9     --insecure
```

Response Sample

```
1 {"code": "SUCCESS", "msg": "success"}
```

4.8 Unassign NFC Card From Visitor

- Request URL: `/api/v1/developer/visitors/:id/nfc_cards/delete`
- Permission Key: `edit:visitor`
- Method: `PUT`

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Request Path

Parameter	Required	Type	Description	How to Get It?
id	T	String	Identity ID of the visitor.	Get it from the API <code>/api/v1/developer/visitors</code>

Request Body

Parameter	Required	Type	Description	How to Get It?
token	T	String	Token of the NFC card.	Get it from the API <code>/api/v1/developer/visitors</code>

Request Sample: Shell/cURL

The request body should be a JSON object containing the following fields:

```
1 curl -XPUT '{{host}}/api/v1/developer/visitors/60b5c15e-9aff-4fc8-9547-  
d21d2e39c1ff/nfc_cards/delete  
2 -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'  
3 -H 'accept: application/json'  
4 -H 'content-type: application/json'  
5 -d '{  
6   "token": "d27822fc682b478dc637c6db01813e465174df6e54ca515d8427db623cfda1d0"  
7 }'  
8 --insecure
```

Response Sample

```
1 {"code": "SUCCESS", "msg": "success"}
```

4.9 Assign PIN Code To Visitor

- Request URL: `/api/v1/developer/visitors/:id/pin_codes`
- Permission Key: `edit:visitor`
- Method: `PUT`

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Request Path

Parameter	Required	Type	Description	How to Get It?
id	T	String	Identity ID of the visitor.	Get it from the API <code>/api/v1/developer/visitors</code>

Request Body

Parameter	Required	Type	Description	How to Get It?
pin_code	T	String	Generate a PIN code for the visitor to unlock doors.	Get it from the API <code>/api/v1/developer/pin_codes</code>

Request Sample: Shell/cURL

The request body should be a JSON object containing the following fields:

```
1 curl -XPUT '{{host}}/api/v1/developer/visitors/17d2f099-99df-429b-becb-1399a6937e5a/pin_codes'
2   -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'
3   -H 'accept: application/json'
4   -H 'content-type: application/json'
5   --data-raw '{
6     "pin_code": "57301208"
7   }'
8   --insecure
```

Response Sample

```
1 { "code": "SUCCESS", "msg": "success" }
```

4.10 Unassign PIN Code From Visitor

- Request URL: /api/v1/developer/visitors/:id/pin_codes
- Permission Key: edit:visitor
- Method: DELETE

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Request Path

Parameter	Required	Type	Description	How to Get It?
id	T	String	Identity ID of the visitor.	Get it from the API /api/v1/developer/visitors

Request Sample: Shell/cURL

The request body should be a JSON object containing the following fields:

```
1 curl -XDELETE '{{host}}/api/v1/developer/visitors/17d2f099-99df-429b-becb-  
1399a6937e5a/pin_codes  
2     -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'  
3     -H 'accept: application/json'  
4     -H 'content-type: application/json'  
5     --insecure  
6
```

Response Sample

```
1 {"code": "SUCCESS", "msg": "success"}
```

5. Access Policy

The APIs here are designed for managing door access policies. These policies can be bound with access schedules, floors, and other door access resources.

5.1 Access Policy Schemas

Parameter	Type	Description
Id		Identity ID of the access policy.
name	String	Name of the access policy.
resources	Array[Object]	Specify the locations that can be accessed.
resources[].type	String	Include door and door_group resources. enum type {door,door_group}
resources[].id	String	When resource type is door_group , it refers to the group ID of a building or a customized door group. When type is door , it refers to the ID of a door.
schedule_id	String	Identity ID of the schedule.

5.2 Create Access Policy

This API allows you to create an access policy.

- Request URL: /api/v1/developer/access_policies
- Permission Key: edit:policy
- Method: POST

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Request Body

Parameter	Required	Type	Description	How to Get It?	Example
name	T	String	Name of the access policy.		
resource	F	Array[Object]	Used to assign accessible locations to the access policy.	Get it from the API <code>/api/v1/developer/door_groups/topology;</code> <code>/api/v1/developer/door_groups</code>	
resources[].type	F	String	<code>enum type</code> <code>{door,door_group}</code>		
resources[].id	F	String	When resource type is <code>door_group</code> , it refers to the group ID of a building or a customized door group. When type is <code>door</code> , it refers to the ID of a door.		
schedule_id	T	String	Identity ID of the schedule. Assign additional schedules.	Get it from the API <code>/api/v1/developer/access_policies/schedules</code>	

Response Body

Parameter	Required	Type	Description	Related API	Purpose
id	T	String	Identity ID of the policy.	<code>/api/v1/developer/users/:user_id/access_policies</code>	Used to both assign an access policy to a user or unassign a policy from them.

Schemas: [Schemas](#)

Request Sample: Shell/cURL

The request body should be a JSON object containing the following fields:

```

1  curl '{{host}}/api/v1/developer/access_policies'
2      -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'
3      -H 'accept: application/json'
4      -H 'content-type: application/json'  --data-raw
5      '{
6          "name": "test",
7          "resource": [
8              {
9                  "id": "6ff875d2-af87-470b-9cb5-774c6596afc8",
10                 "type": "door"
11             },
12             {
13                 "id": "5c496423-6d25-4e4f-8cdf-95ad5135188a",
14                 "type": "door_group"
15             },
16             {
17                 "id": "d5573467-d6b3-4e8f-8e48-8a322b91664a",
18                 "type": "door_group"
19             }
20         ],
21         "schedule_id": "4e108aeb-ec9a-4822-bf86-170ea986f934"
22     }'
```

Response Sample

```
1 {
2   "code": "SUCCESS",
3   "data": {
4     "id": "bb5eb965-42dc-4206-9654-88a2d1c3aaa5",
5     "name": "test13",
6     "resources": [
7       {
8         "id": "6ff875d2-af87-470b-9cb5-774c6596afc8",
9         "type": "door"
10      },
11      {
12        "id": "5c496423-6d25-4e4f-8cdf-95ad5135188a",
13        "type": "door_group"
14      },
15      {
16        "id": "d5573467-d6b3-4e8f-8e48-8a322b91664a",
17        "type": "door_group"
18      }
19    ],
20    "schedule_id": "4e108aeb-ec9a-4822-bf86-170ea986f934"
21  },
22  "msg": "success"
23 }
```

5.3 Update Access Policy

This API allows you to update a policy.

- Request URL: `/api/v1/developer/access_policies/:id`
- Permission Key: `edit:policy`
- Method: `PUT`

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Request Path

Parameter	Required	Type	Description	Example
Id	T	String	Identity ID of the access policy.	

Request Body

Parameter	Required	Type	Description	How to Get It?
name	F	String	Name of the access policy. Omit this parameter if it doesn't need to be updated.	
resource	F	Array[Object]	Used to assign accessible locations to the access policy. Omit this parameter if it doesn't need to be updated.	Get it from the API <code>/api/v1/developer/door_groups/topology;</code> <code>/api/v1/developer/door_groups</code>
resources[].type	F	String	<code>enum type {door,door_group}</code>	
resources[].id	F	String	When resource type is <code>door_group</code> , it refers to the group ID of a building or a customized door group. When type is <code>door</code> , it refers to the ID of a door.	
schedule_id	F	String	Identity ID of the schedule. Assign additional schedules. Omit this parameter if it doesn't need to be updated.	Get it from the API <code>/api/v1/developer/access_policies/schedules</code>

Request Sample: Shell/cURL

The request body should be a JSON object containing the following fields:

```
1  curl '{{host}}/api/v1/developer/access_policies/242c88e3-0524-42de-8447-45891c5df714'
2      -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'
3      -H 'accept: application/json'
4      -H 'content-type: application/json'      --data-raw
5      '{
6          "name": "test",
7          "resource": [
8              {
9                  "id": "6ff875d2-af87-470b-9cb5-774c6596afc8",
10                 "type": "door"
11             },
12             {
13                 "id": "5c496423-6d25-4e4f-8cdf-95ad5135188a",
14                 "type": "door_group"
15             },
16             {
17                 "id": "d5573467-d6b3-4e8f-8e48-8a322b91664a",
18                 "type": "door_group"
19             }
20         ],
21         "schedule_id": "4e108aeb-ec9a-4822-bf86-170ea986f934"
```

```
22     }'  
23     --insecure
```

Response Body

Parameter	Required	Type	Description	Related api	Purpose
id	T	String	Identity ID of the policy.	<code>/api/v1/developer/users/:user_id/access_policies</code>	Used to both assign an access policy to a user or unassign a policy from them.

Schemas: [Schemas](#)

5.4 Delete Access Policy

This API allows you to delete an access policy.

- Request URL: `/api/v1/developer/access_policies/:id`
- Permission Key: `edit:policy`
- Method: `DELETE`

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Request Body

Parameter	Required	Type	Description
Id	T	String	Identity ID of the access policy.

Request Sample: Shell/cURL

The request body should be a JSON object containing the following fields:

```
1 curl -XDELETE '{{host}}/api/v1/developer/access_policies/460d0bcc-5d4f-4e7b-8a3c-  
8d4502765e11'  
2     -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'  
3     --insecure
```

Response Sample

```
1 {"code": "SUCCESS", "msg": "success", "data": "success"}
```

5.5 Fetch Access Policy

This API allows you to fetch a policy details.

- Request URL: `/api/v1/developer/access_policies/:id`
- Permission Key: `view:policy`
- Method: `GET`

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Request Body

Parameter	Required	Type	Description
Id	T	String	Identity ID of the access policy.

Response Body

Parameter	Required	Type	Description	Example	
Data	T	Object			

Schemas: [Schemas](#)

Request Sample: Shell/cURL

The request body should be a JSON object containing the following fields:

```
1 curl '{{host}}/api/v1/developer/ccess_policy'  
2 -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'  
3 -H 'accept: application/json'  
4 -H 'content-type: application/json'  
5 --insecure
```


Response Sample

```
1 {
2   "code": "SUCCESS",
3   "data": {
4     "id": "ed09985f-cf52-486e-bc33-377b6ed7bbf2",
5     "name": "test11",
6     "resources": [
7       {
8         "id": "6ff875d2-af87-470b-9cb5-774c6596afc8",
9         "type": "door"
10      },
11      {
12        "id": "5c496423-6d25-4e4f-8cdf-95ad5135188a",
13        "type": "door_group"
14      },
15      {
16        "id": "d5573467-d6b3-4e8f-8e48-8a322b91664a",
17        "type": "door_group"
18      }
19    ],
20    "schedule_id": "4e108aeb-ec9a-4822-bf86-170ea986f934"
21  },
22  "msg": "success"
23 }
```

5.6 Fetch All Access Policies

This API allows you to fetch all access policies.

- Request URL: /api/v1/developer/access_policies
- Permission Key: view:policy
- Method: GET

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Response Body

Parameter	Required	Type	Description	Example	
Data	T	Array[Object]			

Schemas: [Schemas](#)

Request Sample: Shell/cURL

The request body should be a JSON object containing the following fields:

```
1  curl '{{host}}/api/v1/developer/access_policies'
2      -H 'Authorization: Bearer WHFmHRuX4I7sB2oDkD6wHg'
3      -H 'accept: application/json'
4      -H 'content-type: application/json'
5      --insecure
```

Response Sample

```
1  {
2      "code": "SUCCESS",
3      "data": [
4          {
5              "id": "73f15cab-c725-4a76-a419-a4026d131e96",
6              "name": "Default Admin Policy",
7              "resources": [
8                  {
9                      "id": "d5573467-d6b3-4e8f-8e48-8a322b91664a",
10                     "type": "door_group"
11                 },
12                 {
13                     "id": "5c496423-6d25-4e4f-8cdf-95ad5135188a",
14                     "type": "door_group"
15                 }
16             ],
17             "schedule_id": "73facd6c-839e-4521-a4f4-c07e1d44e748"
18         },
19         {
20             "id": "b96948a4-fed9-40a3-9c4a-e473822a3db7",
21             "name": "Default UNVR Policy",
22             "resources": [
23                 {
24                     "id": "d5573467-d6b3-4e8f-8e48-8a322b91664a",
25                     "type": "door_group"
26                 },
27                 {
28                     "id": "6ff875d2-af87-470b-9cb5-774c6596afc8",
```

```

29         "type": "door"
30     }
31 ],
32     "schedule_id": "58c0f89b-f35c-4d2c-af7b-8b8918df2c31"
33 },
34 {
35     "id": "edbc80df-3698-49fd-8b53-f1867f104947",
36     "name": "TEST",
37     "resources": [
38         {
39             "id": "d5573467-d6b3-4e8f-8e48-8a322b91664a",
40             "type": "door_group"
41         },
42         {
43             "id": "5c496423-6d25-4e4f-8cdf-95ad5135188a",
44             "type": "door_group"
45         },
46         {
47             "id": "6ff875d2-af87-470b-9cb5-774c6596afc8",
48             "type": "door"
49         }
50     ],
51     "schedule_id": "73facd6c-839e-4521-a4f4-c07e1d44e748"
52 }
53 ],
54 "msg": "success"
55 }

```

5.7 Holiday Group Schemas

A holiday group refers to a collection of holidays.

Parameter	Type	Description
id	String	Identity ID of the holiday group.
name	String	Name of the holiday group.
is_default	Boolean	Indicate whether the holiday group is the system default.
description	String	Description of the holiday group.
holidays	Array[Object]	Show a list of the holidays within the holiday group.
holidays[].description	String	Description of the holiday.
holidays[].id	String	Identity ID of the holiday.
holidays[].name	String	Name of the holiday.
holidays[].repeat	Boolean	Indicate whether the holiday repeats annually.
holidays[].start_time	String	Start time of the holiday, provided in UTC format according to RFC3339.
holidays[].end_time	String	End time of the holiday, provided in UTC format according to RFC3339.

5.8 Create Holiday Group

This API allows you to create a holiday group.

- Request URL: `/api/v1/developer/access_policies/holiday_groups`
- Permission Key: `edit:policy`
- Method: `POST`

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Request Body

Parameter	Required	Type	Description	Example
name	T	String	Name of the holiday group.	
description	F	String	Description of the holiday group.	
holidays	F	Array[Object]	Show a list of the holidays within the holiday group.	
holidays[].description	F	String	Description of the holiday.	
holidays[].name	F	String	Name of the holiday.	
holidays[].repeat	F	Boolean	Indicate whether the holiday repeats annually.	
holidays[].is_template	F	Boolean	Indicate whether the holiday is created using a holiday group template.	
holidays[].start_time	F	String	Start time of the holiday, provided in UTC format according to RFC3339.	2023-08-25T00:00:00Z
holidays[].end_time	F	String	End time of the holiday, provided in UTC format according to RFC3339.	2023-08-26T00:00:00Z

Response Body

Parameter	Required	Type	Description	Related API	Purpose
id	T	String	Identity ID of the holiday group.	<code>/api/v1/developer/access_policies/schedules</code>	Used to add a holiday group to the schedule.

Schemas: [Schemas](#)

Request Sample: Shell/cURL

The request body should be a JSON object containing the following fields:

```
1 curl '{{host}}/api/v1/developer/access_policies/holiday_groups'
2 -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'
3 -H 'accept: application/json'
4 -H 'content-type: application/json' --data-raw
5 '{
6     "name": "Holiday Group-169286791557142",
7     "holidays": [
8         {
9             "name": "Holiday Name 1",
10            "description": "",
11            "repeat": false,
12            "start_time": "2023-08-25T00:00:00Z",
13            "end_time": "2023-08-26T00:00:00Z"
14        },
15        {
16            "name": "Holiday Name 2",
17            "description": "",
18            "repeat": false,
19            "start_time": "2023-08-26T00:00:00Z",
20            "end_time": "2023-08-27T00:00:00Z"
21        }
22    ]
23 }
```

```
23     }'  
24     --insecure
```

Response Sample

```
1  {  
2    "code": "SUCCESS",  
3    "data": {  
4      "description": "",  
5      "holidays": [  
6        {  
7          "description": "",  
8          "end_time": "2023-08-26 00:00:00Z",  
9          "id": "8900533d-03be-4f84-832d-54ff59905759",  
10         "name": "Holiday Name 1",  
11         "repeat": false,  
12         "start_time": "2023-08-25 00:00:00Z"  
13       },  
14       {  
15         "name": "holiday-2023-08-26",  
16         "end_time": "2023-08-27 00:00:00Z",  
17         "id": "9fff81cc-d476-40c4-80f9-d510451ce2cd",  
18         "name": "Holiday Name 2",  
19         "repeat": false,  
20         "start_time": "2023-08-26 00:00:00Z"  
21       }  
22     ],  
23     "id": "7be7a7a0-818f-4f76-98c3-1c38957f4dca",  
24     "is_default": false,  
25     "name": "Holiday Group-169286791557142",  
26     "template_name": ""  
27   },  
28   "msg": "success"  
29 }
```

5.9 Update Holiday Group

This API allows you to update a holiday group.

- Request URL: `/api/v1/developer/access_policies/holiday_groups/:id`
- Permission Key: `edit:policy`
- Method: `PUT`

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Request Path

Parameter	Required	Type	Description	Example
Id	T	String	Identity ID of the holiday group.	

Request Body

Parameter	Required	Type	Description	Example
name	T	String	Name of the holiday group.	
description	F	String	Description of the holiday group.	
holidays	F	Array[Object]	Show a list of the holidays within the holiday group. Omit this parameter if it doesn't need to be updated.	
holidays[].id	F	String	Identity ID of the holiday. Omit this parameter if it doesn't need to be updated.	Get it from the API <code>/api/v1/developer/access_policies/holiday_groups</code>
holidays[].description	F	String	Description of the holiday.	
holidays[].name	F	String	Name of the holiday.	
holidays[].repeat	F	Boolean	Indicate whether the holiday repeats annually.	
holidays[].start_time	F	String	Start time of the holiday, provided in UTC format according to RFC3339.	2023-08-25T00:00:00Z
holidays[].end_time	F	String	End time of the holiday, provided in UTC format according to RFC3339.	2023-08-26T00:00:00Z

Response Body

Parameter	Required	Type	Description	Related API	Purpose
id	T	String	Identity ID of the holiday group.	<code>/api/v1/developer/access_policies/schedules</code>	Used to add a holiday group to the schedule.

Schemas: [Schemas](#)

Request Sample: Shell/cURL

The request body should be a JSON object containing the following fields:

```
1 curl -XPUT '{{host}}/api/v1/developer/access_policies/holiday_groups/7be7a7a0-818f-4f76-98c3-1c38957f4dca'
2 -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'
```

```

3  -H 'accept: application/json'
4  -H 'content-type: application/json'  --data-raw
5  '{
6      "name": "Holiday Group-169286791557142",
7      "holidays": [
8          {
9              "name": "Holiday Name 1",
10             "description": "",
11             "repeat": false,
12             "start_time": "2023-08-25T00:00:00Z",
13             "end_time": "2023-08-26T00:00:00Z"
14         },# add a new holiday
15         {
16             "id":"d23a4226-765f-4967-b84f-6dfd53f33c89", # update an existing
holiday
17             "name": "Holiday Name 2",
18             "description": "",
19             "repeat": false,
20             "start_time": "2023-08-26T00:00:00Z",
21             "end_time": "2023-08-27T00:00:00Z"
22         }
23     ]
24 }'
25 --insecure

```

Response Sample

```

1  {
2      "code": "SUCCESS",
3      "data": {
4          "description": "",
5          "holidays": [
6              {
7                  "description": "",
8                  "end_time": "2023-08-26 00:00:00Z",
9                  "id": "8900533d-03be-4f84-832d-54ff59905759",
10                 "name": "Holiday Name 1",
11                 "repeat": false,
12                 "start_time": "2023-08-25 00:00:00Z"
13             },
14             {
15                 "description": "",
16                 "end_time": "2023-08-27 00:00:00Z",
17                 "id": "9fff81cc-d476-40c4-80f9-d510451ce2cd",
18                 "name": "Holiday Name 2",
19                 "repeat": false,
20                 "start_time": "2023-08-26 00:00:00Z"
21             }
22         ]
23     }
24 }

```



```

22     ],
23     "id": "7be7a7a0-818f-4f76-98c3-1c38957f4dca",
24     "is_default": false,
25     "name": "Holiday Group-169286791557142",
26     "template_name": ""
27 },
28 "msg": "success"
29 }

```

5.10 Delete Holiday Group

This API allows you to delete a holiday group.

- Request URL: `/api/v1/developer/access_policies/holiday_groups/:id`
- Permission Key: `edit:policy`
- Method: `DELETE`

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Request Path

Parameter	Required	Type	Description	Related API
id	T	String	Identity ID of the holiday group.	<code>/api/v1/developer/access_policies/holiday_groups</code>

Request Sample: Shell/cURL

The request body should be a JSON object containing the following fields:

```

1  curl -XDELETE '{{host}}/api/v1/developer/access_policies/holiday_groups/7be7a7a0-
    818f-4f76-98c3-1c38957f4dca'
2      -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'
3      -H 'accept: application/json'
4      -H 'content-type: application/json'
5      --insecure

```

Response Sample

```
1 {
2   "code": "SUCCESS",
3   "data": "success",
4   "msg": "success"
5 }
```

5.11 Fetch Holiday Group

This API allows you to fetch a holiday group.

- Request URL: `/api/v1/developer/access_policies/holiday_groups/:id`
- Permission Key: `view:policy`
- Method: `GET`

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Request Body

Parameter	Required	Type	Description
Id	T	String	Identity ID of the holiday group.

Response Body

Parameter	Required	Type	Description	Related API	Purpose
id	T	String	Identity ID of the holiday group.	<code>/api/v1/developer/access_policies/schedules</code>	Used to add a holiday group to the schedule.

Schemas: [Schemas](#)

Request Sample: Shell/cURL

The request body should be a JSON object containing the following fields:

```
1 curl -XGET '{{host}}/api/v1/developer/access_policies/holiday_groups/7be7a7a0-818f-4f76-98c3-1c38957f4dca'
2     -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'
3     -H 'accept: application/json'
4     -H 'content-type: application/json'
5     --insecure
```

Response Sample

```
1 {
2   "code": "SUCCESS",
3   "data": {
4     "description": "",
5     "holidays": [
6       {
7         "description": "",
8         "end_time": "2023-08-26 00:00:00Z",
9         "id": "8900533d-03be-4f84-832d-54ff59905759",
10        "name": "Holiday Name 1",
11        "repeat": false,
12        "start_time": "2023-08-25 00:00:00Z"
13      },
14      {
15        "description": "",
16        "end_time": "2023-08-27 00:00:00Z",
17        "id": "9fff81cc-d476-40c4-80f9-d510451ce2cd",
18        "name": "Holiday Name 2",
19        "repeat": false,
20        "start_time": "2023-08-26 00:00:00Z"
21      }
22    ],
23    "id": "7be7a7a0-818f-4f76-98c3-1c38957f4dca",
24    "is_default": false,
25    "name": "Holiday Group-169286791557142",
26    "template_name": ""
27  },
28  "msg": "success"
29 }
```

5.12 Fetch All Holiday Groups

This API allows you to fetch the list of all holiday groups.

- Request URL: `/api/v1/developer/access_policies/holiday_groups`
- Permission Key: `view:policy`

- Method: GET

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Request Body

Parameter	Required	Type	Description
Id	T	String	Identity ID of the holiday group.

Response Body

Parameter	Required	Type	Description	Related API	Purpose
id	T	String	Identity ID of the holiday group.	/api/v1/developer/access_policies/schedules	Used to add a holiday group to the schedule.
name	T	String	Name of the holiday group.		
description	T	String	Description of the holiday group.		
count	T	Integer	Total number of holidays.		

Request Sample: Shell/cURL

The request body should be a JSON object containing the following fields:

```
1 curl -XGET '{{host}}/api/v1/developer/access_policies/holiday_groups'
2     -H 'Authorization: Bearer WHFmHRuX4I7sB2oDkD6wHg'
3     -H 'accept: application/json'
4     -H 'content-type: application/json'
5     --insecure
```

Response Sample

```
1 {
2   "code": "SUCCESS",
3   "data": [
4     {
5       "count": 0,
6       "description": "",
7       "id": "8cc22b49-a7f4-49a6-9f04-044444992d6c",
8       "is_default": true,
9       "name": "No Holidays"
10    },
11  ]
12 }
```

```
11     {
12         "count": 2,
13         "description": "",
14         "id": "86c634da-7b2c-411c-a2c1-1495d089c719",
15         "is_default": false,
16         "name": "Holiday Group-1692867312225"
17     }
18 ],
19 "msg": "success"
20 }
```

5.13 Schedule Schemas

These schemas are utilized for creating time periods for daily visits from Sunday through Saturday. The primary purpose of these schemas is to facilitate the assignment of access policies to users.

Parameter	Type	Description
id	String	Identity ID of the schedule.
name	String	Name of the schedule.
is_default	Boolean	Indicate whether the schedule is the system default.
type	String	Contains the <code>access</code> type, which is assigned to a user along with an access policy.
weekly	Object	The customizable scheduling strategy for each day from Sunday to Saturday. If not specified, it means access is allowed every day.
weekly.monday	Array[Object]	Specify the daily access time period from Sunday to Saturday.
weekly.monday[].start_time	String	Start time of the access time period.
weekly.monday[].end_time	String	End time of the access time period.
holiday_schedule	Array[Object]	Specify the accessible period during holidays. UniFi Access Requirement: 1.20.11 or later
holiday_schedule[0].start_time	String	Start time of the access time period.
holiday_schedule[0].end_time	String	End time of the access time period.
holiday_group_id	String	Identity ID of the holiday group.
holiday_group.id	String	Identity ID of the holiday group.
holiday_group.name	String	Name of the holiday group.
holiday_group.is_default	Boolean	Indicate whether the holiday group is the system default.
holiday_group.description	String	Description of the holiday group.
holiday_group.holidays	Array[Object]	Show a list of the holidays within the holiday group.
holiday_group.holidays[].description	String	Description of the holiday.
holiday_group.holidays[].id	String	Identity ID of the holiday.
holiday_group.holidays[].name	String	Name of the holiday.
holiday_group.holidays[].repeat	Boolean	Indicate whether the holiday repeats annually.
holiday_group.holidays[].start_time	String	Start time of the holiday, provided in UTC format according to RFC3339.
holiday_group.holidays[].end_time	String	End time of the holiday, provided in UTC format according to RFC3339.

5.14 Create Schedule

This API allows you to create a door access schedule.

- Request URL: `/api/v1/developer/access_policies/schedules`
- Permission Key: `edit:policy`

- Method: `POST`

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Request Body

Parameter	Required	Type	Description	Example
name	T	String	The name of the schedule. This needs to be globally unique.	schedule-1789067565323
week_schedule	T	Object	The customizable scheduling strategy for each day from Sunday to Saturday. If not specified, it means access is allowed every day.	
week_schedule.monday	T	Array[Object]	Specify the daily access time period from Sunday to Saturday.	
week_schedule.monday[0].start_time	T	String	Start time of the access time period.	00:00:00
week_schedule.monday[0].end_time	T	String	End time of the access time period.	23:59:59
holiday_group_id	F	String	Identity ID of the holiday group. The default is <code>no_holidays</code> system group.	75660081-431b-4dbe-9b98-e0257877118e
holiday_schedule	F	Array[Object]	Specify the accessible period during holidays.	
holiday_schedule[].start_time	F	String	Start time of the access time period.	03:15:00
holiday_schedule[].end_time	F	String	End time of the access time period.	11:45:59

Response Body

Parameter	Required	Type	Description	Related API	Purpose
id	T	String	Identity ID of the schedule.	<code>/api/v1/developer/access_policies</code>	Used to add a schedule to the access policy.

Schemas: [Schemas](#)

Request Sample: Shell/cURL

The request body should be a JSON object containing the following fields:

```
1 curl '{{host}}/api/v1/developer/access_policies/schedules'
2   -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'
3   -H 'accept: application/json'
4   -H 'content-type: application/json'   --data-raw
5   '{
6     "name": "schedule-1688977094169",
7     "week_schedule": {
8       "sunday": [],
9       "monday": [
```

```

10         {
11             "start_time": "10:00:00",
12             "end_time": "17:00:59"
13         }
14     ],
15     "tuesday": [
16         {
17             "start_time": "10:00:00",
18             "end_time": "17:00:59"
19         }
20     ],
21     "wednesday": [
22         {
23             "start_time": "10:00:00",
24             "end_time": "17:00:59"
25         }
26     ],
27     "thursday": [],
28     "friday": [
29         {
30             "start_time": "10:00:00",
31             "end_time": "17:00:59"
32         }
33     ],
34     "saturday": [],
35 ],
36 "holiday_group_id": "75660081-431b-4dbe-9b98-e0257877118e",
37 "holiday_schedule": [
38     {
39         "start_time": "03:15:00",
40         "end_time": "11:45:59"
41     },
42     {
43         "start_time": "15:00:00",
44         "end_time": "19:00:59"
45     }
46 ]
47 }'

```

Response Sample

```

1  {
2      "code": "SUCCESS",
3      "data": {
4          "id": "1d31b648-b8ff-4bd1-b742-60dbd70592cd",
5          "is_default": false,
6          "name": "schedule-1688977094169",
7          "type": "access",

```



```
8      "weekly": {
9          "friday": [
10             {
11                 "end_time": "17:00:59",
12                 "start_time": "10:00:00"
13             }
14         ],
15         "monday": [
16             {
17                 "end_time": "17:00:59",
18                 "start_time": "10:00:00"
19             }
20         ],
21         "saturday": [],
22         "sunday": [],
23         "thursday": [],
24         "tuesday": [
25             {
26                 "end_time": "17:00:59",
27                 "start_time": "10:00:00"
28             }
29         ],
30         "wednesday": [
31             {
32                 "end_time": "17:00:59",
33                 "start_time": "10:00:00"
34             }
35         ]
36     },
37     "holiday_group_id": "75660081-431b-4dbe-9b98-e0257877118e",
38     "holiday_group": {
39         "description": "",
40         "holidays": [
41             {
42                 "description": "",
43                 "end_time": "2023-08-26 00:00:00Z",
44                 "id": "d51777c4-9559-45aa-8e23-434995d9d2a1",
45                 "is_template": false,
46                 "name": "Holiday Name 1",
47                 "repeat": false,
48                 "start_time": "2023-08-25 00:00:00Z"
49             },
50             {
51                 "description": "",
52                 "end_time": "2023-08-27 00:00:00Z",
53                 "id": "d23a4226-765f-4967-b84f-6dfd53f33c89",
54                 "is_template": false,
55                 "name": "Holiday Name 2",
56                 "repeat": false,
```

```

57         "start_time": "2023-08-26 00:00:00Z"
58     }
59 ],
60 "id": "75660081-431b-4dbe-9b98-e0257877118e",
61 "is_default": false,
62 "name": "Holiday Group-1692867915571423",
63 "template_name": ""
64 },
65 "holiday_schedule": [
66     {
67         "start_time": "03:15:00",
68         "end_time": "11:45:59"
69     },
70     {
71         "start_time": "15:00:00",
72         "end_time": "19:00:59"
73     }
74 ]
75 },
76 "msg": "success"
77 }

```

5.15 Update Schedule

This API allows you to update a door access schedule.

- Request URL: `/api/v1/developer/access_policies/schedules/:id`
- Permission Key: `edit:policy`
- Method: `PUT`

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Request Path

Parameter	Required	Type	Description	Example	
Id	T	String	Identity ID of the schedule.		

Request Body

Parameter	Required	Type	Description	Example
name	F	String	The name of the schedule. This needs to be globally unique. Omit this parameter if it doesn't need to be updated.	schedule-1789067565323
week_schedule	F	Object	The customizable scheduling strategy for each day from Sunday to Saturday. If not specified, it means access is allowed every day. Omit this parameter if it doesn't need to be updated.	
week_schedule.monday	F	Array[Object]	Specify the daily access time period from Sunday to Saturday.	
week_schedule.monday[0].start_time	F	String	Start time of the access time period.	00:00:00
week_schedule.monday[0].end_time	F	String	End time of the access time period.	23:59:59
holiday_group_id	F	String	Identity ID of the holiday group. The default is <code>no_holidays</code> system group.	75660081-431b-4dbe-9b98-e0257877118e
holiday_schedule	F	Array[Object]	Specify the accessible period during holidays.	
holiday_schedule[].start_time	F	String	Start time of the access time period.	03:15:00
holiday_schedule[].end_time	F	String	End time of the access time period.	11:45:59

Response Body

Parameter	Required	Type	Description	Related API	Purpose
id	T	String	Identity ID of the schedule.	<code>/api/v1/developer/access_policies</code>	Used to add a schedule to the access policy.

Schemas: [Schemas](#)

Request Sample: Shell/cURL

The request body should be a JSON object containing the following fields:

```
1 curl -XPUT '{{host}}/api/v1/developer/access_policies/schedules/1d31b648-b8ff-4bd1-b742-60dbd70592cd'
2   -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'
3   -H 'accept: application/json'
4   -H 'content-type: application/json'   --data-raw
5   '{
6       "name": "schedule-1688977094169",
7       "holiday_group_id": "75660081-431b-4dbe-9b98-e0257877118e",
8       "week_schedule": {
9           "sunday": [],
10          "monday": [
11              {
12                  "start_time": "10:00:00",
13                  "end_time": "17:00:59"
14              }
15          ],
```

```

16         "tuesday": [
17             {
18                 "start_time": "10:00:00",
19                 "end_time": "17:00:59"
20             }
21         ],
22         "wednesday": [
23             {
24                 "start_time": "10:00:00",
25                 "end_time": "17:00:59"
26             }
27         ],
28         "thursday": [
29             {
30                 "start_time": "10:00:00",
31                 "end_time": "17:01:59"
32             }
33         ],
34         "friday": [
35             {
36                 "start_time": "10:00:00",
37                 "end_time": "17:00:59"
38             }
39         ],
40         "saturday": []
41     ],
42     "holiday_schedule": [
43         {
44             "start_time": "03:15:00",
45             "end_time": "11:45:59"
46         }
47     ]
48 }'
49 --insecure

```

Response Sample

```

1  {
2      "code": "SUCCESS",
3      "data": {},
4      "msg": "success"
5  }

```

5.16 Fetch Schedule

This API allows you to fetch a door access schedule.

- Request URL: `/api/v1/developer/access_policies/schedules/:id`
- Permission Key: `view:policy`
- Method: `GET`

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Request Path

Parameter	Required	Type	Description	Example
Id	T	String	Identity ID of the schedule.	

Response Body

Parameter	Required	Type	Description	Example
name	T	String	Name of the schedule.	
week_schedule	T	Object	The customizable scheduling strategy for each day from Sunday to Saturday. If not specified, it means access is allowed every day.	
holiday_group	F	Object	Show the assigned holiday group.	
holiday_schedule	F	Array[Object]	Show the accessible period during holidays.	

Schemas: [Schemas](#)

Request Sample: Shell/cURL

The request body should be a JSON object containing the following fields:

```
1  curl --location '{{host}}/api/v1/developer/access_policies/schedules/908079e7-e26b-
2  4951-9073-d775446d3584' --header 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'
```

Response Sample

```
1  {
2      "code": "SUCCESS",
3      "data": {
4          "id": "1d31b648-b8ff-4bd1-b742-60dbd70592cd",
5          "is_default": false,
6          "name": "schedule-1688977094169",
7          "type": "access",
8          "weekly": {
```

```
9      "friday": [  
10        {  
11          "end_time": "17:00:59",  
12          "start_time": "10:00:00"  
13        }  
14      ],  
15      "monday": [  
16        {  
17          "end_time": "17:00:59",  
18          "start_time": "10:00:00"  
19        }  
20      ],  
21      "saturday": [],  
22      "sunday": [],  
23      "thursday": [  
24        {  
25          "end_time": "17:01:59",  
26          "start_time": "10:00:00"  
27        }  
28      ],  
29      "tuesday": [  
30        {  
31          "end_time": "17:00:59",  
32          "start_time": "10:00:00"  
33        }  
34      ],  
35      "wednesday": [  
36        {  
37          "end_time": "17:00:59",  
38          "start_time": "10:00:00"  
39        }  
40      ]  
41    },  
42    "holiday_group_id": "75660081-431b-4dbe-9b98-e0257877118e",  
43    "holiday_group": {  
44      "description": "",  
45      "holidays": [  
46        {  
47          "description": "",  
48          "end_time": "2023-08-26 00:00:00Z",  
49          "id": "d51777c4-9559-45aa-8e23-434995d9d2a1",  
50          "is_template": false,  
51          "name": "Holiday Name 1",  
52          "repeat": false,  
53          "start_time": "2023-08-25 00:00:00Z"  
54        },  
55        {  
56          "description": "",  
57          "end_time": "2023-08-27 00:00:00Z",
```

```

58         "id": "d23a4226-765f-4967-b84f-6dfd53f33c89",
59         "is_template": false,
60         "name": "Holiday Name 2",
61         "repeat": false,
62         "start_time": "2023-08-26 00:00:00Z"
63     },
64 ],
65     "id": "75660081-431b-4dbe-9b98-e0257877118e",
66     "is_default": false,
67     "name": "Holiday Group-16928679155714",
68     "template_name": ""
69 },
70 "holiday_schedule": [
71     {
72         "end_time": "11:45:59",
73         "start_time": "09:15:00"
74     }
75 ]
76 },
77 "msg": "success"
78 }

```

5.17 Fetch All Schedules

This API allows you to fetch all door access schedules.

- Request URL: `/api/v1/developer/access_policies/schedules`
- Permission Key: `view:policy`
- Method: `GET`

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Response Body

Parameter	Required	Type	Description	Example
Data	T	Array[Object]		

Schemas: [Schemas](#)

Request Sample: Shell/cURL

The request body should be a JSON object containing the following fields:

```
1 curl --location '{{host}}/api/v1/developer/access_policies/schedules'
2 -H 'Authorization: Bearer WHFmHRuX4I7sB2oDkD6wHg'
3 --insecure
4
```

Response Sample

```
1 {
2   "code": "SUCCESS",
3   "data": [
4     {
5       "id": "73facd6c-839e-4521-a4f4-c07e1d44e748",
6       "holiday_group_id": "75660081-431b-4dbe-9b98-e0257877118e",
7       "is_default": true,
8       "name": "Always Access",
9       "status": 1,
10      "type": "access"
11    },
12    {
13      "id": "58c0f89b-f35c-4d2c-af7b-8b8918df2c31",
14      "holiday_group_id": "75660081-431b-4dbe-9b98-e0257877118e",
15      "is_default": false,
16      "name": "UNVR Schedule",
17      "status": 1,
18      "type": "access"
19    }
20  ],
21  "msg": "success"
22 }
```

5.18 Delete Schedule

This API allows you to delete a door access schedule.

- Request URL: `/api/v1/developer/access_policies/schedules/:id`
- Permission Key: `edit:policy`
- Method: `DELETE`

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Request Path

Parameter	Required	Type	Description	Example	
Id	T	String	Identity ID of the schedule.		

Request Sample: Shell/cURL

The request body should be a JSON object containing the following fields:

```
1  curl -XDELETE '{{host}}/api/v1/developer/access_policies/schedules/f5355214-3a45-4e0b-9245-12df7075df37'
2      -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'
3      -H 'accept: application/json'
4      -H 'content-type: application/json'
5      --insecure
```

Response Sample

```
1  {"code": "SUCCESS", "msg": "success", "data": "success"}
```

6. Credential

The APIs here are designed for managing PIN codes, NFC cards, and other related credentials.

6.1 Generate PIN Code

This API enables you to generate a PIN code. A PIN code can be assigned to a visitor or user, and once assigned, they can use it to unlock doors.

- Request URL: `/api/v1/developer/credentials/pin_codes`
- Permission Key: `view:credential`
- Method: `POST`

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Response Body

Parameter	Required	Type	Description	Related API	Purpose
data	T	String	PIN code	<code>/api/v1/developer/users;</code> <code>/api/v1/developer/visitors</code>	Assign the PIN code to the created user or visitor.

Request Sample: Shell/cURL

The request body should be a JSON object containing the following fields:

```
1 curl --location --request POST
  'https://{host}/api/v1/developer/credentials/pin_codes'
2   -H 'Authorization: Bearer WHFmHRuX4I7sB2oDkD6wHg'
3   -H 'Content-Type: application/json' \
4   --data ''
5   --insecure
```

Response Sample

```
1 {
2   "code": "SUCCESS",
3   "data": "67203419",
4   "msg": "success"
5 }
```

6.2 Enroll NFC Card

Wake up a UA reader and create a session to enroll an NFC card.

- Request URL: `/api/v1/developer/credentials/nfc_cards/sessions`
- Permission Key: `edit:credential`
- Method: `POST`

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Request Body

Parameter	Required	Type	Description	How to Get It?
device_id	T	String	Identity ID of the device.	Get it from the API <code>/api/v1/developer/devices</code> .
reset_ua_card	F	Boolean		This option allows you to reset an NFC card already enrolled at another site.

Response Body

Parameter	Required	Type	Description	Related API	Purpose
session_id	T	String	The session for enrolling an NFC card.	#6.3 <code>/api/v1/developer/credentials/nfc_cards/sessions/{session_id}</code>	NFC card polling result.

Request Sample

```
1 curl '{{host}}/api/v1/developer/credentials/nfc_cards/sessions'
2   -H 'Authorization: Bearer WHFmHRuX4I7sB2oDkD6wHg'
3   -H 'accept: application/json'
4   -H 'content-type: application/json'
5   --data-raw '{"device_id": "0418d6a2bb7a", "reset_ua_card": false}'
6   --insecure
```

Response Sample

```

1 {
2   "code": "SUCCESS",
3   "msg": "success",
4   "data": {
5     "session_id": "e8a97c52-6676-4c48-8589-bd518afc4094"
6   }
7 }

```

6.3 Fetch NFC Card Enrollment Status

This API enables you to poll a UA reader to fetch the NFC card enrollment status and the generated card tokens.

- Request URL: `/api/v1/developer/credentials/nfc_cards/sessions/:id`
- Permission Key: `edit:credential`
- Method: `GET`

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Request Body

Parameter	Required	Type	Description	Related API	How to Get It?
id	T	String	The id of the session #6.2.	<code>/api/v1/developer/users;</code> <code>/api/v1/developer/visitors</code>	Get session id from the API #6.2

Response Body

Parameter	Required	Type	Description	Related API	Purpose
token	T	String	Unique NFC card token.	<code>/api/v1/developer/users;</code> <code>/api/v1/developer/visitors</code>	The generated card token is used to bind to a user or visitor.
card_id	T	String	Display ID of the NFC card.		

Request Sample

```

1 GET /api/v1/developer/credentials/nfc_cards/sessions/e8a97c52-6676-4c48-8589-
    bd518afc4094

```

Response Sample

```
1 {
2   "code": "SUCCESS",
3   "msg": "success",
4   "data": {
5     "card_id": "014A3151",
6     "token": "821f90b262e90c5c0fbcddf3d6d2f3b94cc015d6e8104ab4fb96e4c8b8e90cb7"
7   }
8 }
```

6.4 Remove a Session Created for NFC Card Enrollment

This API enables you to remove a session created for enrolling an NFC card.

- Request URL: `/api/v1/developer/credentials/nfc_cards/sessions/:id`
- Permission Key: `edit:credential`
- Method: `DELETE`

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Request Body

Parameter	Required	Type	Description	Related API	How to Get It?
id	T	String	The id of the session #6.2.	<code>/api/v1/developer/users;</code> <code>/api/v1/developer/visitors</code>	Get session id from the API #6.2


Request Sample

```
1 DELETE /api/v1/developer/credentials/nfc_cards/sessions/e8a97c52-6676-4c48-8589-
bd518afc4094
```

Response Sample

```
1 {"code": "SUCCESS", "msg": "success", "data": "success"}
```

6.5 Flowchart for NFC Card Enrollment

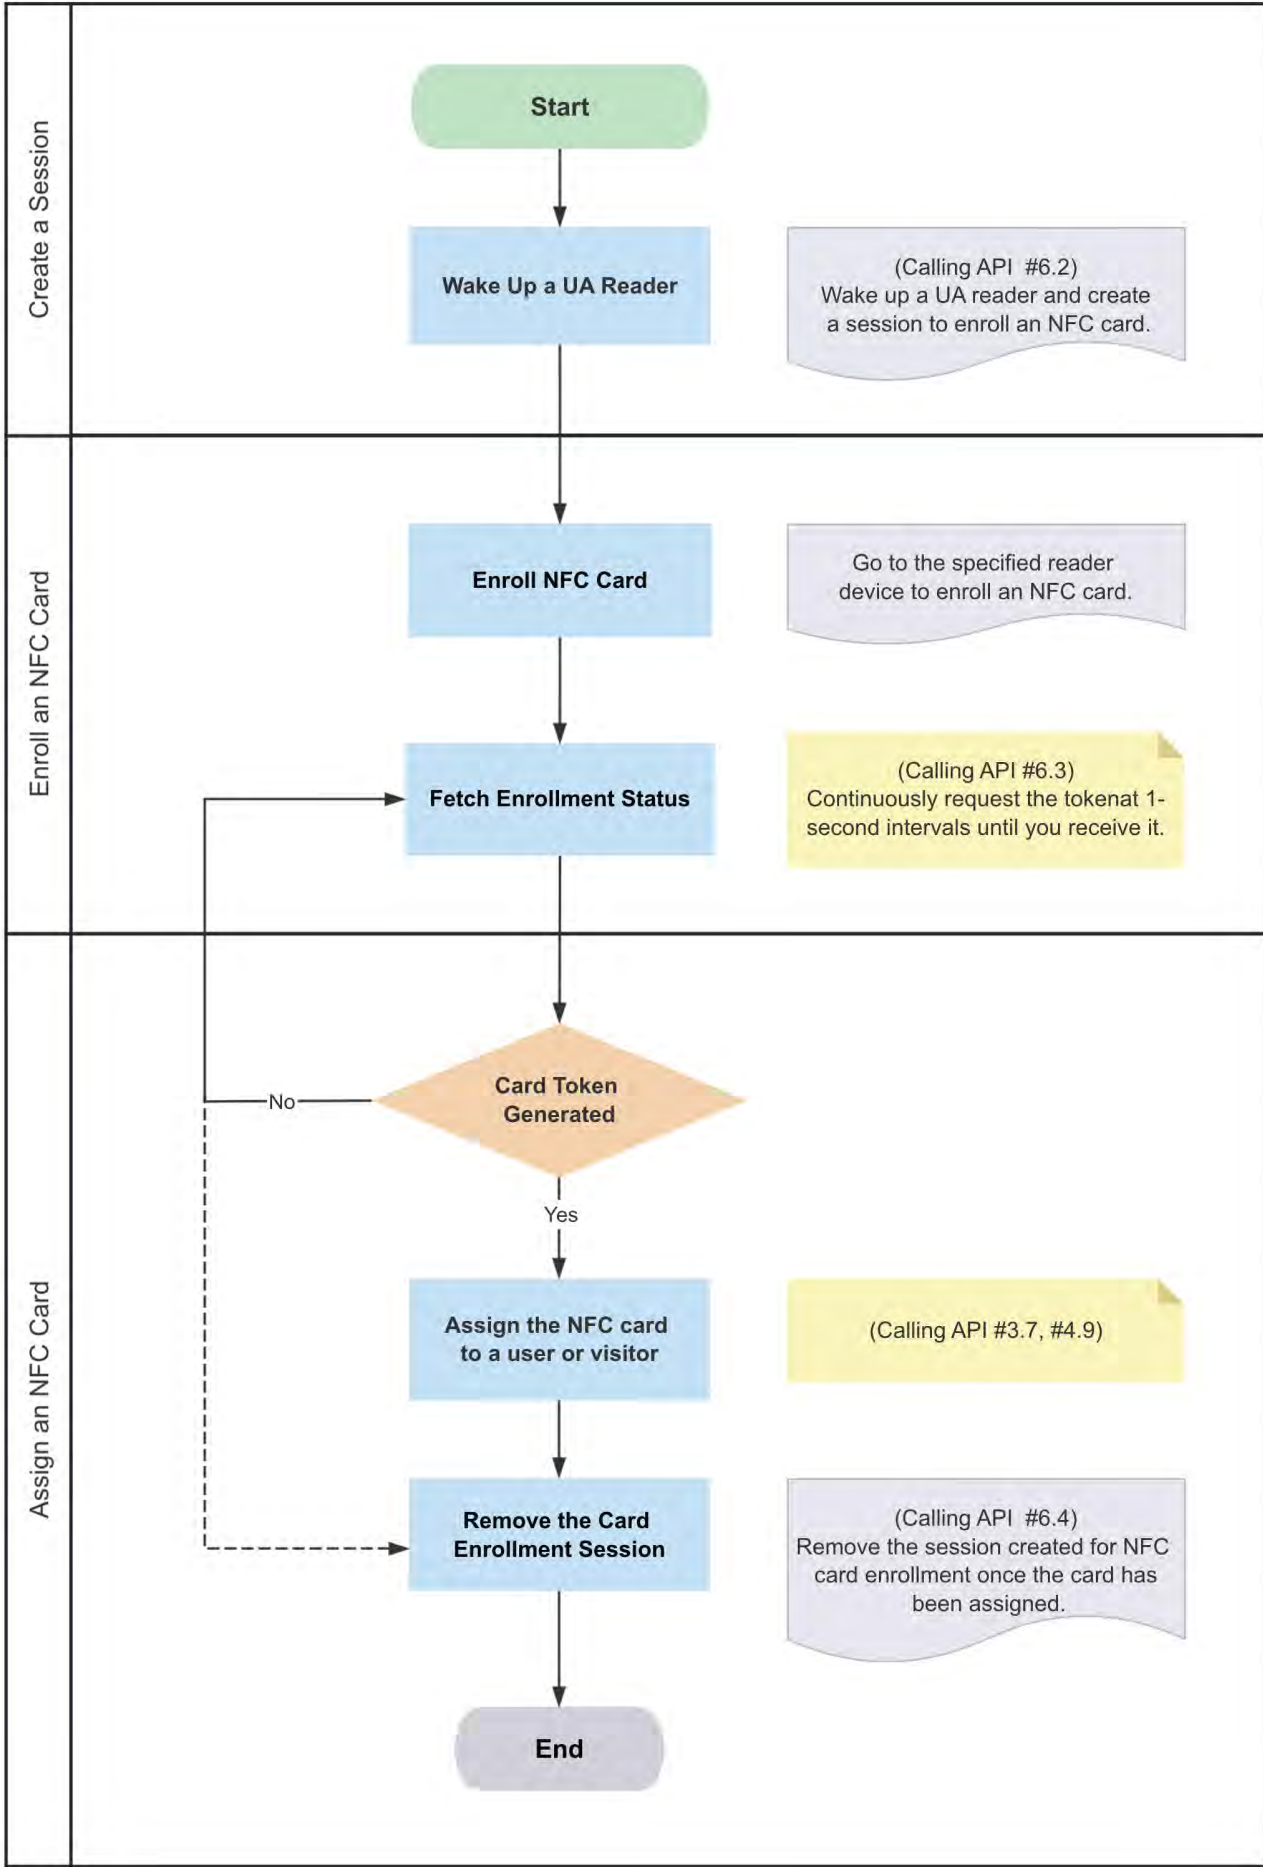

6.6 NFC Card Schemas

Parameter	Type	Description
token	String	Identity token of the NFC card.
display_id	String	Display ID of the NFC card.
status	String	Status of the NFC card. <code>enum status {assigned,pending,disable,deleted,loss}</code>
alias	String	Preferred name of the NFC card.
card_type	String	Type of the NFC card.
user_id	String	Owner ID of the NFC card.
user_type	String	Type of the owner. <code>enum user_type {USER,VISITOR}</code>
user	Object	Owner of the NFC card.
user.id	String	Identity ID of the user.
user.first_name	String	First name of the user.
user.last_name	String	Last name of the user.
user.name	String	Full name of the user.

6.7 Fetch NFC Card

This API allows you to fetch NFC card details.

- Request URL: `/api/v1/developer/credentials/nfc_cards/tokens/:token`
- Permission Key: `view:credential`
- Method: `GET`
- UniFi Access Requirement: `Version 1.22.16 or later`

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Request Path

Parameter	Required	Type	Description	Example	How to Get It?
token	T	String	Token of the NFC card.	821f90b262e90c5c0fbcddf3d6d2f3b94cc015d6e8104ab4fb96e4c8b8e90cb7	Get it from the API #6.3 #6.8

Response Body

Schemas: [NFC Card Schemas](#)

Response Sample

```
1  {
2    "code": "SUCCESS",
3    "data": {
4      "alias": "",
5      "card_type": "ua_card",
6      "display_id": "100005",
7      "note": "100005",
8      "status": "assigned",
9      "token":
10     "f77d69b08eaf5eb5d647ac1a0a73580f1b27494b345f40f54fa022a8741fa15c",
11     "user": {
12       "avatar": "",
13       "first_name": "H",
14       "id": "e0051e08-c4d5-43db-87c8-a9b19cb66513",
15       "last_name": "L",
16       "name": "H L"
17     },
18     "user_id": "e0051e08-c4d5-43db-87c8-a9b19cb66513",
19     "user_type": "USER"
20   },
21   "msg": "success"
22 }
```

Request Sample

The request body should be a JSON object containing the following fields:

```
1  curl -XGET
2    '{{host}}/api/v1/developer/credentials/nfc_cards/tokens/f77d69b08eaf5eb5d647ac1a0a73
3    580f1b27494b345f40f54fa022a8741fa15c'
4    -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'
5    -H 'accept: application/json'
6    -H 'content-type: application/json'
7    --insecure
```

6.8 Fetch All NFC Cards

This API allows you to fetch all NFC cards.

- Request URL: `/api/v1/developer/credentials/nfc_cards/tokens`

- Permission Key: `view:credential`
- Method: `GET`
- UniFi Access Requirement: `Version 1.22.16 or later`

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Query Parameters

Parameter	Required	Type	Description	Example
page_num	F	String	Current page number in the pagination.	1
page_size	F	String	Number of users per page.	25

Response Body

Schemas: [NFC Card Schemas](#)

Response Sample

```
1  {
2    "code": "SUCCESS",
3    "data": [
4      {
5        "alias": "",
6        "card_type": "ua_card",
7        "display_id": "100004",
8        "note": "100004",
9        "status": "assigned",
10       "token":
11       "9e24cdfafebf63e58fd02c5f67732b478948e5793d31124239597d9a86b30dc4",
12       "user": {
13         "avatar": "",
14         "first_name": "H",
15         "id": "e0051e08-c4d5-43db-87c8-a9b19cb66513",
16         "last_name": "L",
17         "name": "H L"
18       },
19       "user_id": "e0051e08-c4d5-43db-87c8-a9b19cb66513",
20       "user_type": "USER"
21     },
22     {
23       "alias": "F77D69B03",
```

```

23         "card_type": "ua_card",
24         "display_id": "100005",
25         "note": "100005",
26         "status": "assigned",
27         "token":
" f77d69b08eaf5eb5d647ac1a0a73580f1b27494b345f40f54fa022a8741fa15c",
28         "user": {
29             "avatar": "",
30             "first_name": "H2",
31             "id": "34dc90a7-409f-4bf8-a5a8-1c59535a21b9",
32             "last_name": "L",
33             "name": "H2 L"
34         },
35         "user_id": "34dc90a7-409f-4bf8-a5a8-1c59535a21b9",
36         "user_type": "VISITOR"
37     }
38 ],
39     "msg": "succ",
40     "pagination": {
41         "page_num": 1,
42         "page_size": 2,
43         "total": 2
44     }
45 }

```

Request Sample

The request body should be a JSON object containing the following fields:

```

1  curl -XGET '{{host}}/api/v1/developer/credentials/nfc_cards/tokens?
page_num=1&page_size=12'
2      -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'
3      -H 'accept: application/json'
4      -H 'content-type: application/json'
5      --insecure

```

6.9 Delete NFC Card

This API allows you to delete an NFC card.

- Request URL: `/api/v1/developer/credentials/nfc_cards/tokens/:token`
- Permission Key: `edit:credential`
- Method: `DELETE`
- UniFi Access Requirement: `Version 1.22.16 or later`

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Request Path

Parameter	Required	Type	Description	Example	How to Get It?
token	T	String	Token of the NFC card.	821f90b262e90c5c0fbcddf3d6d2f3b94cc015d6e8104ab4fb96e4c8b8e90cb7	Get it from the API #6.3 #6.8

Response Sample

```
1 {
2   "code": "SUCCESS",
3   "data": "success",
4   "msg": "success"
5 }
```

Request Sample

The request body should be a JSON object containing the following fields:

```
1 curl -XDELETE
   '{{host}}/api/v1/developer/credentials/nfc_cards/tokens/f77d69b08eaf5eb5d647ac1a0a73
   580f1b27494b345f40f54fa022a8741fa15c'
2   -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'
3   -H 'accept: application/json'
4   -H 'content-type: application/json'
5   --insecure
```

7. Space

The APIs here are designed for managing spaces, including doors, door groups, and floors.

7.1 Fetch Door Group Topology

Fetch all current floor and door resources for access policy and visitor assignment purposes.

- Request URL: `/api/v1/developer/door_groups/topology`
- Permission Key: `view:space`
- Method: `GET`

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Response Body

Parameter	Required	Type	Description	Purpose	Related API
id	F	String	Identity ID of the door group.	Used when creating an access policy.	
type	T	String	enum group_type {building, access} The building type contains all the doors; the access type represents all the customized door groups.		access: /api/v1/developer/door_groups
resource_topologies	T	Array[Object]	Contain information about the floor and all its associated doors.	Bind policies or specify available locations for visitors to access.	/api/v1/developer/access_policies /api/v1/developer/visitors
resource_topologies[].id	T	String	Identity ID of the floor.		
resource_topologies[].type	T	String	Type of the floor.		
resource_topologies[].name	T	String	Name of the floor.		
resource_topologies[].resources	T	Array[Object]	Contain all the doors on the floor.		
resource_topologies[].is_bind_hub	F	Boolean	Indicate whether the door has bound to a hub device. It can only be used for remote opening if it's bound.		
resource_topologies[].resources.id	T	String	Identity ID of the door.		
resource_topologies[].resources.name	T	String	Name of the door.		
resource_topologies[].resources.type	T	String	Type of the door.		

Request Sample

The request body should be a JSON object containing the following fields:

```

1  curl -X GET '{{host}}/api/v1/developer/door_groups/topology'
2      -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'
3      -H 'accept: application/json'
4      -H 'content-type: application/json'
5      --insecure

```

Response Sample

```

1  {
2      "code": "SUCCESS",
3      "data": [
4          {
5              "id": "d5573467-d6b3-4e8f-8e48-8a322b91664a",
6              "name": "All Doors",

```

```

7      "resource_topologies": [
8          {
9              "id": "9bee6e0e-108d-4c52-9107-76f2c7dea4f1",
10             "name": "Main Floor",
11             "resources": [
12                 {
13                     "id": "6ff875d2-af87-470b-9cb5-774c6596afc8",
14                     "name": "Door 3855",
15                     "type": "door",
16                     "is_bind_hub": true
17                 }
18             ],
19             "type": "floor"
20         }
21     ],
22     "type": "building"
23 },
24 {
25     "id": "5c496423-6d25-4e4f-8cdf-95ad5135188a",
26     "name": "customized group",
27     "resource_topologies": [
28         {
29             "id": "9bee6e0e-108d-4c52-9107-76f2c7dea4f1",
30             "name": "Main Floor",
31             "resources": [
32                 {
33                     "id": "6ff875d2-af87-470b-9cb5-774c6596afc8",
34                     "name": "Door 3855",
35                     "type": "door",
36                     "is_bind_hub": true
37                 }
38             ],
39             "type": "floor"
40         }
41     ],
42     "type": "access"
43 }
44 ],
45 "msg": "success"
46 }

```

7.2 Create Door Group

This API allows you to create a door group.

- Request URL: `/api/v1/developer/door_groups`
- Permission Key: `edit:space`

- Method: `POST`

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Request Body

Parameter	Required	Type	Description	Example	How to Get It?
group_name	T	String	Name of the door group. This needs to be globally unique.		
resources	T	Array[String]	Collection of door ID.		<code>/api/v1/developer/door_groups/topology</code>

Response Body

Parameter	Required	Type	Description	Purpose	Related API
id	T	String	Identity ID of the door group.	Used to assign access group to visitor and access policy.	<code>/api/v1/developer/visitors;</code> <code>/api/v1/developer/access_policies;</code>
name	T	String	Name of the door group.		
resources	T	String	All doors contained under the group.		
resources[].id	T	String	Identity ID of the door.		
resources[].type	T	String	Type of the door.		

Request Sample

The request body should be a JSON object containing the following fields:

```
1  curl '{{host}}/api/v1/developer/door_groups'
2      -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'
3      -H 'accept: application/json'
4      -H 'content-type: application/json'
5      --data-raw '{
6          "group_name": "Test",
7          "resources": [
8              "6ff875d2-af87-470b-9cb5-774c6596afc8"
9          ]
10     }'
11     --insecure
```


Response Sample

```
1 {
2   "code": "SUCCESS",
3   "data": {
4     "id": "0140fa3d-8973-4305-a0ce-5306ae277878",
5     "name": "Customized Door Group",
6     "resources": [
7       {
8         "id": "6ff875d2-af87-470b-9cb5-774c6596afc8",
9         "type": "door"
10      }
11    ],
12    "type": "access"
13  },
14  "msg": "success"
15 }
```

7.3 Fetch Door Group

This API allows you to fetch door group details.

- Request URL: `/api/v1/developer/door_groups/:id`
- Permission Key: `view:space`
- Method: `GET`

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Request Path

Parameter	Required	Type	Description
Id	T	String	Identity ID of the door group.

Response Body

Parameter	Required	Type	Description	Purpose	Related API
id	T	String	Identity ID of the door group.	Used to assign access group to visitor and access policy.	<code>/api/v1/developer/visitors;</code> <code>/api/v1/developer/access_policies;</code>
name	T	String	Name of the door group.		
type	t	String	Include door access and building resources. <code>enum type {access,building}</code> The <code>building</code> type stands for all doors, which is a special group obtained from the topology API . The <code>access</code> type represents all custom door groups.		
resources	T	String	All doors contained under the group.		
resources[].id	T	String	Identity ID of the door.		
resources[].type	T	String	The access type represents all custom door group types.		
resources[].name	T	String	Name of the door.		

Request Sample

The request body should be a JSON object containing the following fields:

```

1  curl '{{host}}/api/v1/developer/door_groups/d5573467-d6b3-4e8f-8e48-8a322b91664a'
2      -H 'Authorization: Bearer wHfMHRuX4I7sB2oDkD6wHg'
3      -H 'accept: application/json'
4      -H 'content-type: application/json'
5      --insecure

```

Response Sample

```

1  # Group type is building
2  {
3      "code": "SUCCESS",
4      "data": {
5          "id": "d5573467-d6b3-4e8f-8e48-8a322b91664a",
6          "name": "All Doors",
7          "resources": [
8              {
9                  "id": "6ff875d2-af87-470b-9cb5-774c6596afc8",
10                 "name": "Door 3855",
11                 "type": "door"
12             },
13             {
14                 "id": "7cc1823f-9cdb-447b-b01b-4cb2abc661c0",
15                 "name": "A2 Door",
16                 "type": "door"
17             },

```

```

18         {
19             "id": "ececa68e-239f-4b82-adc4-0c9ce70c60ff",
20             "name": "A3",
21             "type": "door"
22         }
23     ],
24     "type": "building"
25 },
26 "msg": "success"
27 }
28
29 # Customized groups
30 {
31     "code": "SUCCESS",
32     "data": {
33         "id": "1be0c995-0347-4cb2-93b3-66a9624af568",
34         "name": "Door Group 01",
35         "resources": [
36             {
37                 "id": "6ff875d2-af87-470b-9cb5-774c6596afc8",
38                 "type": "door",
39                 "name": "Door 385"
40             }
41         ],
42         "type": "access"
43     },
44     "msg": "success"
45 }

```

7.4 Update Door Group

This API allows you to update door group details.

- Request URL: `/api/v1/developer/door_groups/:id`
- Permission Key: `edit:space`
- Method: `PUT`

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Request Path

Parameter	Required	Type	Description
id	T	String	Identity ID of the door group.

Request Body

Parameter	Required	Type	Description	Example	How to Get It?
group_name	F	String	Name of door group. Omit this parameter if it doesn't need to be updated.		
resources	F	Array[String]	Collection of door identifier ID. Omit this parameter if it doesn't need to be updated.		<code>/api/v1/developer/door_groups/topology</code>

Response Body

Parameter	Required	Type	Description	Purpose	Related API
id	T	String	Identity ID of the door group.	Used to assign access group to visitor and access policy.	<code>/api/v1/developer/visitors;</code> <code>/api/v1/developer/access_policies;</code>
name	T	String	Name of the door group.		
resources	T	String	All doors contained under the group.		
resources[].id	T	String	Identity ID of the door.		
resources[].type	T	String	Type of the door.		

Request Sample

The request body should be a JSON object containing the following fields:

```
1  curl -X PUT '{host}/api/v1/developer/door_groups/0140fa3d-8973-4305-a0ce-5306ae277878'
2      -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'
3      -H 'accept: application/json'
4      -H 'content-type: application/json'
5      --data-raw '{
6          "resources": [
7              "6ff875d2-af87-470b-9cb5-774c6596afc8",
8              "5a2c3d4e-1f6b-4c8d-9e0f-2a3b4c5d6e7f",
9              "2p3q4r5s-6t7u-8v9w-x0y1-z2a3b4c5d6e"
10         ]
11     }'
12      --insecure
13
14  # Delete all door resources
```

```

15  curl -X PUT '{host}}/api/v1/developer/door_groups/0140fa3d-8973-4305-a0ce-
    5306ae277878'
16      -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'
17      -H 'accept: application/json'
18      -H 'content-type: application/json'
19      --data-raw '{
20          "resources": [ ]
21      }'
22      --insecure

```

Response Sample

```

1  {
2      "code": "SUCCESS",
3      "data": {
4          "id": "0140fa3d-8973-4305-a0ce-5306ae277878",
5          "name": "test",
6          "resources": [
7              {
8                  "id": "6ff875d2-af87-470b-9cb5-774c6596afc8",
9                  "type": "door"
10             }
11         ],
12         "type": "access"
13     },
14     "msg": "success"
15 }

```

7.5 Fetch All Door Groups

This API allows you to fetch the list of all door groups.

- Request URL: `/api/v1/developer/door_groups`
- Permission Key: `view:space`
- Method: `GET`

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Response Body

Parameter	Required	Type	Description	Purpose	Related API
id	T	String	Identity ID of the door group.	Used to create a door groups and to open doors remotely, if a device is bound.	<code>/api/v1/developer/door_groups;</code> <code>/api/v1/developer/doors/:id/remote_unlock;</code>
name	T	String	Name of the door group.		
type	t	String	Include door access and building resources. <code>enum type {access,building}</code> The <code>building</code> type represents all doors, which is a special group obtained from the topology API . But the list does not contain the group type <code>building</code> . The <code>access</code> type represents all custom door groups.		
resources	T	String	All doors contained under the group.		
resources[].id	T	String	Identity ID of the door.		
resources[].type	T	String	Type of the door.		

Response Sample

The request body should be a JSON object containing the following fields:

```
1 curl '{{host}}/api/v1/developer/door_groups'
2   -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'
3   -H 'accept: application/json'
4   -H 'content-type: application/json'
5   --insecure
```

Response Sample

```
1 {
2   "code": "SUCCESS",
3   "data": [
4     {
5       "id": "5c496423-6d25-4e4f-8cdf-95ad5135188a",
6       "name": "Test",
7       "resources": [
8         {
9           "id": "6ff875d2-af87-470b-9cb5-774c6596afc8",
10          "type": "door"
11        }
12      ],
13      "type": "access"
```

```

14     },
15     {
16         "id": "1907cc46-0a73-4077-94c1-95b625bdb0f8",
17         "name": "Test2",
18         "resources": [
19             {
20                 "id": "6ff875d2-af87-470b-9cb5-774c6596afc8",
21                 "type": "door"
22             }
23         ],
24         "type": "access"
25     }
26 ],
27 "msg": "success"
28 }

```

7.6 Delete Door Group

This API allows you to delete a door group.

- Request URL: `/api/v1/developer/door_groups/:id`
- Permission Key: `edit:space`
- Method: `DELETE`

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Request Path

Parameter	Required	Type	Description
id	T	String	Identity ID of the door group.

Request Sample

The request body should be a JSON object containing the following fields:

```
1 curl -X DELETE '{{host}}/api/v1/developer/door_groups/0140fa3d-8973-4305-a0ce-
5306ae277878'
2     -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'
3     -H 'accept: application/json'
4     -H 'content-type: application/json'
5     --insecure
```

Response Sample

```
1 {
2     "code": "SUCCESS",
3     "data": "success",
4     "msg": "success"
5 }
```

7.7 Fetch Door

This API allows you to fetch door details.

- Request URL: `/api/v1/developer/doors/:id`
- Permission Key: `view:space`
- Method: `GET`

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Request Path

Parameter	Required	Type	Description
id	T	String	Identity ID of the door.

Response Body

Parameter	Required	Type	Description	Purpose	Related API
id	T	String	Identity ID of the door group.	1. Used to create a door group. 2. Used to unlock a door remotely, if the door is bound to a hub device.	<code>/api/v1/developer/door_groups;</code> <code>/api/v1/developer/doors/:id/remote_unlock;</code>
name	T	String	Name of the door.		
full_name	T	String	Full name of the door.		
floor_id	T	String	Identity ID of the floor.		
type	T	String	Type of the door.		
is_bind_hub	T	String	Indicate whether the door has bound to a hub device. It can only be used for remote opening if it's bound.		
door_lock_relay_status	T	String	Door lock status. <code>enum door_lock_relay_status {lock,unlock}</code>		
door_position_status	T	String	DPS: Door position status, including both <code>open</code> and <code>close</code> . A null value means that no device is connected.		

Request Sample

The request body should be a JSON object containing the following fields:

```

1  curl -X GET '{{host}}/api/v1/developer/doors/0ed545f8-2fcd-4839-9021-b39e707f6aa9'
2      -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'
3      -H 'accept: application/json'
4      -H 'content-type: application/json'
5      --insecure

```

Response Sample

```

1  {
2      "code": "SUCCESS",
3      "data": {
4          "door_lock_relay_status": "lock",
5          "door_position_status": "",
6          "floor_id": "3275af8d-3fa7-4902-a11b-011e41c8464a",
7          "full_name": "UNVR - 1F - Main Door",
8          "id": "0ed545f8-2fcd-4839-9021-b39e707f6aa9",
9          "is_bind_hub": true,
10         "name": "Main Door",
11         "type": "door"
12     },
13     "msg": "success"
14 }

```

7.8 Fetch All Doors

This API allows you to fetch the list of all doors.

- Request URL: `/api/v1/developer/doors`
- Permission Key: `view:space`
- Method: `GET`

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Response Body

Parameter	Required	Type	Description	Purpose	Related API
id	T	String	Identity ID of the door group.	1. Used to create a door group. 2. Used to unlock a door remotely, if the door is bound to a hub device.	<code>/api/v1/developer/door_groups;</code> <code>/api/v1/developer/doors/:id/remote_unlock;</code>
name	T	String	Name of the door.		
full_name	T	String	Full name of the door.		
floor_id	T	String	Identity ID of the floor.		
type	T	String	Type of the door.		
is_bind_hub	T	String	Indicate whether the door has bound to a hub device. It can only be used for remote opening if it's bound.		
door_lock_relay_status	T	String	Door lock status. <code>enum door_lock_relay_status {lock,unlock}</code>		
door_position_status	T	String	DPS: Door position status, including both <code>open</code> and <code>close</code> . A null value means that no device is connected.		

Request Sample

The request body should be a JSON object containing the following fields:

```
1 curl -X GET '{{host}}/api/v1/developer/doors'
2     -H 'Authorization: Bearer WHFmHRuX4I7sB2oDkD6wHg'
3     -H 'accept: application/json'
4     -H 'content-type: application/json'
5     --insecure
```

Response Sample

```
1 {
2   "code": "SUCCESS",
3   "data": [
4     {
5       "door_lock_relay_status": "unlock",
6       "door_position_status": "open",
7       "floor_id": "23c5db06-b59b-494d-94f1-23e88fbe4909",
8       "full_name": "UNVR - 2F - A2 Door",
9       "id": "0ed545f8-2fcd-4839-9021-b39e707f6aa9",
10      "is_bind_hub": true,
11      "name": "A2 Door",
12      "type": "door"
13    },
14    {
15      "door_lock_relay_status": "lock",
16      "door_position_status": "close",
17      "floor_id": "7c62b4b3-692f-44ea-8eb8-e212833b4e0f",
18      "full_name": "UNVR - 1F - Door 3855",
19      "id": "5785e97b-6123-4596-ba49-b6e51164db9b",
20      "is_bind_hub": true,
21      "name": "Door 3855",
22      "type": "door"
23    }
24  ],
25  "msg": "success"
26 }
```

7.9 Remote Door Unlocking

This API allows you to remotely unlock a door.

- Request URL: `/api/v1/developer/doors/:id/unlock`
- Permission Key: `edit:space`
- Method: `PUT`

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Request Path

Parameter	Required	Type	Description
id	T	String	Identity ID of the door.

Request Sample

The request body should be a JSON object containing the following fields:

```
1 curl -X PUT '{{host}}/api/v1/developer/doors/5785e97b-6123-4596-ba49-b6e51164db9b/unlock'
2     -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'
3     -H 'accept: application/json'
4     -H 'content-type: application/json'
5     --insecure
```

Response Sample

```
1 {
2     "code": "SUCCESS",
3     "data": "success",
4     "msg": "success"
5 }
```

7.10 Set Temporary Door Locking Rule

This API allows you to temporarily set the locking rules for doors.

- Request URL: `/api/v1/developer/doors/:id/lock_rule`
- Permission Key: `edit:space`
- Method: `PUT`
- UniFi Access Requirement: `1.24.6` or later
- **NOTE:** UAH-Ent(EAH8) devices are **not supported**.

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Request Path

Parameter	Required	Type	Description
id	T	String	Identity ID of the door.

Request Body

Parameter	Required	Type	Description	Example
type	T	String	enum type {keep_lock,keep_unlock,custom,reset,lock_early} keep_lock is used to set the door to the "keep locked" state, while keep_unlock is used to set it to the "keep unlocked" state. custom allows customization of the unlock time duration, and reset is used to restore the door to its initial state (not applicable to the "lock_early" state). NOTE: If the door is currently on an unlock schedule (schedule), you can use lock_early to lock the door early.	
interval	F	Integer	Set the lock time duration (minutes) when type is custom.	10

Request Sample

The request body should be a JSON object containing the following fields:

```
1  # Customized 10-minute unlocked
2  curl -X PUT '{{host}}/api/v1/developer/doors/e4978b83-203d-4015-97df-
   b86efc91cb0c/lock_rule'
3      -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'
4      -H 'accept: application/json'
5      -H 'content-type: application/json'
6      --data '{
7          "type": "custom",
8          "interval": 10
9      }'
10     --insecure
11
12  # Keep it unlocked
13  curl -X PUT '{{host}}/api/v1/developer/doors/e4978b83-203d-4015-97df-
   b86efc91cb0c/lock_rule'
14      -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'
15      -H 'accept: application/json'
16      -H 'content-type: application/json'
17      --data '{
18          "type": "keep_unlock"
19      }'
20     --insecure
```

```

21
22 # Keep it locked
23 curl -X PUT '{{host}}/api/v1/developer/doors/e4978b83-203d-4015-97df-
b86efc91cb0c/lock_rule'
24     -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'
25     -H 'accept: application/json'
26     -H 'content-type: application/json'
27     --data '{
28         "type": "keep_lock"
29     }'
30     --insecure
31
32 # Use reset to restore the temporary unlock schedule (e.g., "Unlock for 1 Hour") to
its original locked state. This parameter is intended solely for resetting a
temporary unlock schedule. If you wish to lock a door before its scheduled unlock
time ends, use lock_early below instead.
33 curl -X PUT '{{host}}/api/v1/developer/doors/e4978b83-203d-4015-97df-
b86efc91cb0c/lock_rule'
34     -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'
35     -H 'accept: application/json'
36     -H 'content-type: application/json'
37     --data '{
38         "type": "reset"
39     }'
40     --insecure
41
42 # If the door is currently on an unlock schedule, you can use lock_early to lock
the door before the scheduled time ends. For instance, if the unlock schedule is
set from 9:00 AM to 6:00 PM, you can use this parameter at 3:00 PM to end the
schedule and lock the door earlier.
43 curl -X PUT '{{host}}/api/v1/developer/doors/e4978b83-203d-4015-97df-
b86efc91cb0c/lock_rule'
44     -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'
45     -H 'accept: application/json'
46     -H 'content-type: application/json'
47     --data '{
48         "type": "lock_early"
49     }'
50     --insecure

```

Response Sample

```

1  {
2      "code": "SUCCESS",
3      "data": "success",
4      "msg": "success"
5  }

```

7.11 Fetch Door Locking Rule

This API allows you to fetch the locking rules for doors.

- Request URL: `/api/v1/developer/doors/:id/lock_rule`
- Permission Key: `view:space`
- Method: `GET`
- UniFi Access Requirement: `1.24.6` or later
- **NOTE:** UAH-Ent(EAH8) devices are **not supported**.

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Request Path

Parameter	Required	Type	Description
id	T	String	Identity ID of the door.

Response Body

Parameter	Required	Type	Description	Example
type	T	String	enum type {schedule,keep_lock,keep_unlock,custom,lock_early} keep_lock is used to set the "keep locked" state, while keep_unlock is used to set the "keep unlocked" state. custom is used to customize the unlock time duration. schedule indicates that the door is currently in the unlock schedule state. The lock_early is used to terminate doors in an unlock schedule early.	
ended_time	T	Integer	End time of the set rule.	1708672257

Request Sample

The request body should be a JSON object containing the following fields:

```
1 curl -X '{{host}}/api/v1/developer/doors/e4978b83-203d-4015-97df-  
b86efc91cb0c/lock_rule'  
2 -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'  
3 -H 'accept: application/json'  
4 -H 'content-type: application/json'  
5 --insecure
```

Response Sample

```
1  # Keep it locked
2  {
3      "code": "SUCCESS",
4      "data": {
5          "ended_time": 3602128309,
6          "type": "keep_lock"
7      },
8      "msg": "success"
9  }
10
11 # Keep it unlocked
12 {
13     "code": "SUCCESS",
14     "data": {
15         "ended_time": 3602128562,
16         "type": "keep_unlock"
17     },
18     "msg": "success"
19 }
20
21 # Customized unlock duration
22 {
23     "code": "SUCCESS",
24     "data": {
25         "ended_time": 1708673342,
26         "type": "custom"
27     },
28     "msg": "success"
29 }
30
31 #The `lock_early` is used to terminate doors in an unlock schedule early.
32 {
33     "code": "SUCCESS",
34     "data": {
35         "type": "lock_early",
36         "ended_time": 1708673342,
37     },
38     "msg": "success"
39 }
```

7.12 Set Door Emergency Status

This API allows you to set the emergency status for all doors.

- Request URL: `/api/v1/developer/doors/settings/emergency`

- Permission Key: `edit:space`
- Method: `PUT`
- UniFi Access Requirement: `1.24.6` or later

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Request Body

Parameter	Required	Type	Description	Example
lockdown	F	Boolean	<code>True</code> will keep the door locked.	true
evacuation	F	Boolean	<code>True</code> will keep the door unlocked.	false

Request Sample

The request body should be a JSON object containing the following fields:

```
1  # Keep it locked
2  curl -X PUT '{{host}}/api/v1/developer/doors/settings/emergency'
3      -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'
4      -H 'accept: application/json'
5      -H 'content-type: application/json'
6      --data '{
7          "lockdown": true,
8          "evacuation": false
9      }'
10     --insecure
11
12 # Keep it unlocked
13 curl -X PUT '{{host}}/api/v1/developer/doors/settings/emergency'
14     -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'
15     -H 'accept: application/json'
16     -H 'content-type: application/json'
17     --data '{
18         "lockdown": false,
19         "evacuation": true
20     }'
21     --insecure
22
23 # Restore the initial state or release the setting
24 curl -X PUT '{{host}}/api/v1/developer/doors/settings/emergency'
25     -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'
```

```
26 -H 'accept: application/json'
27 -H 'content-type: application/json'
28 --data '{
29     "lockdown": false,
30     "evacuation": false
31 }'
32 --insecure
```

Response Sample

```
1 {
2     "code": "SUCCESS",
3     "data": "success",
4     "msg": "success"
5 }
```

7.13 Fetch Door Emergency Status

This API allows you to fetch the emergency status for all doors.

- Request URL: `/api/v1/developer/doors/settings/emergency`
- Permission Key: `view:space`
- Method: `GET`
- UniFi Access Requirement: `1.24.6` or later

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Response Body

Parameter	Required	Type	Description	Example
lockdown	F	Boolean	<code>True</code> will keep the door locked.	true
evacuation	F	Boolean	<code>True</code> will keep the door unlocked.	false

Request Sample

The request body should be a JSON object containing the following fields:

```
1 curl -X '{{host}}/api/v1/developer/doors/settings/emergency'
2     -H 'Authorization: Bearer WHFmHRuX4I7sB2oDkD6wHg'
3     -H 'accept: application/json'
4     -H 'content-type: application/json'
5     --insecure
6
```

Response Sample

```
1 {
2     "code": "SUCCESS",
3     "data": {
4         "evacuation": true,
5         "lockdown": false
6     },
7     "msg": "success"
8 }
```

8. Device

The APIs here are designed for device management, including obtaining device lists, device information, device statuses, device configurations, and more.

8.1 Fetch Devices

Obtain a list of all current devices. The device ID is required for enrolling an NFC card.

- Request URL: `/api/v1/developer/devices`
- Permission Key: `view:device`
- Method: `GET`

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Response Body

Parameter	Required	Type	Description	Purpose	Related API
id	T	String	Identity ID of the device.	Used for enrolling an NFC card.	<code>/api/v1/developer/credentials/nfc_cards/sessions</code>
name	T	String	Name of the device.		
type	T	String	Type of the device.		
full_name	T	String	Full name of the device.		

Request Sample: Shell/cURL

```
1 curl '{{host}}/api/v1/developer/devices'
2   -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'
3   -H 'accept: application/json'
4   --insecure
```

Response Body

```
1 {
2   "code": "SUCCESS",
3   "data": [
4     [
5       {
6         "full_name": "UNVR - Main Floor - Door 3855 - UA-HUB-3855",
```

```
7         "id": "7483c2773855",
8         "name": "UA-HUB-3855",
9         "type": "UAH"
10    },
11    {
12        "full_name": "UNVR - Main Floor - Door 3855 - out - UA-LITE-8CED",
13        "id": "f492bfd28ced",
14        "name": "UA-LITE-8CED",
15        "type": "UDA-LITE"
16    },
17    {
18        "full_name": "UNVR - Main Floor - Door 3855 - in - UA-G2-PRO-BB7A",
19        "id": "0418d6a2bb7a",
20        "name": "UA-G2-PRO-BB7A",
21        "type": "UA-G2-PRO"
22    }
23 ]
24 ],
25 "msg": "success"
26 }
```

9. System Log

The APIs here are designed for system log management.

9.1 Topic Reference

Parameter	Description
all	Fetch all logs.
door_openings	Fetch door opening logs.
critical	Fetch logs for device restart, deletion, offline status, and detection.
updates	Fetch device update logs.
device_events	Fetch logs for device online status, device updates, access policy synchronization, and active and inactive door unlock schedules.
admin_activity	Fetch logs for admin activity, such as access policy updates, settings changes, and user management.
visitor	Fetch logs of of visitor-related operations.

9.1.1 Event Structure

Event: Basic information about the event.

Key	Value (Example)
Type	access.door.unlock
Display Message	Access Granted (Remote)
Result	ACCESS
Published	1701087091000
Tag	access

Actor: Information about the event operator.

Key	Value
ID	[Actor ID]
Type	user
Display Name	[Display Name]
Alternate ID	[Alternate ID]
Alternate Name	[Alternate Name]
Avatar	[Avatar]
SSO Picture	[SSO Picture]

Authentication: Certification information.

Key	Value
Credential Provider	REMOTE_THROUGH_UAH
Issuer	[Issuer]

Target(s): Additional information associated with the event. **Note that each event contains different attributes.**

Type	ID	Display Name	Alternate ID	Alternate Name
UAH	7483c2773855	UA-HUB-3855	[Alternate ID]	[Alternate Name]
device_config	door_entry_method	entry/exit	[Alternate ID]	[Alternate Name]
door	e4978b83-203d-4015-97df-b86efc91cb0c	Door 3855	[Alternate ID]	[Alternate Name]
floor	04ddb371-457f-44ae-b8cc-8e96bcee5de4	1F	[Alternate ID]	[Alternate Name]
building	e622671e-89a5-11ee-8897-76acb95e28d5	UDM Pro	[Alternate ID]	[Alternate Name]

9.2 Fetch System Logs

This API enables you to fetch system logs.

- Request URL: `/api/v1/developer/system/logs`
- Permission Key: `view:system_log`
- Method: `POST`

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Query Parameters

Parameter	Required	Type	Description	Example
page_num	F	String	Current page number in the pagination.	1
page_size	F	String	Number of logs per page.	25

Request Body

Parameter	Required	Type	Description	Example
topic	T	String	Fetch different system logs by topic . enum topic {critical,door_openings,updates,device_events,admin_activity,visitor}	door_openings
since	F	Integer	Start time for log fetching.	1689304925
until	F	Integer	End time for log fetching.	1689804925
actor_id	F	String	Identity ID of the actor (user, visitor, and device).	3e1f196e-c97b-4748-aecb-eab5e9c251b2

Response Body

Parameter	Required	Type	Description
actor	T	Object	Information about the event operator.
event	T	Object	Basic information about the event.
authentication	F	Object	Certification information.
target	F	Array[Object]	Additional information associated with the event, such as updated information.

Request Sample: Shell/cURL


```
1 curl '{{host}}/api/v1/developer/system/logs?page_size=1&page_num=25'
2   -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'
3   -H 'accept: application/json'
4   -H 'content-type: application/json'
5   --data '{
6       "topic": "door_openings",
7       "since": 1690770546,
8       "until": 1690771546,
9       "actor_id": "3elf196e-c97b-4748-aecb-eab5e9c251b2"
10  }'
11  --insecure
```

Response Body

```
1  {
2      "code": "SUCCESS",
3      "data": {
4          "hits": [
5              {
6                  "@timestamp": "2023-07-11T12:11:27Z",
7                  "_id": "",
8                  "_source": {
9                      "actor": {
10                         "alternate_id": "",
11                         "alternate_name": "",
12                         "display_name": "N/A",
13                         "id": "",
14                         "type": "user"
15                     },
16                     "authentication": {
17                         "credential_provider": "NFC",
18                         "issuer": "6FC02554"
19                     },
20                     "event": {
21                         "display_message": "Access Denied / Unknown (NFC)",
22                         "published": 1689077487000,
23                         "reason": "",
24                         "result": "BLOCKED",
25                         "type": "access.door.unlock"
26                     },
27                     "target": [
28                         {
29                             "alternate_id": "",
30                             "alternate_name": "",
31                             "display_name": "UA-HUB-3855",
32                             "id": "7483c2773855",
33                             "type": "UAH"
34                         }
35                     ]
36                 }
37             }
38         ]
39     }
40 }
```

```

35         ]
36     },
37     "tag": "access"
38 }
39 ]
40 },
41 "page": 1,
42 "total": 4
43 }

```

9.3 Export System Logs

This API enables you to export system logs to a CSV file.

- Request URL: `/api/v1/developer/system/logs/export`
- Permission Key: `view:system_log`
- Method: `POST`
- UniFi Access Requirement: `1.20.11` or later

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Request Body

Parameter	Required	Type	Description	Example
topic	T	String	Fetch different system logs by topic . enum topic {critical,door_openings,updates,device_events,admin_activity,visitor}	door_openings
since	T	Integer	Start time for log fetching.	1689304925
until	T	Integer	End time for log fetching. Note that the since and until periods cannot exceed one month.	1689804925
timezone	T	String	Timezone for formatting time.	America/New_York
actor_id	F	String	Identity ID of the actor (user, visitor, and device).	3e1f196e-c97b-4748-aecb-eab5e9c251b2

Request Sample: Shell/cURL

```

1  curl '{{host}}/api/v1/developer/system/logs/export'
2      -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'
3      -H 'accept: application/json'
4      -H 'content-type: application/json'
5      --data '{
6          "topic": "door_openings",
7          "since": 1690770546,
8          "until": 1690771546,
9          "timezone": "America/New_York",
10         "actor_id": "3elf196e-c97b-4748-aecb-eab5e9c251b2"
11     }'
12     --insecure

```

9.4 Fetch Resources in System Logs

This API enables you to fetch the resources in system logs.

- Request URL: `api/v1/developer/system/logs/resource/:id`
- Permission Key: `view:system_log`
- Method: `GET`
- UniFi Access Requirement: `1.24.6 or later`

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Request Body

Parameter	Required	Type	Description	Example
Id	T	String	Resource ID is obtained from targets categorized as the 'activities_resource' type in system logs.	"target": [{"type": "activities_resource", "id": "0418d6a38f00-b6906057-2a90-4426-835c-b5b172381fec", "display_name": "Resource", "alternate_id": "", "alternate_name": ""}]

Response Sample

```

1  {
2      "code": "SUCCESS",
3      "msg": "success",
4      "data": {
5          "video_record": "/activities_resource/video/1708424638_f24a7b67-c584-4e22-a7b8-074f0fa93da0.mp4",
6          "video_record_thumbnail":
7              "/activities_resource/thumbnail/1708424638_a6d1fa60-d895-4d4c-a40c-447f97c8824f.jpg",
8          "created_at": "2024-02-20T18:23:58+08:00",
9          "updated_at": "2024-02-20T18:23:58+08:00"
10     }
11 }

```

Request Sample: Shell/cURL

```

1  curl '{{host}}/api/v1/developer/system/logs/resource/0418d6a38f00-b6906057-2a90-4426-835c-b5b172381fec'
2      -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'
3      -H 'accept: application/json'
4      -H 'content-type: application/json'
5      --insecure

```

9.5 Fetch Static Resources in System Logs

This API enables you to fetch static resources in system logs.

- Request URL: `api/v1/developer/system/static/:path`
- Permission Key: `view:system_log`
- Method: `GET`
- UniFi Access Requirement: `1.24.6` or later

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Request Body

Parameter	Required	Type	Description	Example
path	T	String	Resource paths, currently supporting <code>/avatar</code> , <code>/capture</code> , and <code>activities_resource</code> .	

Request Sample: Shell/cURL

```
1 # avatar resource
2 curl '{{host}}/api/v1/developer/system/static/avatar/dalaceb6-20ba-4285-a6b1-
  c4f2bf7161f8'
3     -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'
4     -H 'accept: application/json'
5     -H 'content-type: application/json'
6     --insecure
7
8 # preview resource
9 curl '{{host}}/api/v1/developer/system/static/preview/1700707333_9660da3a-06c8-
  459d-8cc9-24889d13fba5.png'
10    -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'
11    -H 'accept: application/json'
12    -H 'content-type: application/json'
13    --insecure
14
15 # capture video resource
16 curl
  '{{host}}/api/v1/developer/system/static/activities_resource/video/1708402379_92746
  868-5c69-4a11-9d4c-33f03785d741.jpg'
17    -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'
18    -H 'accept: application/json'
19    -H 'content-type: application/json'
20    --insecure
21
22 # capture thumbnail resource
23 curl
  '{{host}}/api/v1/developer/system/static/activities_resource/thumbnail/1708402379_9
  2746868-5c69-4a11-9d4c-33f03785d741.jpg'
24    -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'
25    -H 'accept: application/json'
26    -H 'content-type: application/json'
27    --insecure
```

10. UniFi Identity

The APIs here are designed for the UniFi Identity app.

10.1 Send UniFi Identity Invitations

This API enables you to send invitations and invite users to join UniFi Identity.

- Request URL: `/api/v1/developer/users/identity/invitations`
- Permission Key: `edit:user`
- Method: `POST`
- UniFi Access Requirement: `1.24.6` or later

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Request Body

Parameter	Required	Type	Description
Array[Object].user_id	T	String	Identity ID of the user.
Array[Object].email	F	String	Email of the user. If filled in, it will update the user's existing email address.

Request Sample: Shell/cURL

```
1  curl -XPOST '{{host}}/api/v1/developer/users/identity/invitations'
2      -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'
3      -H 'accept: application/json'
4      -H 'content-type: application/json'
5      --data-raw '[
6      {
7          "user_id": "e0051e08-c4d5-43db-87c8-a9b19cb66513",
8          "email": "example@*.com"
9      },
10     ]'
11
12  --insecure
```

Response Body

```
1  # Success
2  {
3      "code": "SUCCESS",
4      "data": [],
5      "msg": "success"
6  }
7
8  # If there is a failure to send an email
9  {
10     "code": "SUCCESS",
11     "data": [
12         {
13             "error_code": "",
14             "error_msg": "invalid email",
15             "user_email": "example@*.com",
16             "user_id": "e0051e08-c4d5-43db-87c8-a9b19cb66513"
17         }
18     ],
19     "msg": "success"
20 }
```

10.2 Fetch Available Resources

This API enables you to fetch the available UniFi Identity resources.

- Request URL: `/api/v1/developer/users/identity/assignments`
- Permission Key: `view:user`
- Method: `GET`
- UniFi Access Requirement: `1.24.6 or later`

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Query Parameters

Parameter	Required	Type	Description	Example
resource_type	F	String	Display the type of resources; show all when left blank. <code>enum resource_type {ev_station,vpn,wifi}</code>	resource_type=ev_station,wifi,vpn

Response Body

Parameter	Required	Type	Description
data.[resource_type]	T	String	Type of the resources. <code>enum resource_type {ev_station,vpn,wifi,camera}</code>
id	T	String	Identity ID of the resources.
name	T	String	Name of the resources.
deleted	T	Boolean	Indicate whether the resource is disabled.

Request Sample: Shell/cURL

```
1 curl '{{host}}/api/v1/developer/users/identity/assignments?
  resource_type=ev_station,wifi,vpn'
2     -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'
3     -H 'accept: application/json'
4     -H 'content-type: application/json'
5     --insecure
```

Response Sample

```
1 {
2     "code": "SUCCESS",
3     "data": {
4         "ev_station": [],
5         "vpn": [
6             {
7                 "deleted": false,
8                 "id": "65dff9a9c188cb71cfac8e9d",
9                 "metadata": null,
10                "name": "UDM Pro",
11                "short_name": ""
12            }
13        ],
14        "wifi": [
15            {
16                "deleted": false,
17                "id": "65dff9a8c188cb71cfac8e9a",
18                "metadata": null,
19                "name": "UniFi Identity",
20                "short_name": ""
21            }
22        ]
23    },
24    "msg": "success"
25 }
```


10.3 Assign Resources to Users

This API enables you to assign UniFi Identity resources to users.

- Request URL: `/api/v1/developer/users/:id/identity/assignments`
- Permission Key: `edit:user`
- Method: `POST`
- UniFi Access Requirement: `1.24.6` or later

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Request Path

Parameter	Required	Type	Description	How to Get It?
id	T	String	Identity ID of the user.	Get it from the API <code>/api/v1/developer/users</code>

Request Body

Parameter	Required	Type	Description	How to Get It?
resource_type	T	String	<code>enum resource_type {ev_station,vpn,wifi}</code>	Get it from the API 10.2
resource_ids	T	Array[String]	Identity ID of the resources.	Get it from the API 10.2

Request Sample: Shell/cURL

```
1  curl -XPOST '{{host}}/api/v1/developer/users/b602879b-b857-400b-970b-
2      336d4cb881ad/identity/assignments'
3      -H 'Authorization: Bearer wHfMHRuX4I7sB2oDkD6wHg'
4      -H 'accept: application/json'
5      -H 'content-type: application/json'
6      --data '{
7          "resource_type": "wifi",
8          "resource_ids": [
9              "65dff9a8c188cb71cfac8e9a"
10         ]
11     }'
12     --insecure
```

Response Sample

```
1 {
2   "code": "SUCCESS",
3   "data": null,
4   "msg": "success"
5 }
```

10.4 Fetch Resources Assigned to Users

This API enables you to fetch the UniFi Identity resources assigned to users.

- Request URL: `/api/v1/developer/users/:id/identity/assignments`
- Permission Key: `view:user`
- Method: `GET`
- UniFi Access Requirement: `1.24.6 or later`

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Request Path

Parameter	Required	Type	Description	How to Get It?
id	T	String	Identity ID of the user.	Get it from the API <code>/api/v1/developer/users</code>

Response Body

Parameter	Required	Type	Description
data.[resource_type]	T	Array[Object]	Type of the resources. <code>enum resource_type {ev_station,vpn,wifi,camera}</code>
id	T	String	Identity ID of the resources.
name	T	String	Name of the resources.
deleted	T	Boolean	Indicate whether a resource is disabled.

Request Sample: Shell/cURL

```
1 curl -XGET '{{host}}/api/v1/developer/users/b602879b-b857-400b-970b-
336d4cb881ad/identity/assignments'
2 -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'
3 -H 'accept: application/json'
4 -H 'content-type: application/json'
5 --insecure
```

Response Sample

```
1 {
2   "code": "SUCCESS",
3   "data": {
4     "ev_station": [],
5     "vpn": [
6       {
7         "deleted": false,
8         "id": "65dff9a9c188cb71cfac8e9d",
9         "metadata": {
10          "has_ip": true
11        },
12        "name": "UDM Pro",
13        "short_name": ""
14      }
15    ],
16    "wifi": [
17      {
18        "deleted": false,
19        "id": "65dff9a8c188cb71cfac8e9a",
20        "metadata": null,
21        "name": "UniFi Identity",
22        "short_name": ""
23      }
24    ]
25  },
26  "msg": "success"
27 }
```

10.5 Assign Resources to User Groups

This API enables you to assign UniFi Identity resources to user groups.

- Request URL: `/api/v1/developer/user_groups/:id/identity/assignments`
- Permission Key: `edit:user`
- Method: `POST`
- UniFi Access Requirement: `2.2.0 or later`

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Request Path

Parameter	Required	Type	Description	How to Get It?
id	T	String	Identity ID of the user group.	Get it from the API <code>/api/v1/developer/user_groups</code>

Request Body

Parameter	Required	Type	Description	How to Get It?
resource_type	T	String	<code>enum resource_type {ev_station,vpn,wifi}</code>	Get it from the API 10.2
resource_ids	T	Array[String]	Identity ID of the resources.	Get it from the API 10.2

Request Sample: Shell/cURL

```
1  curl -XPOST '{{host}}/api/v1/developer/user_groups/7476c839-8e10-472e-894f-
2  c5b8254c35b5/identity/assignments'
3  -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'
4  -H 'accept: application/json'
5  -H 'content-type: application/json'
6  --data '{
7      "resource_type": "wifi",
8      "resource_ids": [
9          "65dff9a8c188cb71cfac8e9a"
10     ]
11 }'
12 --insecure
```

Response Sample

```
1  {
2      "code": "SUCCESS",
3      "data": null,
4      "msg": "success"
5  }
```

10.6 Fetch the Resources Assigned to User Groups

This API enables you to fetch the UniFi Identity resources assigned to user groups.

- Request URL: `/api/v1/developer/user_groups/:id/identity/assignments`
- Permission Key: `view:user`
- Method: `GET`
- UniFi Access Requirement: `2.2.0 or later`

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Request Path

Parameter	Required	Type	Description	How to Get It?
id	T	String	Identity ID of the user group.	Get it from the API <code>/api/v1/developer/user_groups</code>

Response Body

Parameter	Required	Type	Description
data.[resource_type]	T	Array[Object]	Type of the resources. <code>enum resource_type {ev_station,vpn,wifi,camera}</code>
id	T	String	Identity ID of the resources.
name	T	String	Name of the resources.
deleted	T	Boolean	Indicate whether a resource is disabled.

Request Sample: Shell/cURL

```

1  curl -XGET '{{host}}/api/v1/developer/user_groups/7476c839-8e10-472e-894f-
    c5b8254c35b5/identity/assignments'
2      -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'
3      -H 'accept: application/json'
4      -H 'content-type: application/json'
5      --insecure

```

Response Sample

```

1  {
2      "code": "SUCCESS",
3      "data": {
4          "ev_station": [],
5          "vpn": [
6              {
7                  "deleted": false,
8                  "id": "65dff9a9c188cb71cfac8e9d",
9                  "metadata": {

```

```
10         "has_ip": true
11     },
12     "name": "UDM Pro",
13     "short_name": ""
14 }
15 ],
16 "wifi": [
17     {
18         "deleted": false,
19         "id": "65dff9a8c188cb71cfac8e9a",
20         "metadata": null,
21         "name": "UniFi Identity",
22         "short_name": ""
23     }
24 ]
25 },
26 "msg": "success"
27 }
```

11. Notification

The APIs here are designed for Webhooks and WebSockets.

11.1 Fetch Notifications [WebSocket]

This API enables you to fetch notifications, such as doorbell notifications.

- Request URL: `/api/v1/developer/devices/notifications`
- Permission Key: `view:device`
- Protocol: `WebSocket`
- Method: `GET`
- UniFi Access Requirement: `1.20.11 or later`

Request Sample: [wscat](#)

```
1 wscat
2   --no-check
3   -c wss://192.168.1.1:12445/api/v1/developer/devices/notifications
4   -H "Authorization: Bearer qoFJMyRG2eeCWlW9YQX0+g"
5   -H "Upgrade: websocket"
6   -H "Connection: Upgrade"
```

WebSocket Payload

When a doorbell rings: `[access.remote_view]`

```
1 {
2   "event": "access.remote_view",
3   "receiver_id": "",
4   "event_object_id": "535b6125-860c-489a-b0a1-0ba01906afa9",
5   "save_to_history": false,
6   "data": {
7     "channel": "4513899f-0370-4116-9731-63a6b0feea23",
8     "token": "6dff120f-2688-497d-856f-0ca08b383d1d",
9     "device_id": "e4388386be1d",
10    "device_type": "UA-G2-PRO",
11    "device_name": "UA-G2-PRO-BE1D",
12    "door_name": "Door 236b",
13    "controller_id": "68d79a1f494f",
14    "floor_name": "1F",
15    "request_id": "J0FeDJc8ZNzHjxr1SUIP6GLQDjAkdZFp",
16    "clear_request_id": "",
17    "in_or_out": "in",
18    "create_time": 1694771479,
```

```

19     "reason_code": 0,
20     "door_guard_ids": [
21         "daa10301-7744-4623-a90e-372718af1d41",
22         "9d526114-70ce-49ec-8655-81767ffb3eb4",
23         "c003514f-60bb-4aa3-9150-cd361b1458a0",
24         "0d6273e4-9b54-4b91-b7f8-40d0d41780c1",
25         "f395f473-e6ea-4232-a45f-9ec20c813e96",
26         "c52f9920-be17-4357-936c-47d94dad753a",
27         "8ed10bf7-8f5e-4b68-98da-76d2f315d515",
28         "e4de9c92-e385-4b31-8cfc-8e9d192c0e10",
29         "2159ac55-a1d9-42f3-ba2b-6c87cf5ea383"
30     ],
31     "connected_uah_id": "e4388384236b",
32     "room_id": "WR-e4388386be1d-3YSCjtuV5VuyfLT46mUXnnY2q5KQfKxX",
33     "host_device_mac": "68D79A1F494B"
34 }
35 }

```

Doorbell status change: [access.remote_view.change]

reason_code	Description
105	Doorbell timed out.
106	An admin rejected to unlock a door.
107	An admin successfully unlocked a door.
108	A visitor canceled a doorbell.
400	Doorbell was answered by another admin.

```

1  {
2      "event": "access.remote_view.change",
3      "receiver_id": "",
4      "event_object_id": "450a6c0f-28f7-47ca-99c3-5a35475fece4",
5      "save_to_history": false,
6      "data": {
7          "reason_code": 108,
8          "remote_call_request_id": "J0FeDJc8ZNzHjxr1SUIP6GLQDjAkdZFp"
9      }
10 }

```

Remote door unlock by admin: [access.data.device.remote_unlock]

```

1  {
2      "event": "access.data.device.remote_unlock",
3      "receiver_id": "",
4      "event_object_id": "e4388384236b",

```



```

5     "save_to_history": false,
6     "data": {
7         "unique_id": "5d600936-8618-4f2d-a1b7-d786865b70ba",
8         "name": "Door 236b",
9         "up_id": "913a35bc-66c9-4293-a617-846dd2e285ed",
10        "timezone": "",
11        "location_type": "door",
12        "extra_type": "",
13        "full_name": "UDR-ML - 1F - Door 236b",
14        "level": 0,
15        "work_time": "[]",
16        "work_time_id": "",
17        "extras": {
18            "uah-input_state_dps": "off",
19            "uah-wiring_state_dps-neg": "off",
20            "uah-wiring_state_dps-pos": "off"
21        }
22    }
23 }

```

11.2 List of Supported Webhook Events [Webhook]

To enable webhook events, you need to register webhook endpoints. Once registered, UniFi Access can push real-time event data to your application's webhook endpoint as events occur. UniFi Access uses HTTPS to send these webhook events to your application, delivering a JSON payload that includes a JSON object.

Event/Operation	Description
access.doorbell.incoming	Doorbell notifications.
access.doorbell.completed	Accept, decline, or cancel doorbell notifications.
access.doorbell.incoming.REN	Doorbells triggered via request-to-enter (REN) buttons.
access.device.dps_status	Changes in door position sensor (DPS) status.
access.door.unlock	All door unlock events.

11.3 Fetch Webhook Endpoints List [Webhook]

This API enables you to fetch the available webhook endpoints.

- Request URL: `/api/v1/developer/webhooks/endpoints`
- Permission Key: `view:webhook`

- Method: `GET`
- UniFi Access Requirement: `2.2.10` or later

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Response Body

Parameter	Required	Type	Description
id	T	String	Identity ID of the endpoint.
endpoint	T	String	HTTPS endpoint.
name	T	String	Endpoint name of the subscription.
secret	T	String	The secret used for verifying events coming from UniFi Access.
events	T	Array[String]	Select the event you want to subscribe to.

Request Sample: Shell/cURL

```
1 curl '{{host}}/api/v1/developer/webhooks/endpoints'
2   -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'
3   -H 'accept: application/json'
4   -H 'content-type: application/json'
5   --insecure
```

Response Sample

```
1 {
2   "code": "SUCCESS",
3   "data": [
4     {
5       "endpoint": "http://192.168.1.1:8080",
6       "events": [
7         "access.doorbell.incoming",
8         "access.doorbell.completed",
9         "access.doorbell.incoming.REN",
10        "access.device.dps_status",
11        "access.door.unlock"
12      ],
13      "id": "1a639160-a7c8-45cb-8789-50dfd255a0fe",
```

```

14         "name": "subscription events",
15         "secret": "6601f1243d2ff70f"
16     }
17 ],
18     "msg": "success"
19 }

```

11.4 Add Webhook Endpoints [Webhook]

This API enables you to add a webhook endpoint.

- Request URL: `/api/v1/developer/webhooks/endpoints`
- Permission Key: `edit:webhook`
- Method: `POST`
- UniFi Access Requirement: `2.2.10` or later

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Request Body

Parameter	Required	Type	Description
endpoint	T	String	HTTPS endpoint. Note: It is recommended to use HTTPS.
name	T	String	Endpoint name of the subscription.
events	T	Array[String]	Select the event you want to subscribe to.

Request Sample: Shell/cURL

```

1  curl -XPOST '{{host}}/api/v1/developer/webhooks/endpoints'
2  -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'
3  -H 'accept: application/json'
4  -H 'content-type: application/json'
5  --data '{
6      "name": "subscription events",
7      "endpoint": "http://192.168.1.1:8080",
8      "events": [
9          "access.doorbell.incoming",
10         "access.doorbell.completed",
11         "access.doorbell.incoming.REN",

```

```

12         "access.device.dps_status",
13         "access.door.unlock"
14     ]
15 }
16 --insecure

```

Response Sample

```

1  {
2      "code": "SUCCESS",
3      "data": {
4          "endpoint": "http://192.168.1.1:8080",
5          "events": [
6              "access.doorbell.incoming",
7              "access.doorbell.completed",
8              "access.doorbell.incoming.REN",
9              "access.device.dps_status",
10             "access.door.unlock"
11         ],
12         "id": "a22ee283-c91f-432b-9d0f-e89bccad4be",
13         "name": "subscription events",
14         "secret": "1a7c9c6a69bb5a1e"
15     },
16     "msg": "success"
17 }

```

11.5 Update Webhook Endpoints [Webhook]

This API enables you to update the available webhook endpoints.

- Request URL: `/api/v1/developer/webhooks/endpoints/:id`
- Permission Key: `edit:webhook`
- Method: `PUT`
- UniFi Access Requirement: `2.2.10` or later

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Request Path

Parameter	Required	Type	Description	Example
id	T	String	Identity ID of the endpoint.	a22ee283-c91f-432b-9d0f-e89bcccad4be

Request Body

Parameter	Required	Type	Description
endpoint	T	String	HTTPS endpoint.
name	T	String	Endpoint name of the subscription.
events	T	Array[String]	Select the event you want to subscribe to.

Request Sample: Shell/cURL

```
1  curl -XPUT '{{host}}/api/v1/developer/webhooks/endpoints/a22ee283-c91f-432b-9d0f-e89bcccad4be'
2      -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'
3      -H 'accept: application/json'
4      -H 'content-type: application/json'
5      --data '{
6          "name": "subscription events",
7          "endpoint": "http://192.168.1.1:8080",
8          "events": [
9              "access.doorbell.incoming",
10             "access.doorbell.completed",
11             "access.doorbell.incoming.REN",
12             "access.device.dps_status",
13             "access.door.unlock"
14         ]
15     }
16     --insecure
```

Response Sample

```
1  {
2      "code": "SUCCESS",
3      "data": {
4          "endpoint": "http://192.168.1.1:8080",
5          "events": [
6              "access.doorbell.incoming",
7              "access.doorbell.completed",
8              "access.doorbell.incoming.REN",
9              "access.device.dps_status",
```

```

10         "access.door.unlock"
11     ],
12     "id": "a22ee283-c91f-432b-9d0f-e89bcccad4be",
13     "name": "subscription events",
14     "secret": "1a7c9c6a69bb5a1e"
15 },
16 "msg": "success"
17 }

```

11.6 Delete Webhook Endpoints [Webhook]

This API enables you to delete the available webhook endpoints.

- Request URL: `/api/v1/developer/webhooks/endpoints/:id`
- Permission Key: `edit:webhook`
- Method: `DELETE`
- UniFi Access Requirement: `2.2.10` or later

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Request Path

Parameter	Required	Type	Description	Example
id	T	String	Identity ID of the endpoint.	a22ee283-c91f-432b-9d0f-e89bcccad4be

Request Sample: Shell/cURL

```

1 curl -XDELETE '{{host}}/api/v1/developer/webhooks/endpoints/a22ee283-c91f-432b-9d0f-
  e89bcccad4be'
2     -H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg'
3     -H 'accept: application/json'
4     -H 'content-type: application/json'
5     --insecure

```

Response Sample

```
1 {
2   "code": "SUCCESS",
3   "data": null,
4   "msg": "success"
5 }
```

11.7 Allow Webhook Endpoint Owner to Receive Webhook Events [Webhook]

The following samples demonstrate how to receive webhook messages. Note that the secret needs to be adjusted to the assigned secret. These are just examples; in actual use, HTTPS and a custom URL should be used.

Request from UniFi Access

- Request URL: `Your webhook endpoint`
- Method: `POST`
- UniFi Access Requirement: `2.2.10 or later`

Parameter	Required	Type	Description	Example
Signature	T	String	Contains request time(t) and signature(v1)	t=1695902233, v1=a7ea8840af212767d7795481bed914a9f2ea7241d35212b597bec13aa4bfa06b

Response Payload Sample

```
1 #access.door.unlock
2 {
3   "event": "access.door.unlock",
4   "event_object_id": "4a98adf6-dbb8-4312-9b8b-593f6eba8c8e",
5   "data": {
6     "location": {
7       "id": "d2b87427-7efa-43c1-aa52-b00d40d99ecf",
8       "location_type": "door",
9       "name": "Door 3855",
10      "up_id": "62ff3aa1-ae96-4b6b-8eb5-44aadfd4aabd",
11      "extras": {
12        "door_thumbnail": "/preview/reader_0418d6a2bb7a_d2b87427-7efa-43c1-aa52-b00d40d99ecf_1722913291.jpg",
13        "door_thumbnail_last_update": 1722913291,
14        "uah-input_state_dps": "on",
15        "uah-wiring_state_dps-neg": "on",
16        "uah-wiring_state_dps-pos": "on"
17      },
18    },
19  }
```

```

18         "device_ids": null
19     },
20     "device": {
21         "name": "UA-HUB-3855",
22         "alias": "Door 3855",
23         "id": "7483c2773855",
24         "ip": "192.168.1.132",
25         "mac": "",
26         "online": false,
27         "device_type": "UAH",
28         "connected_hub_id": "",
29         "location_id": "d2b87427-7efa-43c1-aa52-b00d40d99ecf",
30         "firmware": "v4.6.1.0",
31         "version": "v4.6.129",
32         "guid": "4a5e238f-4bae-48d5-84d7-dd2b0e919ab5",
33         "start_time": 1721988528,
34         "hw_type": "",
35         "revision": "1722912520784126005",
36         "cap": null
37     },
38     "actor": {
39         "id": "d62e92fd-91aa-44c2-9b36-6d674a4b74d0",
40         "name": "Hon***",
41         "type": "user"
42     },
43     "object": {
44         "authentication_type": "CALL", //Door opening method,
NFC/PIN_CODE/Call For a DoorBell
45         "authentication_value": "",
46         "policy_id": "",
47         "policy_name": "",
48         "reader_id": "",
49         "result": "Access Granted"
50     }
51 }
52 }
53
54 #access.doorbell.incoming
55 {
56     "event": "access.doorbell.incoming",
57     "event_object_id": "641cee06-89b5-4fef-9ce5-f9a2ae33ffd8",
58     "data": {
59         "location": {
60             "id": "d2b87427-7efa-43c1-aa52-b00d40d99ecf",
61             "location_type": "door",
62             "name": "Door 3855",
63             "up_id": "62ff3aa1-ae96-4b6b-8eb5-44aadfd4aabd",
64             "extras": {

```



```

65         "door_thumbnail": "/preview/reader_0418d6a2bb7a_d2b87427-7efa-
43c1-aa52-b00d40d99ecf_1722912625.jpg",
66         "door_thumbnail_last_update": 1722912625,
67         "uah-input_state_dps": "on",
68         "uah-wiring_state_dps-neg": "on",
69         "uah-wiring_state_dps-pos": "on"
70     },
71     "device_ids": null
72 },
73 "device": {
74     "name": "UA G2 Pro bb7a",
75     "alias": "Door 3855 - Entry2",
76     "id": "0418d6a2bb7a",
77     "ip": "192.168.1.37",
78     "mac": "04:18:d6:a2:bb:7a",
79     "online": false,
80     "device_type": "UA-G2-PRO",
81     "connected_hub_id": "7483c2773855",
82     "location_id": "d2b87427-7efa-43c1-aa52-b00d40d99ecf",
83     "firmware": "v1.5.33",
84     "version": "v1.5.3543",
85     "guid": "06d4277c-3dd3-4691-8aac-3e140abb8699",
86     "start_time": 1722483954,
87     "hw_type": "GA",
88     "revision": "1722912520784126005",
89     "cap": null
90 },
91 "actor": null,
92 "object": {
93     "request_id": "Ed8XSsi4fLm6St7JOLLa26UcmzAZlGzn"
94 }
95 }
96 }
97
98 #access.doorbell.completed
99 > Doorbell status changes:
100 | reason_code | Description |
101 | ----- | ----- |
102 | 105 | Doorbell timed out. |
103 | 106 | An admin declined the door unlock request. |
104 | 107 | An admin successfully unlocked the door. |
105 | 108 | A visitor canceled the doorbell. |
106 | 400 | Doorbell was answered by another admin. |
107
108 {
109     "event": "access.doorbell.completed",
110     "event_object_id": "c4bf20b7-1bd3-4b4c-a0b9-bca3cb273bcf",
111     "data": {
112         "location": {

```

```

113         "id": "d2b87427-7efa-43c1-aa52-b00d40d99ecf",
114         "location_type": "door",
115         "name": "Door 3855",
116         "up_id": "62ff3aa1-ae96-4b6b-8eb5-44aafd4aabd",
117         "extras": {
118             "door_thumbnail": "/preview/reader_0418d6a2bb7a_d2b87427-7efa-
43c1-aa52-b00d40d99ecf_1722913291.jpg",
119             "door_thumbnail_last_update": 1722913291,
120             "uah-input_state_dps": "on",
121             "uah-wiring_state_dps-neg": "on",
122             "uah-wiring_state_dps-pos": "on"
123         },
124         "device_ids": null
125     },
126     "device": {
127         "name": "UA G2 Pro bb7a",
128         "alias": "Door 3855 - Entry2",
129         "id": "0418d6a2bb7a",
130         "ip": "192.168.1.37",
131         "mac": "04:18:d6:a2:bb:7a",
132         "online": false,
133         "device_type": "UA-G2-PRO",
134         "connected_hub_id": "7483c2773855",
135         "location_id": "d2b87427-7efa-43c1-aa52-b00d40d99ecf",
136         "firmware": "v1.5.33",
137         "version": "v1.5.3543",
138         "guid": "06d4277c-3dd3-4691-8aac-3e140abb8699",
139         "start_time": 1722483954,
140         "hw_type": "GA",
141         "revision": "1722912520784126005",
142         "cap": null
143     },
144     "actor": null,
145     "object": {
146         "host_device_mac": "",
147         "reason_code": 400,
148         "request_id": "Ed8XSsi4fLm6St7JOLLa26UcmzAZlGzn" //Request ID for
doorbell
149     }
150 }
151 }
152
153 #access.device.dps_status
154 {
155     "event": "access.device.dps_status",
156     "event_object_id": "229899f2-ba52-461a-a3af-e011fb5078d1",
157     "data": {
158         "location": {
159             "id": "d2b87427-7efa-43c1-aa52-b00d40d99ecf",

```

```

160         "location_type": "door",
161         "name": "Door 3855",
162         "up_id": "62ff3aa1-ae96-4b6b-8eb5-44aadfd4aabd",
163         "extras": {
164             "door_thumbnail": "/preview/reader_0418d6a2bb7a_d2b87427-7efa-
43c1-aa52-b00d40d99ecf_1722912625.jpg",
165             "door_thumbnail_last_update": 1722912625,
166             "uah-input_state_dps": "on",
167             "uah-wiring_state_dps-neg": "on",
168             "uah-wiring_state_dps-pos": "on"
169         },
170         "device_ids": null
171     },
172     "device": {
173         "name": "UA-HUB-3855",
174         "alias": "Door 3855",
175         "id": "7483c2773855",
176         "ip": "192.168.1.132",
177         "mac": "74:83:c2:77:38:55",
178         "online": false,
179         "device_type": "UAH",
180         "connected_hub_id": "",
181         "location_id": "d2b87427-7efa-43c1-aa52-b00d40d99ecf",
182         "firmware": "v4.6.1.0",
183         "version": "v4.6.129",
184         "guid": "4a5e238f-4bae-48d5-84d7-dd2b0e919ab5",
185         "start_time": 1721988528,
186         "hw_type": "",
187         "revision": "1722912520784126005",
188         "cap": null
189     },
190     "actor": null,
191     "object": {
192         "event_type": "dps_change", //DPS change type
193         "status": "close" //DPS change status
194     }
195 }
196 }
197
198 #access.doorbell.incoming.REN
199 {
200     "event": "access.doorbell.incoming.REN",
201     "event_object_id": "a819573f-a273-4909-b13b-b1477b9e4a19",
202     "data": {
203         "location": {
204             "id": "d2b87427-7efa-43c1-aa52-b00d40d99ecf",
205             "location_type": "door",
206             "name": "Door 3855",
207             "up_id": "62ff3aa1-ae96-4b6b-8eb5-44aadfd4aabd",

```

```

208         "extras": {
209             "door_thumbnail": "/preview/reader_0418d6a2bb7a_d2b87427-7efa-
43c1-aa52-b00d40d99ecf_1722912625.jpg",
210             "door_thumbnail_last_update": 1722912625,
211             "uah-input_state_dps": "off",
212             "uah-wiring_state_dps-neg": "off",
213             "uah-wiring_state_dps-pos": "off"
214         },
215         "device_ids": null
216     },
217     "device": null,
218     "actor": null,
219     "object": {
220         "host_device_mac": "74ACB95E28D5",
221         "reason_code": 0,
222         "request_id": "65d22fd2-29d7-43a8-b0f5-30a6722fcf1e" //Request ID for
doorbell
223     }
224 }
225 }
226
227

```

Handle Request (Using GO as a Sample)

You can get the secret [here](#). It is recommended to handle asynchronous processing logic, as there is currently a 5-second timeout set.

```

1  package main
2
3  import (
4      "crypto/hmac"
5      "crypto/sha256"
6      "encoding/hex"
7      "encoding/json"
8      "errors"
9      "fmt"
10     "io/ioutil"
11     "log"
12     "net/http"
13     "strconv"
14     "strings"
15     "time"
16 )
17
18 const (
19     port    = ":8080"
20     secret = "6601f1243d2ff70f"
21 )

```

```

22
23 func handlePostRequest(w http.ResponseWriter, r *http.Request) {
24     signature := r.Header.Get("Signature")
25
26     body, err := ioutil.ReadAll(r.Body)
27     if err != nil {
28         http.Error(w, "Failed to read request body", http.StatusBadRequest)
29         return
30     }
31
32     _, err = ConstructEvent(body, signature, secret)
33     if err != nil {
34         w.WriteHeader(http.StatusInternalServerError)
35         w.Write([]byte(err.Error()))
36         return
37     }
38
39     w.WriteHeader(http.StatusOK)
40     w.Write([]byte("OK"))
41 }
42
43 func main() {
44     http.HandleFunc("/", handlePostRequest)
45
46     fmt.Printf("Server listening on port %s...\n", port)
47     log.Fatal(http.ListenAndServe(port, nil))
48 }
49
50 var (
51     ErrInvalidHeader    = errors.New("webhook has invalid Signature header")
52     ErrNoValidSignature = errors.New("webhook had no valid signature")
53     ErrNotSigned        = errors.New("webhook has no Signature header")
54 )
55
56 func ConstructEvent(payload []byte, header string, secret string)
57 (json.RawMessage, error) {
58     return constructEvent(payload, header, secret)
59 }
60
61 type signedHeader struct {
62     timestamp time.Time
63     signature []byte
64 }
65
66 func constructEvent(payload []byte, sigHeader string, secret string)
67 (json.RawMessage, error) {
68     var e json.RawMessage
69
70     if err := validatePayload(payload, sigHeader, secret); err != nil {

```

```

69         return e, err
70     }
71
72     if err := json.Unmarshal(payload, &e); err != nil {
73         return e, fmt.Errorf("Failed to parse webhook body json: %s", err.Error())
74     }
75
76     return e, nil
77 }
78
79 var signingVersion = "v1"
80
81 func parseSignatureHeader(header string) (*signedHeader, error) {
82     sh := &signedHeader{}
83
84     if header == "" {
85         return sh, ErrNotSigned
86     }
87
88     pairs := strings.Split(header, ",")
89     for _, pair := range pairs {
90         parts := strings.Split(pair, "=")
91         if len(parts) != 2 {
92             return sh, ErrInvalidHeader
93         }
94
95         switch parts[0] {
96         case "t":
97             timestamp, err := strconv.ParseInt(parts[1], 10, 64)
98             if err != nil {
99                 return sh, ErrInvalidHeader
100             }
101             sh.timestamp = time.Unix(timestamp, 0)
102
103         case signingVersion:
104             sig, err := hex.DecodeString(parts[1])
105             if err != nil {
106                 continue
107             }
108
109             sh.signature = sig
110         }
111     }
112
113     if len(sh.signature) == 0 {
114         return sh, ErrNoValidSignature
115     }
116
117     return sh, nil

```

```

118 }
119
120 func validatePayload(payload []byte, sigHeader string, secret string) error {
121     header, err := parseSignatureHeader(sigHeader)
122     if err != nil {
123         return err
124     }
125
126     expectedSignature := computeSignature(header.timestamp, payload, secret)
127     if hmac.Equal(expectedSignature, header.signature) {
128         return nil
129     }
130
131     return ErrNoValidSignature
132 }
133
134 func computeSignature(t time.Time, payload []byte, secret string) []byte {
135     mac := hmac.New(sha256.New, []byte(secret))
136     mac.Write([]byte(fmt.Sprintf("%d", t.Unix())))
137     mac.Write([]byte("."))
138     mac.Write(payload)
139     return mac.Sum(nil)
140 }
141
142 func hexSignature(signature []byte) string {
143     return hex.EncodeToString(signature)
144 }

```

Handle Request (Using Rust as a Sample)

You can get the secret [here](#). It is recommended to handle asynchronous processing logic, as there is currently a 5-second timeout set.

```

1  use hex::FromHex;
2  use sha2::Sha256;
3  use warp::Filter;
4  use bytes::Bytes;
5  use hmac::{Hmac, Mac};
6
7  const SECRET: &[u8] = b"6601f1243d2ff70f";
8
9  #[tokio::main]
10 async fn main() {
11     let routes = warp::post()
12         .and(warp::body::bytes())
13         .and(warp::header::header("Signature"))
14         .and_then(handle_post_request);
15
16     warp::serve(routes).run(([0, 0, 0, 0], 8080)).await;

```

```

17 }
18
19 async fn handle_post_request(payload: Bytes, signature: String) -> Result<impl
warp::Reply, warp::Rejection> {
20     let payload_str = std::str::from_utf8(&payload)
21         .map_err(|_| warp::reject::custom(ErrorKind::InvalidPayload))?;
22
23     let validated_payload = validate_payload(payload_str, &signature, SECRET)?;
24     println!("Validated Payload: {}", validated_payload);
25
26     Ok(warp::reply::with_status("OK", warp::http::StatusCode::OK))
27 }
28
29 #[derive(Debug)]
30 enum ErrorKind {
31     InvalidHeader,
32     NoValidSignature,
33     NotSigned,
34     InvalidPayload,
35 }
36
37 impl warp::reject::Reject for ErrorKind {}
38
39 fn validate_payload<'a>(payload: &'a str, sig_header: &'a str, secret: &[u8]) ->
Result<&'a str, warp::reject::Rejection> {
40     let header = parse_signature_header(sig_header)?;
41
42     let expected_signature = compute_signature(header.timestamp,
payload.as_bytes(), secret);
43
44     if expected_signature == header.signature {
45         return Ok(payload);
46     }
47
48     Err(warp::reject::custom(ErrorKind::NoValidSignature))
49 }
50
51 struct SignedHeader {
52     timestamp: u64,
53     signature: Vec<u8>,
54 }
55
56 fn parse_signature_header(header: &str) -> Result<SignedHeader,
warp::reject::Rejection> {
57     let mut sh = SignedHeader {
58         timestamp: 0,
59         signature: Vec::new(),
60     };
61

```



```

62     if header.is_empty() {
63         return Err(warp::reject::custom(ErrorKind::NotSigned));
64     }
65
66     let pairs: Vec<&str> = header.split(',').collect();
67     for pair in pairs {
68         let parts: Vec<&str> = pair.split('=').collect();
69         if parts.len() != 2 {
70             return Err(warp::reject::custom(ErrorKind::InvalidHeader));
71         }
72
73         match parts[0] {
74             "t" => {
75                 let timestamp = parts[1].parse::<u64>().map_err(|_|
warp::reject::custom(ErrorKind::InvalidHeader))?;
76                 sh.timestamp = timestamp;
77             }
78             "v1" => {
79                 let sig = Vec::from_hex(parts[1]).ok();
80                 if let Some(sig) = sig {
81                     sh.signature = sig;
82                 }
83             }
84             _ => continue,
85         }
86     }
87
88     if sh.signature.is_empty() {
89         return Err(warp::reject::custom(ErrorKind::NoValidSignature));
90     }
91
92     Ok(sh)
93 }
94
95 type HmacSha256 = Hmac<Sha256>;
96
97 fn compute_signature(timestamp: u64, payload: &[u8], secret: &[u8]) -> Vec<u8> {
98     let mut mac = HmacSha256::new_from_slice(secret).expect("HMAC can take key of
any size");
99     mac.update(timestamp.to_string().as_bytes());
100     mac.update(b".");
101     mac.update(payload);
102     mac.finalize().into_bytes().to_vec()
103 }

```

Handle Request (Using Python as a Sample)

You can get the secret [here](#). It is recommended to handle asynchronous processing logic, as there is currently a 5-second timeout set.

```
1  import hmac
2  import hashlib
3  import json
4  from flask import Flask, request, jsonify
5  from datetime import datetime
6  import time
7
8  app = Flask(__name__)
9
10 SECRET = "6601f1243d2ff70f"
11 SIGNING_VERSION = "v1"
12
13 class WebhookError(Exception):
14     pass
15
16 class InvalidHeaderError(WebhookError):
17     pass
18
19 class NoValidSignatureError(WebhookError):
20     pass
21
22 class NotSignedError(WebhookError):
23     pass
24
25 def parse_signature_header(header):
26     if not header:
27         raise NotSignedError("Webhook has no Signature header")
28
29     pairs = header.split(",")
30     parsed_header = {}
31     for pair in pairs:
32         key, value = pair.split("=")
33         parsed_header[key] = value
34
35     if 't' not in parsed_header or SIGNING_VERSION not in parsed_header:
36         raise InvalidHeaderError("Webhook has invalid Signature header")
37
38     timestamp = int(parsed_header['t'])
39     signature = bytes.fromhex(parsed_header[SIGNING_VERSION])
40     return timestamp, signature
41
42 def compute_signature(timestamp, payload, secret):
43     mac = hmac.new(secret.encode(), digestmod=hashlib.sha256)
44     mac.update(f"{timestamp}".encode())
```

```
45     mac.update(b".")
46     mac.update(payload)
47     return mac.digest()
48
49 def validate_payload(payload, sig_header, secret):
50     timestamp, received_signature = parse_signature_header(sig_header)
51     expected_signature = compute_signature(timestamp, payload, secret)
52     if not hmac.compare_digest(expected_signature, received_signature):
53         raise NoValidSignatureError("Webhook had no valid signature")
54
55 def construct_event(payload, sig_header, secret):
56     validate_payload(payload, sig_header, secret)
57     return json.loads(payload)
58
59 @app.route("/", methods=["POST"])
60 def handle_post_request():
61     signature = request.headers.get("Signature")
62
63     try:
64         payload = request.data
65         event = construct_event(payload, signature, SECRET)
66     except WebhookError as e:
67         return str(e), 500
68     except Exception as e:
69         return "Failed to read request body", 400
70
71     return "OK", 200
72
73 if __name__ == "__main__":
74     app.run(port=8080)
```

12. API Server

The APIs here are designed for API server configuration.

12.1 Upload HTTPS Certificate

This API allows you to update the HTTPS certificate for the Access API, applicable only to port **12445**. **Please note that restarting the Access application is necessary to apply these changes.** If the Private Key and Certificate do not match, it will result in a "parameter error" message.

- Request URL: `/api/v1/developer/api_server/certificates`
- Permission Key: `edit:api_server`
- Method: `POST`
- UniFi Access Requirement: `Version 2.2.10 or later`

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Request Body

Parameter	Required	Type	Description	Example
key	T	File	Private Key	server.key
cert	T	File	Certificate	server.crt

Response Sample

```
1 {
2   "code": "SUCCESS",
3   "data": "success",
4   "msg": "success"
5 }
```

Request Sample

The request body should be a JSON object containing the following fields:

```
1 curl -XPOST
2 '{{host}}/api/v1/developer/api_server/certificates' \
3 --H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg/yg' \
4 --form 'key=@"/server.key"' \
5 --form 'cert=@"/server.crt"'
```

12.2 Delete HTTPS Certificate

This API allows you to delete the HTTPS certificate for the Access API, applicable only to port **12445**. **Please note that restarting the Access application is necessary to apply these changes.**

- Request URL: `/api/v1/developer/api_server/certificates`
- Permission Key: `edit:api_server`
- Method: `DELETE`
- UniFi Access Requirement: `Version 2.2.10 or later`

Request Header

Parameter	Required	Type	Description
Authorization	T	String	Token required for authentication and access control.

Response Sample

```
1 {
2     "code": "SUCCESS",
3     "data": "success",
4     "msg": "success"
5 }
```

Request Sample

The request body should be a JSON object containing the following fields:

```
1 curl -XDELETE
2 '{{host}}/api/v1/developer/api_server/certificates' \
3 --H 'Authorization: Bearer wHFmHRuX4I7sB2oDkD6wHg/yg'
```

13. Change Logs

V2.2.6

- Supports user groups and user group policies. (#3.11-#3.22,#10.5-#10.6)
- Supports remote door unlock for Access Ultra (UA-Ultra). (#7.9)

V2.2.10

- Supports webhook API (#11.2-#11.7)
- Supports API server certificates (#12.1-#12.2)