WEEK04 DAY02 Assignment

1. Adding the Fine tuned model in popup.js

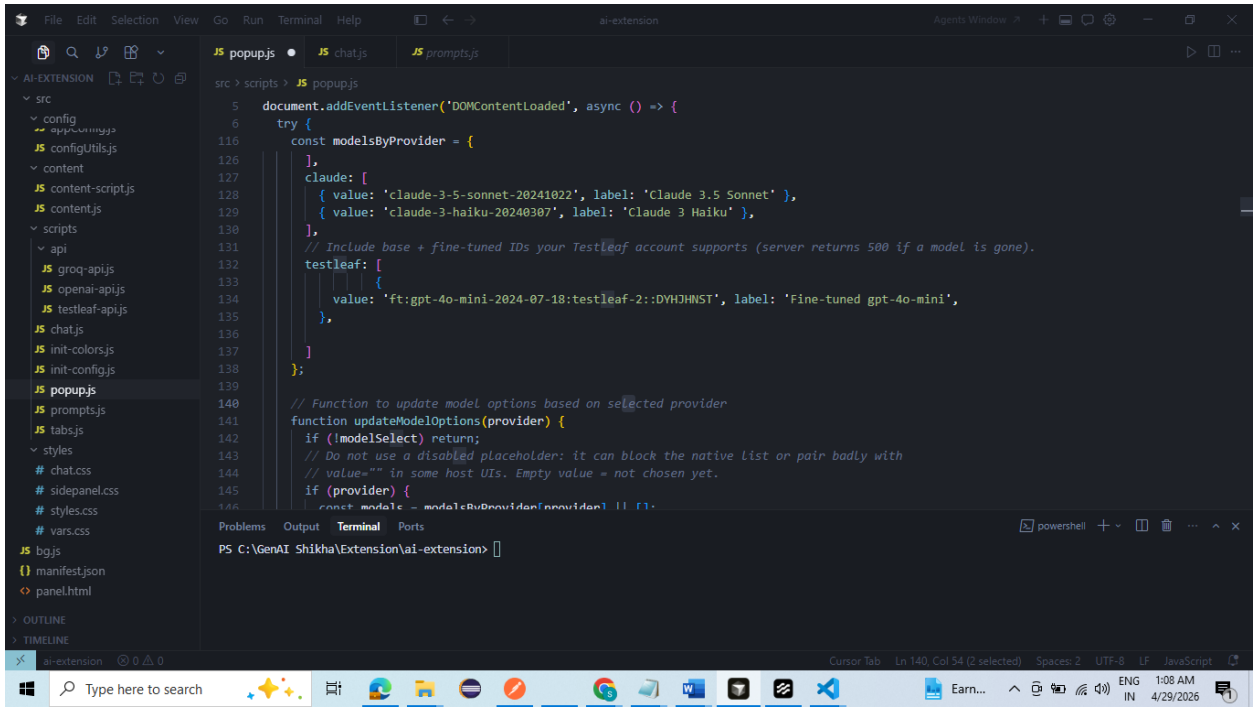

2. Selecting the Fine-tuned model in “AI Browser” Extension

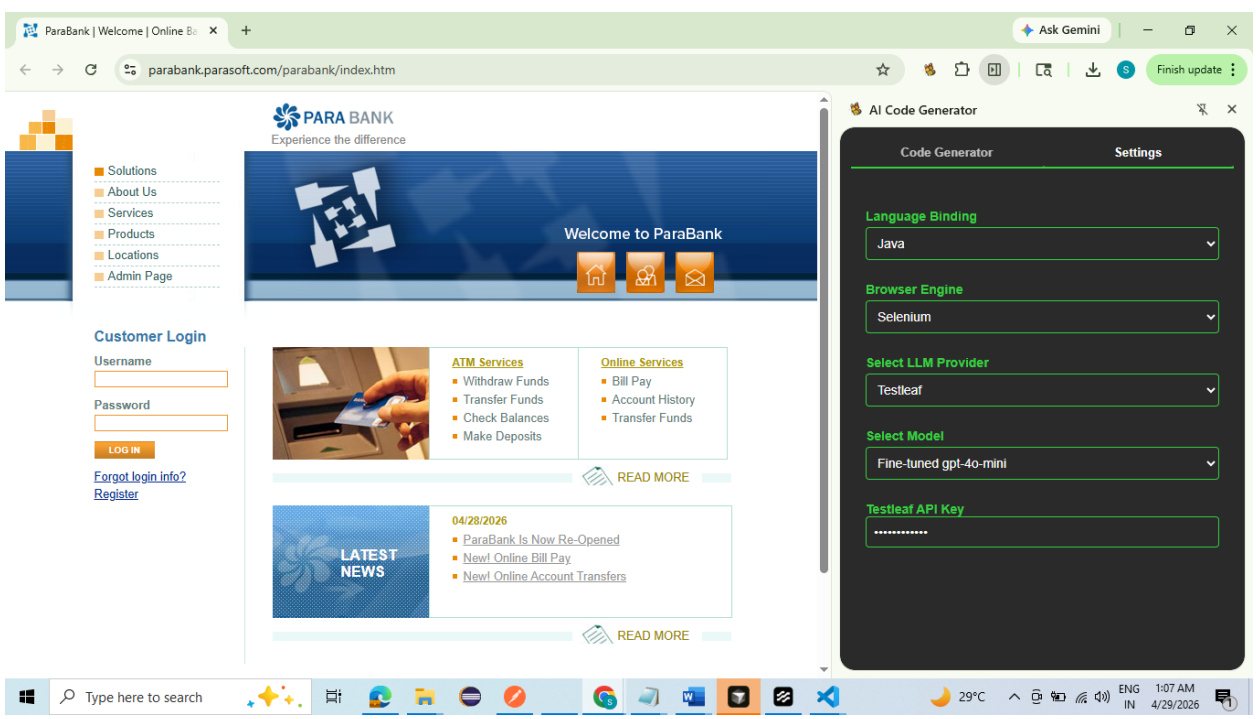

3. Generating the Code using “AI Code Generator” and selecting the fine-tuned model for https://parabank.parasoft.com/parabank/index.htm login functionality

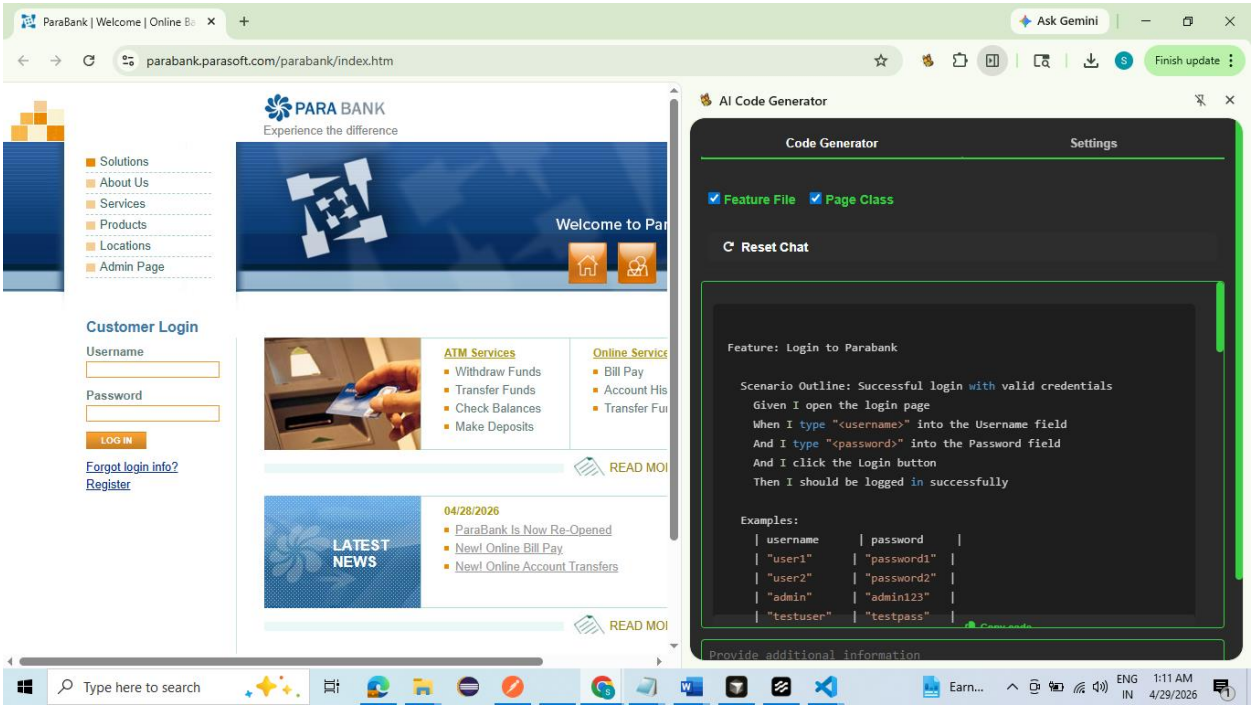

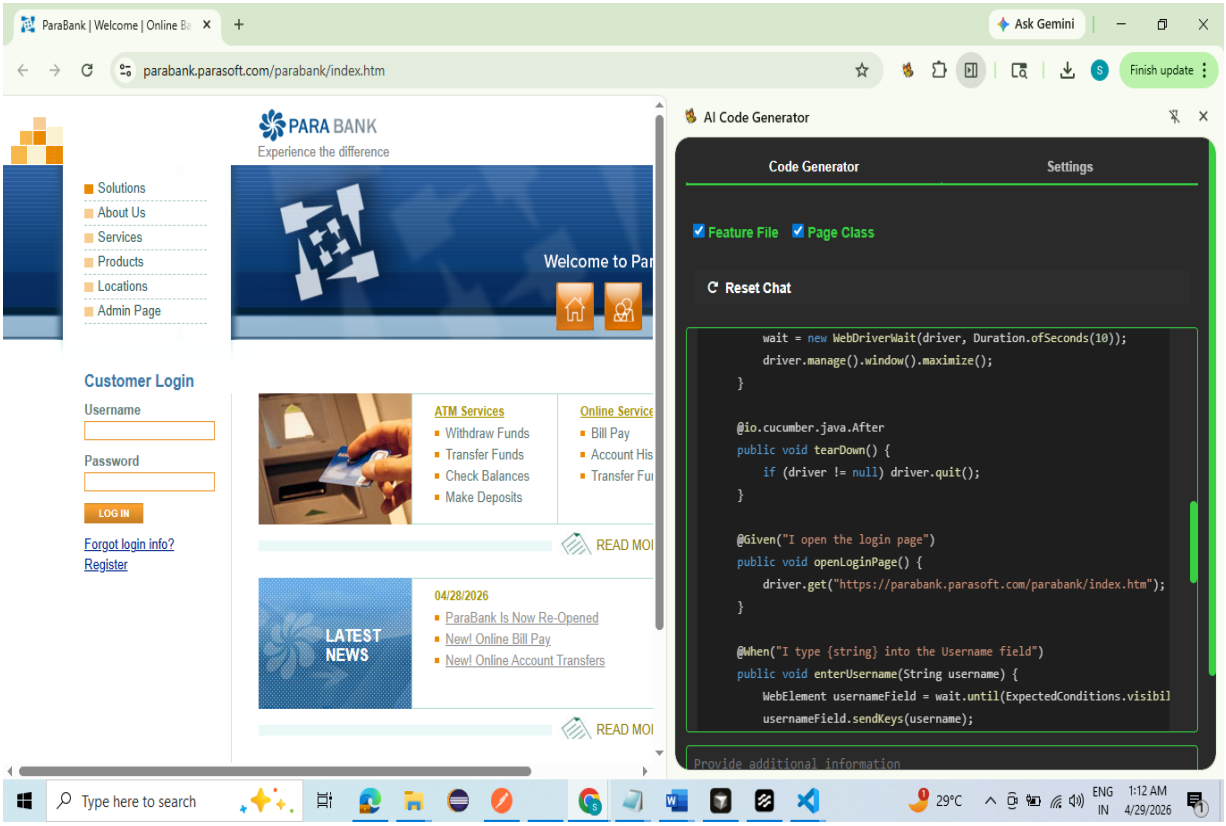

Generated selenium java Code for https://parabank.parasoft.com/parabank/index.htm –

```
Feature: Login to Parabank

  Scenario Outline: Successful login with valid credentials
    Given I open the login page
    When I type "<username>" into the Username field
    And I type "<password>" into the Password field
    And I click the Login button
    Then I should be logged in successfully

  Examples:
    | username      | password     |
    | "user1"      | "password1"  |
    | "user2"      | "password2"  |
    | "admin"      | "admin123"   |
    | "testuser"   | "testpass"   |
```

```
package com.leaftaps.stepdefs;

import io.cucumber.java.en.*;
import org.openqa.selenium.*;
import org.openqa.selenium.chrome.ChromeDriver;
import org.openqa.selenium.support.ui.*;

import java.time.Duration;

public class LoginStepDefinitions {
    private WebDriver driver;
    private WebDriverWait wait;

    @io.cucumber.java.Before
    public void setUp() {
        System.setProperty("webdriver.chrome.driver", "path/to/chromedriver"); // Set the path to
your WebDriver
        driver = new ChromeDriver();
        wait = new WebDriverWait(driver, Duration.ofSeconds(10));
        driver.manage().window().maximize();
    }

    @io.cucumber.java.After
    public void tearDown() {
        if (driver != null) driver.quit();
    }
```

```
    @Given("I open the login page")
    public void openLoginPage() {
        driver.get("https://parabank.parasoft.com/parabank/index.htm");
    }

    @When("I type {string} into the Username field")
    public void enterUsername(String username) {
        WebElement usernameField =
wait.until(ExpectedConditions.visibilityOfElementLocated(By.name("username")));
        usernameField.sendKeys(username);
    }

    @When("I type {string} into the Password field")
    public void enterPassword(String password) {
        WebElement passwordField =
wait.until(ExpectedConditions.visibilityOfElementLocated(By.name("password")));
        passwordField.sendKeys(password);
    }

    @When("I click the Login button")
    public void clickLogin() {
        WebElement loginButton =
wait.until(ExpectedConditions.elementToBeClickable(By.xpath("//input[@value='Log In']")));
        loginButton.click();
    }

    @Then("I should be logged in successfully")
    public void verifyLogin() {
        // Assuming a successful login redirects to a dashboard or home page
        wait.until(ExpectedConditions.urlContains("parabank/home.htm"));
        String pageTitle = driver.getTitle();
        assert pageTitle.contains("Accounts Overview") : "Login failed, expected Accounts Overview
page.";
    }
}
```

Generated Typescript playwright code for parabank top banner and top most menu options on left side https://parabank.parasoft.com/parabank/index.htm

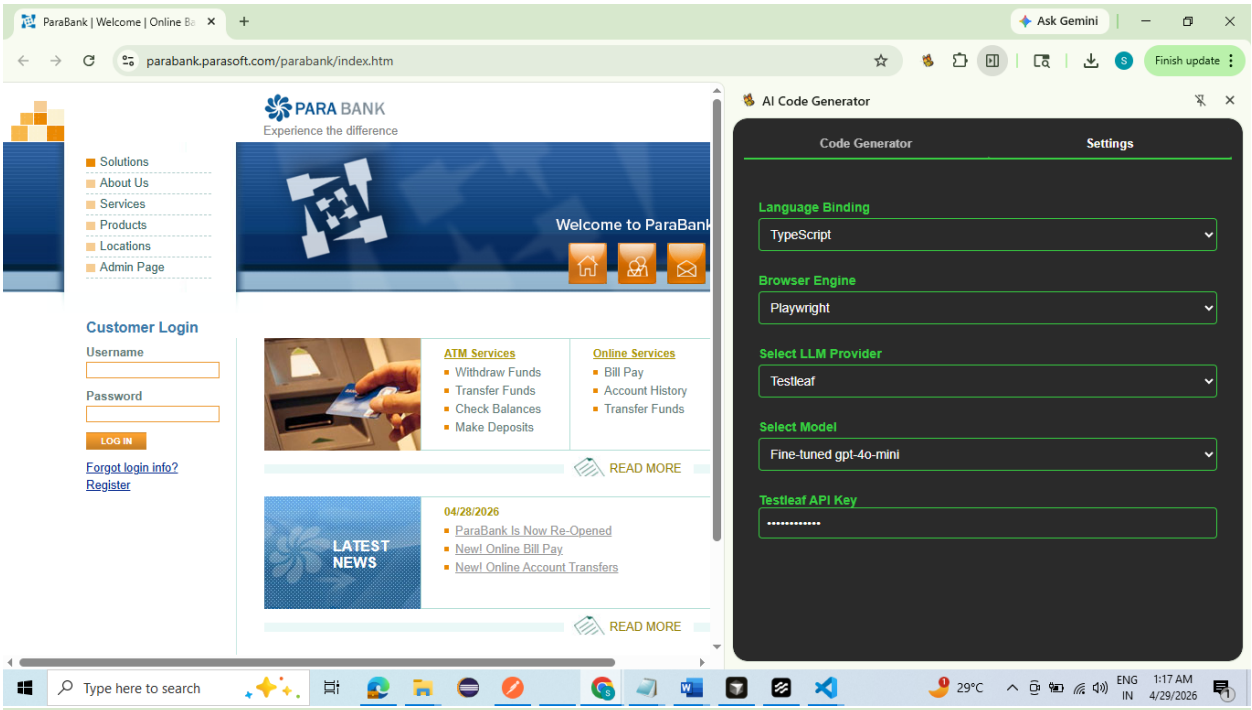

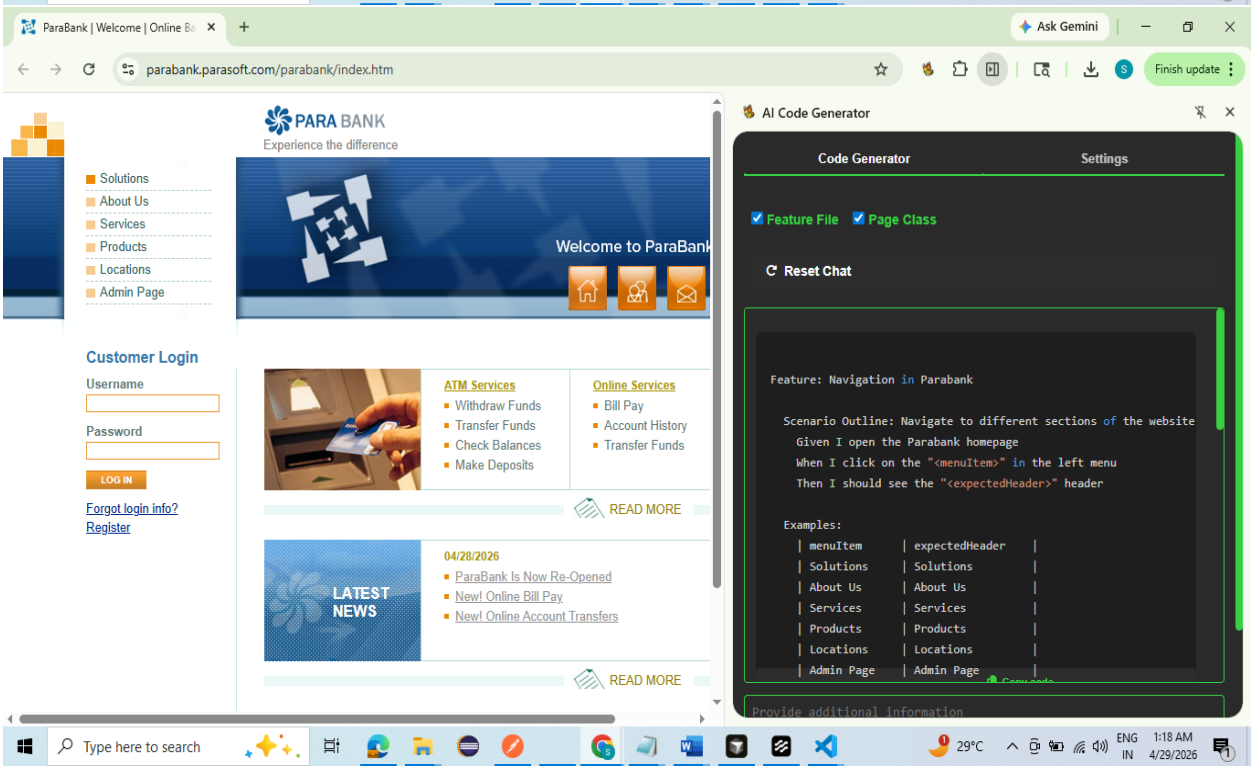

```
Feature: Navigation in Parabank

  Scenario Outline: Navigate to different sections of the website
    Given I open the Parabank homepage
    When I click on the "<menuItem>" in the left menu
    Then I should see the "<expectedHeader>" header

  Examples:
    | menuItem      | expectedHeader    |
    | Solutions     | Solutions         |
    | About Us      | About Us          |
    | Services      | Services          |
    | Products      | Products          |
    | Locations     | Locations         |
    | Admin Page    | Admin Page        |
    | home          | Welcome to Parabank|
    | about         | About Us          |
    | contact       | Contact Us        |

import { chromium, Browser, Page } from 'playwright';
import { Before, After, Given, When, Then } from '@cucumber/cucumber';

let browser: Browser;
let page: Page;

Before(async () => {
   browser = await chromium.launch({ headless: true });
   page = await browser.newPage();
});

After(async () => {
   await browser.close();
});

Given('I open the Parabank homepage', async () => {
   await page.goto("https://parabank.parasoft.com/parabank/index.htm");
});

When('I click on the {string} in the left menu', async (menuItem: string) => {
   await page.click(`ul.leftmenu li:has-text("${menuItem}")`);
});

Then('I should see the {string} header', async (expectedHeader: string) => {
   await page.waitForSelector('h1'); // Assuming the header is an <h1> element
```

```
    const headerText = await page.textContent('h1');
    if (headerText !== expectedHeader) {
        throw new Error(`Expected header to be "${expectedHeader}", but got "${headerText}"`);
    }
});
```