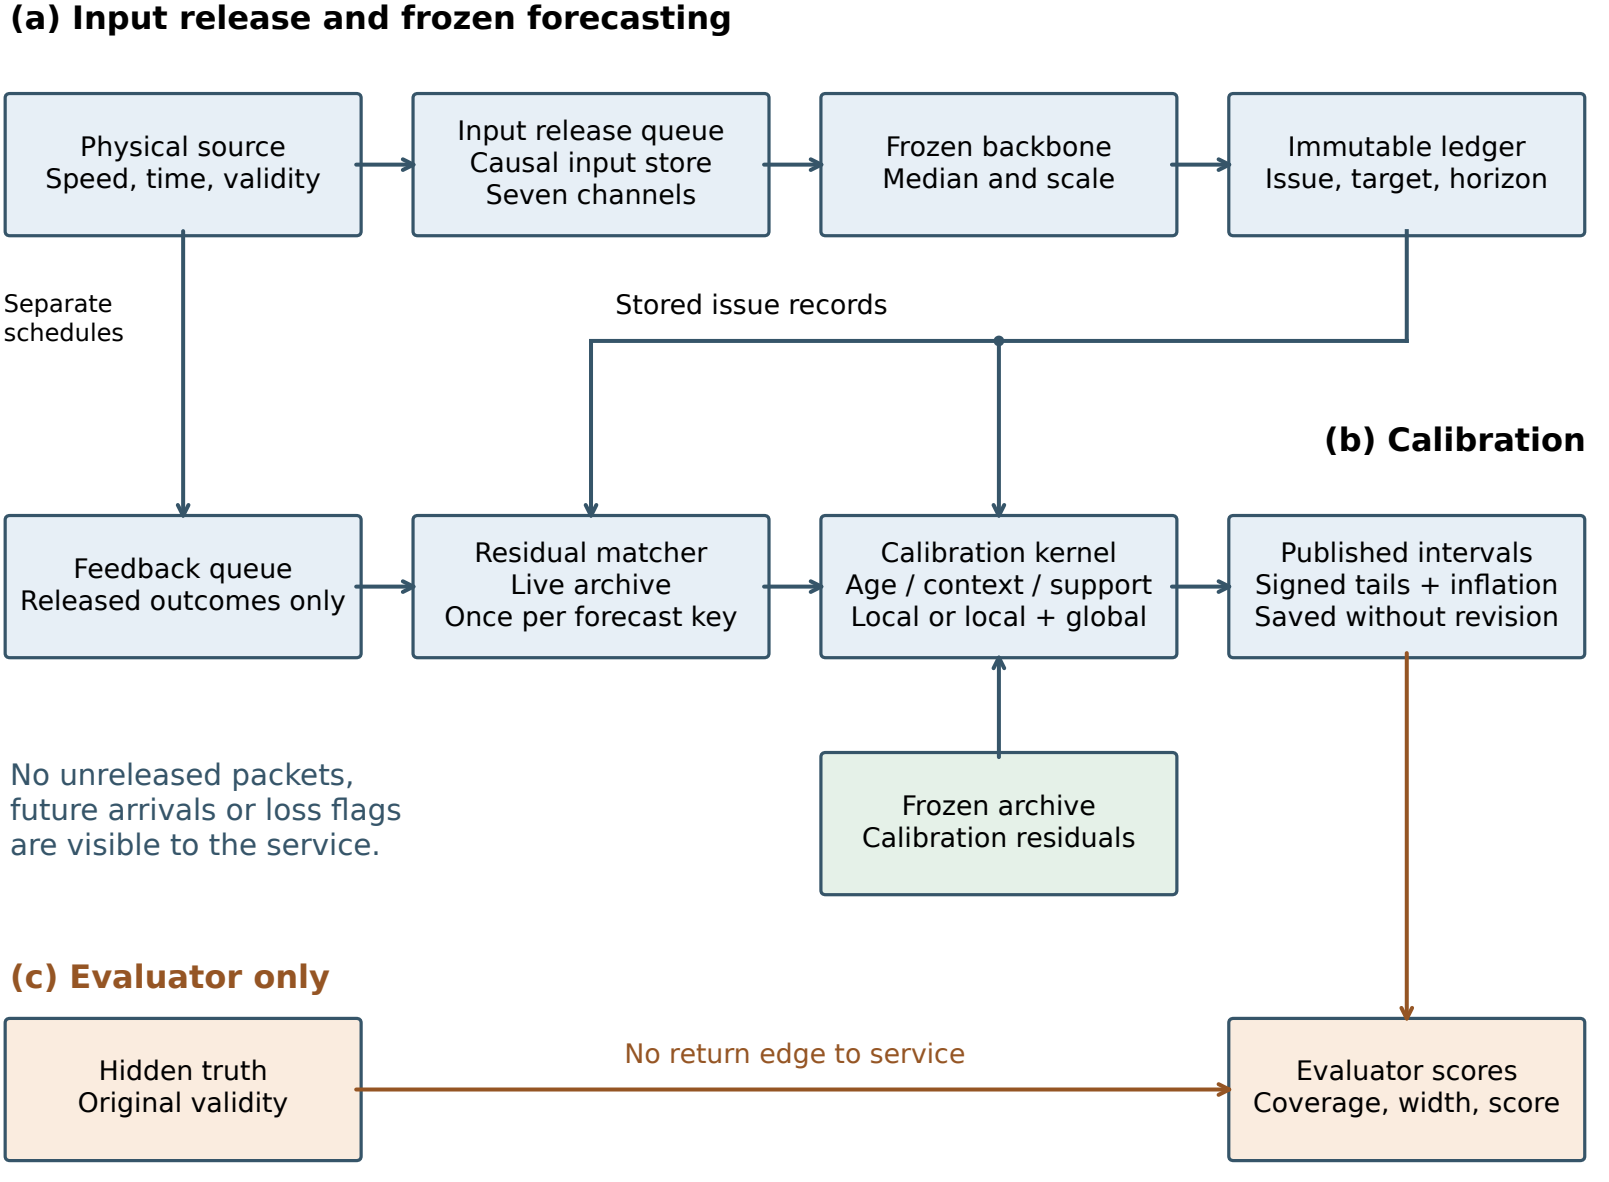
(a) Input release and frozen forecasting
Physical source
Speed, time, validity
Input release queue
Causal input store
Seven channels
Frozen backbone
Median and scale
Immutable ledger
Issue, target, horizon
Separate schedules
Stored issue records
(b) Calibration
Feedback queue
Released outcomes only
Residual matcher
Live archive
Once per forecast key
Calibration kernel
Age / context / support
Local or local + global
Published intervals
Signed tails + inflation
Saved without revision
No unreleased packets, future arrivals or loss flags are visible to the service.
Frozen archive
Calibration residuals
(c) Evaluator only
Hidden truth
Original validity
No return edge to service
Evaluator scores
Coverage, width, score