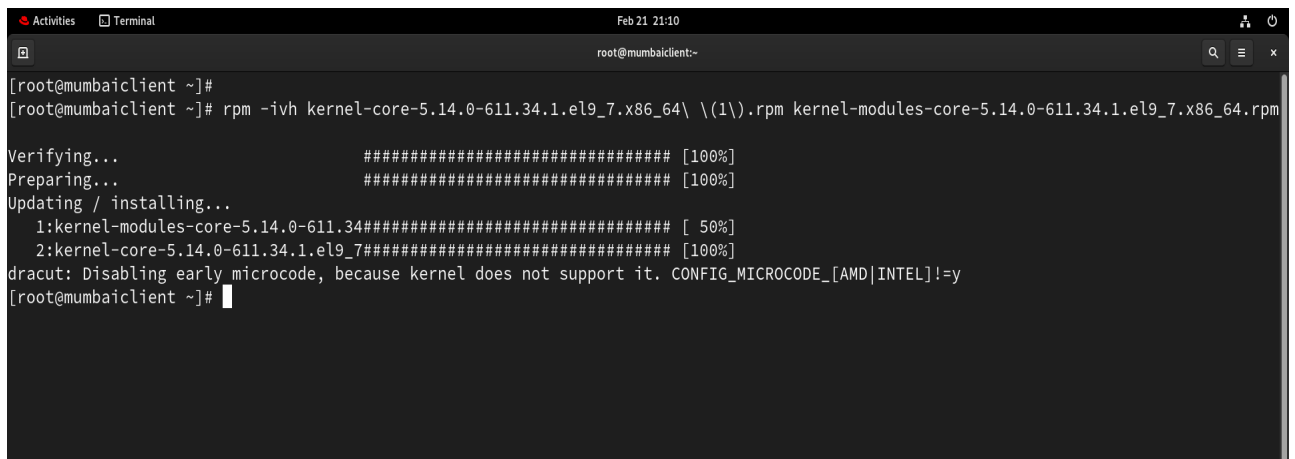


INSTALLATIONS

While manual installation you need to have both the “kernel-core” and “kernel-modules-core” .rpm packages with a same versions .

After that you need to run a command as shown in the image .Remember you have to put both the .rpm files one after the other

don't forget to give a space between the two .rpm files “Please Use TAB extension”



```
Activities Terminal Feb 21 21:10
root@mumbaiclient:~
[root@mumbaiclient ~]#
[root@mumbaiclient ~]# rpm -ivh kernel-core-5.14.0-611.34.1.el9_7.x86_64 \ (1\).rpm kernel-modules-core-5.14.0-611.34.1.el9_7.x86_64.rpm

Verifying... ##### [100%]
Preparing... ##### [100%]
Updating / installing...
 1:kernel-modules-core-5.14.0-611.34##### [ 50%]
 2:kernel-core-5.14.0-611.34.1.el9_7##### [100%]
dracut: Disabling early microcode, because kernel does not support it. CONFIG_MICROCODE_[AMD|INTEL]!=y
[root@mumbaiclient ~]#
```

dracut: Disabling early microcode because kernel does not support it

👉 It means:

Your kernel does not support loading CPU fixes at the very beginning of boot.

That's all.

Very Simple Meaning

Think like this:

Microcode = small CPU bug fix update

Early microcode = load fix at very first second of boot

Your kernel = cannot load it that early

So system says: “Okay, I will skip early loading.”

System still works normally.

Does it damage system?

- ✗ No
- ✗ No performance issue
- ✗ No crash
- ✗ No boot problem

Your system is safe.

When is it important?

Only in:

Big production servers

Security-sensitive systems

Enterprise environments

For:

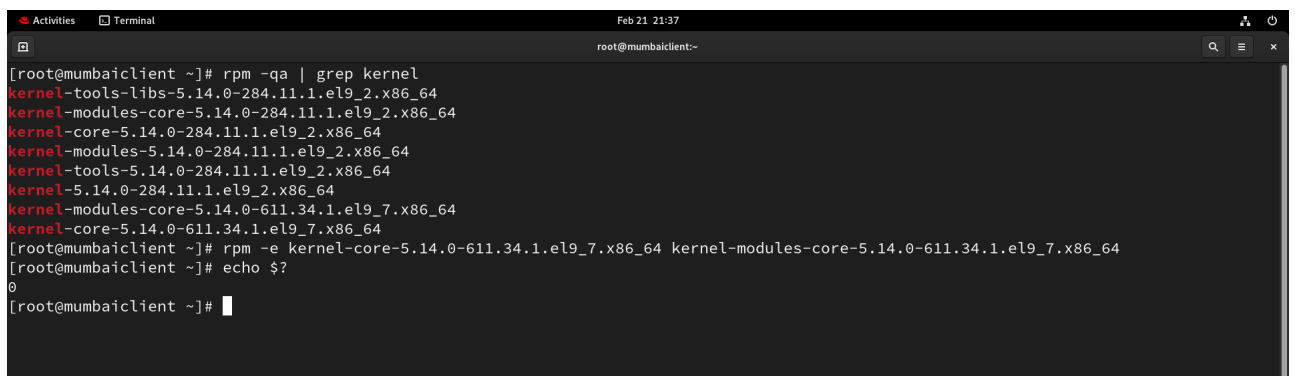
VMware lab

Learning Linux

DevOps practice

✅ It is completely fine.

ERASE

A terminal window titled 'Terminal' with a timestamp of 'Feb 21 21:37'. The prompt is 'root@mumbaiclient:~'. The user runs the command 'rpm -qa | grep kernel', which lists several kernel-related packages in red text: 'kernel-tools-libs-5.14.0-284.11.1.el9_2.x86_64', 'kernel-modules-core-5.14.0-284.11.1.el9_2.x86_64', 'kernel-core-5.14.0-284.11.1.el9_2.x86_64', 'kernel-modules-5.14.0-284.11.1.el9_2.x86_64', 'kernel-tools-5.14.0-284.11.1.el9_2.x86_64', 'kernel-5.14.0-284.11.1.el9_2.x86_64', 'kernel-modules-core-5.14.0-611.34.1.el9_7.x86_64', and 'kernel-core-5.14.0-611.34.1.el9_7.x86_64'. The user then runs 'rpm -e kernel-core-5.14.0-611.34.1.el9_7.x86_64 kernel-modules-core-5.14.0-611.34.1.el9_7.x86_64'. The prompt returns to 'root@mumbaiclient ~]#'.

```
[root@mumbaiclient ~]# rpm -qa | grep kernel
kernel-tools-libs-5.14.0-284.11.1.el9_2.x86_64
kernel-modules-core-5.14.0-284.11.1.el9_2.x86_64
kernel-core-5.14.0-284.11.1.el9_2.x86_64
kernel-modules-5.14.0-284.11.1.el9_2.x86_64
kernel-tools-5.14.0-284.11.1.el9_2.x86_64
kernel-5.14.0-284.11.1.el9_2.x86_64
kernel-modules-core-5.14.0-611.34.1.el9_7.x86_64
kernel-core-5.14.0-611.34.1.el9_7.x86_64
[root@mumbaiclient ~]# rpm -e kernel-core-5.14.0-611.34.1.el9_7.x86_64 kernel-modules-core-5.14.0-611.34.1.el9_7.x86_64
[root@mumbaiclient ~]# echo $?
0
[root@mumbaiclient ~]#
```

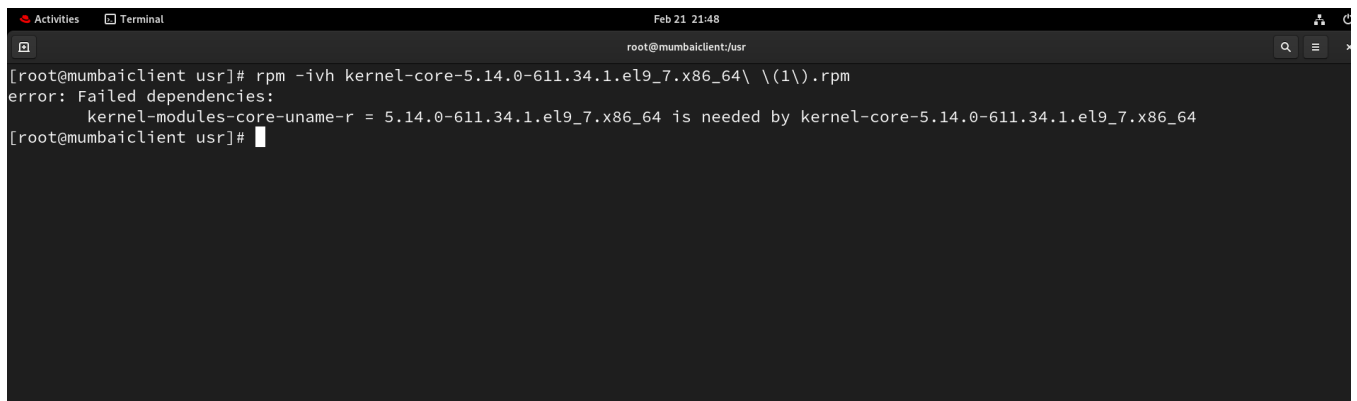
While Erasing also you need to have both the “kernel-core” and “kernel-modules-core” .rpm files

As shown in the image.

As kernel alone cannot run he need modules (drivers) to talk with Hardware.

ERROR

When you try to install only “kernel-core” .rpm file you will see this error as shown in the image

A terminal window titled 'Terminal' with a timestamp of 'Feb 21 21:48'. The prompt is '[root@mumbaiclient usr]#'. The user enters the command 'rpm -ivh kernel-core-5.14.0-611.34.1.el9_7.x86_64\ \ (1\).rpm'. The output shows an error: 'error: Failed dependencies: kernel-modules-core-uname-r = 5.14.0-611.34.1.el9_7.x86_64 is needed by kernel-core-5.14.0-611.34.1.el9_7.x86_64'. The prompt returns to '[root@mumbaiclient usr]#'.

```
[root@mumbaiclient usr]# rpm -ivh kernel-core-5.14.0-611.34.1.el9_7.x86_64\ \ (1\).rpm
error: Failed dependencies:
        kernel-modules-core-uname-r = 5.14.0-611.34.1.el9_7.x86_64 is needed by kernel-core-5.14.0-611.34.1.el9_7.x86_64
[root@mumbaiclient usr]#
```